

# OPAx354 250MHz、レール・ツー・レールI/O、CMOSオペアンプ

## 1 特長

- ユニティ・ゲイン帯域幅: 250MHz
- 広い帯域幅: 100MHz GBW
- 高いスルー・レート: 150V/ $\mu$ s
- 低ノイズ: 6.5nV/ $\sqrt{\text{Hz}}$
- レール・ツー・レールI/O
- 高い出力電流: 100mA超
- 非常に優れたビデオ性能
  - 差動ゲイン: 0.02%、差動位相: 0.09°
  - 0.1dBのゲイン・フラットネス(40MHz)
- 低い入力バイアス電流: 3pA
- 静止電流: 4.9mA
- サーマル・シャットダウン
- 電源電圧範囲: 2.5V~5.5V
- MicroSIZEおよび PowerPAD™搭載のパッケージ

## 2 アプリケーション

- ビデオ処理
- 超音波
- 光ネットワーク、調節可能なレーザー
- フォトダイオード・トランスインピーダンス・アンプ
- アクティブ・フィルタ
- 高速積分器
- A/Dコンバータ入力バッファ
- D/Aコンバータ出力アンプ
- バーコード・スキャナ
- 通信

## 3 概要

OPAx354シリーズの高速、電圧帰還型CMOSオペアンプは、広い帯域幅を必要とするビデオおよびその他のアプリケーション用に設計されています。これらはユニティ・ゲイン安定で、大きな出力電流を駆動できます。差動ゲインは0.02%、差動位相は0.09°です。静止電流はチャネルごとにわずか4.9mAです。

OPAx354シリーズのオペアンプは、最低2.5V ( $\pm 1.25$ V)、最高5.5V ( $\pm 2.75$ V)のシングルまたはデュアル電源で動作するよう最適化されています。同相入力範囲は電源の範囲よりも拡大されています。出力スイングはレールから100mV以内で、広いダイナミック・レンジに対応しています。

100mAの連続出力電流のすべてを必要とするアプリケーションでは、シングルおよびデュアルの8ピンHSOP PowerPADバージョンを使用できます。

シングル・バージョン(OPA354)は、小型の5ピンSOT-23および8ピンHSOP PowerPADパッケージで供給されます。デュアル・バージョン(OPA2354)は、小型の8ピンVSSOPおよび8ピンHSOP PowerPADパッケージで供給されます。クワッド・バージョン(OPA4354)は14ピンTSSOPと14ピンSOICパッケージで供給されます。


マルチチャネル・バージョンは、完全に独立した回路により、クロストークを最小化し、干渉の発生を防止しています。すべての仕様は、拡張温度範囲の-40°C~+125°Cで規定されています。

### 製品情報<sup>(1)</sup>

| 型番      | パッケージ      | 本体サイズ(公称)     |
|---------|------------|---------------|
| OPA354  | HSOP (8)   | 4.89mm×3.90mm |
|         | SOT-23 (5) | 2.90mm×1.60mm |
| OPA2354 | VSSOP (8)  | 3.00mm×3.00mm |
|         | HSOP (8)   | 4.89mm×3.90mm |
| OPA4354 | SOIC (14)  | 8.65mm×3.91mm |
|         | TSSOP (14) | 5.00mm×4.40mm |

(1) 提供されているすべてのパッケージについては、データシートの末尾にある注文情報を参照してください。

### 概略回路図



## 目次

|          |                                                                                        |           |           |                                             |           |
|----------|----------------------------------------------------------------------------------------|-----------|-----------|---------------------------------------------|-----------|
| <b>1</b> | <b>特長</b> .....                                                                        | <b>1</b>  | 8.4       | Device Functional Modes.....                | <b>21</b> |
| <b>2</b> | <b>アプリケーション</b> .....                                                                  | <b>1</b>  | <b>9</b>  | <b>Application and Implementation</b> ..... | <b>22</b> |
| <b>3</b> | <b>概要</b> .....                                                                        | <b>1</b>  | 9.1       | Application Information.....                | <b>22</b> |
| <b>4</b> | <b>改訂履歴</b> .....                                                                      | <b>2</b>  | 9.2       | Typical Application .....                   | <b>22</b> |
| <b>5</b> | <b>Device Comparison Table</b> .....                                                   | <b>3</b>  | <b>10</b> | <b>Power Supply Recommendations</b> .....   | <b>24</b> |
| <b>6</b> | <b>Pin Configuration and Functions</b> .....                                           | <b>3</b>  | <b>11</b> | <b>Layout</b> .....                         | <b>24</b> |
| <b>7</b> | <b>Specifications</b> .....                                                            | <b>6</b>  | 11.1      | Layout Guidelines .....                     | <b>24</b> |
| 7.1      | Absolute Maximum Ratings .....                                                         | <b>6</b>  | 11.2      | Layout Example .....                        | <b>24</b> |
| 7.2      | ESD Ratings.....                                                                       | <b>6</b>  | 11.3      | Power Dissipation .....                     | <b>24</b> |
| 7.3      | Recommended Operating Conditions.....                                                  | <b>6</b>  | 11.4      | PowerPAD Thermally-Enhanced Package .....   | <b>25</b> |
| 7.4      | Thermal Information: OPA354 .....                                                      | <b>7</b>  | 11.5      | PowerPAD Assembly Process.....              | <b>25</b> |
| 7.5      | Thermal Information: OPA2354 .....                                                     | <b>7</b>  | <b>12</b> | <b>デバイスおよびドキュメントのサポート</b> .....             | <b>27</b> |
| 7.6      | Thermal Information: OPA4354 .....                                                     | <b>7</b>  | 12.1      | ドキュメントのサポート .....                           | <b>27</b> |
| 7.7      | Electrical Characteristics: $V_S = 2.7\text{ V to }5.5\text{ V (Single-Supply)}$ ..... | <b>8</b>  | 12.2      | 関連リンク .....                                 | <b>27</b> |
| 7.8      | Typical Characteristics .....                                                          | <b>11</b> | 12.3      | ドキュメントの更新通知を受け取る方法.....                     | <b>27</b> |
| <b>8</b> | <b>Detailed Description</b> .....                                                      | <b>16</b> | 12.4      | コミュニティ・リソース .....                           | <b>27</b> |
| 8.1      | Overview .....                                                                         | <b>16</b> | 12.5      | 商標 .....                                    | <b>27</b> |
| 8.2      | Functional Block Diagram .....                                                         | <b>16</b> | 12.6      | 静電気放電に関する注意事項 .....                         | <b>27</b> |
| 8.3      | Feature Description.....                                                               | <b>17</b> | 12.7      | Glossary .....                              | <b>28</b> |
|          |                                                                                        |           | <b>13</b> | <b>メカニカル、パッケージ、および注文情報</b> .....            | <b>28</b> |



## 4 改訂履歴

|                                                                                                                                                           |             |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|
| <b>Revision F (June 2016) から Revision G に変更</b>                                                                                                           | <b>Page</b> |
| • Deleted table note about input pins and input signals from <i>Absolute Maximum Ratings</i> table .....                                                  | <b>6</b>    |
| <b>Revision E (March 2002) から Revision F に変更</b>                                                                                                          | <b>Page</b> |
| • 「ESD 定格」表、「機能説明」セクション、「デバイスの機能モード」セクション、「アプリケーションと実装」セクション、「電源に関する推奨事項」セクション、「レイアウト」セクション、「デバイスおよびドキュメントのサポート」セクション、「メカニカル、パッケージ、および注文情報」セクション 追加 ..... | <b>1</b>    |
| • データシートの末尾にある POA を参照し、「パッケージ/注文情報」表を 削除.....                                                                                                            | <b>1</b>    |
| • Renamed <i>OPAx354 Related Products</i> table to <i>Device Comparison Table</i> .....                                                                   | <b>3</b>    |

## 5 Device Comparison Table

| FEATURES                                            | PRODUCT                         |
|-----------------------------------------------------|---------------------------------|
| Shutdown Version of OPAx354 Family                  | <a href="#">OPAx357</a>         |
| 200-MHz GBW, Rail-to-Rail Output, CMOS, Shutdown    | <a href="#">OPAx355</a>         |
| 200-MHz GBW, Rail-to-Rail Output, CMOS              | <a href="#">OPAx356</a>         |
| 38-MHz GBW, Rail-to-Rail Input/Output, CMOS         | <a href="#">OPAx350/OPAx353</a> |
| 75-MHz BW G = 2, Rail-to-Rail Output                | <a href="#">OPA2631</a>         |
| 150-MHz BW G = 2, Rail-to-Rail Output               | <a href="#">OPA2634</a>         |
| 100-MHz BW, Differential Input/Output, 3.3-V Supply | <a href="#">THS412x</a>         |

## 6 Pin Configuration and Functions



NC – no internal connection


PowerPAD must be connected to V– or left floating.

### Pin Functions: OPA354

| PIN  |        |         | I/O | DESCRIPTION                                   |
|------|--------|---------|-----|-----------------------------------------------|
| NAME | SOT-23 | HSOP    |     |                                               |
| –IN  | 4      | 2       | I   | Inverting input                               |
| +IN  | 3      | 3       | I   | Noninverting input                            |
| NC   | —      | 1, 5, 8 | —   | No internal connection (can be left floating) |
| OUT  | 1      | 6       | O   | Output                                        |
| V–   | 2      | 4       | —   | Negative (lowest) supply                      |
| V+   | 5      | 7       | —   | Positive (highest) supply                     |

**OPA354, OPA2354, OPA4354**

JAJSF99G – MARCH 2002 – REVISED APRIL 2018

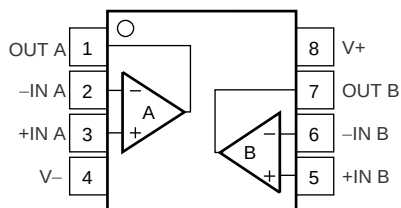
[www.ti.com](http://www.ti.com)
**OPA2354 DGK and DDA Packages  
8-Pin VSSOP, HSOP  
Top View**


(1) PowerPAD must be connected to V- or left floating.

**Pin Functions: OPA2354**

| PIN   |     | I/O | DESCRIPTION                   |
|-------|-----|-----|-------------------------------|
| NAME  | NO. |     |                               |
| -IN A | 2   | I   | Inverting input, channel A    |
| +IN A | 3   | I   | Noninverting input, channel A |
| -IN B | 6   | I   | Inverting input, channel B    |
| +IN B | 5   | I   | Noninverting input, channel B |
| OUT A | 1   | O   | Output, channel A             |
| OUT B | 7   | O   | Output, channel B             |
| V-    | 4   | —   | Negative (lowest) supply      |
| V+    | 8   | —   | Positive (highest) supply     |

**OPA4354 D and PW Packages  
14-Pin SOIC, TSSOP  
Top View**

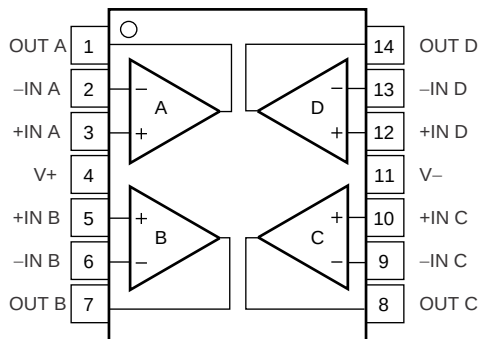

**Pin Functions: OPA4354**

| PIN   |     | I/O | DESCRIPTION                   |
|-------|-----|-----|-------------------------------|
| NAME  | NO. |     |                               |
| -IN A | 2   | I   | Inverting input, channel A    |
| +IN A | 3   | I   | Noninverting input, channel A |
| -IN B | 6   | I   | Inverting input, channel B    |
| +IN B | 5   | I   | Noninverting input, channel B |
| -IN C | 9   | I   | Inverting input, channel C    |
| +IN C | 10  | I   | Noninverting input, channel C |
| -IN D | 13  | I   | Inverting input, channel D    |
| +IN D | 12  | I   | Noninverting input, channel D |
| OUT A | 1   | O   | Output, channel A             |
| OUT B | 7   | O   | Output, channel B             |
| OUT C | 8   | O   | Output, channel C             |
| OUT D | 14  | O   | Output, channel D             |
| V-    | 11  | —   | Negative (lowest) supply      |
| V+    | 4   | —   | Positive (highest) supply     |

## 7 Specifications

### 7.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)<sup>(1)</sup>

|             |                                     | MIN          | MAX        | UNIT |
|-------------|-------------------------------------|--------------|------------|------|
| Voltage     | Supply voltage, V+ to V-            | 7.5          |            | V    |
|             | Signal input terminals              | (V-) - (0.5) | (V+) + 0.5 |      |
| Current     | Signal input terminals              | -10          | 10         | mA   |
|             | Output short circuit <sup>(2)</sup> | Continuous   |            |      |
| Temperature | Operating, T <sub>A</sub>           | -55          | 150        | °C   |
|             | Junction, T <sub>J</sub>            |              | 150        |      |
|             | Storage, T <sub>stg</sub>           | -65          | 150        |      |

- (1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) Short-circuit to ground, one amplifier per package.

### 7.2 ESD Ratings

|                                            |                                                                                | VALUE | UNIT |
|--------------------------------------------|--------------------------------------------------------------------------------|-------|------|
| V <sub>(ESD)</sub> Electrostatic discharge | Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001 <sup>(1)</sup>              | ±2000 | V    |
|                                            | Charged-device model (CDM), per JEDEC specification JESD22-C101 <sup>(2)</sup> | ±250  |      |

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
- (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

### 7.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

|                |                                                  | MIN | MAX | UNIT |
|----------------|--------------------------------------------------|-----|-----|------|
| V <sub>S</sub> | Supply voltage, V <sub>-</sub> to V <sub>+</sub> | 2.5 | 5.5 | V    |
|                | Specified temperature                            | -40 | 125 | °C   |

## 7.4 Thermal Information: OPA354

| THERMAL METRIC <sup>(1)</sup> |                                              | OPA354       |            | UNIT |
|-------------------------------|----------------------------------------------|--------------|------------|------|
|                               |                                              | DBV (SOT-23) | DDA (HSOP) |      |
|                               |                                              | 5 PINS       | 8 PINS     |      |
| $R_{\theta JA}$               | Junction-to-ambient thermal resistance       | 216.3        | 42.5       | °C/W |
| $R_{\theta JC(top)}$          | Junction-to-case (top) thermal resistance    | 84.3         | 54         | °C/W |
| $R_{\theta JB}$               | Junction-to-board thermal resistance         | 43.1         | 26.5       | °C/W |
| $\Psi_{JT}$                   | Junction-to-top characterization parameter   | 3.8          | 8          | °C/W |
| $\Psi_{JB}$                   | Junction-to-board characterization parameter | 42.3         | 26.4       | °C/W |
| $R_{\theta JC(bot)}$          | Junction-to-case (bottom) thermal resistance | —            | 3.6        | °C/W |

(1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.

## 7.5 Thermal Information: OPA2354

| THERMAL METRIC <sup>(1)</sup> |                                              | OPA2354    |             | UNIT |
|-------------------------------|----------------------------------------------|------------|-------------|------|
|                               |                                              | DDA (HSOP) | DGK (VSSOP) |      |
|                               |                                              | 8 PINS     | 8 PINS      |      |
| $R_{\theta JA}$               | Junction-to-ambient thermal resistance       | 40.6       | 175.9       | °C/W |
| $R_{\theta JC(top)}$          | Junction-to-case (top) thermal resistance    | 46         | 67.8        | °C/W |
| $R_{\theta JB}$               | Junction-to-board thermal resistance         | 20.7       | 97.1        | °C/W |
| $\Psi_{JT}$                   | Junction-to-top characterization parameter   | 5.6        | 9.3         | °C/W |
| $\Psi_{JB}$                   | Junction-to-board characterization parameter | 20.6       | 95.5        | °C/W |
| $R_{\theta JC(bot)}$          | Junction-to-case (bottom) thermal resistance | 2.5        | —           | °C/W |

(1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.

## 7.6 Thermal Information: OPA4354

| THERMAL METRIC <sup>(1)</sup> |                                              | OPA4354  |            | UNIT |
|-------------------------------|----------------------------------------------|----------|------------|------|
|                               |                                              | D (SOIC) | PW (TSSOP) |      |
|                               |                                              | 14 PINS  | 14 PINS    |      |
| $R_{\theta JA}$               | Junction-to-ambient thermal resistance       | 83.8     | 92.6       | °C/W |
| $R_{\theta JC(top)}$          | Junction-to-case (top) thermal resistance    | 70.7     | 27.5       | °C/W |
| $R_{\theta JB}$               | Junction-to-board thermal resistance         | 59.5     | 33.6       | °C/W |
| $\Psi_{JT}$                   | Junction-to-top characterization parameter   | 11.6     | 1.9        | °C/W |
| $\Psi_{JB}$                   | Junction-to-board characterization parameter | 37.7     | 33.1       | °C/W |
| $R_{\theta JC(bot)}$          | Junction-to-case (bottom) thermal resistance | —        | —          | °C/W |

(1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.

## 7.7 Electrical Characteristics: $V_S = 2.7\text{ V to }5.5\text{ V}$ (Single-Supply)

 at  $T_A = 25^\circ\text{C}$ ,  $R_F = 0\ \Omega$ ,  $R_L = 1\text{ k}\Omega$ , and connected to  $V_S / 2$ , (unless otherwise noted)

| PARAMETER            |                                      | TEST CONDITIONS                                                                                                           | MIN        | TYP                   | MAX        | UNIT    |
|----------------------|--------------------------------------|---------------------------------------------------------------------------------------------------------------------------|------------|-----------------------|------------|---------|
| OFFSET VOLTAGE       |                                      |                                                                                                                           |            |                       |            |         |
| V <sub>OS</sub>      | Input offset voltage                 | V <sub>S</sub> = 5 V<br>T <sub>A</sub> = 25°C                                                                             |            | ±2                    | ±8         | mV      |
|                      |                                      | V <sub>S</sub> = 5 V,<br>T <sub>A</sub> = −40°C to +125°C                                                                 |            |                       | ±10        |         |
| dV <sub>OS</sub> /dT | Input offset voltage vs temperature  | V <sub>S</sub> = 5 V<br>T <sub>A</sub> = −40°C to +125°C                                                                  |            | ±4                    |            | μV/°C   |
| PSRR                 | Input offset voltage vs power supply | V <sub>S</sub> = 2.7 V to 5.5 V<br>V <sub>CM</sub> = (V <sub>S</sub> / 2) − 0.55 V                                        |            | ±200                  | ±800       | μV/V    |
|                      |                                      | V <sub>S</sub> = 2.7 V to 5.5 V<br>V <sub>CM</sub> = (V <sub>S</sub> / 2) − 0.55 V<br>at T <sub>A</sub> = −40°C to +125°C |            |                       | ±900       |         |
| INPUT BIAS CURRENT   |                                      |                                                                                                                           |            |                       |            |         |
| I <sub>B</sub>       | Input bias current                   |                                                                                                                           |            | 3                     | ±50        | pA      |
| I <sub>OS</sub>      | Input offset current                 |                                                                                                                           |            | ±1                    | ±50        | pA      |
| NOISE                |                                      |                                                                                                                           |            |                       |            |         |
| e <sub>n</sub>       | Input voltage noise density          | f = 1 MHz                                                                                                                 |            | 6.5                   |            | nV/√Hz  |
| i <sub>n</sub>       | Current noise density                | f = 1 MHz                                                                                                                 |            | 50                    |            | fA/√Hz  |
| INPUT VOLTAGE RANGE  |                                      |                                                                                                                           |            |                       |            |         |
| V <sub>CM</sub>      | Common-mode voltage                  |                                                                                                                           | (V−) − 0.1 |                       | (V+) + 0.1 | V       |
| CMRR                 | Common-mode rejection ratio          | V <sub>S</sub> = 5.5 V<br>−0.1 V < V <sub>CM</sub> < 3.5 V<br>T <sub>A</sub> = 25°C                                       | 66         | 80                    |            | dB      |
|                      |                                      | V <sub>S</sub> = 5.5 V<br>−0.1 V < V <sub>CM</sub> < 3.5 V<br>T <sub>A</sub> = −40°C to +125°C                            | 64         |                       |            |         |
|                      |                                      | V <sub>S</sub> = 5.5 V<br>−0.1 V < V <sub>CM</sub> < 5.6 V<br>T <sub>A</sub> = 25°C                                       | 56         | 68                    |            |         |
|                      |                                      | V <sub>S</sub> = 5.5 V<br>−0.1 V < V <sub>CM</sub> < 5.6 V<br>T <sub>A</sub> = −40°C to +125°C                            | 55         |                       |            |         |
| INPUT IMPEDANCE      |                                      |                                                                                                                           |            |                       |            |         |
|                      | Differential                         |                                                                                                                           |            | 10 <sup>13</sup>    2 |            | Ω    pF |
|                      | Common-mode                          |                                                                                                                           |            | 10 <sup>13</sup>    2 |            | Ω    pF |
| OPEN-LOOP GAIN       |                                      |                                                                                                                           |            |                       |            |         |
| A <sub>OL</sub>      | Open-loop gain                       | V <sub>S</sub> = 5.5 V<br>0.3 V < V <sub>O</sub> < 4.7 V<br>T <sub>A</sub> = 25°C                                         | 94         | 110                   |            | dB      |
|                      |                                      | V <sub>S</sub> = 5 V<br>0.4 V < V <sub>O</sub> < 4.6 V<br>T <sub>A</sub> = −40°C to +125°C                                | 90         |                       |            |         |
| FREQUENCY RESPONSE   |                                      |                                                                                                                           |            |                       |            |         |
| f <sub>−3dB</sub>    | Small-signal bandwidth               | At G = +1<br>V <sub>O</sub> = 100 mV <sub>pp</sub><br>R <sub>F</sub> = 25 Ω                                               |            | 250                   |            | MHz     |
|                      |                                      | At G = +2<br>V <sub>O</sub> = 100 mV <sub>pp</sub>                                                                        |            | 90                    |            |         |
| GBW                  | Gain-bandwidth product               | G = +10                                                                                                                   |            | 100                   |            | MHz     |
| f <sub>0.1dB</sub>   | Bandwidth for 0.1-dB gain flatness   | At G = +2<br>V <sub>O</sub> = 100 mV <sub>pp</sub>                                                                        |            | 40                    |            | MHz     |



**Electrical Characteristics:  $V_S = 2.7\text{ V}$  to  $5.5\text{ V}$  (Single-Supply) (continued)**

at  $T_A = 25^\circ\text{C}$ ,  $R_F = 0\ \Omega$ ,  $R_L = 1\text{ k}\Omega$ , and connected to  $V_S / 2$ , (unless otherwise noted)

| PARAMETER |                        | TEST CONDITIONS                                         | MIN | TYP | MAX | UNIT             |
|-----------|------------------------|---------------------------------------------------------|-----|-----|-----|------------------|
| SR        | Slew rate              | $V_S = 5\text{ V}$ , $G = +1$ , 4-V step                |     | 150 |     | V/ $\mu\text{s}$ |
|           |                        | $V_S = 5\text{ V}$ , $G = +1$ , 2-V step                |     | 130 |     |                  |
|           |                        | $V_S = 3\text{ V}$ , $G = +1$ , 2-V step                |     | 110 |     |                  |
|           | Rise-and-fall time     | At $G = +1$<br>$V_O = 200\text{ mV}_{PP}$<br>10% to 90% |     | 2   |     | ns               |
|           |                        | At $G = +1$ , $V_O = 2\text{ V}_{PP}$ , 10% to 90%      |     | 11  |     |                  |
|           | Settling time          | 0.1%, $V_S = 5\text{ V}$ , $G = +1$<br>2-V output step  |     | 30  |     | ns               |
|           |                        | 0.01%, $V_S = 5\text{ V}$ , $G = +1$<br>2-V output step |     | 60  |     |                  |
|           | Overload recovery time | $V_{IN} \times \text{Gain} = V_S$                       |     | 5   |     | ns               |

**Electrical Characteristics:  $V_S = 2.7\text{ V}$  to  $5.5\text{ V}$  (Single-Supply) (continued)**

 at  $T_A = 25^\circ\text{C}$ ,  $R_F = 0\ \Omega$ ,  $R_L = 1\text{ k}\Omega$ , and connected to  $V_S / 2$ , (unless otherwise noted)

| PARAMETER                              |                                                      | TEST CONDITIONS                                                                                                | MIN | TYP   | MAX | UNIT |
|----------------------------------------|------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|-----|-------|-----|------|
| FREQUENCY RESPONSE (CONTINUED)         |                                                      |                                                                                                                |     |       |     |      |
| Harmonic distortion                    | Second harmonic                                      | At G = +1, f = 1 MHz,<br>V <sub>O</sub> = 2 V <sub>PP</sub><br>R <sub>L</sub> = 200 Ω, V <sub>CM</sub> = 1.5 V |     | –75   |     | dBc  |
|                                        | Third harmonic                                       | At G = +1, f = 1 MHz<br>V <sub>O</sub> = 2 V <sub>PP</sub><br>R <sub>L</sub> = 200 Ω, V <sub>CM</sub> = 1.5 V  |     | –83   |     |      |
| Differential gain error                |                                                      | NTSC, R <sub>L</sub> = 150 Ω                                                                                   |     | 0.02% |     |      |
| Differential phase error               |                                                      | NTSC, R <sub>L</sub> = 150 Ω                                                                                   |     | 0.09  |     | °    |
| Channel-to-channel crosstalk           | OPA2354                                              | f = 5 MHz                                                                                                      |     | –100  |     | dB   |
|                                        | OPA4354                                              |                                                                                                                |     | –84   |     |      |
| OUTPUT                                 |                                                      |                                                                                                                |     |       |     |      |
| Voltage output swing from rail         |                                                      | V <sub>S</sub> = 5 V, R <sub>L</sub> = 1 kΩ, A <sub>OL</sub> > 94 dB<br>T <sub>A</sub> = 25°C                  |     | 0.1   | 0.3 | V    |
|                                        |                                                      | V <sub>S</sub> = 5 V, R <sub>L</sub> = 1 kΩ, A <sub>OL</sub> > 90 dB<br>T <sub>A</sub> = –40°C to +125°C       |     |       | 0.4 |      |
| I <sub>O</sub>                         | Output current, single, dual, quad <sup>(1)(2)</sup> | V <sub>S</sub> = 5 V                                                                                           |     | 100   |     | mA   |
|                                        |                                                      | V <sub>S</sub> = 3 V                                                                                           |     | 50    |     | mA   |
| Closed-loop output impedance           |                                                      | f < 100 kHz                                                                                                    |     | 0.05  |     | Ω    |
| R <sub>O</sub>                         | Open-loop output resistance                          |                                                                                                                |     | 35    |     | Ω    |
| POWER SUPPLY                           |                                                      |                                                                                                                |     |       |     |      |
| V <sub>S</sub>                         | Specified voltage                                    |                                                                                                                |     | 2.7   | 5   | V    |
|                                        | Operating voltage                                    |                                                                                                                |     | 2.5   | 5.5 |      |
| I <sub>Q</sub>                         | Quiescent current (per amplifier)                    | T <sub>A</sub> = 25°C, V <sub>S</sub> = 5 V (enabled)<br>I <sub>O</sub> = 0                                    |     | 4.9   | 6   | mA   |
|                                        |                                                      | T <sub>A</sub> = –40°C to +125°C                                                                               |     |       | 7.5 |      |
| THERMAL SHUTDOWN: JUNCTION TEMPERATURE |                                                      |                                                                                                                |     |       |     |      |
| Shutdown                               |                                                      |                                                                                                                |     | 160   |     | °C   |
| Reset from shutdown                    |                                                      |                                                                                                                |     | 140   |     | °C   |
| THERMAL RANGE                          |                                                      |                                                                                                                |     |       |     |      |
| Specified                              |                                                      |                                                                                                                |     | –40   | 125 | °C   |
| Operating                              |                                                      |                                                                                                                |     | –55   | 150 | °C   |
| Storage                                |                                                      |                                                                                                                |     | –65   | 150 | °C   |

 (1) See typical characteristic curves, *Output Voltage Swing vs Output Current* (Fig. 20 and Fig. 22).

(2) Specified by design.

## 7.8 Typical Characteristics

at  $T_A = 25^\circ\text{C}$ ,  $V_S = 5\text{ V}$ ,  $G = +1$ ,  $R_F = 0\ \Omega$ ,  $R_L = 1\text{ k}\Omega$ , and connected to  $V_S / 2$ , (unless otherwise noted)

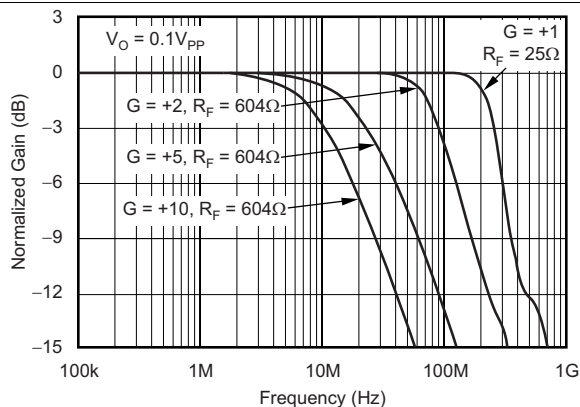


FIG 1. Noninverting Small-Signal Frequency Response

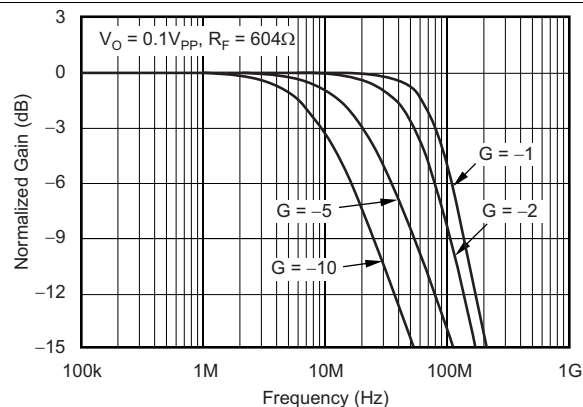


FIG 2. Inverting Small-Signal Frequency Response

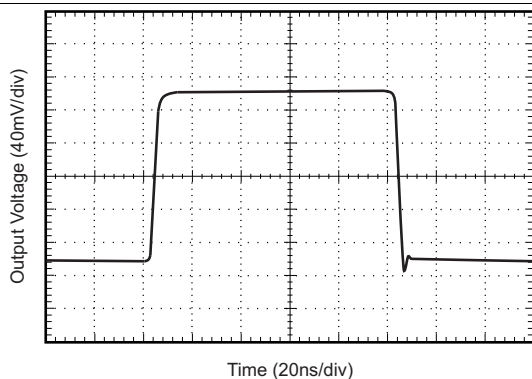


FIG 3. Noninverting Small-Signal Step Response

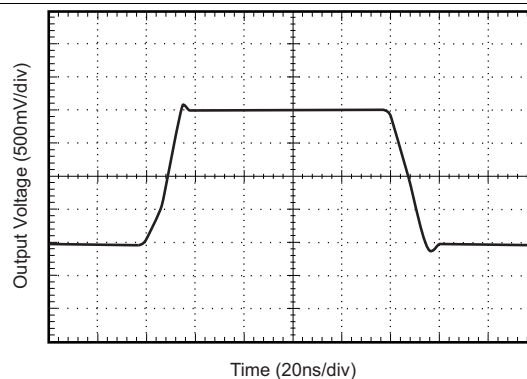


FIG 4. Noninverting Large-Signal Step Response

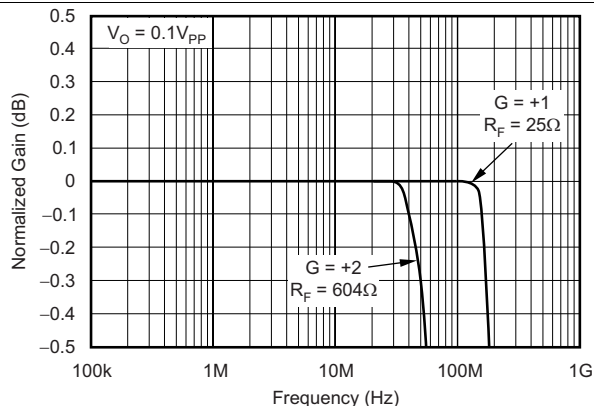


FIG 5. 0.1-dB Gain Flatness

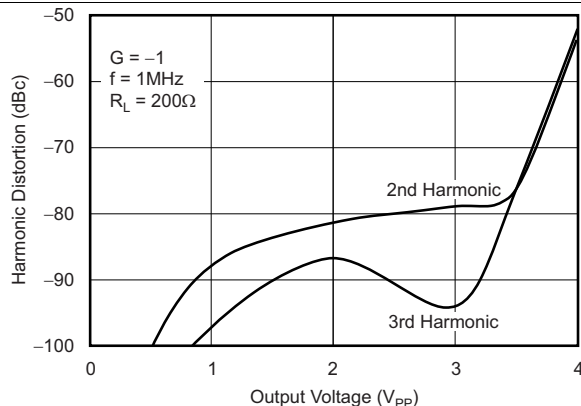


FIG 6. Harmonic Distortion vs Output Voltage

## Typical Characteristics (continued)

at  $T_A = 25^\circ\text{C}$ ,  $V_S = 5\text{ V}$ ,  $G = +1$ ,  $R_F = 0\ \Omega$ ,  $R_L = 1\text{ k}\Omega$ , and connected to  $V_S / 2$ , (unless otherwise noted)

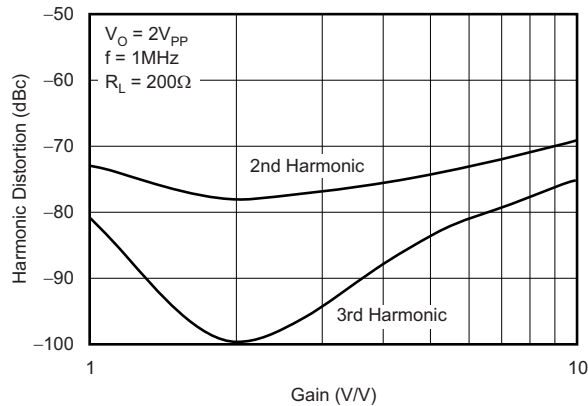


FIG 7. Harmonic Distortion vs Noninverting Gain

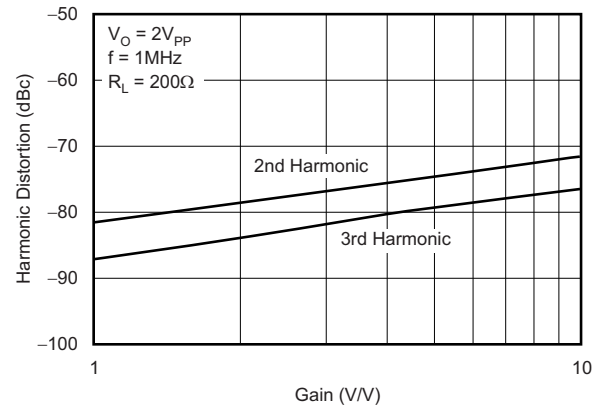


FIG 8. Harmonic Distortion vs Inverting Gain

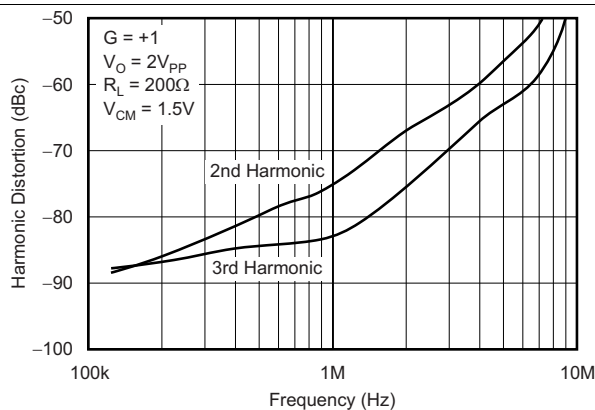


FIG 9. Harmonic Distortion vs Frequency

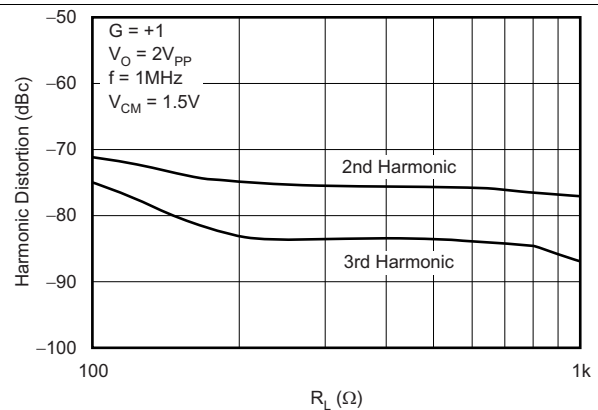


FIG 10. Harmonic Distortion vs Load Resistance

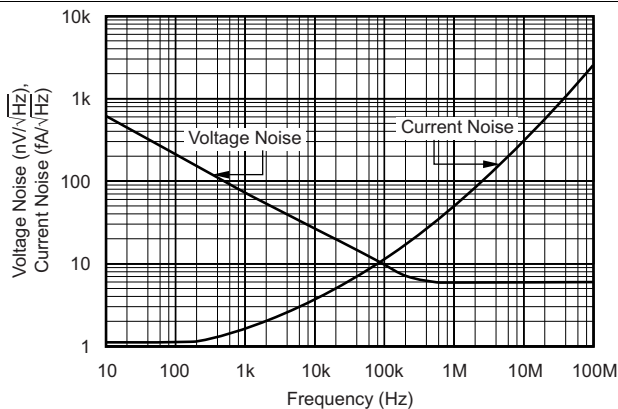


FIG 11. Input Voltage and Current Noise Spectral Density vs Frequency

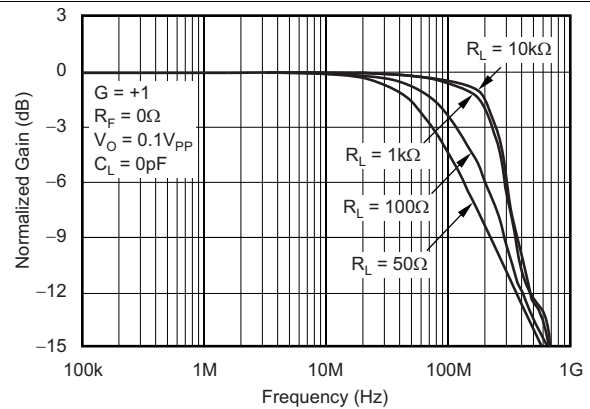


FIG 12. Frequency Response for Various  $R_L$  Values

## Typical Characteristics (continued)

at  $T_A = 25^\circ\text{C}$ ,  $V_S = 5\text{ V}$ ,  $G = +1$ ,  $R_F = 0\ \Omega$ ,  $R_L = 1\text{ k}\Omega$ , and connected to  $V_S / 2$ , (unless otherwise noted)

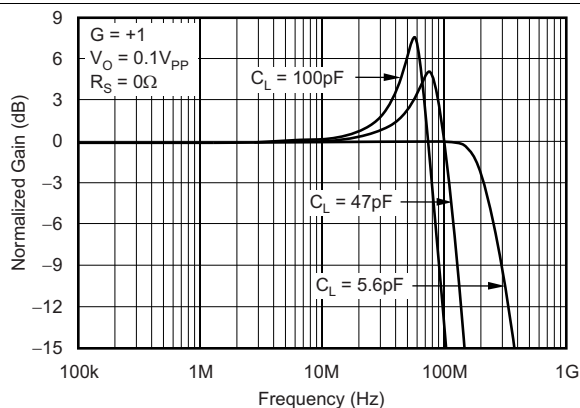


FIG 13. Frequency Response for Various  $C_L$  Values

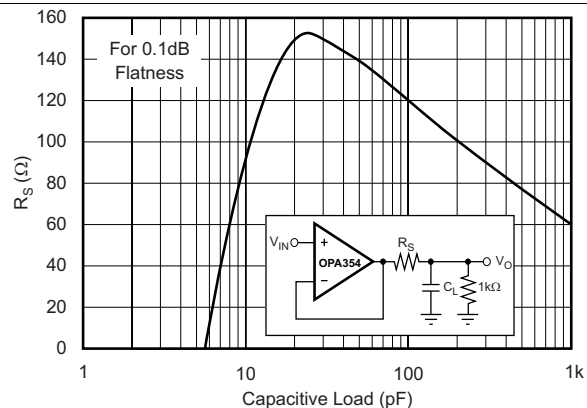


FIG 14. Recommended  $R_S$  vs Capacitive Load

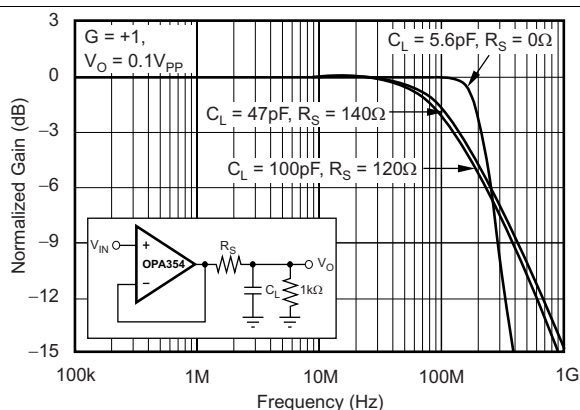


FIG 15. Frequency Response vs Capacitive Load

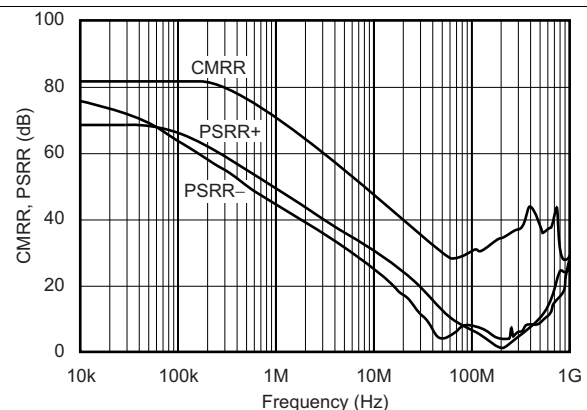


FIG 16. Common-Mode Rejection Ratio and Power-Supply Rejection Ratio vs Frequency

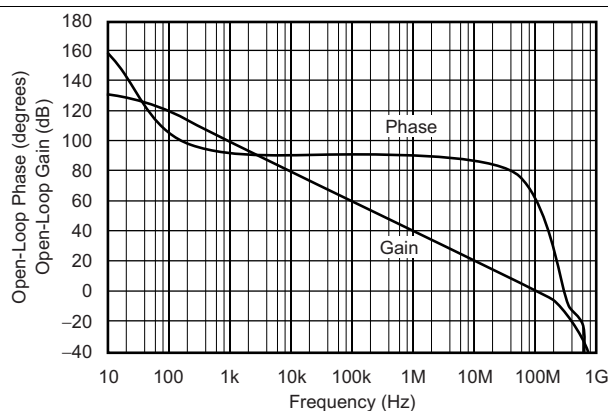


FIG 17. Open-Loop Gain and Phase

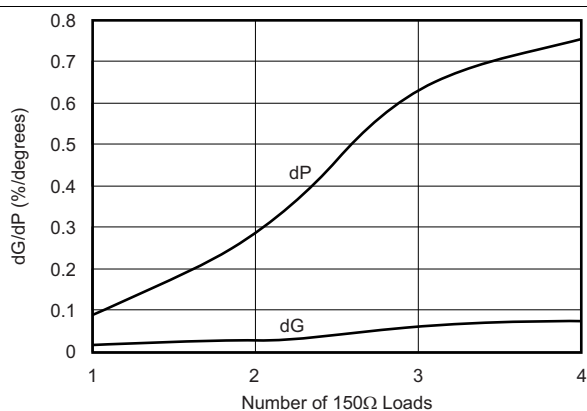


FIG 18. Composite Video Differential Gain and Phase

## Typical Characteristics (continued)

at  $T_A = 25^\circ\text{C}$ ,  $V_S = 5\text{ V}$ ,  $G = +1$ ,  $R_F = 0\ \Omega$ ,  $R_L = 1\text{ k}\Omega$ , and connected to  $V_S / 2$ , (unless otherwise noted)

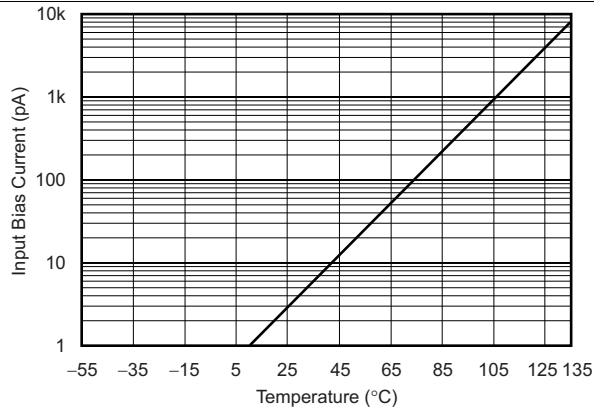


图 19. Input Bias Current vs Temperature

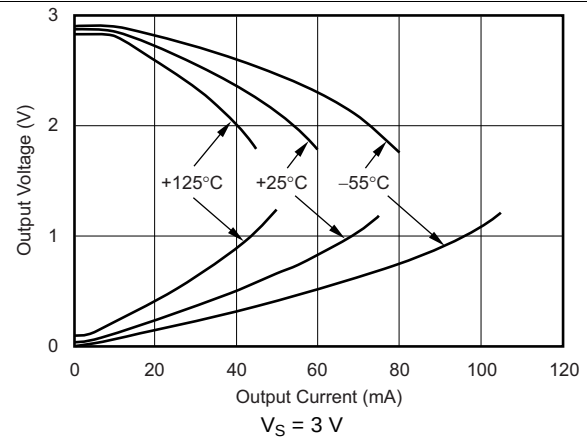


图 20. Output Voltage Swing vs Output Current

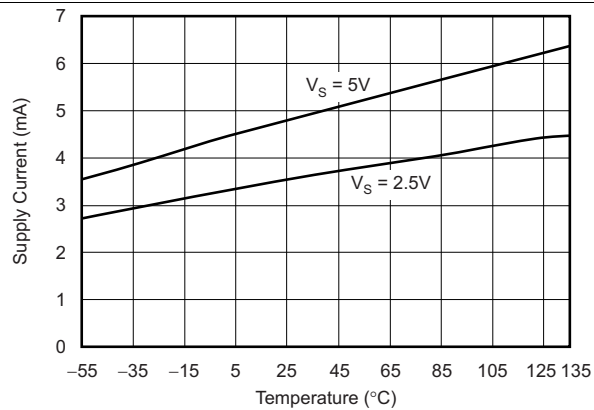


图 21. Supply Current vs Temperature

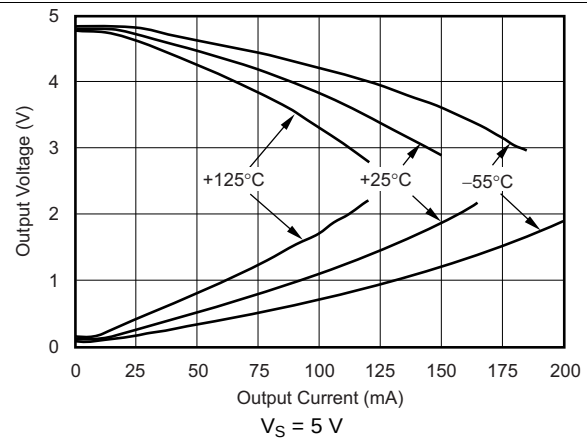


图 22. Output Voltage Swing vs Output Current

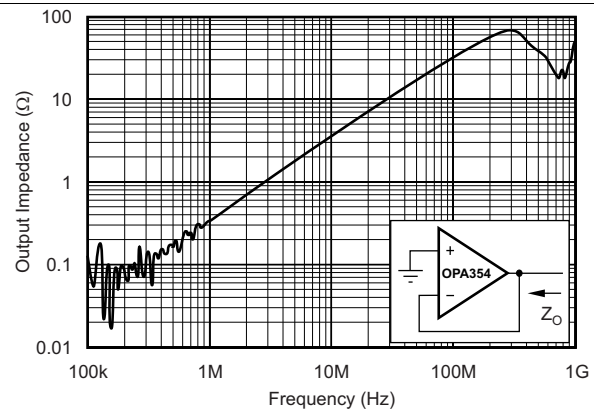


图 23. Closed-Loop Output Impedance vs Frequency

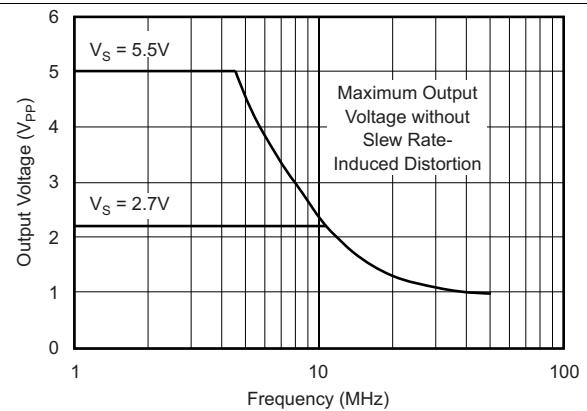


图 24. Maximum Output Voltage vs Frequency

## Typical Characteristics (continued)

at  $T_A = 25^\circ\text{C}$ ,  $V_S = 5\text{ V}$ ,  $G = +1$ ,  $R_F = 0\ \Omega$ ,  $R_L = 1\text{ k}\Omega$ , and connected to  $V_S / 2$ , (unless otherwise noted)

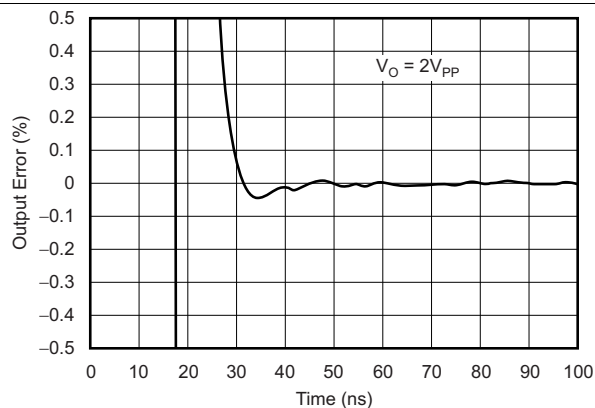


FIG 25. Output Settling Time to 0.1%

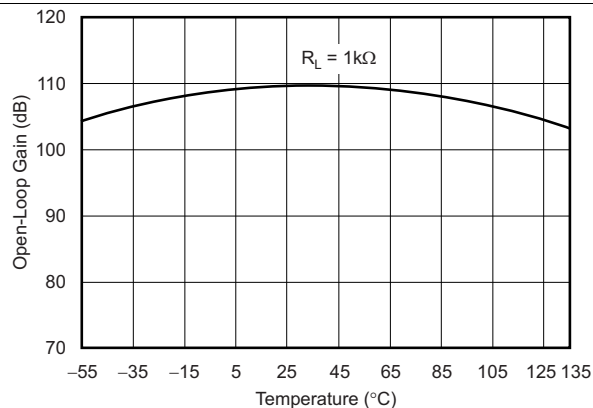


FIG 26. Open-Loop Gain vs Temperature

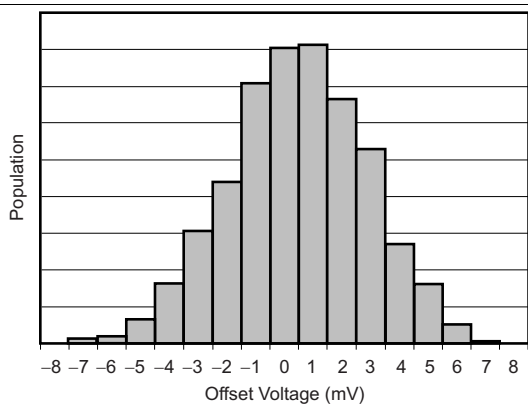


FIG 27. Offset Voltage Production Distribution

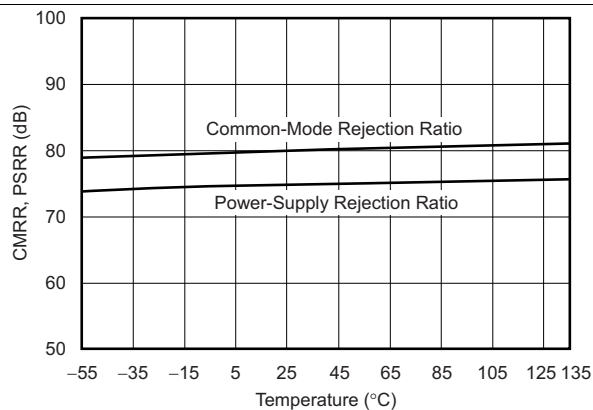


FIG 28. Common-Mode Rejection Ratio and Power-Supply Rejection Ratio vs Temperature

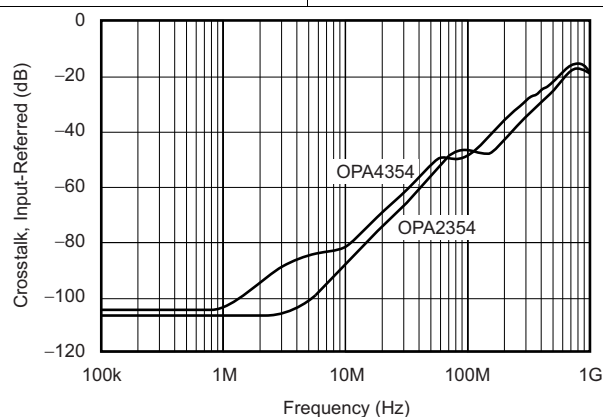


FIG 29. Channel-to-Channel Crosstalk


## 8 Detailed Description

### 8.1 Overview

The OPAx354 is a CMOS, rail-to-rail I/O, high-speed, voltage-feedback operational amplifier designed for video, high-speed, and other applications. It is available as a single, dual, or quad op amp.

The amplifier features a 100-MHz gain bandwidth, and 150-V/ $\mu$ s slew rate, but the amplifier is unity-gain stable and can operate as a 1-V/V voltage follower.

### 8.2 Functional Block Diagram

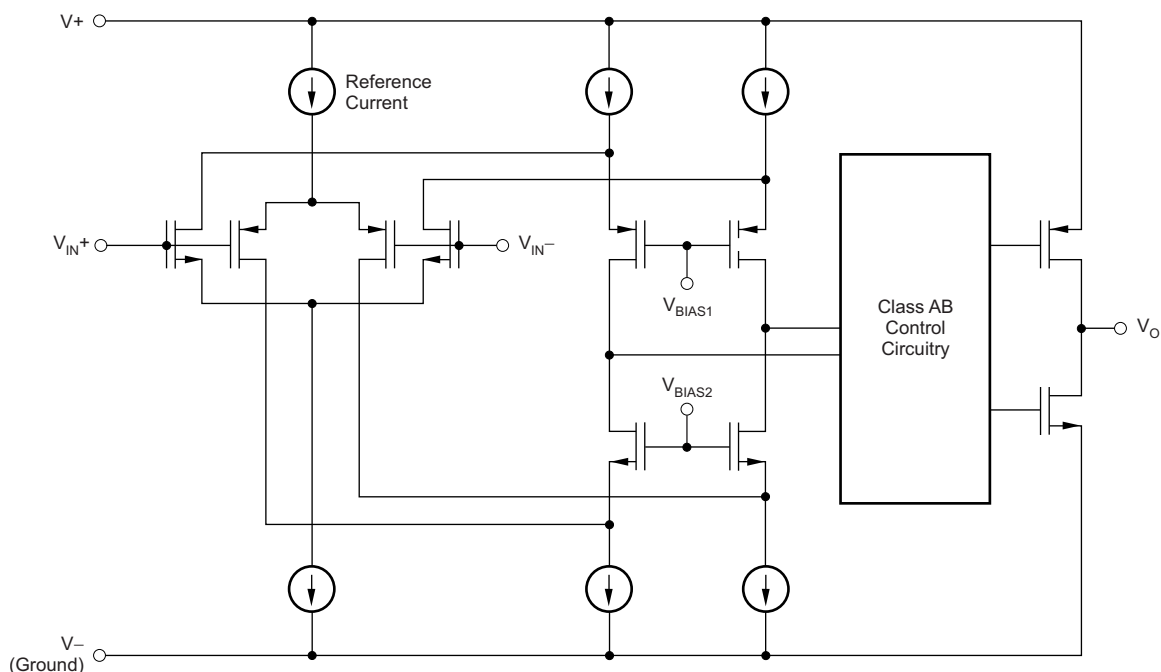



## 8.3 Feature Description

### 8.3.1 Operating Voltage

The OPAx354 is specified over a power-supply range of 2.7 V to 5.5 V ( $\pm 1.35$  V to  $\pm 2.75$  V). However, the supply voltage may range from 2.5 V to 5.5 V ( $\pm 1.25$  V to  $\pm 2.75$  V). Supply voltages higher than 7.5 V (absolute maximum) can permanently damage the amplifier.

Parameters that vary over supply voltage or temperature are shown in the [Typical Characteristics](#) section of this data sheet.

### 8.3.2 Rail-to-Rail Input

The specified input common-mode voltage range of the OPAx354 extends 100 mV beyond the supply rails. This extended range is achieved with a complementary input stage: an N-channel input differential pair in parallel with a P-channel differential pair, as shown in the [Functional Block Diagram](#). The N-channel pair is active for input voltages close to the positive rail, typically  $(V+) - 1.2$  V to 100 mV above the positive supply, while the P-channel pair is on for inputs from 100 mV below the negative supply to approximately  $(V+) - 1.2$  V. There is a small transition region, typically  $(V+) - 1.5$  V to  $(V+) - 0.9$  V, in which both pairs are on. This 600-mV transition region vary  $\pm 500$  mV with process variation. Therefore, the transition region (both input stages on) range from  $(V+) - 2$  V to  $(V+) - 1.5$  V on the low end, up to  $(V+) - 0.9$  V to  $(V+) - 0.4$  V on the high end.

A double-folded cascode adds the signal from the two input pairs and presents a differential signal to the class AB output stage.

### 8.3.3 Rail-to-Rail Output

A class AB output stage with common-source transistors achieves rail-to-rail output. For high-impedance loads ( $> 200 \Omega$ ), the output voltage swing is typically 100 mV from the supply rails. With 10- $\Omega$  loads, a useful output swing is achieved while maintaining high open-loop gain. See the typical characteristic curves, *Output Voltage Swing vs Output Current* ([Figure 20](#) and [Figure 22](#)).

### 8.3.4 Output Drive

The OPAx354 output stage supplies a continuous output current of  $\pm 100$  mA and yet provide approximately 2.7 V of output swing on a 5-V supply, as shown in [Figure 30](#). For maximum reliability, TI does not recommend running a continuous DC current in excess of  $\pm 100$  mA. See the typical characteristic curves, *Output Voltage Swing vs Output Current* ([Figure 20](#) and [Figure 22](#)). For supplying continuous output currents greater than  $\pm 100$  mA, the OPAx354 may be operated in parallel, as shown in [Figure 31](#).

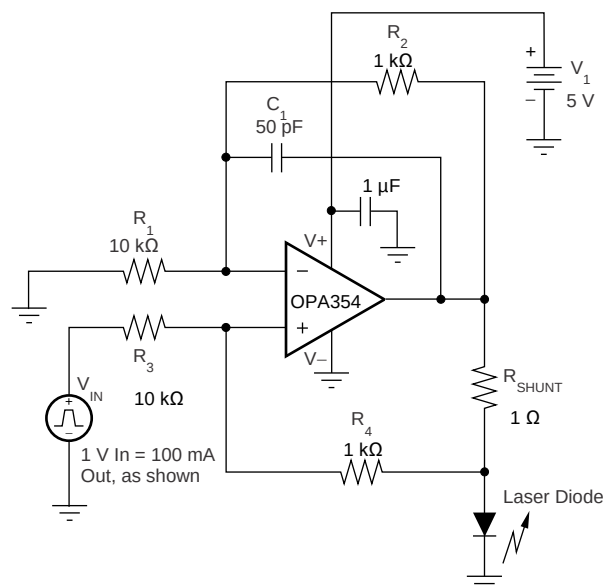


Figure 30. Laser Diode Driver

## Feature Description (continued)

The OPAx354 provides peak currents up to 200 mA, which corresponds to the typical short-circuit current. Therefore, an on-chip thermal shutdown circuit is provided to protect the OPAx354 from dangerously high junction temperatures. At 160°C, the protection circuit shuts down the amplifier. Normal operation resumes when the junction temperature cools to below 140°C.

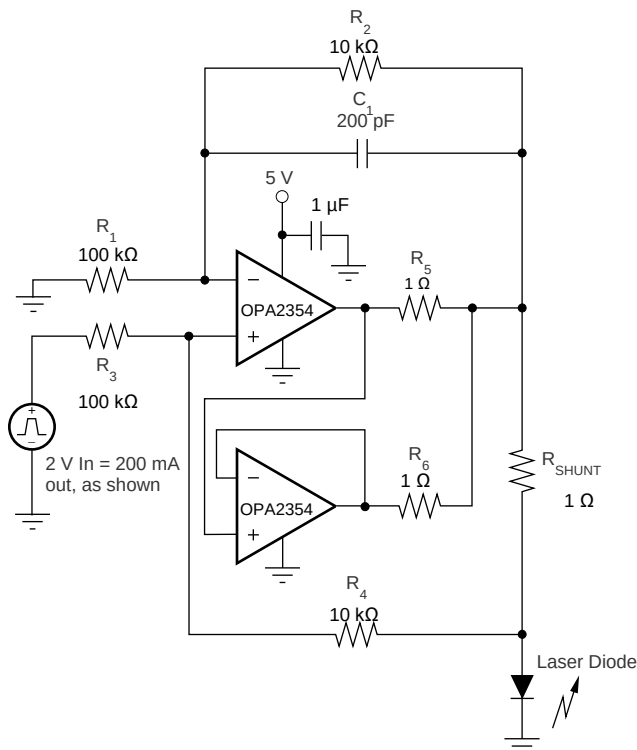


FIG 31. Parallel Operation

### 8.3.5 Video

The OPAx354 output stage is capable of driving standard back-terminated 75-Ω video cables, as shown in FIG 32. By back-terminating a transmission line, the output stage does not exhibit a capacitive load to the driver. A properly back-terminated 75-Ω cable does not appear as capacitance; the cable presents a 150-Ω resistive load to the OPAx354 output.


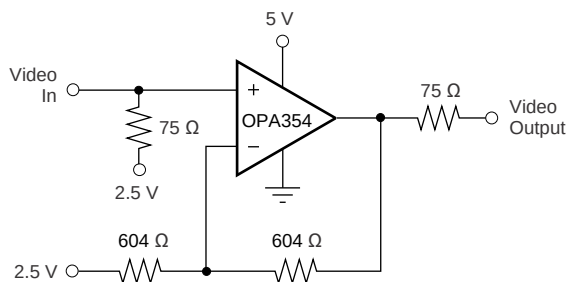


FIG 32. Single-Supply Video Line Driver

The OPAx354 is used as an amplifier for RGB graphic signals, which feature a voltage of zero at the video black level, by offsetting and AC-coupling the signal. See FIG 33.

## Feature Description (continued)

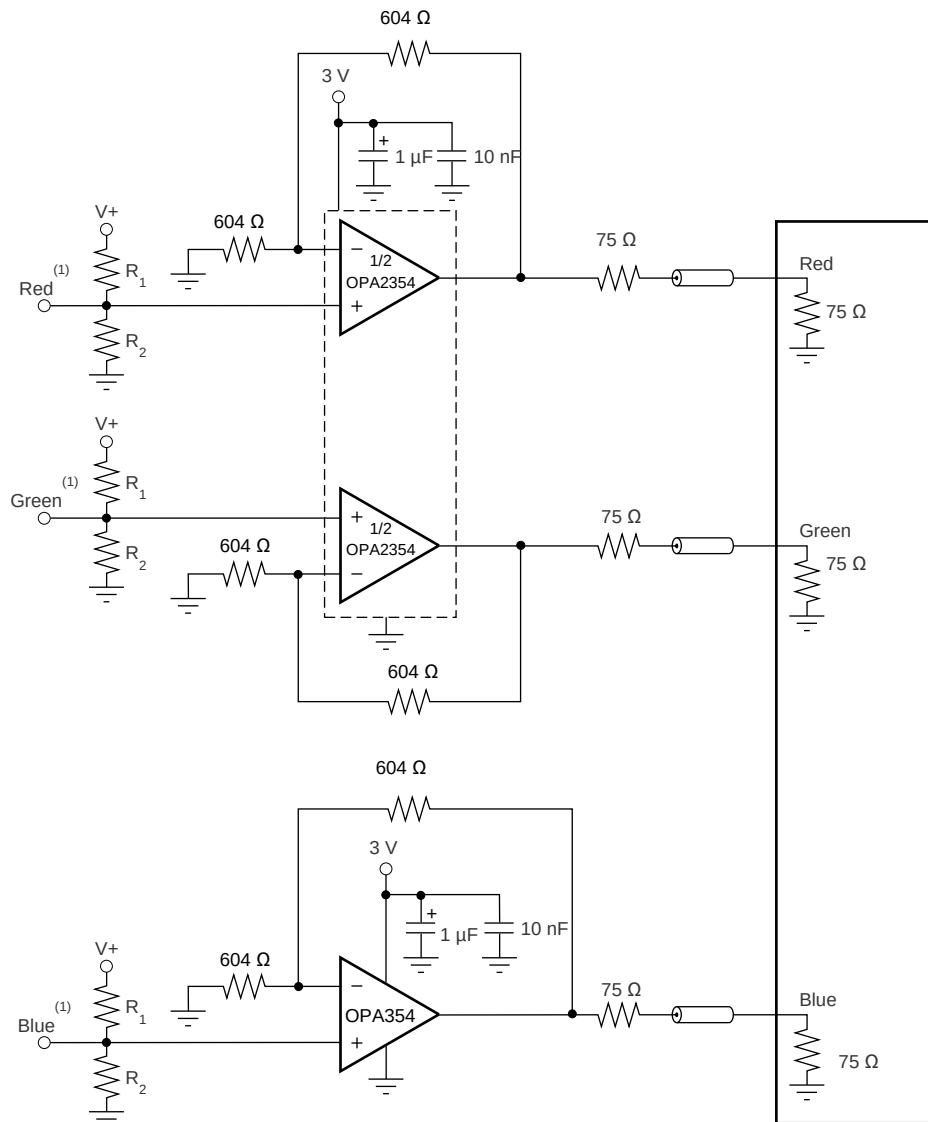

(1) Source video signal offset 300 mV above ground to accommodate op amp swing-to-ground capability.


**FIG 33. RGB Cable Driver**

## Feature Description (continued)

### 8.3.6 Driving Analog-to-Digital converters

The OPAx354 series op amps offer 60 ns of settling time to 0.01%, making the series a good choice for driving high- and medium-speed sampling A/D converters and reference circuits. The OPAx354 series provide an effective means of buffering the A/D converter input capacitance and resulting charge injection while providing signal gain. For applications requiring high DC accuracy, the [OPA350 series](#) is recommended.

Figure 34 shows the OPAx354 driving an A/D converter. With the OPAx354 in an inverting configuration, a capacitor across the feedback resistor is used to filter high-frequency noise in the signal.

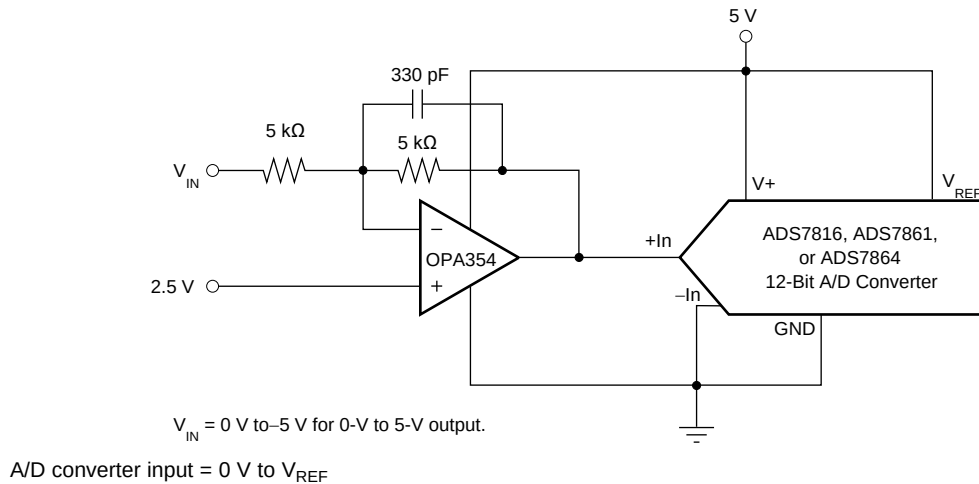


**Figure 34. The OPAx354 in Inverting Configuration Driving the ADS7816**

### 8.3.7 Capacitive Load and Stability

The OPAx354 series op amps drives a wide range of capacitive loads. However, all op amps may become unstable under certain conditions. Op amp configuration, gain, and load value are just a few of the factors to consider when determining stability. An op amp in unity-gain configuration is most susceptible to the effects of capacitive loading. The capacitive load reacts with the device output resistance, along with any additional load resistance, to create a pole in the small-signal response that degrades the phase margin. See the *Frequency Response for Various  $C_L$*  typical characteristic curve (Figure 13) for details.

The OPAx354 topology enhances its ability to drive capacitive loads. In unity gain, these op amps perform well with large capacitive loads. See the *Recommended  $R_S$  vs Capacitive Load* (Figure 14) and *Frequency Response vs Capacitive Load* (Figure 15) typical characteristic curves for details.

One method of improving capacitive load drive in the unity-gain configuration is to insert a 10-Ω to 20-Ω resistor in series with the output, as shown in Figure 35. This configuration significantly reduces ringing with large capacitive loads; see the *Frequency Response vs Capacitive Load* typical characteristic curve (Figure 15). However, if there is a resistive load in parallel with the capacitive load,  $R_S$  creates a voltage divider. This voltage division introduces a DC error at the output and slightly reduces output swing. This error may be insignificant. For instance, with  $R_L = 10\text{ k}\Omega$  and  $R_S = 20\text{ }\Omega$ , there is an error of approximately 0.2% at the output.

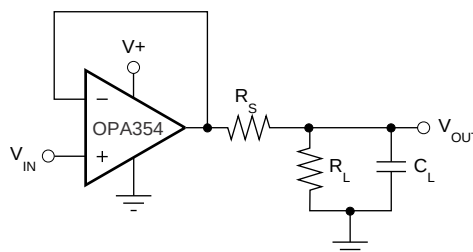


**Figure 35. Series Resistor in Unity-Gain Configuration Improves Capacitive Load Drive**

## Feature Description (continued)

### 8.3.8 Wideband Transimpedance Amplifier

Wide bandwidth, low input bias current, low input voltage, and current noise make the OPAx354 a preferred wideband photodiode transimpedance amplifier for low-voltage single-supply applications. Low-voltage noise is important because photodiode capacitance causes the effective noise gain of the circuit to increase at high frequency.

The key elements to a transimpedance design (as shown in [Figure 36](#)) are the expected diode capacitance [including the parasitic input common-mode and differential-mode input capacitance (2 + 2) pF for the OPAx354], the desired transimpedance gain ( $R_F$ ), and the gain-bandwidth product (GBW) for the OPAx354 (100 MHz, typical). With these three variables set, the feedback capacitor value ( $C_F$ ) may be set to control the frequency response.

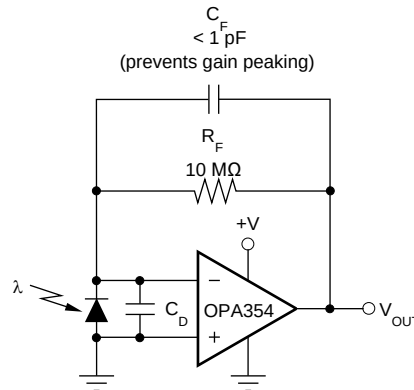

**Figure 36. Transimpedance Amplifier**

To achieve a maximally flat, second-order, Butterworth frequency response, the feedback pole must be set as shown in [Equation 1](#):

$$\frac{1}{2\pi R_F C_F} = \sqrt{\frac{\text{GBP}}{4\pi R_F C_D}} \quad (1)$$

Typical surface-mount resistors have a parasitic capacitance of approximately 0.2 pF that must be deducted from the calculated feedback capacitance value. Bandwidth is calculated by [Equation 2](#):

$$f_{-3\text{dB}} = \sqrt{\frac{\text{GBP}}{2\pi R_F C_D}} \text{ Hz} \quad (2)$$

For even higher transimpedance bandwidth, the high-speed CMOS [OPA355](#) (200-MHz GBW) or the [OPA655](#) (400-MHz GBW) may be used.

## 8.4 Device Functional Modes

The OPAx354 family of devices is powered on when the supply is connected. The devices can operate as single-supply operational amplifiers or dual-supply amplifiers depending on the application. The devices are used with asymmetrical supplies as long as the differential voltage ( $V_-$  to  $V_+$ ) is at least 1.8 V and no greater than 5.5 V (example:  $V_-$  set to -3.5 V and  $V_+$  set to 1.5 V).

## 9 Application and Implementation

### 注

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

### 9.1 Application Information

The OPAX354 family of devices is a CMOS, rail-to-rail I/O, high-speed, voltage-feedback operational amplifier designed for video, high-speed, and other applications. The OPAX354 family of devices is available as a single, dual, or quad op amp. The amplifier features a 100-MHz gain bandwidth, and 150-V/ $\mu$ s slew rate, but it is unity-gain stable and operates as a 1-V/V voltage follower.

### 9.2 Typical Application

Wide gain bandwidth, low input bias current, low input voltage, and current noise make the OPAX354 family of devices an ideal wideband photodiode transimpedance amplifier. Low-voltage noise is important because photodiode capacitance causes the effective noise gain of the circuit to increase at high frequency. The key elements to a transimpedance design, as shown in 图 37, are the expected diode capacitance, (which include the parasitic input common-mode and differential-mode input capacitance) the desired transimpedance gain, and the gain-bandwidth (GBW) for the OPAX354 family of devices (20 MHz). With these three variables set, the feedback capacitor value is set to control the frequency response. Feedback capacitance includes the stray capacitance, which is 0.2 pF for a typical surface-mount resistor.

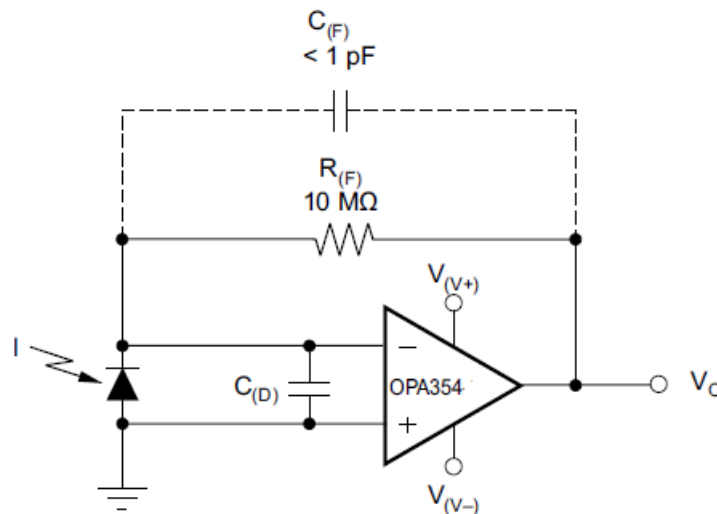


图 37. Dual-Supply Transimpedance Amplifier

#### 9.2.1 Design Requirements

For this design example, use the parameters listed in 表 1 as the input parameters.

表 1. Design Parameters

| PARAMETER                  | EXAMPLE VALUE |
|----------------------------|---------------|
| Supply voltage, $V_{(V+)}$ | 2.5 V         |
| Supply voltage, $V_{(V-)}$ | -2.5 V        |

$C_{(F)}$  is optional to prevent gain peaking.  $C_{(F)}$  includes the stray capacitance of  $R_{(F)}$ .

## 9.2.2 Detailed Design Procedure

To achieve a maximally-flat, second-order Butterworth frequency response, set the feedback pole using 式 3.

$$\frac{1}{2 \times \pi \times R_{(F)} \times C_{(F)}} = \sqrt{\frac{GBW}{4 \times \pi \times R_{(F)} \times C_{(D)}}} \quad (3)$$

Calculate the bandwidth using 式 4.


$$f_{(-3 \text{ dB})} = \sqrt{\frac{GBW}{2 \times \pi \times R_{(F)} \times C_{(D)}}} \quad (4)$$

### 9.2.2.1 Optimizing the Transimpedance Circuit

To achieve the best performance, components must be selected according to the following guidelines:

1. For lowest noise, select  $R_{(F)}$  to create the total required gain. Using a lower value for  $R_{(F)}$  and adding gain after the transimpedance amplifier generally produces poorer noise performance. The noise produced by  $R_{(F)}$  increases with the square-root of  $R_{(F)}$ , whereas the signal increases linearly. Therefore, signal-to-noise ratio improves when all the required gain is placed in the transimpedance stage.
2. Minimize photodiode capacitance and stray capacitance at the summing junction (inverting input). This capacitance causes the voltage noise of the op amp to amplify (increasing amplification at high frequency). Using a low-noise voltage source to reverse-bias a photodiode reduce the capacitance. Smaller photodiodes have lower capacitance. Use optics to concentrate light on a small photodiode.
3. Noise increases with increased bandwidth. Limit the circuit bandwidth to only the required bandwidth. Use a capacitor across the  $R_{(F)}$  to limit bandwidth, even if a capacitor not required for stability.
4. Circuit board leakage degrades the performance of an otherwise well-designed amplifier. Clean the circuit board carefully. A circuit board guard trace that encircles the summing junction and is driven at the same voltage helps control leakage.

## 9.2.3 Application Curve

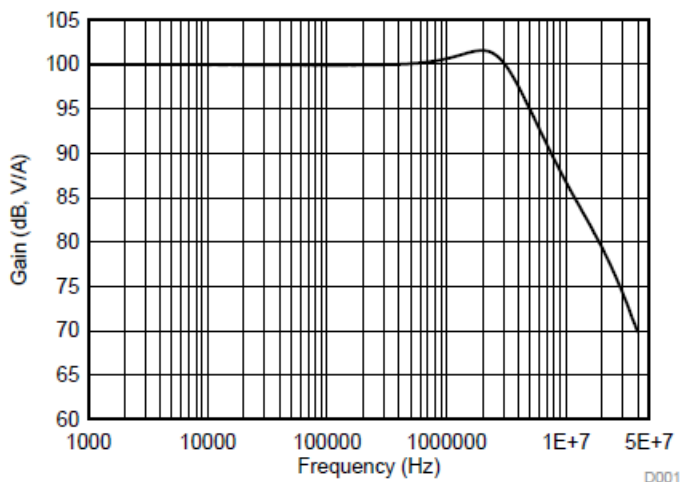

☒ 38. AC Transfer Function

## 10 Power Supply Recommendations

The OPAx354 family of devices is specified for operation from 2.5 V to 5.5 V ( $\pm 1.25$  to  $\pm 2.75$  V); many specifications apply from  $-40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$ . Parameters that exhibit significant variance with regard to operating voltage or temperature are shown [Typical Characteristics](#).

Place 0.1- $\mu\text{F}$  bypass capacitors close to the power-supply pins to reduce errors coupling in from noisy or high impedance power supplies. For more detailed information on bypass capacitor placement, see the [Layout Guidelines](#) section..

## 11 Layout

### 11.1 Layout Guidelines

Good high-frequency printed-circuit board (PCB) layout techniques must be employed for the OPAx354. Generous use of ground planes, short and direct signal traces, and a suitable bypass capacitor located at the V+ pin ensure clean, stable operation. Large areas of copper provides a means of dissipating heat that is generated in normal operation.

TI does not recommend using sockets with any high-speed amplifier.

A 10-nF ceramic bypass capacitor is the minimum recommended value; adding a 1- $\mu\text{F}$  or larger tantalum capacitor in parallel is beneficial when driving a low-resistance load. Providing adequate bypass capacitance is essential to achieving low harmonic and intermodulation distortion.

### 11.2 Layout Example

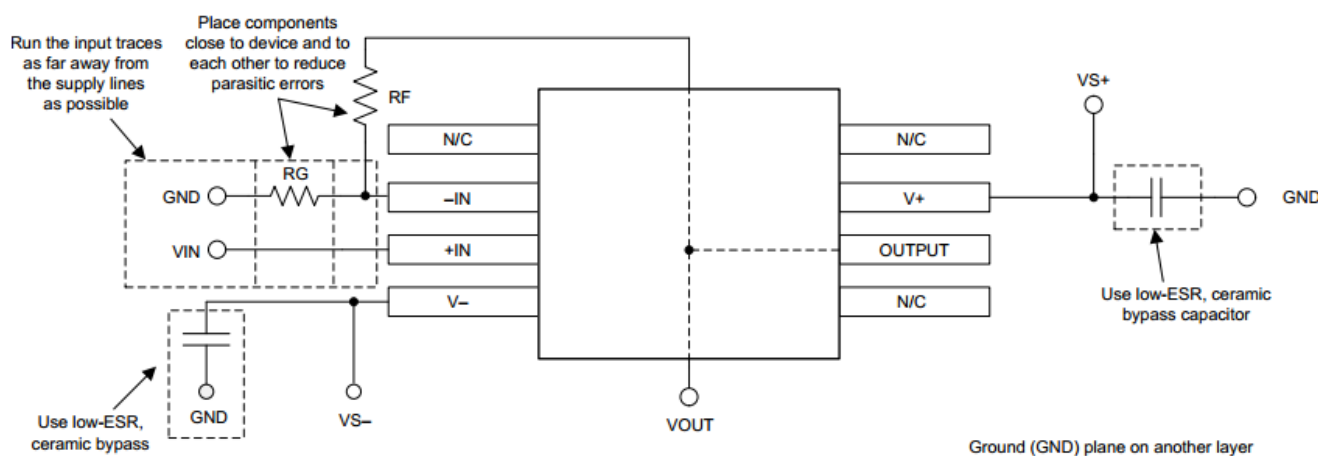


FIG 39. Operational Amplifier Board Layout for Noninverting Configuration

### 11.3 Power Dissipation

Power dissipation depends on power-supply voltage, signal and load conditions. With DC signals, power dissipation is equal to the product of output current times the voltage across the conducting output transistor,  $V_S - V_O$ . Power dissipation is minimized by using the lowest possible power-supply voltage necessary to assure the required output voltage swing.

For resistive loads, the maximum power dissipation occurs at a DC output voltage of one-half the power-supply voltage. Dissipation with AC signals is lower. [AB-039 Power Amplifier Stress and Power Handling Limitations](#) explains how to calculate or measure power dissipation with unusual signals and loads. See [www.ti.com](http://www.ti.com) for more details.



## Power Dissipation (continued)

Any tendency to activate the thermal protection circuit indicates excessive power dissipation or an inadequate heat sink. For reliable operation, junction temperature must be limited to 150°C (maximum.) To estimate the margin of safety in a complete design, increase the ambient temperature until the thermal protection is triggered at 160°C. The thermal protection must trigger more than 35°C above the maximum expected ambient condition of the application.


### 11.4 PowerPAD Thermally-Enhanced Package

In addition to the regular 5-pin SOT-23 and 9-pin VSSOP packages, the single and dual versions of the OPAx354 also come in an 8-pin SOIC PowerPAD package. The 98-pin SO with PowerPAD is a standard size 8-pin SOIC package where the exposed leadframe on the bottom of the package is soldered directly to the PCB to create a low thermal resistance. This direct attachment enhances the OPAx354 power dissipation capability significantly, and eliminates the use of bulky heat sinks and slugs that are traditionally used in thermal packages. This package is easily mounted using standard PCB assembly techniques.

注

Because the 8-pin HSOP PowerPAD is pin-compatible with standard 8-pin SOIC packages, the OPA354 and OPA2354 can directly replace operational amplifiers in existing sockets. Soldering the PowerPAD to the PCB is always required, even with applications that have low power dissipation. This configuration provides the necessary thermal and mechanical connection between the leadframe die pad and the PCB.

The PowerPAD package is designed so that the leadframe die pad (or thermal pad) is exposed on the bottom of the device, as shown in [Figure 40](#). This exposed die provides an extremely low thermal resistance ( $R_{\theta JC}$ ) path between the die and the exterior of the package. The thermal pad on the bottom of the device can then be soldered directly to the PCB, using the PCB as a heat sink. In addition, plated-through holes (vias) provide a low thermal resistance heat flow path to the back side of the PCB.

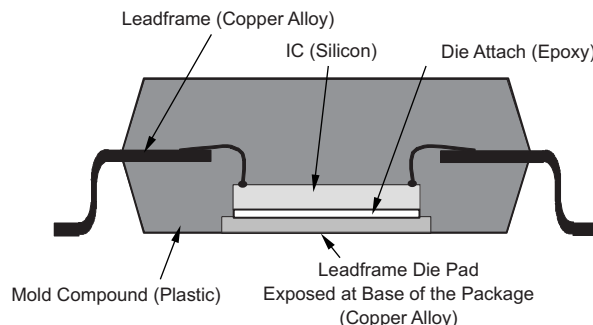

**Figure 40. Section View of a PowerPAD Package**


### 11.5 PowerPAD Assembly Process

The PowerPAD must be connected to the most negative supply voltage for the device, which is ground in single-supply applications and V<sub>-</sub> in split-supply applications.

Prepare the PCB with a top-side etch pattern, as shown in [Figure 41](#). The exact land design may vary based on the specific assembly process requirements. There must be etch for the leads and etch for the thermal land.

Place the recommended number of plated-through holes (or thermal vias) in the area of the thermal pad. These holes must be 13 mils (.013 in) in diameter. The holes are small so that solder wicking through the holes is not a problem during reflow. TI recommends a minimum of five holes for the 8-pin HSOP PowerPAD package, as shown in [Figure 41](#).

## PowerPAD Assembly Process (continued)

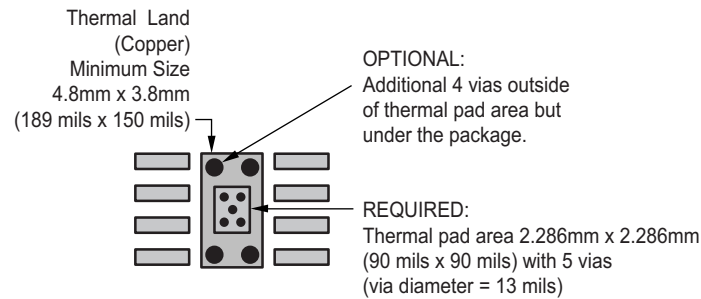


**FIG 41. 8-Pin PowerPAD PCB Etch and Via Pattern**

TI recommends, but does not require, placing a small number of additional holes under the package and outside the thermal pad area. These holes provide additional heat paths between the copper thermal land and the ground plane. The holes may be larger because the holes are not in the area to be soldered, so wicking is not a problem. This technique is shown in [FIG 41](#).

Connect all holes, including those within the thermal pad area and outside the pad area, to the internal ground plane or other internal copper plane for single-supply applications, and to V– for split-supply applications.

When laying out these holes, do not use the typical web or spoke via connection methodology, as shown in [FIG 42](#). Web connections have a high thermal resistance connection that is useful for slowing the heat transfer during soldering operations. This feature makes soldering the vias that have ground plane connections easier. However, in this application, low thermal resistance is desired for the most efficient heat transfer. Therefore, the holes under the PowerPAD package must make connection to the internal ground plane with a complete connection around the entire circumference of the plated-through hole.

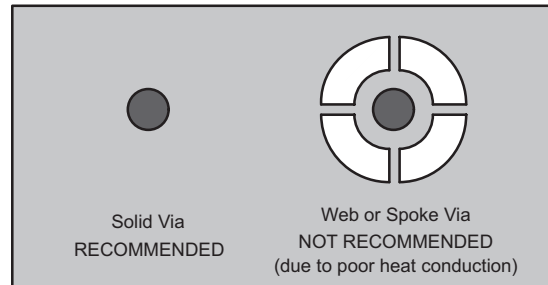

**FIG 42. Via Connection**

The top-side solder mask must leave the pad connections and the thermal pad area exposed. The thermal pad area must leave the 13-mil holes exposed. The larger holes outside the thermal pad area may be covered with a solder mask.

Apply solder paste to the exposed thermal pad area and all of the package pins.

With these preparatory steps in place, the PowerPAD device is placed in position and run through the solder reflow operation as any standard surface-mount component. This preparation and processing results in a part that is properly installed.

For detailed information on the PowerPAD package, including thermal modeling considerations and repair procedures, see [PowerPAD Thermally Enhanced Package](#) on [www.ti.com](http://www.ti.com).

## 12 デバイスおよびドキュメントのサポート

### 12.1 ドキュメントのサポート

関連資料については、以下を参照してください。

- テキサス・インスツルメンツ、『[ADS8326 16ビット、高速、2.7V～5.5V microPower サンプルングのアナログ/デジタル・コンバータ](#)』
- テキサス・インスツルメンツ、『[回路基板のレイアウト技法](#)』
- テキサス・インスツルメンツ、『[トランスインピーダンス・アンプの直感的な補償](#)』
- テキサス・インスツルメンツ、『[FilterPro™ ユーザー・ガイド](#)』
- テキサス・インスツルメンツ、『[高速オペアンプのノイズ解析](#)』
- テキサス・インスツルメンツ、『[OPA380 および OPA2380 高精度、高速トランスインピーダンス・アンプ](#)』
- テキサス・インスツルメンツ、『[OPA355, OPA2355, OPA3355 シャットダウン機能付き200MHz、CMOS オペアンプ](#)』
- テキサス・インスツルメンツ、『[OPA656 広帯域、ユニティ・ゲイン安定、FET 入力オペアンプ](#)』
- テキサス・インスツルメンツ、『[パワー・アンプのストレスと電力処理の制限](#)』
- テキサス・インスツルメンツ、『[放熱特性に優れたPowerPAD パッケージ](#)』

### 12.2 関連リンク

表 2 に、クイック・アクセス・リンクの一覧を示します。カテゴリには、技術資料、サポートおよびコミュニティ・リソース、ツールとソフトウェア、およびサンプル注文またはご購入へのクイック・アクセスが含まれます。

表 2. 関連リンク

| 製品      | プロダクト・フォルダ              | ご注文はこちら                 | 技術資料                    | ツールとソフトウェア              | サポートとコミュニティ             |
|---------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|
| OPA354  | <a href="#">ここをクリック</a> | <a href="#">ここをクリック</a> | <a href="#">ここをクリック</a> | <a href="#">ここをクリック</a> | <a href="#">ここをクリック</a> |
| OPA2354 | <a href="#">ここをクリック</a> | <a href="#">ここをクリック</a> | <a href="#">ここをクリック</a> | <a href="#">ここをクリック</a> | <a href="#">ここをクリック</a> |
| OPA4354 | <a href="#">ここをクリック</a> | <a href="#">ここをクリック</a> | <a href="#">ここをクリック</a> | <a href="#">ここをクリック</a> | <a href="#">ここをクリック</a> |

### 12.3 ドキュメントの更新通知を受け取る方法

ドキュメントの更新についての通知を受け取るには、[ti.com](#)のデバイス製品フォルダを開いてください。右上の隅にある「通知を受け取る」をクリックして登録すると、変更されたすべての製品情報に関するダイジェストを毎週受け取れます。変更の詳細については、修正されたドキュメントに含まれている改訂履歴をご覧ください。

### 12.4 コミュニティ・リソース

The following links connect to TI community resources. Linked contents are provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

**TI E2E™ オンライン・コミュニティ** *TIのE2E ( Engineer-to-Engineer )* コミュニティ。エンジニア間の共同作業を促進するために開設されたものです。e2e.ti.comでは、他のエンジニアに質問し、知識を共有し、アイデアを検討して、問題解決に役立てることができます。

**設計サポート** *TIの設計サポート* 役に立つE2Eフォーラムや、設計サポート・ツールをすばやく見つけることができます。技術サポート用の連絡先情報も参照できます。

### 12.5 商標

PowerPAD, E2E are trademarks of Texas Instruments.  
All other trademarks are the property of their respective owners.

### 12.6 静電気放電に関する注意事項



これらのデバイスは、限定的なESD (静電破壊) 保護機能を内蔵しています。保存時または取り扱い時は、MOSゲートに対する静電破壊を防止するために、リード線同士をショートさせておくか、デバイスを導電フォームに入れる必要があります。

## 12.7 Glossary

[SLYZ022](#) — *TI Glossary*.

This glossary lists and explains terms, acronyms, and definitions.

## 13 メカニカル、パッケージ、および注文情報

以降のページには、メカニカル、パッケージ、および注文に関する情報が記載されています。この情報は、そのデバイスについて利用可能な最新のデータです。このデータは予告なく変更されることがあり、ドキュメントが改訂される場合もあります。本データシートのブラウザ版を使用されている場合は、画面左側の説明をご覧ください。

## PACKAGING INFORMATION

| Orderable Device | Status<br>(1) | Package Type | Package<br>Drawing | Pins | Package<br>Qty | Eco Plan<br>(2) | Lead finish/<br>Ball material<br>(6) | MSL Peak Temp<br>(3) | Op Temp (°C) | Device Marking<br>(4/5) | Samples                 |
|------------------|---------------|--------------|--------------------|------|----------------|-----------------|--------------------------------------|----------------------|--------------|-------------------------|-------------------------|
| OPA2354AIDDA     | ACTIVE        | SO PowerPAD  | DDA                | 8    | 75             | RoHS & Green    | SN                                   | Level-1-260C-UNLIM   | -40 to 125   | OPA<br>2354A            | <a href="#">Samples</a> |
| OPA2354AIDDAG3   | ACTIVE        | SO PowerPAD  | DDA                | 8    | 75             | RoHS & Green    | SN                                   | Level-1-260C-UNLIM   | -40 to 125   | OPA<br>2354A            | <a href="#">Samples</a> |
| OPA2354AIDDAR    | ACTIVE        | SO PowerPAD  | DDA                | 8    | 2500           | RoHS & Green    | SN                                   | Level-1-260C-UNLIM   | -40 to 125   | OPA<br>2354A            | <a href="#">Samples</a> |
| OPA2354AIDDARG3  | ACTIVE        | SO PowerPAD  | DDA                | 8    | 2500           | RoHS & Green    | SN                                   | Level-1-260C-UNLIM   | -40 to 125   | OPA<br>2354A            | <a href="#">Samples</a> |
| OPA2354AIDGKR    | ACTIVE        | VSSOP        | DGK                | 8    | 2500           | RoHS & Green    | Call TI   SN   NIPDAUAG              | Level-2-260C-1 YEAR  | -40 to 125   | OACI                    | <a href="#">Samples</a> |
| OPA2354AIDGKT    | ACTIVE        | VSSOP        | DGK                | 8    | 250            | RoHS & Green    | Call TI   SN   NIPDAUAG              | Level-2-260C-1 YEAR  | -40 to 125   | OACI                    | <a href="#">Samples</a> |
| OPA2354AIDGKTG4  | ACTIVE        | VSSOP        | DGK                | 8    | 250            | RoHS & Green    | Call TI                              | Level-2-260C-1 YEAR  | -40 to 125   | OACI                    | <a href="#">Samples</a> |
| OPA354AIDBVR     | ACTIVE        | SOT-23       | DBV                | 5    | 3000           | RoHS & Green    | NIPDAU                               | Level-2-260C-1 YEAR  | -40 to 125   | OABI                    | <a href="#">Samples</a> |
| OPA354AIDBVT     | ACTIVE        | SOT-23       | DBV                | 5    | 250            | RoHS & Green    | NIPDAU                               | Level-2-260C-1 YEAR  | -40 to 125   | OABI                    | <a href="#">Samples</a> |
| OPA354AIDBVTG4   | ACTIVE        | SOT-23       | DBV                | 5    | 250            | RoHS & Green    | NIPDAU                               | Level-2-260C-1 YEAR  | -40 to 125   | OABI                    | <a href="#">Samples</a> |
| OPA354AIDDA      | ACTIVE        | SO PowerPAD  | DDA                | 8    | 75             | RoHS & Green    | SN                                   | Level-1-260C-UNLIM   | -40 to 125   | OPA<br>354A             | <a href="#">Samples</a> |
| OPA354AIDDAG3    | ACTIVE        | SO PowerPAD  | DDA                | 8    | 75             | RoHS & Green    | SN                                   | Level-1-260C-UNLIM   | -40 to 125   | OPA<br>354A             | <a href="#">Samples</a> |
| OPA354AIDDAR     | ACTIVE        | SO PowerPAD  | DDA                | 8    | 2500           | RoHS & Green    | SN                                   | Level-1-260C-UNLIM   | -40 to 125   | OPA<br>354A             | <a href="#">Samples</a> |
| OPA4354AID       | ACTIVE        | SOIC         | D                  | 14   | 50             | RoHS & Green    | NIPDAU                               | Level-2-260C-1 YEAR  | -40 to 125   | OPA4354A                | <a href="#">Samples</a> |
| OPA4354AIDR      | ACTIVE        | SOIC         | D                  | 14   | 2500           | RoHS & Green    | NIPDAU                               | Level-2-260C-1 YEAR  | -40 to 125   | OPA4354A                | <a href="#">Samples</a> |
| OPA4354AIPWR     | ACTIVE        | TSSOP        | PW                 | 14   | 2500           | RoHS & Green    | NIPDAU                               | Level-2-260C-1 YEAR  | -40 to 125   | OPA<br>4354A            | <a href="#">Samples</a> |
| OPA4354AIPWRG4   | ACTIVE        | TSSOP        | PW                 | 14   | 2500           | RoHS & Green    | NIPDAU                               | Level-2-260C-1 YEAR  | -40 to 125   | OPA<br>4354A            | <a href="#">Samples</a> |
| OPA4354AIPWT     | ACTIVE        | TSSOP        | PW                 | 14   | 250            | RoHS & Green    | NIPDAU                               | Level-2-260C-1 YEAR  | -40 to 125   | OPA<br>4354A            | <a href="#">Samples</a> |

(1) The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

(2) **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

**RoHS Exempt:** TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

**Green:** TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of  $\leq 1000$ ppm threshold. Antimony trioxide based flame retardants must also meet the  $\leq 1000$ ppm threshold requirement.

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.


#### **OTHER QUALIFIED VERSIONS OF OPA4354 :**

- Automotive : [OPA4354-Q1](#)

NOTE: Qualified Version Definitions:

- Automotive - Q100 devices qualified for high-reliability automotive applications targeting zero defects


## TAPE AND REEL INFORMATION

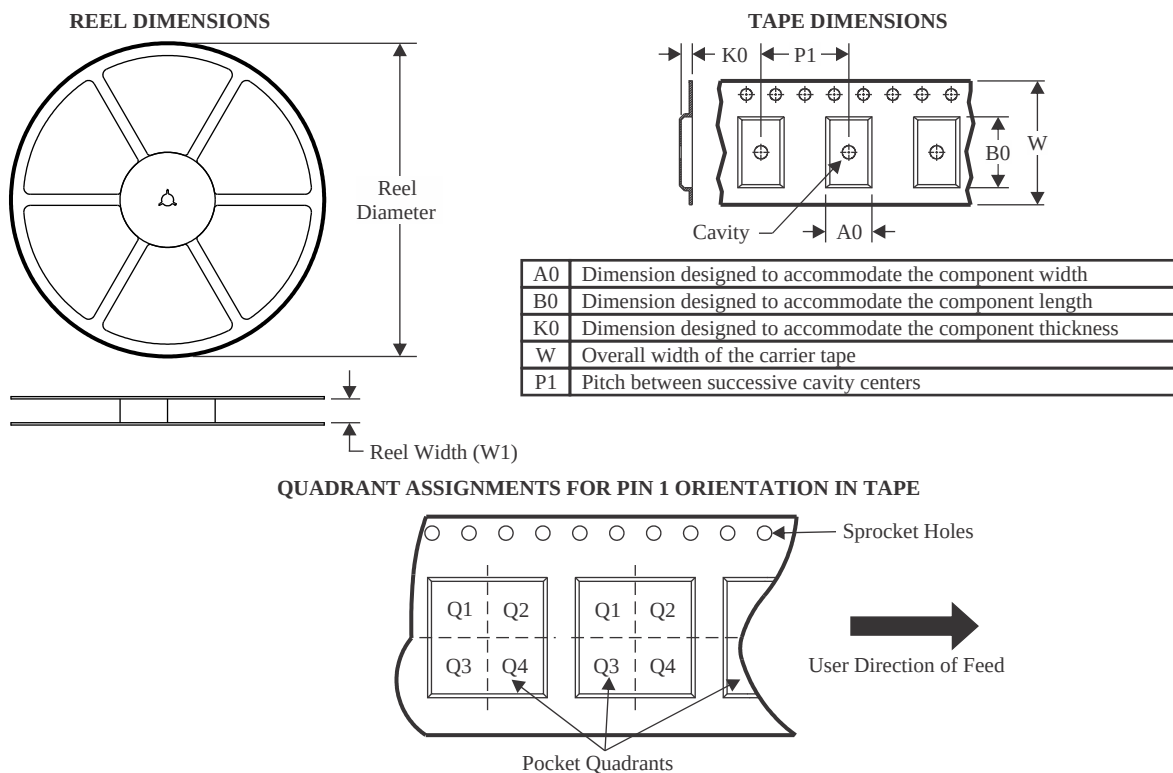

\*All dimensions are nominal

| Device        | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|---------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| OPA2354AIDAR  | SO PowerPAD  | DDA             | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |
| OPA2354AIDGKR | VSSOP        | DGK             | 8    | 2500 | 330.0              | 12.4               | 5.3     | 3.4     | 1.4     | 8.0     | 12.0   | Q1            |
| OPA2354AIDGKT | VSSOP        | DGK             | 8    | 250  | 330.0              | 12.4               | 5.3     | 3.4     | 1.4     | 8.0     | 12.0   | Q1            |
| OPA354AIDBVR  | SOT-23       | DBV             | 5    | 3000 | 178.0              | 9.0                | 3.23    | 3.17    | 1.37    | 4.0     | 8.0    | Q3            |
| OPA354AIDBVT  | SOT-23       | DBV             | 5    | 250  | 178.0              | 9.0                | 3.3     | 3.2     | 1.4     | 4.0     | 8.0    | Q3            |
| OPA354AIDAR   | SO PowerPAD  | DDA             | 8    | 2500 | 330.0              | 12.4               | 6.4     | 5.2     | 2.1     | 8.0     | 12.0   | Q1            |
| OPA4354AIDR   | SOIC         | D               | 14   | 2500 | 330.0              | 16.4               | 6.5     | 9.0     | 2.1     | 8.0     | 16.0   | Q1            |
| OPA4354AIPWR  | TSSOP        | PW              | 14   | 2500 | 330.0              | 12.4               | 6.9     | 5.6     | 1.6     | 8.0     | 12.0   | Q1            |
| OPA4354AIPWT  | TSSOP        | PW              | 14   | 250  | 180.0              | 12.4               | 6.9     | 5.6     | 1.6     | 8.0     | 12.0   | Q1            |

## TAPE AND REEL BOX DIMENSIONS

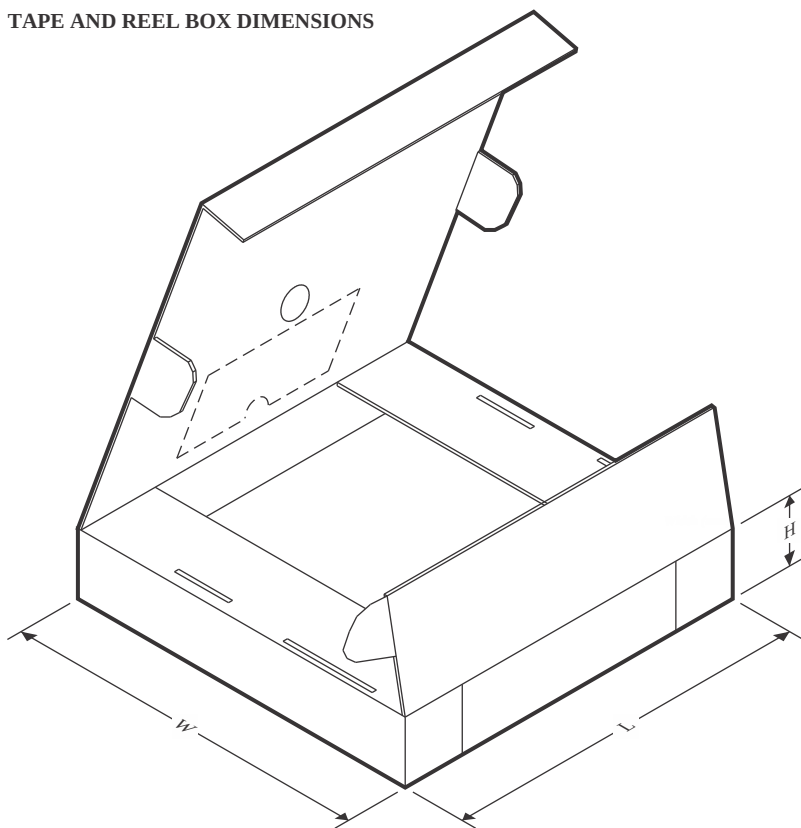


\*All dimensions are nominal

| Device        | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|---------------|--------------|-----------------|------|------|-------------|------------|-------------|
| OPA2354AIDDAR | SO PowerPAD  | DDA             | 8    | 2500 | 356.0       | 356.0      | 35.0        |
| OPA2354AIDGKR | VSSOP        | DGK             | 8    | 2500 | 366.0       | 364.0      | 50.0        |
| OPA2354AIDGKT | VSSOP        | DGK             | 8    | 250  | 366.0       | 364.0      | 50.0        |
| OPA354AIDBVR  | SOT-23       | DBV             | 5    | 3000 | 180.0       | 180.0      | 18.0        |
| OPA354AIDBVT  | SOT-23       | DBV             | 5    | 250  | 180.0       | 180.0      | 18.0        |
| OPA354AIDDAR  | SO PowerPAD  | DDA             | 8    | 2500 | 356.0       | 356.0      | 35.0        |
| OPA4354AIDR   | SOIC         | D               | 14   | 2500 | 356.0       | 356.0      | 35.0        |
| OPA4354AIPWR  | TSSOP        | PW              | 14   | 2500 | 356.0       | 356.0      | 35.0        |
| OPA4354AIPWT  | TSSOP        | PW              | 14   | 250  | 210.0       | 185.0      | 35.0        |




## TUBE

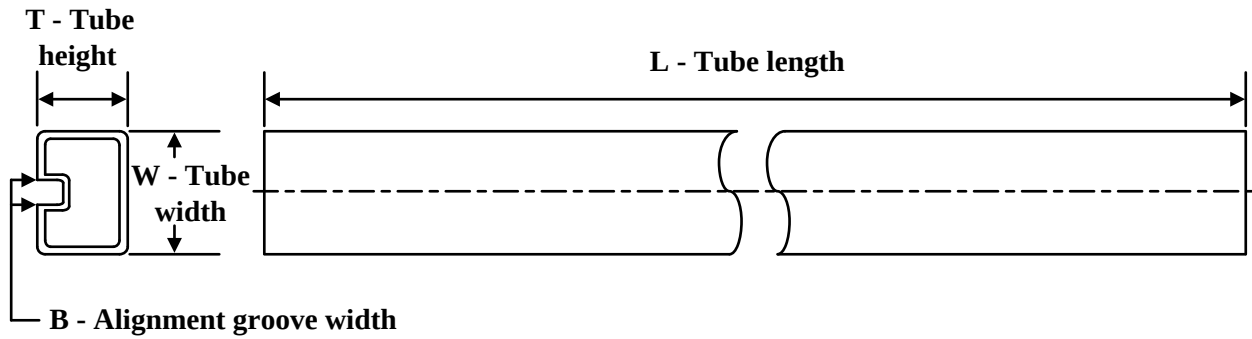

\*All dimensions are nominal

| Device         | Package Name | Package Type | Pins | SPQ | L (mm) | W (mm) | T (μm) | B (mm) |
|----------------|--------------|--------------|------|-----|--------|--------|--------|--------|
| OPA2354AIDDA   | DDA          | HSOIC        | 8    | 75  | 506.6  | 8      | 3940   | 4.32   |
| OPA2354AIDDAG3 | DDA          | HSOIC        | 8    | 75  | 506.6  | 8      | 3940   | 4.32   |
| OPA354AIDDA    | DDA          | HSOIC        | 8    | 75  | 506.6  | 8      | 3940   | 4.32   |
| OPA354AIDDAG3  | DDA          | HSOIC        | 8    | 75  | 506.6  | 8      | 3940   | 4.32   |
| OPA4354AID     | D            | SOIC         | 14   | 50  | 506.6  | 8      | 3940   | 4.32   |

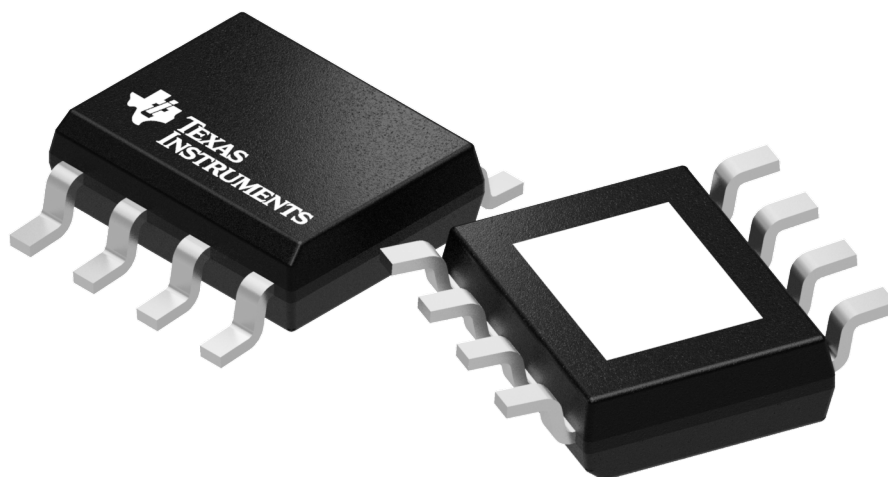

Images above are just a representation of the package family, actual package may vary.  
Refer to the product data sheet for package details.



## PowerPAD™ SOIC - 1.7 mm max height

## PLASTIC SMALL OUTLINE



PowerPAD is a trademark of Texas Instruments.

NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
5. Reference JEDEC registration MS-012, variation BA.

# EXAMPLE BOARD LAYOUT


DDA0008D

PowerPAD™ SOIC - 1.7 mm max height

PLASTIC SMALL OUTLINE

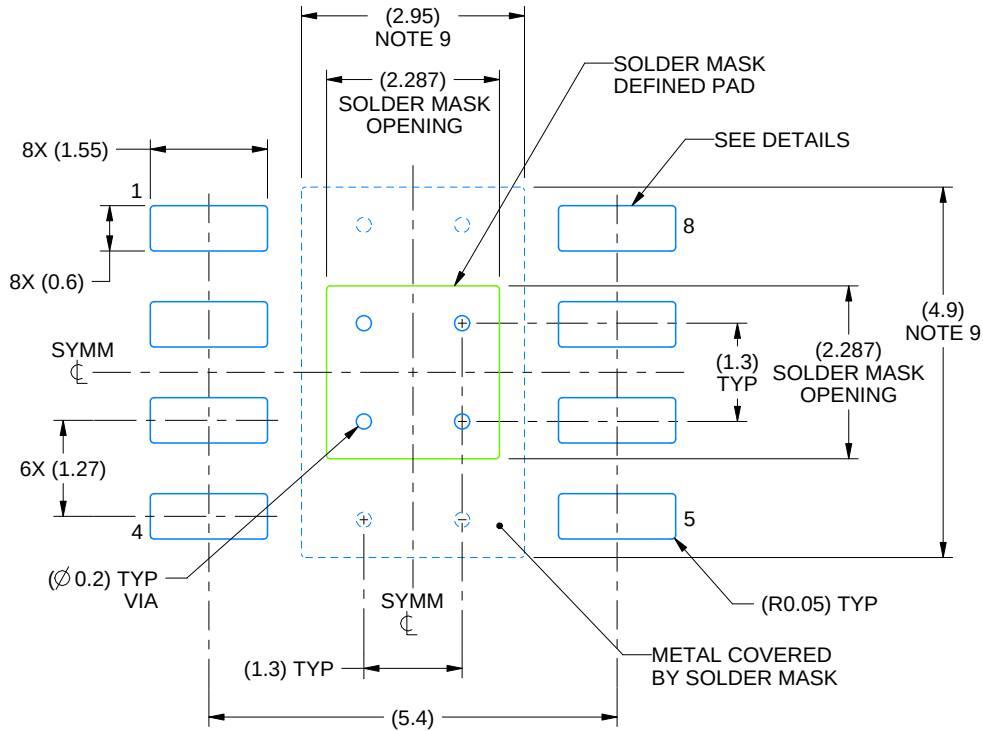

LAND PATTERN EXAMPLE  
SCALE:10X

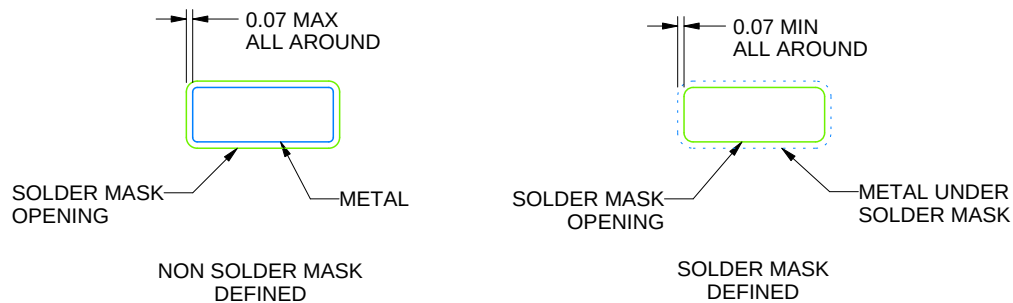

SOLDER MASK DETAILS

4218820/A 12/2022

NOTES: (continued)


6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.
8. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature numbers SLMA002 ([www.ti.com/lit/slma002](http://www.ti.com/lit/slma002)) and SLMA004 ([www.ti.com/lit/slma004](http://www.ti.com/lit/slma004)).
9. Size of metal pad may vary due to creepage requirement.

# EXAMPLE STENCIL DESIGN

DDA0008D

PowerPAD™ SOIC - 1.7 mm max height

PLASTIC SMALL OUTLINE

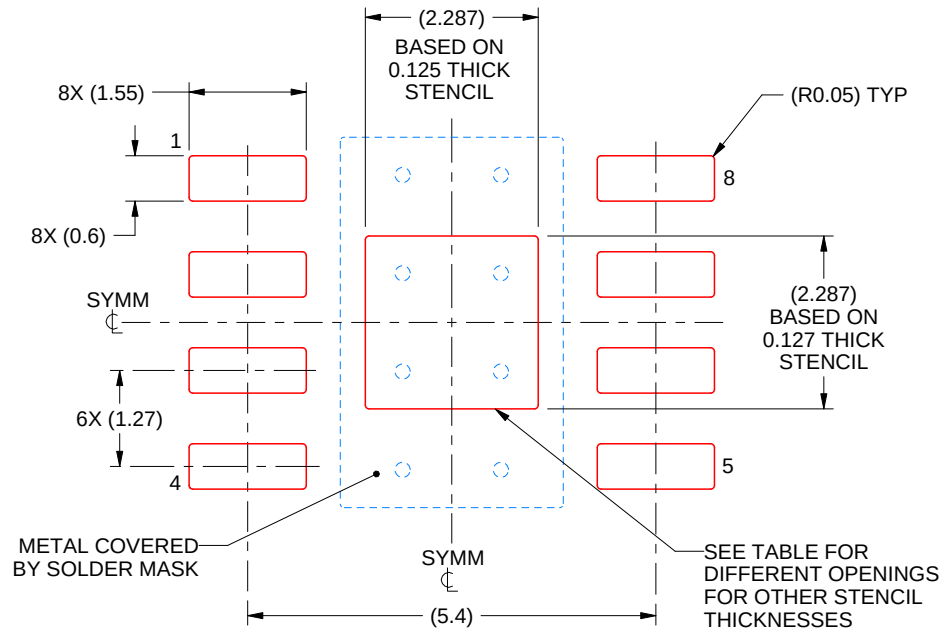

**SOLDER PASTE EXAMPLE**  
EXPOSED PAD  
100% PRINTED SOLDER COVERAGE BY AREA  
SCALE:10X

| STENCIL THICKNESS | SOLDER STENCIL OPENING |
|-------------------|------------------------|
| 0.1               | 2.557 X 2.557          |
| 0.125             | 2.287 X 2.287 (SHOWN)  |
| 0.150             | 2.088 X 2.088          |
| 0.175             | 1.933 X 1.933          |

4218820/A 12/2022

NOTES: (continued)

10. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
11. Board assembly site may have different recommendations for stencil design.



## SOT-23 - 1.45 mm max height

## SMALL OUTLINE TRANSISTOR




1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. Reference JEDEC MO-178.
4. Body dimensions do not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.25 mm per side.
5. Support pin may differ or may not be present.

# EXAMPLE BOARD LAYOUT


DBV0005A

SOT-23 - 1.45 mm max height

SMALL OUTLINE TRANSISTOR

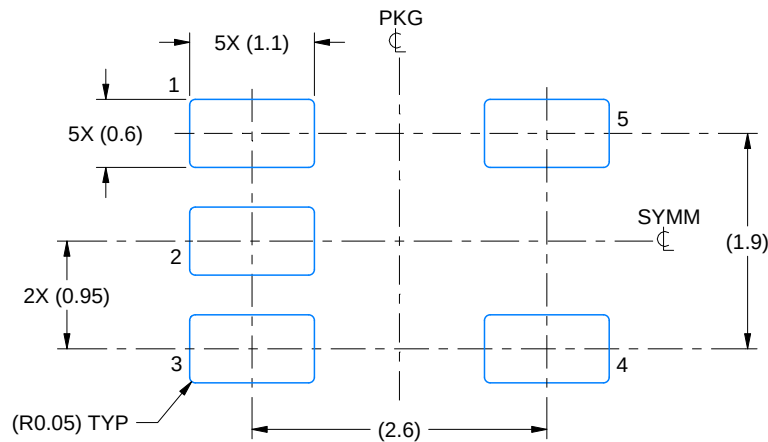

LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE:15X

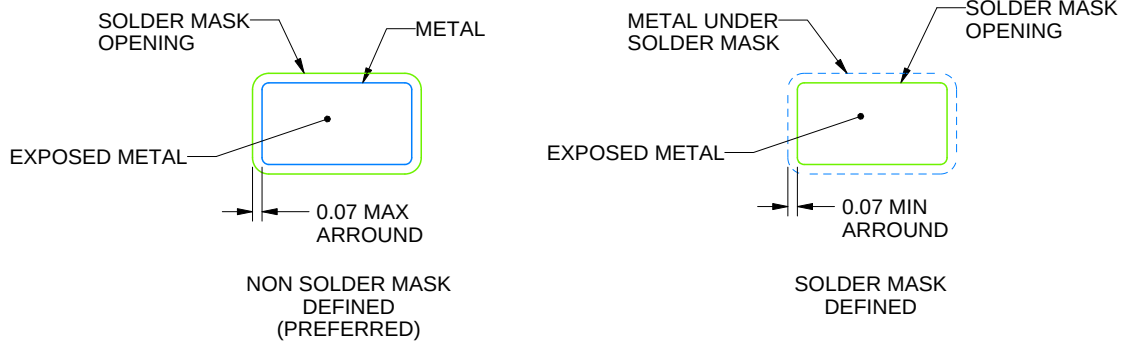

SOLDER MASK DETAILS

4214839/J 02/2024

NOTES: (continued)


6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

## EXAMPLE STENCIL DESIGN

DBV0005A

SOT-23 - 1.45 mm max height

SMALL OUTLINE TRANSISTOR

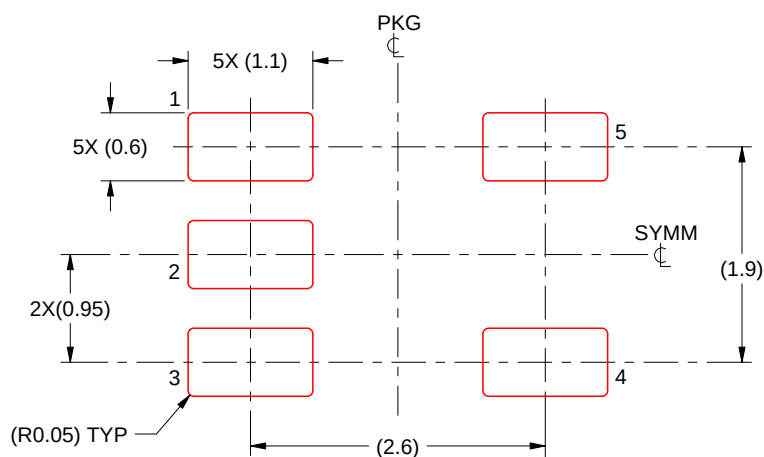

SOLDER PASTE EXAMPLE  
BASED ON 0.125 mm THICK STENCIL  
SCALE:15X

4214839/J 02/2024


NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.



D (R-PDSO-G14)

PLASTIC SMALL OUTLINE

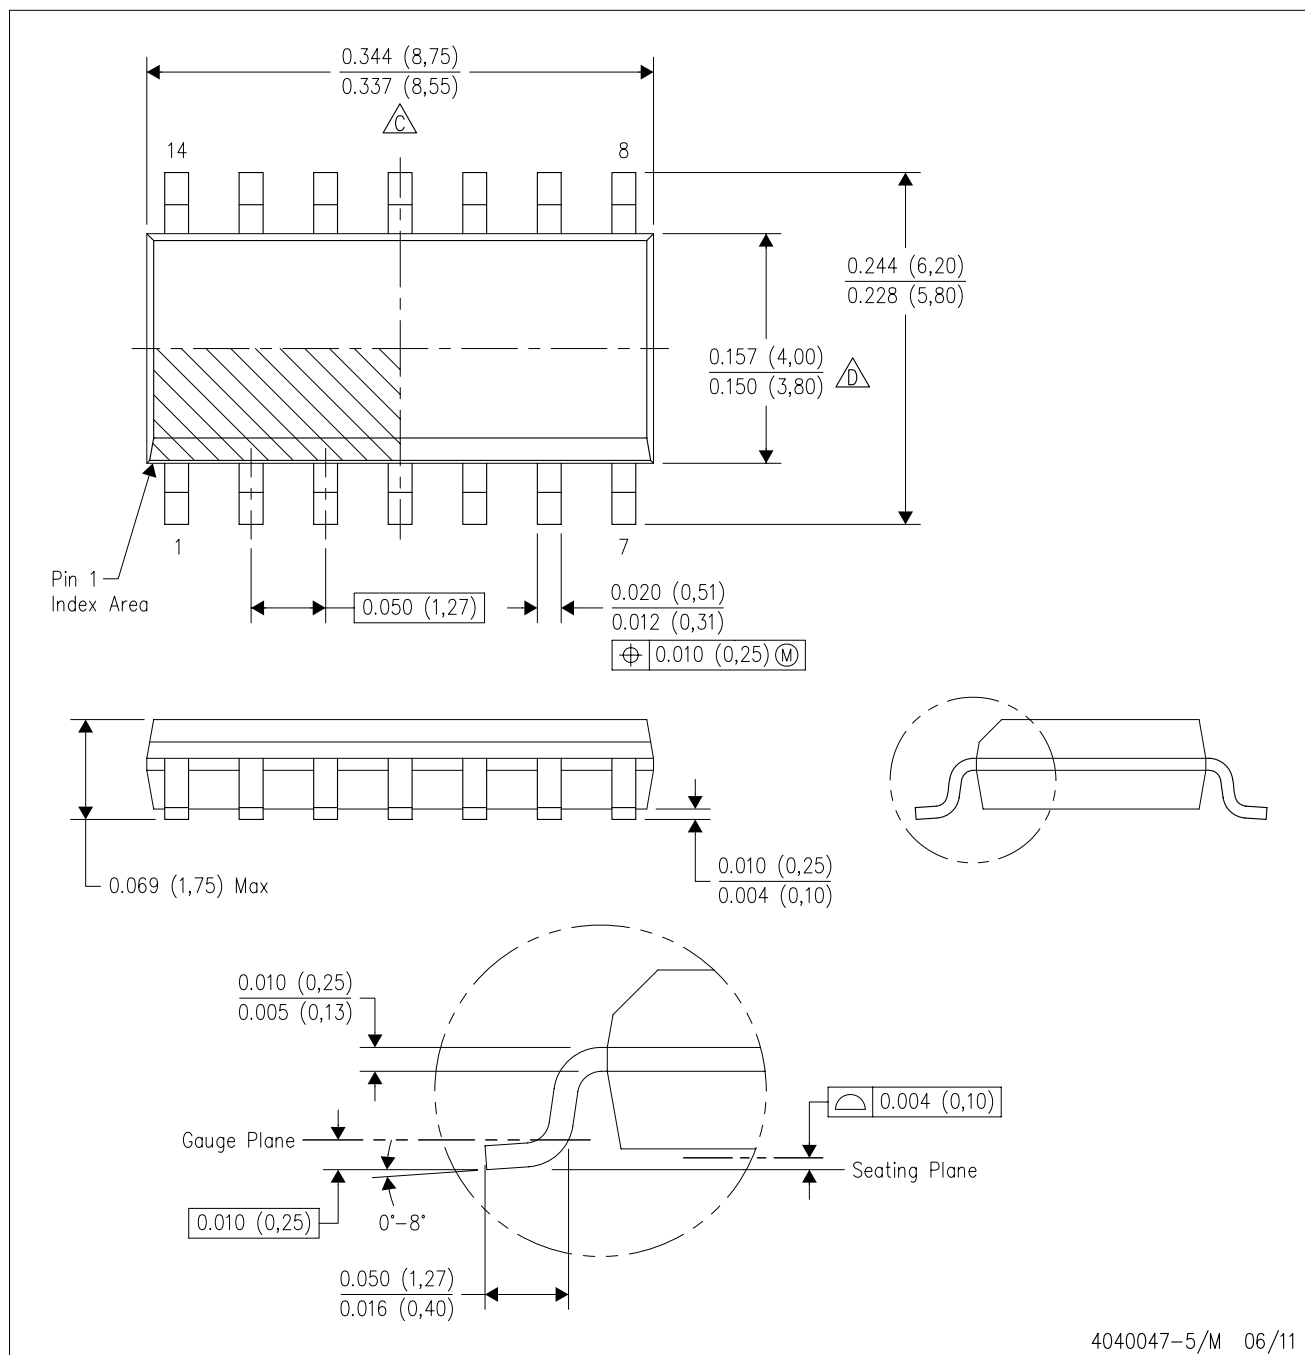


NOTES:

- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- C. Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.006 (0,15) each side.
- D. Body width does not include interlead flash. Interlead flash shall not exceed 0.017 (0,43) each side.
- E. Reference JEDEC MS-012 variation AB.

D (R-PDSO-G14)


PLASTIC SMALL OUTLINE

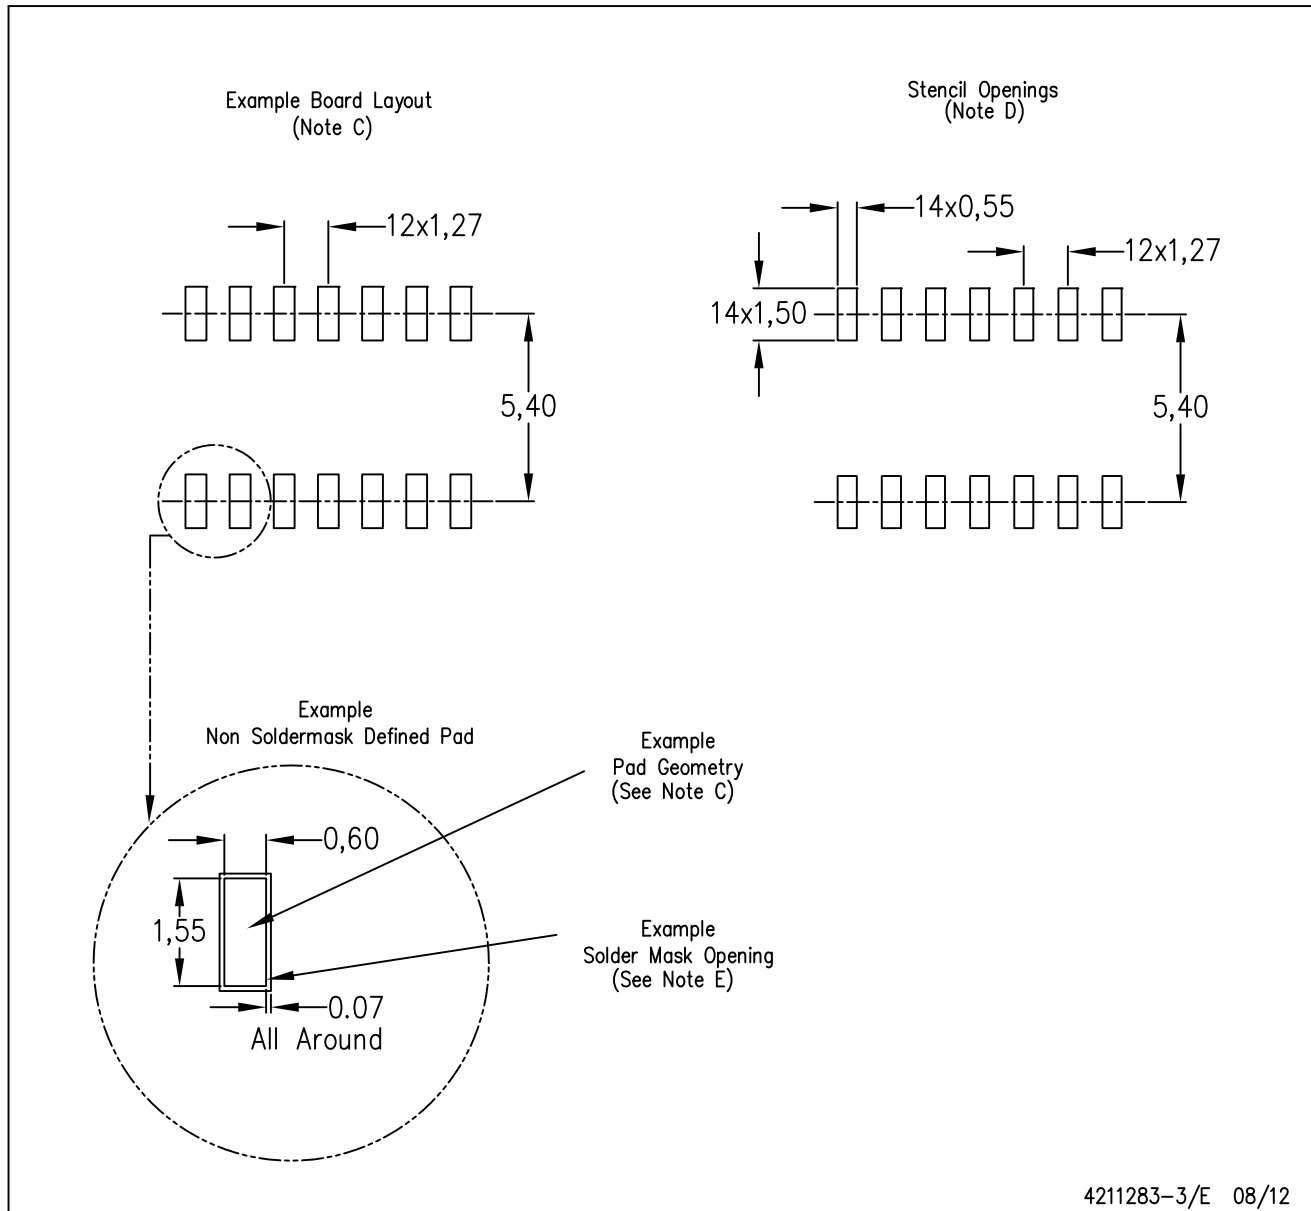

- NOTES:
- A. All linear dimensions are in millimeters.
  - B. This drawing is subject to change without notice.
  - C. Publication IPC-7351 is recommended for alternate designs.
  - D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC-7525 for other stencil recommendations.
  - E. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.

PW (R-PDSO-G14)


PLASTIC SMALL OUTLINE

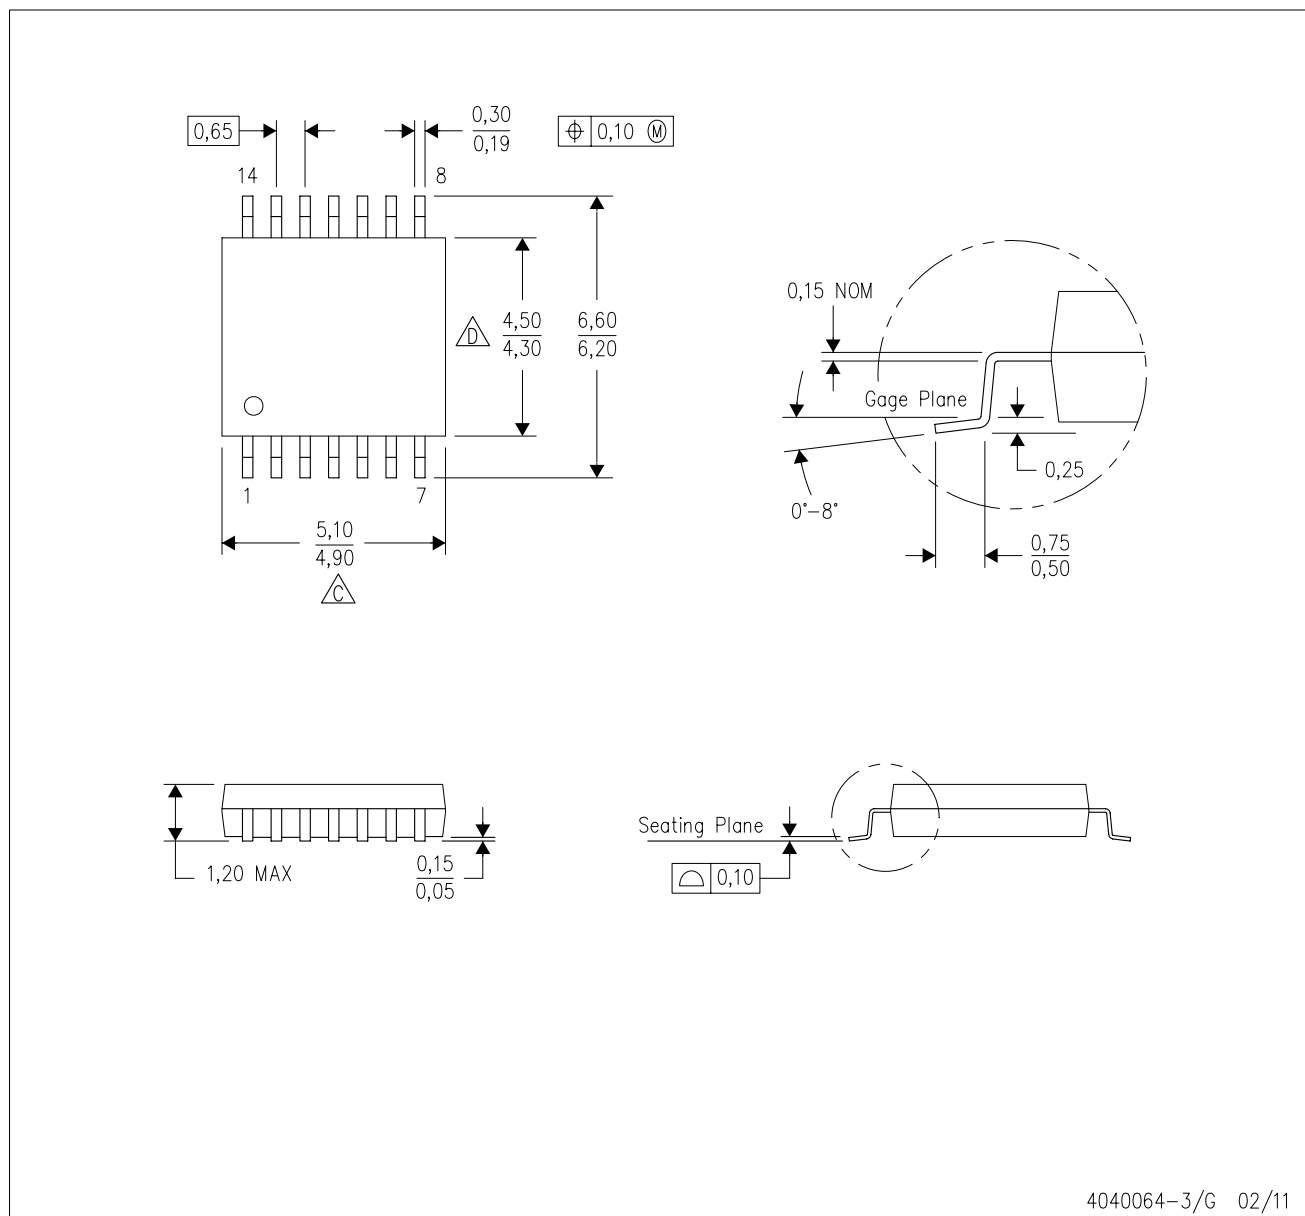

- NOTES:
- A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M-1994.
  - B. This drawing is subject to change without notice.
  - C. Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0,15 each side.
  - D. Body width does not include interlead flash. Interlead flash shall not exceed 0,25 each side.
  - E. Falls within JEDEC MO-153


PW (R-PDSO-G14)

PLASTIC SMALL OUTLINE

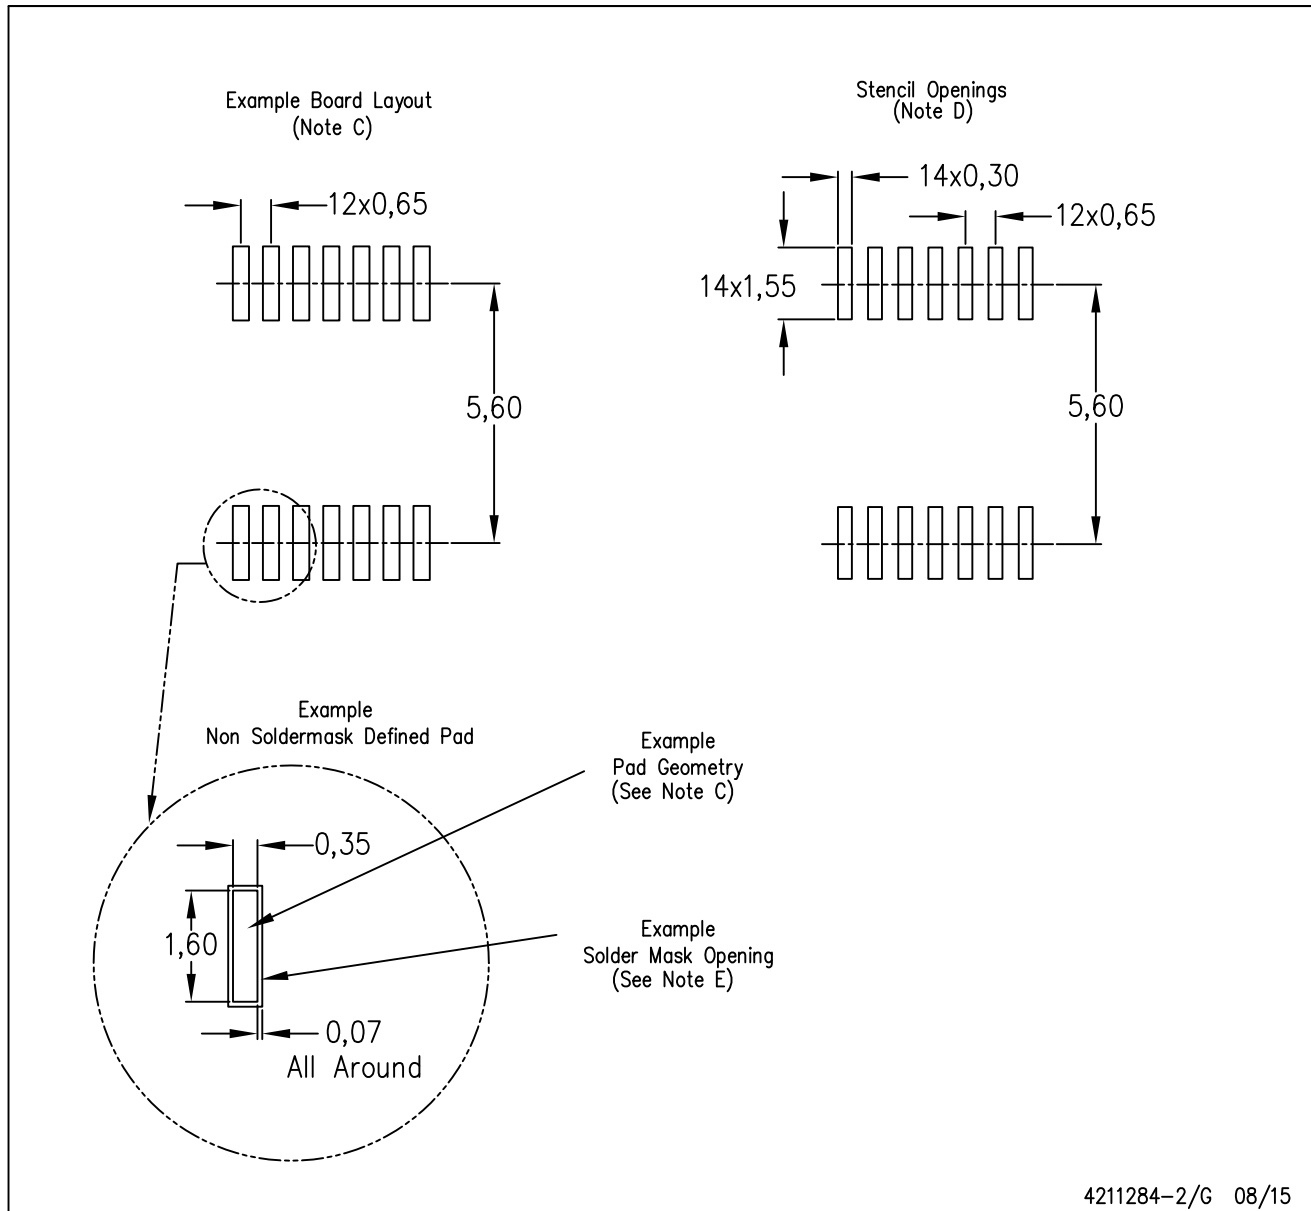

- NOTES:
- A. All linear dimensions are in millimeters.
  - B. This drawing is subject to change without notice.
  - C. Publication IPC-7351 is recommended for alternate designs.
  - D. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC-7525 for other stencil recommendations.
  - E. Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.


DGK0008A



# PACKAGE OUTLINE

VSSOP - 1.1 mm max height

SMALL OUTLINE PACKAGE

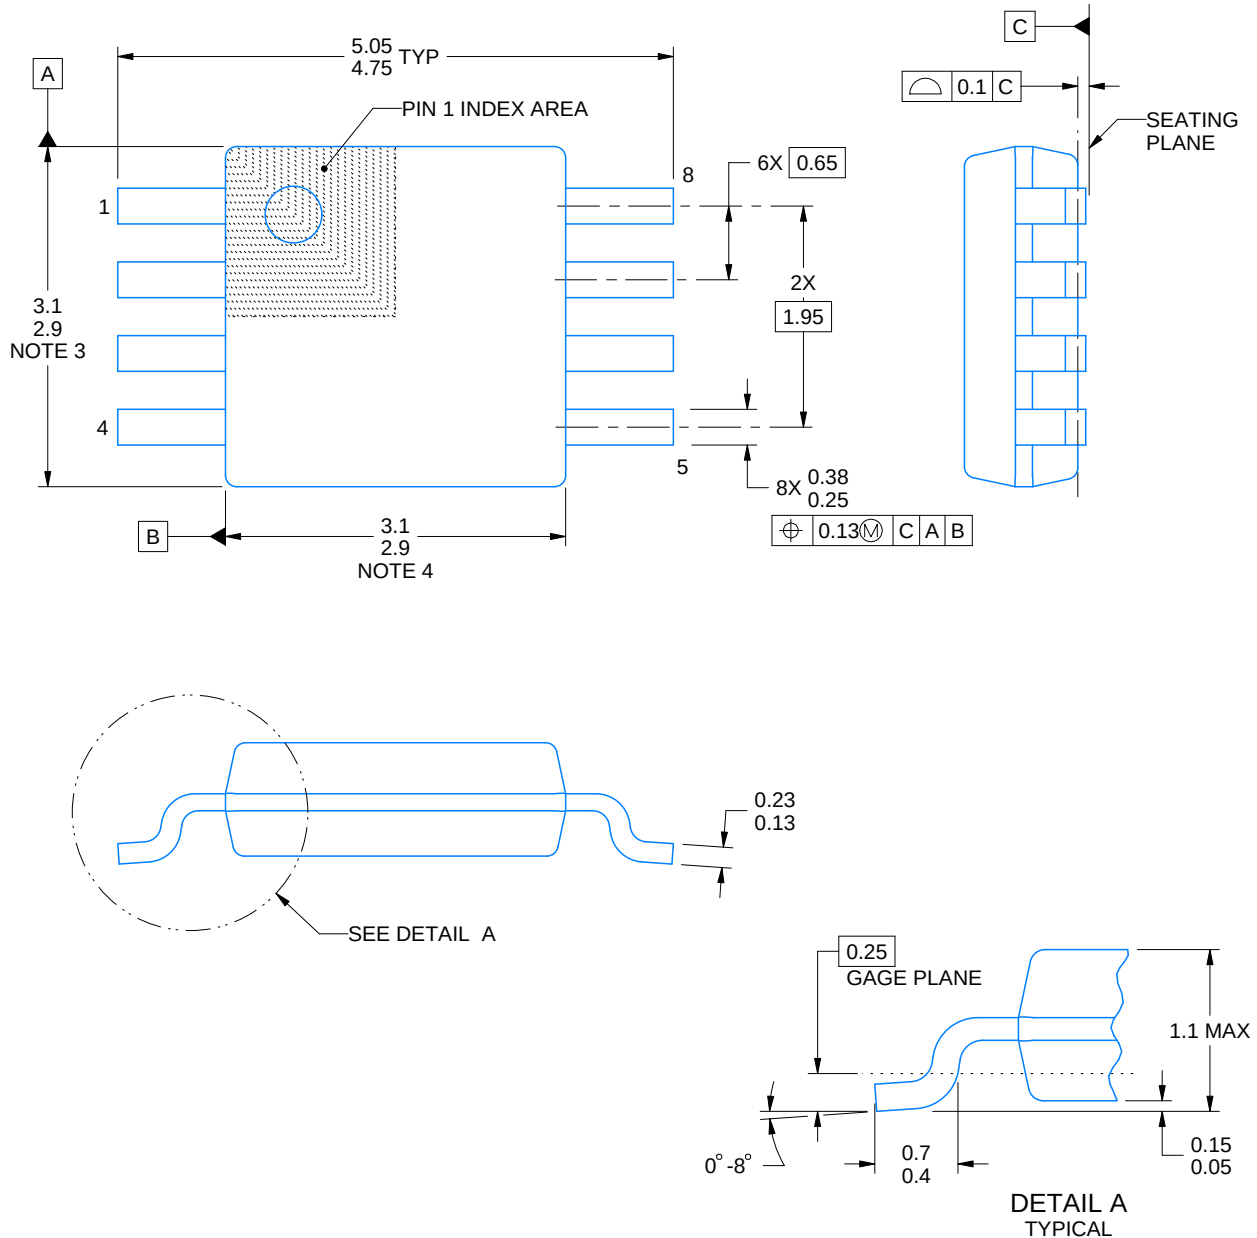

4214862/A 04/2023

## NOTES:

PowerPAD is a trademark of Texas Instruments.


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
5. Reference JEDEC registration MO-187.

# EXAMPLE BOARD LAYOUT


DGK0008A

<sup>TM</sup> VSSOP - 1.1 mm max height

SMALL OUTLINE PACKAGE

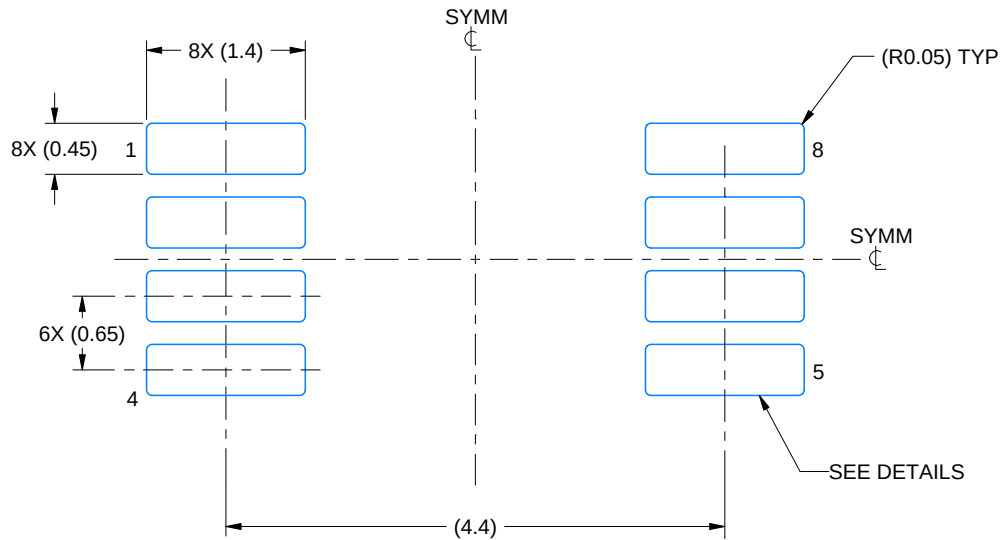

LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE: 15X

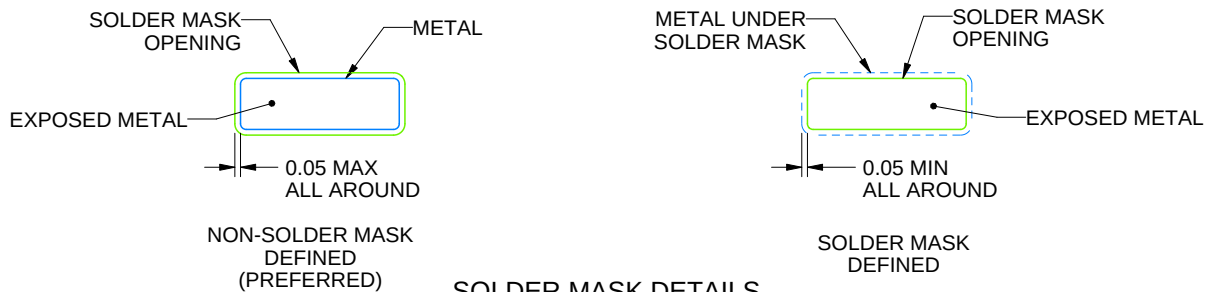

SOLDER MASK DETAILS

4214862/A 04/2023

NOTES: (continued)


6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.
8. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.
9. Size of metal pad may vary due to creepage requirement.

## EXAMPLE STENCIL DESIGN

DGK0008A

<sup>TM</sup> VSSOP - 1.1 mm max height

SMALL OUTLINE PACKAGE

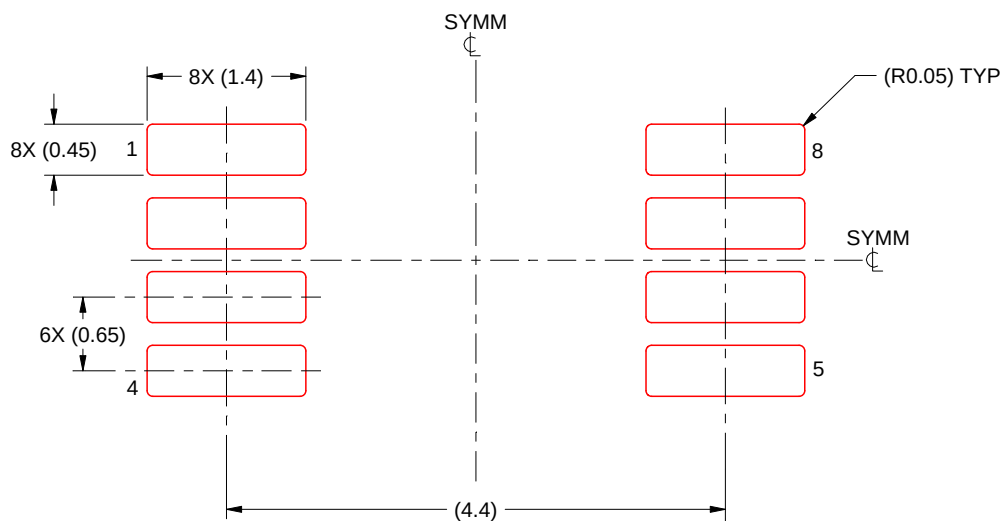

SOLDER PASTE EXAMPLE  
SCALE: 15X

4214862/A 04/2023

NOTES: (continued)

11. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
12. Board assembly site may have different recommendations for stencil design.

## 重要なお知らせと免責事項

TI は、技術データと信頼性データ (データシートを含みます)、設計リソース (リファレンス・デザインを含みます)、アプリケーションや設計に関する各種アドバイス、Web ツール、安全性情報、その他のリソースを、欠陥が存在する可能性のある「現状のまま」提供しており、商品性および特定目的に対する適合性の黙示保証、第三者の知的財産権の非侵害保証を含むいかなる保証も、明示的または黙示的にかかわらず拒否します。

これらのリソースは、TI 製品を使用する設計の経験を積んだ開発者への提供を意図したものです。(1) お客様のアプリケーションに適した TI 製品の選定、(2) お客様のアプリケーションの設計、検証、試験、(3) お客様のアプリケーションに該当する各種規格や、その他のあらゆる安全性、セキュリティ、規制、または他の要件への確実な適合に関する責任を、お客様のみが単独で負うものとし、TI は一切の責任を拒否します。

上記の各種リソースは、予告なく変更される可能性があります。これらのリソースは、リソースで説明されている TI 製品を使用するアプリケーションの開発の目的でのみ、TI はその使用をお客様に許諾します。これらのリソースに関して、他の目的で複製することや掲載することは禁止されています。TI や第三者の知的財産権のライセンスが付与されている訳ではありません。お客様は、これらのリソースを自身で使用した結果発生するあらゆる申し立て、損害、費用、損失、責任について、TI およびその代理人を完全に補償するものとし、TI は一切の責任を拒否します。

TI の製品は、[TI の販売条件](#)、または [ti.com](#) やかかる TI 製品の関連資料などのいずれかを通じて提供する適用可能な条項の下で提供されています。TI がこれらのリソースを提供することは、適用される TI の保証または他の保証の放棄の拡大や変更を意味するものではありません。

お客様がいかなる追加条項または代替条項を提案した場合でも、TI はそれらに異議を唱え、拒否します。

郵送先住所：Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2024, Texas Instruments Incorporated