

AN-1262 Four-Speed Fan Control Using Simple Remote Diode Temperature Sensor

ABSTRACT

The LM88 is a dual remote diode temperature sensor with three digital comparators and has three open-drain outputs (O_SP0, O_SP1 and O_CRIT) that can be used as interrupts or to signal system shutdown.

Contents

1	Basic Information	1
---	-------------------------	---

List of Figures

1	Low Cost Remote Diode Temperature Fan Speed Control	2
2	Temperature Response Diagram Of The LM88's Outputs	3
3	Fan Voltage Temperature Response.....	3

1 Basic Information

The circuit shown in [Figure 1](#) controls the speed of a 12V DC fan using an LM88 Remote Diode Temperature Sensor (RDTS) IC. The digital comparators can be programmed independently to make a greater than or less than comparison. When programmed for a greater than comparison:

- O_SP0 and O_SP1 activate when the temperatures measured by D0 or D1 exceed the associated setpoints of T_SP0 or T_SP1.
- O_CRIT activates when the temperature measured by either D0 or D1 exceeds set point T_CRIT.
- T_CRIT can be set at 1°C intervals from -40°C to +125°C. T_SP0 and T_SP1 can be set at 4°C intervals in the range of T_CRIT, ±100°C.

In the circuit shown in [Figure 1](#), the two D+ inputs have been wired in parallel to allow all three set points to be evaluated against a single temperature measurement. The hysteresis of each comparator is internally set to 1°C, allowing the set point values to be placed very close together without any interaction. The three outputs of the LM88 are connected to resistors forming a crude 2-bit DAC. The output of this DAC is fed to a PNP emitter follower, controlling the voltage on the negative pin of the fan from 1.25V to 5.7V. The output voltage (V_{OUT}) decreases as the temperature reading increases, when $SP0 < SP1 < CRIT$.

The equations shown in [Figure 1](#) describe the behavior of V_{OUT} . The maximum speed of the fan is dependent on the minimum V_{OUT} . The minimum V_{OUT} is dependent on the drain to source on resistance (R_{ds}) of the O_CRIT output, the MPSW51's beta and base emitter voltage when $R5$ is set to 0Ω (as shown in [Figure 1](#)). The MPSW51 beta variation will introduce an error term that cannot be accounted for. Therefore, it is tempting to make the current through the resistors as high as possible. Increasing this current is a "Catch 22", because the minimum V_{OUT} level will increase as the current increases, because of O_CRIT's R_{ds} that is typical 100Ω and worst case .4V/3 mA = 133Ω. A compromise would be to set this current 10 times the MPSW51 base current.

O_SP0, O_SP1 and O_CRIT have a maximum voltage limit of 5V. This sets the ratio of $R2/(R2+R1) = 5/12 = 0.41666$.


The current through R1 and R2 should be set such that the base current of the MPSW51 is negligible. The current through the fan with (12 - 5.7) 6.3V is about 65mA or so. That makes the base current about 65mA/130 = 0.5 mA. Since the beta will vary slightly as the collector current changes, it's best to set the current through R1/R2 ten times greater than 0.5 mA. Therefore,

$$(R1+R2)= 12V/5mA = 2400\Omega \quad (1)$$

since,

$$R2/(R2+R1)=5/12 \quad (2)$$

$$R2= (5/12)*(2400)=1000\Omega \text{ and } R1=1400\Omega \quad (3)$$

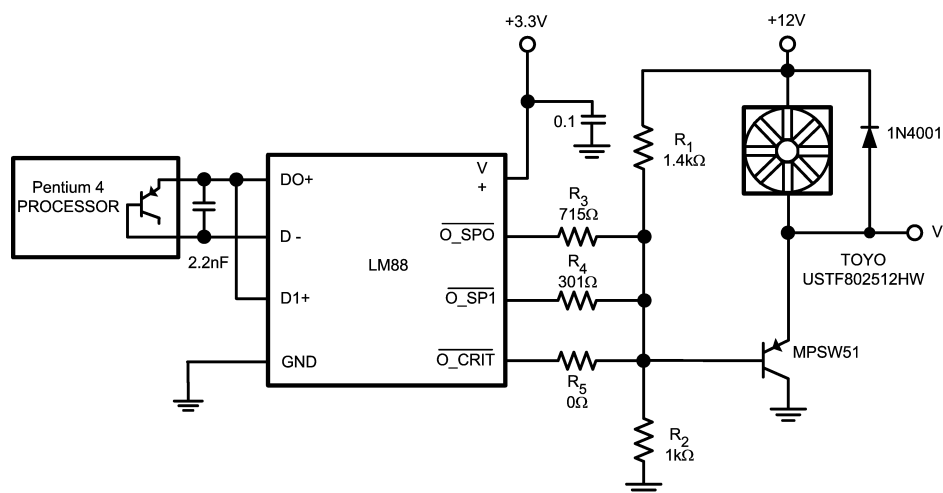

if TD < SP0 $V_{OUTmin} = 5.7V$ (fan min. on)

if TD < SP1 $V_{OUTint1} = ((Rp23/(R1+Rp23))12V)+0.7V=3.61V$

if TD < CRIT $V_{OUTint2} = ((Rp234/(R1+Rp234))12V)+0.7V=2.28V$

if TD < CRIT $V_{OUTmax} = ((Rp2345/(R1+Rp2345))12V)+0.7V=1.25V$

where SP0<SP1<CRIT and TD=diode temperature, see text for values of Rp23, Rp234 and Rp2345

Figure 1. Low Cost Remote Diode Temperature Fan Speed Control

When the temperature of the diode is less than the SP0, SP1 and T_CRIT set points, all of the LM88's outputs will be deactivated. Therefore, V_{OUT} will be set to approximately 5.7V. This will set the slowest speed of the fan.

The first intermediate fan speed will be set when only O_SP0 is activated. This happens when the temperature measured is greater than the SP0 set point but less than the SP1 and CRIT set points. For this case, the following equations set V_{OUT} :

$$Rp23 = (R3+Rds)||R2 = 1/(1/(R3+Rds)+1/R2) \quad (4)$$

and

$$V_{OUTint1} = ((Rp23/(R1+Rp23))12V)+0.7V \quad (5)$$

Therefore, If Rds = 100Ω typical, then with R3 = 715Ω, $V_{OUT} = 3.614V$ making the voltage across the fan equal to 12V - 3.614V = 8.386V.

The second intermediate speed of the fan will be set when both O_SP0 and O_SP1 are activated. This happens when the temperature measured is greater than both the SP0 and SP1 set points but less than the CRIT set point. For this case, the following equations set V_{OUT} :

$$Rp234=(R3+Rds)||((R4+Rds)||R2) = \quad (6)$$

and

$$1/(1/(R3+Rds)+1/(R4+Rds)+1/R2) \quad (7)$$

$V_{OUTint2} = ((Rp234/(R1+Rp234))12V)+0.7V$. If R3 = 715Ω and Rds = 100Ω (typical) setting R4 to 301Ω will give a $V_{OUT} = 2.277V$ making the voltage across the fan equal to 12V - 2.277V = 9.723V.

The fourth, and maximum, speed of the fan will be set when all three outputs O_CRIT, O_SP0 and O_SP1 are activated. This happens when the temperature measured is greater than all three set points. For this case the following equations set V_{OUT} :

$$R_{p2345} = (R5+Rds) \parallel (R4+Rds) \parallel (R3+Rds) \parallel R2 = \tag{8}$$

and

$$1/(1/(R5+Rds)+1/(R4+Rds)+1/(R3+Rds)+1/R2) \tag{9}$$

$V_{OUT,max} = ((R_{p2345}/(R1+R_{p2345}))12V)+0.7V$. If $R3 = 715\Omega$, $R4 = 301\Omega$ and $Rds = 100\Omega$ (typical) setting $R5$ to 0Ω will give $V_{OUT} = 1.255V$ making the maximum voltage across the fan equal to $12V - 1.255V = 10.745V$.

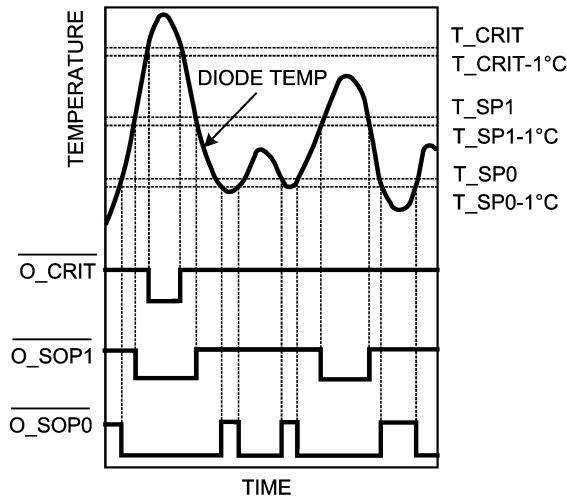


Figure 2. Temperature Response Diagram Of The LM88's Outputs

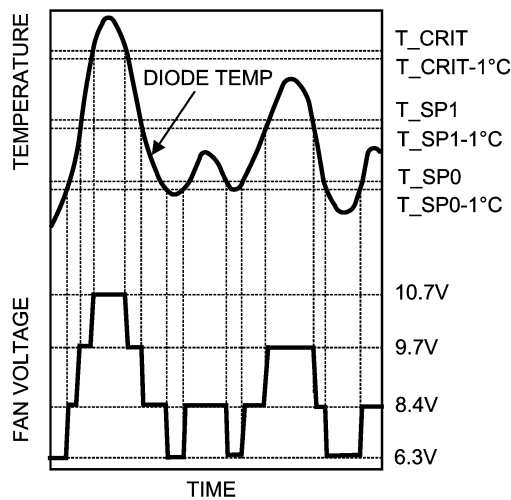


Figure 3. Fan Voltage Temperature Response

Using 1% resistor values measurements were made and the measured V_{OUT} was within 3% of the calculated V_{OUT} voltage.

Figure 2 and Figure 3 show the temperature response diagram of the LM88's outputs and the fan voltage. As the temperature increases the sequential activation of O_SP0 followed by O_SP1 and finally O_CRIT cause the voltage across the fan to increase.

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

Products

Audio	www.ti.com/audio
Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DLP® Products	www.dlp.com
DSP	dsp.ti.com
Clocks and Timers	www.ti.com/clocks
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
OMAP Applications Processors	www.ti.com/omap
Wireless Connectivity	www.ti.com/wirelessconnectivity

Applications

Automotive and Transportation	www.ti.com/automotive
Communications and Telecom	www.ti.com/communications
Computers and Peripherals	www.ti.com/computers
Consumer Electronics	www.ti.com/consumer-apps
Energy and Lighting	www.ti.com/energy
Industrial	www.ti.com/industrial
Medical	www.ti.com/medical
Security	www.ti.com/security
Space, Avionics and Defense	www.ti.com/space-avionics-defense
Video and Imaging	www.ti.com/video

TI E2E Community

e2e.ti.com