INA333-Q1 汽车类零温漂微功率仪表放大器

1 特性

- 符合面向汽车应用的 AEC-Q100 标准：
  - 温度等级 1：–40°C ≤ T_A ≤ +125°C
- 功能安全型
  - 可提供用于功能安全系统设计的文档
- 低失调电压：25 µV（最大值），G ≥ 100
- 低温漂：0.1 µV/°C，G ≥ 100
- 低噪声：50nV/√Hz，G ≥ 100
- 高 CMRR：96dB（最小值），G ≥ 10
- 低输入偏置电流：280pA（最大值）
- 电源电压范围：1.8V 至 5.5V
- 输入电压：(V-) + 0.1V 至 (V+) - 0.1V
- 输出范围：(V-) + 0.05V 至 (V+) - 0.05V
- 低静态电流：50 µA
- 工作温度：–40°C 至 +125°C
- RFI 滤波输入
- 封装：8 引脚 VSSOP

2 应用

- 动力总成扭矩传感器
- 动力总成压力传感器
- 动力总成温度传感器
- 动力总成爆震传感器
- 车辆乘员检测传感器
- 驾驶员生命体征监测
- 控制面板，基于力传感器的开关

3 说明

INA333-Q1 是一款具备出色精度的低功耗精密仪表放大器。该器件具有三级运算放大器设计、小尺寸和低功耗，是需要漏电流检测等精密测量的汽车应用的理想选择。此 INA333-Q1 也是使用电阻式电桥传感器的应用的理想选择。

可通过单个外部电阻器在 1 到 1000 范围内设置增益。INA333-Q1 的设计适用业界通用的增益公式：G = 1 + (100kΩ/R_G)。


INA333-Q1 提供极低的失调电压（25 µV，G ≥ 100）、出色的温漂（0.1 µV/°C，G ≥ 100）和高共模抑制（G ≥ 10 时为 96dB）。该器件采用低至 1.8V (±0.9V) 的电源电压，静态电流仅为 50µA。自动校准技术可在汽车温度范围内保持出色的精度。INA333-Q1 提供 1µV 的极低峰峰值噪声。

INA333-Q1 器件采用 8 引脚 VSSOP 封装，额定温度范围为 T_A = –40°C 至 +125°C。

封装信息

器件型号	封装(1)	封装尺寸(2)
INA333-Q1	VSSOP (8)	3 mm × 4.9 mm

(1) 如需了解所有可用封装，请参阅数据表末尾的封装选项附录。
(2) 封装尺寸（长 × 宽）为标称值，并包括引脚（如适用）。

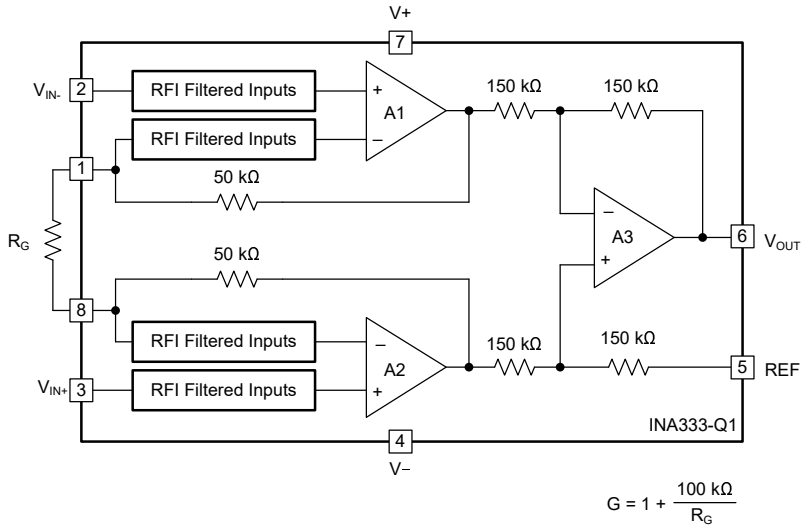

简化原理图

本文档旨在为方便起见，提供有关 TI 产品中文版本的信息，以确认产品的概要。有关适用的官方英文版本的最新信息，请访问 www.ti.com，其内容始终优先。TI 不保证翻译的准确性和有效性。在实际设计之前，请务必参考最新版本的英文版本。

Table of Contents

1 特性.....1
2 应用.....1
3 说明.....1
4 Revision History.....2
5 Pin Configuration and Functions.....3
6 Specifications.....4
6.1 Absolute Maximum Ratings.....4
6.2 ESD Ratings.....4
6.3 Recommended Operating Conditions.....4
6.4 Thermal Information.....4
6.5 Electrical Characteristics.....5
6.6 Typical Characteristics.....7
7 Detailed Description.....13
7.1 Overview.....13
7.2 Functional Block Diagram.....13
7.3 Feature Description.....13
7.4 Device Functional Modes.....13
8 Application and Implementation.....14
8.1 Application Information.....14
8.2 Typical Application.....15
8.3 Power Supply Recommendations.....20
8.4 Layout.....20
9 Device and Documentation Support.....21
9.1 Device Support.....21
9.2 Documentation Support.....22
9.3 接收文档更新通知.....22
9.4 支持资源.....22
9.5 Trademarks.....22
9.6 静电放电警告.....22
9.7 术语表.....22
10 Mechanical, Packaging, and Orderable Information.....22

4 Revision History

注：以前版本的页码可能与当前版本的页码不同

Changes from Revision A (May 2020) to Revision B (June 2023)	Page
• 添加了“功能安全”特性要点	1
• 将首页图中的四个电阻器从 150Ω 更改为 150kΩ	1
• Changed four resistors in functional block diagram from 150 Ω to 150 kΩ	13

Changes from Revision * (October 2019) to Revision A (May 2020)	Page
• 将器件状态从“预告信息（预发布）”更改为“量产数据（正在供货）”	1

Copyright © 2023 Texas Instruments Incorporated

5 Pin Configuration and Functions

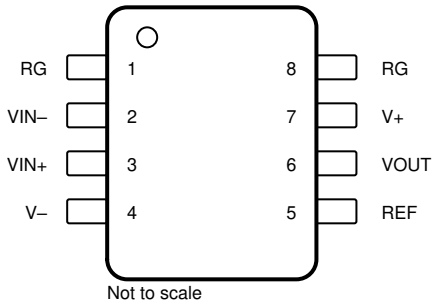


图 5-1. DGK Package, 8-Pin VSSOP (Top View)

表 5-1. Pin Functions

PIN		TYPE	DESCRIPTION
NAME	NO.		
REF	5	Input	Reference input. This pin must be driven by low impedance or connected to ground.
RG	1, 8	—	Gain setting pins. For gains greater than 1, place a gain resistor between pins 1 and 8.
V+	7	—	Positive supply
V –	4	—	Negative supply
VIN+	3	Input	Positive input
VIN –	2	Input	Negative input
VOUT	6	Output	Output

Copyright © 2023 Texas Instruments Incorporated

6 Specifications

6.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)(1)

			MIN	MAX	UNIT
V_S	Supply voltage	Single-supply, V_S = (V+)		7	V
		Dual-supply, V_S = (V+) – (V–)		±3.5	
	Input voltage	Common-mode	(V–) – 0.3	(V+) + 0.3	V
		Differential		(V+) – (V–) + 0.2	
	Input current			±10	mA
	Output short circuit(2)		Continuous	Continuous	
T_A	Operating temperature		–55	150	°C
T_J	Junction temperature			150	°C
T_{stg}	Storage temperature		–65	150	°C

(1) Operation outside of *Absolute Maximum Ratings* may cause permanent damage to the device. *Absolute Maximum Ratings* do not imply functional operation of the device at these or any other conditions beyond those listed under *Recommended Operating Conditions*. If used outside the *Recommended Operating Conditions* but within the *Absolute Maximum Ratings,* the device may not be fully functional, and this may affect device reliability, functionality, performance, and shorten the device lifetime.
(2) Short-circuit to ground, one amplifier per package.

6.2 ESD Ratings

			VALUE	UNIT
$V_{(ESD)}$	Electrostatic discharge	Human-body model (HBM), per AEC Q100-002 HBM ESD classification level 2(1)	±2000	V
		Charge device model (CDM), per AEC Q100-011 CDM ESD classification level C5	±750	

(1) AEC Q100-002 indicates that HBM stressing shall be in accordance with the ANSI/ESDA/JEDEC JS-001 specification.

6.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

		MIN	MAX	UNIT
V_S	Supply voltage	1.8	5.5	V
T_A	Operating temperature	–40	125	°C

6.4 Thermal Information

THERMAL METRIC(1)		INA333-Q1 DGK (VSSOP) 8 PINS	UNIT
$R_{\theta JA}$	Junction-to-ambient thermal resistance	169.5	°C/W
$R_{\theta JC(top)}$	Junction-to-case (top) thermal resistance	62.7	°C/W
$R_{\theta JB}$	Junction-to-board thermal resistance	90.3	°C/W
ψ_{JT}	Junction-to-top characterization parameter	7.6	°C/W
ψ_{JB}	Junction-to-board characterization parameter	88.7	°C/W
$R_{\theta JC(bot)}$	Junction-to-case (bottom) thermal resistance	N/A	°C/W

(1) For more information about traditional and new thermal metrics, see the Semiconductor and IC Package Thermal Metrics application report.

Copyright © 2023 Texas Instruments Incorporated

6.5 Electrical Characteristics

at V_S = 1.8 V to 5.5 V at T_A = 25°C, R_L = 10 kΩ, V_{REF} = V_S / 2, and G = 1 (unless otherwise noted)

PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
INPUT(1)							
V_{OSI}	Input stage offset voltage(2)				±10	±25	µV
		vs temperature, T_A = –40°C to +125°C				±0.1	µV/°C
V_{OSO}	Output stage offset voltage(2)				±25	±110	µV
		vs temperature, T_A = –40°C to +125°C				±0.5	µV/°C
PSRR	Power-supply rejection ratio			90	102		dB
Z_{id}	Differential impedance				100 || 3		GΩ || pF
Z_{ic}	Common-mode impedance				100 || 3		GΩ || pF
V_{CM}	Common-mode voltage	V_O = 0 V		(V–) + 0.1		(V+) – 0.1	V
CMRR	Common-mode rejection ratio	DC to 60 Hz, V_S = 5.5 V, V_{CM} = (V–) + 0.1 V to (V+) – 0.1 V	G = 1	78	90		dB
			G = 10	96	110		
			G = 100	96	115		
			G = 1000	96	115		
INPUT BIAS CURRENT							
I_B	Input bias current				±70	±280	pA
		T_A = –40°C to +125°C			See 图 6-26		pA/°C
I_{OS}	Input offset current				±50	±280	pA
		T_A = –40°C to +125°C			See 图 6-28		pA/°C
INPUT VOLTAGE NOISE							
e_{NI}	Input voltage noise	G = 100, R_S = 0 Ω	f = 10 Hz		50		nV/√Hz
			f = 100 Hz		50		
			f = 1 kHz		50		
			f = 0.1 Hz to 10 Hz		1		μV_{PP}
I_n	Input current noise	f = 10 Hz			100		fA/√Hz
		f = 0.1 Hz to 10 Hz			2		pA_{PP}
GAIN							
	Gain equation				1 + (100 kΩ / R_G)		V/V
G	Gain			1		1000	V/V
GE	Gain error	V_S = 5.5 V, (V–) + 100 mV ≤ V_O ≤ (V+) – 100 mV	G = 1		±0.01	±0.1	%
			G = 10		±0.05	±0.25	
			G = 100		±0.07	±0.25	
			G = 1000		±0.25	±0.5	
	Gain vs temperature	T_A = –40°C to +125°C			±1	±5	ppm/°C
			G > 1(3)		±15	±50	
	Gain nonlinearity	G = 1 to 1000, V_S = 5.5 V, (V–) + 100 mV ≤ V_O ≤ (V+) – 100 mV			10		ppm
OUTPUT							
	Output voltage swing from rail	V_S = 5.5 V			40	50	mV
	Capacitive load drive				500		pF
I_{SC}	Short-circuit current	Continuous to common			–40, +5		mA

Copyright © 2023 Texas Instruments Incorporated

6.5 Electrical Characteristics (continued)

at V_S = 1.8 V to 5.5 V at T_A = 25°C, R_L = 10 kΩ, V_{REF} = V_S / 2, and G = 1 (unless otherwise noted)

PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
FREQUENCY RESPONSE							
BW	Bandwidth, –3 dB	G = 1			150		kHz
		G = 10			35		
		G = 100			3.5		
		G = 1000			350		Hz
SR	Slew rate	V_S = 5 V, V_O = 4-V step	G = 1		0.16		V/µs
			G = 100		0.05		
t_S	Settling time to 0.01%	V_{STEP} = 4 V	G = 1		50		µs
			G = 100		400		
	Settling time to 0.001%	V_{STEP} = 4 V	G = 1		60		
			G = 100		500		
	Overload recovery	50% overdrive			75		µs
REFERENCE INPUT							
R_{IN}	Input impedance				300		kΩ
	Voltage range			V–		V+	V
POWER SUPPLY							
I_Q	Quiescent current	V_{IN} = V_S / 2			50	75	µA
		T_A = –40°C to +125°C				80	

(1) Total V_{OS}, referred-to-input = (V_{OSI}) + (V_{OSO} / G).
(2) RTI = Referred-to-input.
(3) Does not include effects of external resistor R_G.

Copyright © 2023 Texas Instruments Incorporated

6.6 Typical Characteristics

at T_A = 25°C, V_S = 5 V, R_L = 10 kΩ, V_{REF} = midsupply, and G = 1 (unless otherwise noted)

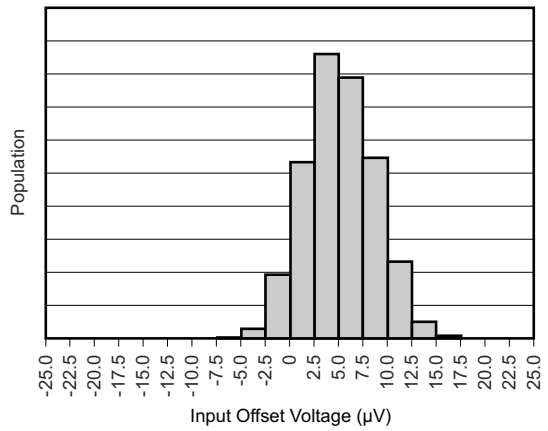


图 6-1. Input Offset Voltage

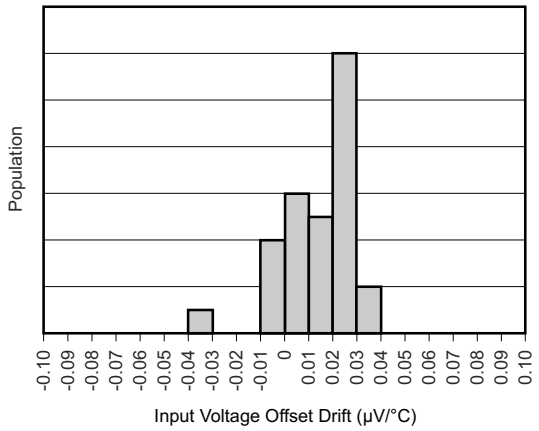


图 6-2. Input Voltage Offset Drift (– 40°C to 125°C)

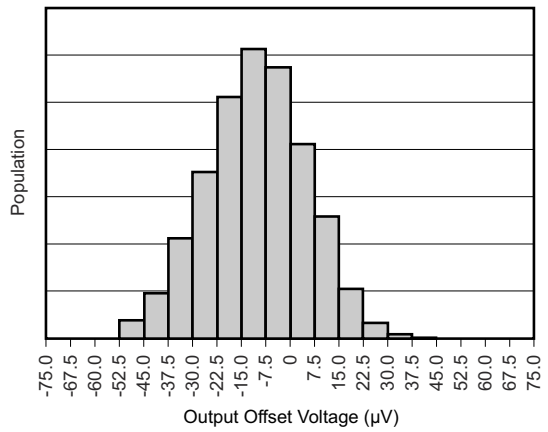


图 6-3. Output Offset Voltage

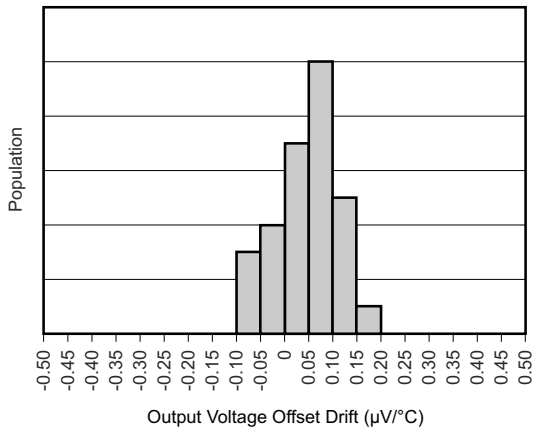


图 6-4. Output Voltage Offset Drift (– 40°C to 125°C)

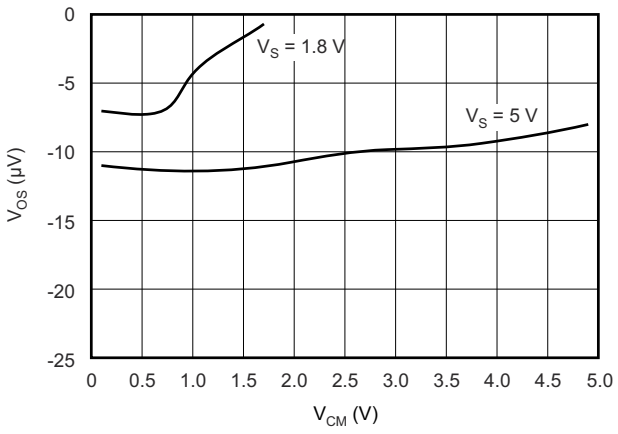


图 6-5. Offset Voltage vs Common-Mode Voltage

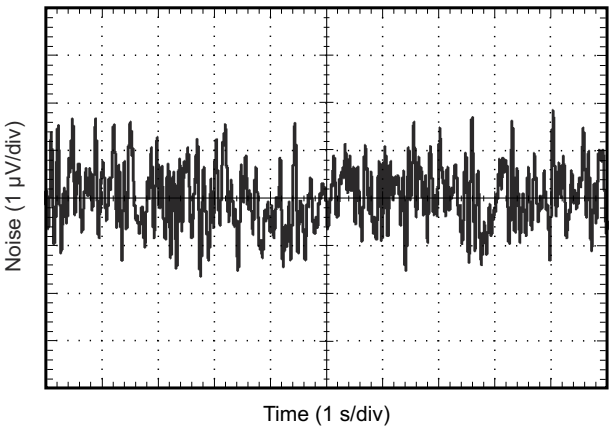


图 6-6. 0.1-Hz to 10-Hz Noise

Copyright © 2023 Texas Instruments Incorporated

6.6 Typical Characteristics (continued)

at T_A = 25°C, V_S = 5 V, R_L = 10 kΩ, V_{REF} = midsupply, and G = 1 (unless otherwise noted)

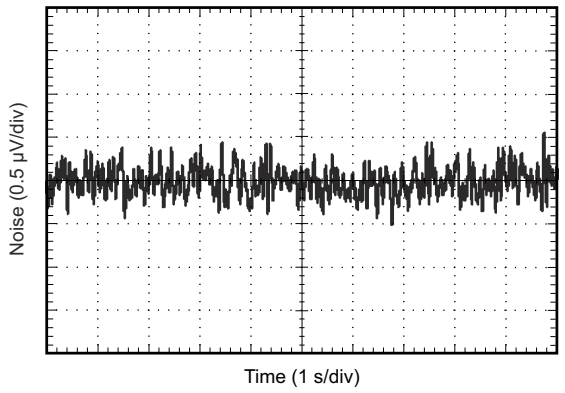


图 6-7. 0.1-Hz to 10-Hz Noise

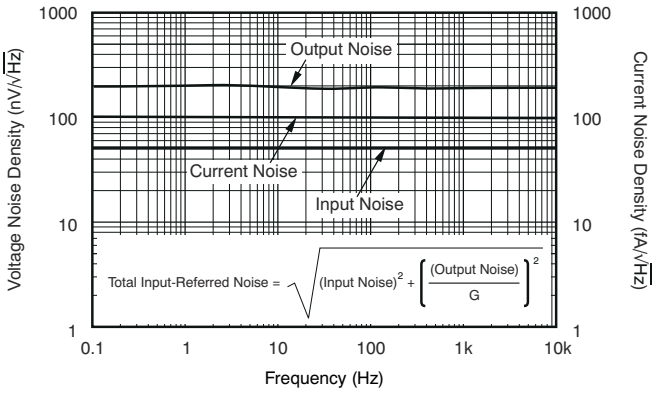


图 6-8. Spectral Noise Density

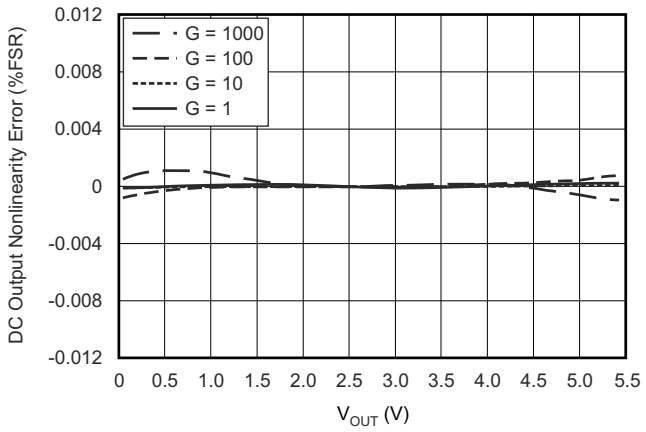


图 6-9. Nonlinearity Error

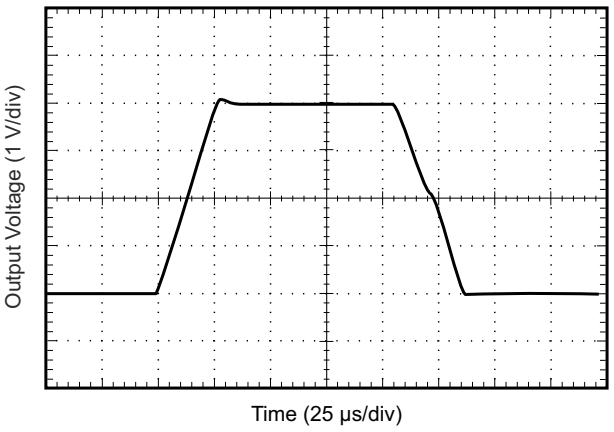


图 6-10. Large Signal Response

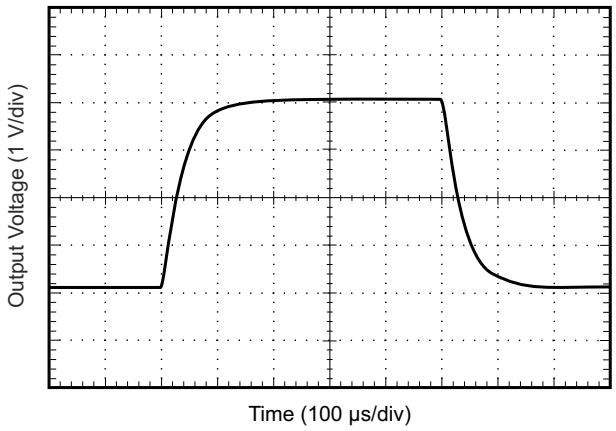


图 6-11. Large-Signal Step Response

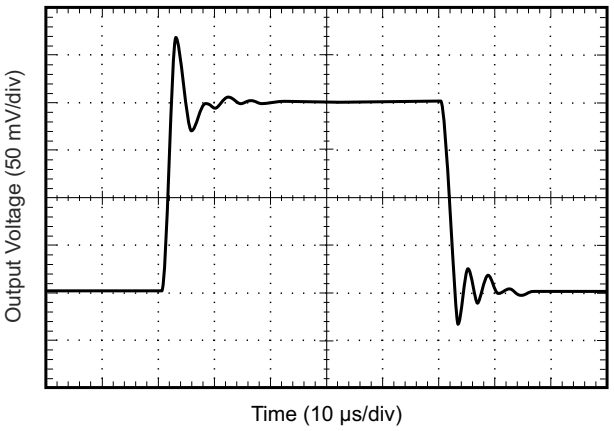


图 6-12. Small-Signal Step Response

Copyright © 2023 Texas Instruments Incorporated

6.6 Typical Characteristics (continued)

at T_A = 25°C, V_S = 5 V, R_L = 10 kΩ, V_{REF} = midsupply, and G = 1 (unless otherwise noted)

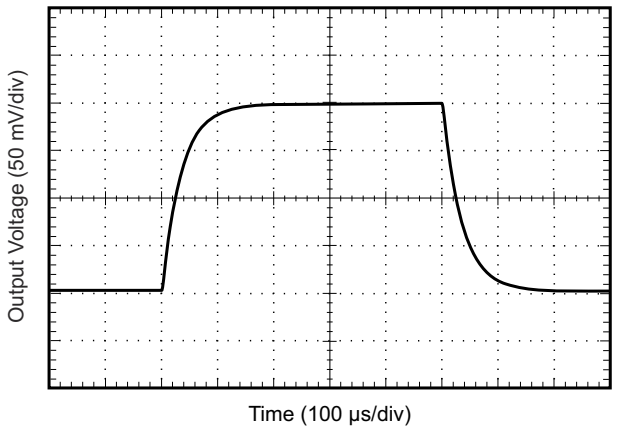


图 6-13. Small-Signal Step Response

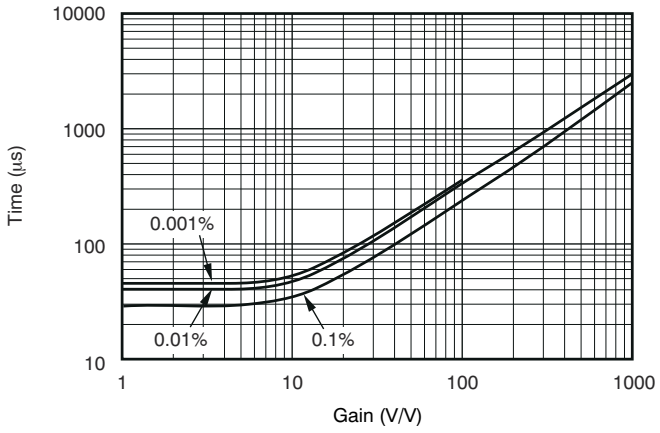


图 6-14. Settling Time vs Gain

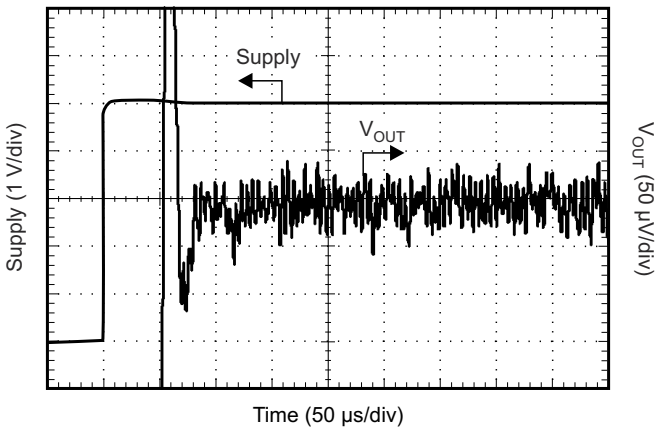


图 6-15. Start-Up Settling Time

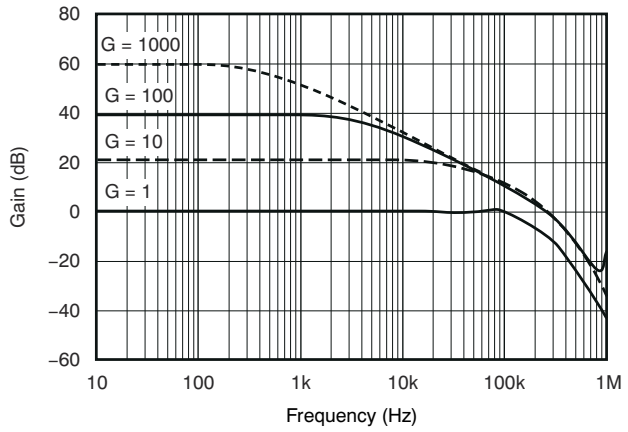


图 6-16. Gain vs Frequency

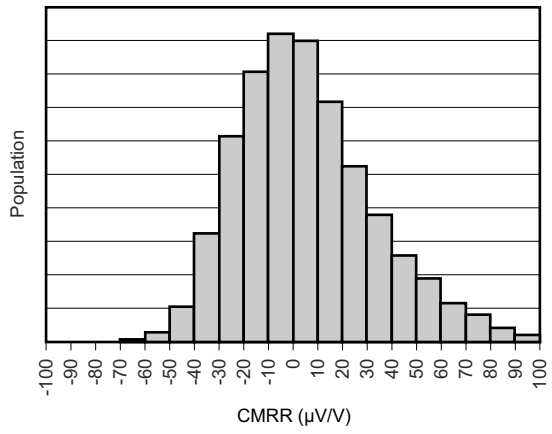


图 6-17. Common-Mode Rejection Ratio

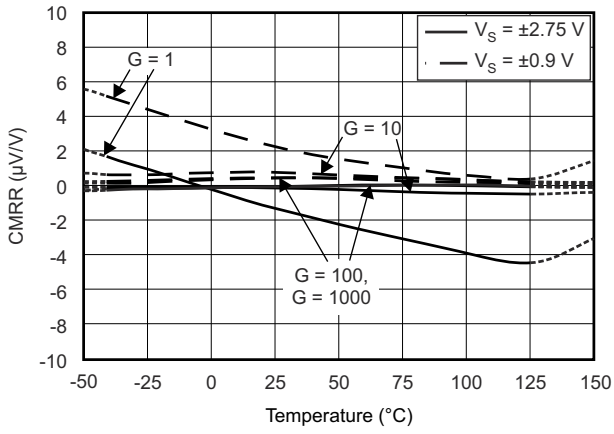


图 6-18. Common-Mode Rejection Ratio vs Temperature

Copyright © 2023 Texas Instruments Incorporated

6.6 Typical Characteristics (continued)

at T_A = 25°C, V_S = 5 V, R_L = 10 kΩ, V_{REF} = midsupply, and G = 1 (unless otherwise noted)

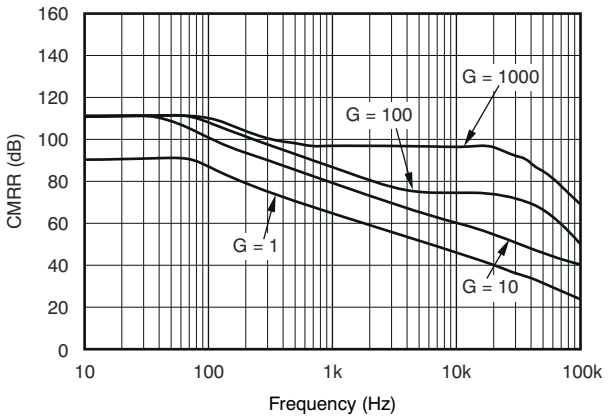


图 6-19. Common-Mode Rejection Ratio vs Frequency

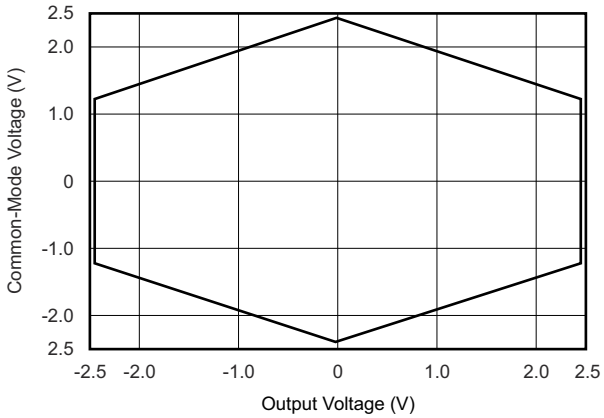


图 6-20. Typical Common-Mode Range vs Output Voltage

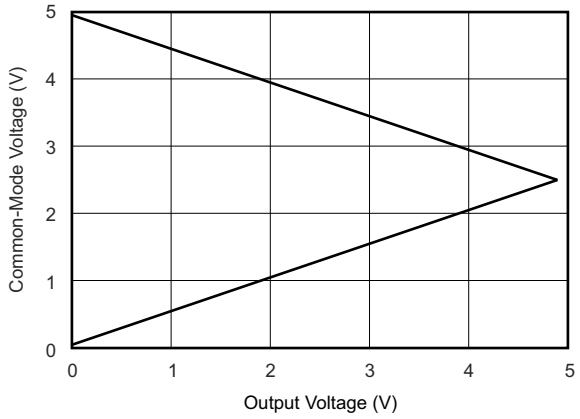


图 6-21. Typical Common-Mode Range vs Output Voltage

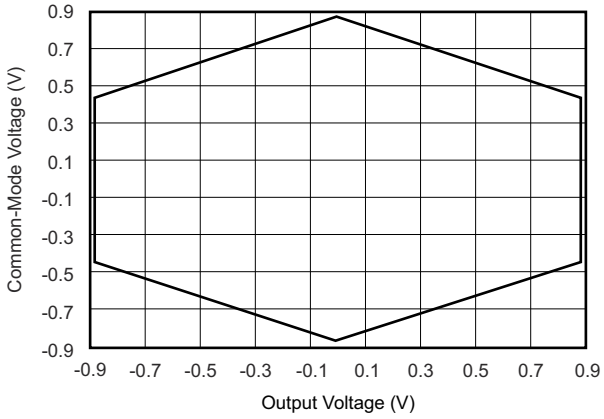


图 6-22. Typical Common-Mode Range vs Output Voltage

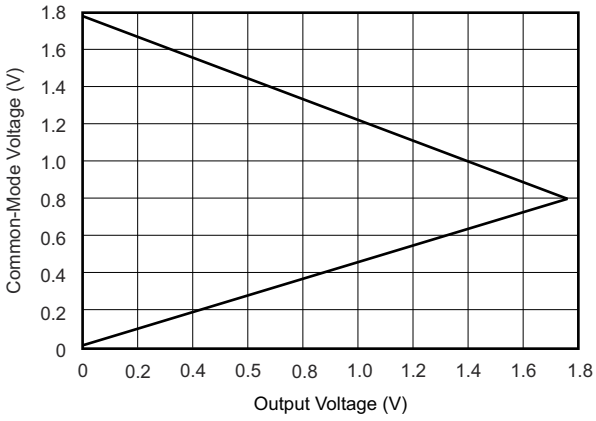


图 6-23. Typical Common-Mode Range vs Output Voltage

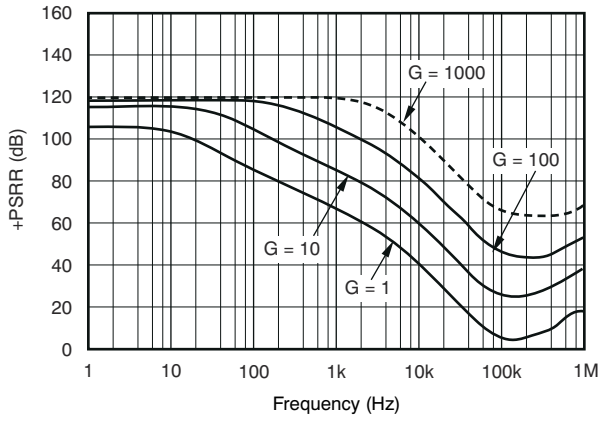


图 6-24. Positive Power-Supply Rejection Ratio

Copyright © 2023 Texas Instruments Incorporated

6.6 Typical Characteristics (continued)

at T_A = 25°C, V_S = 5 V, R_L = 10 kΩ, V_{REF} = midsupply, and G = 1 (unless otherwise noted)

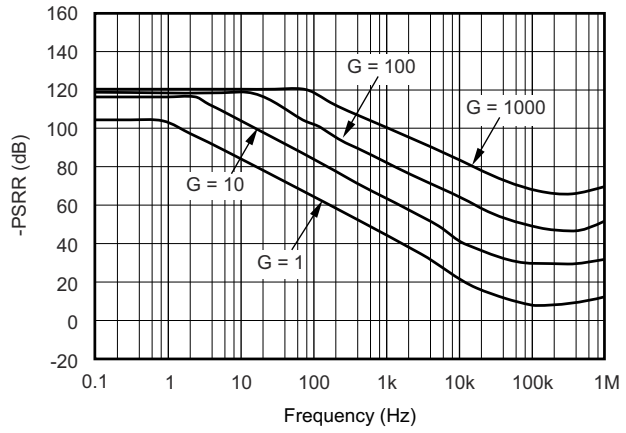


图 6-25. Negative Power-Supply Rejection Ratio

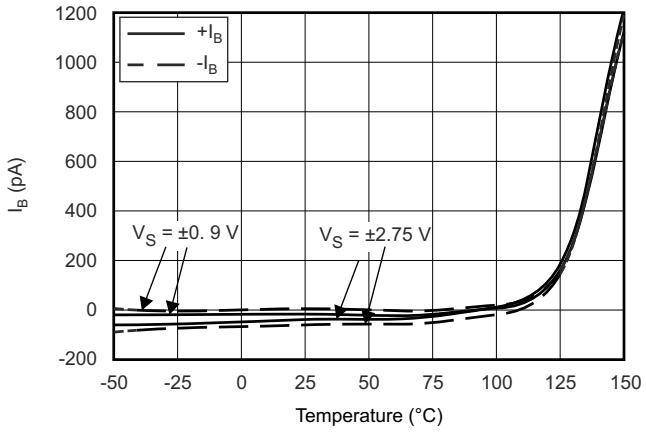


图 6-26. Input Bias Current vs Temperature

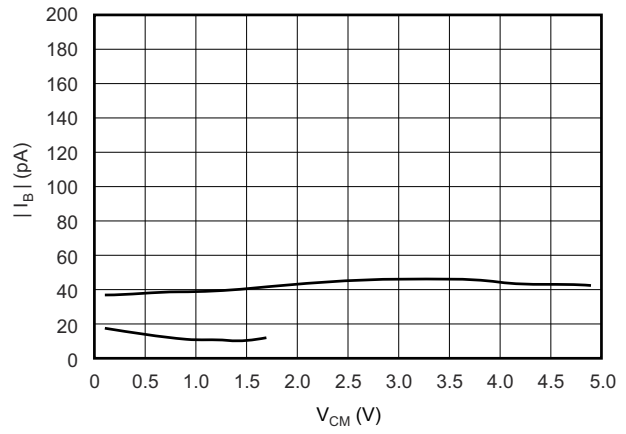


图 6-27. Input Bias Current vs Common-Mode Voltage

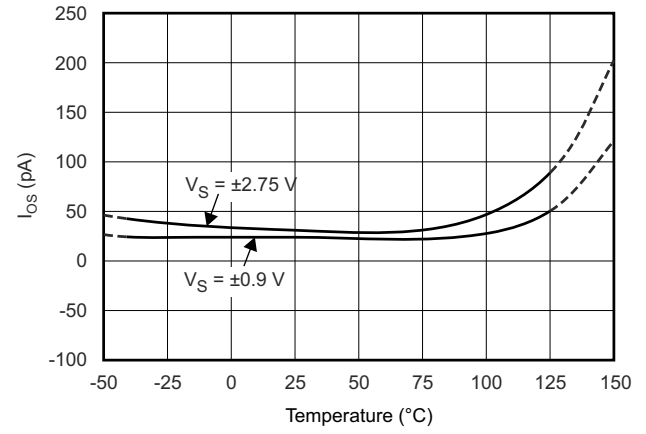


图 6-28. Input Offset Current vs Temperature

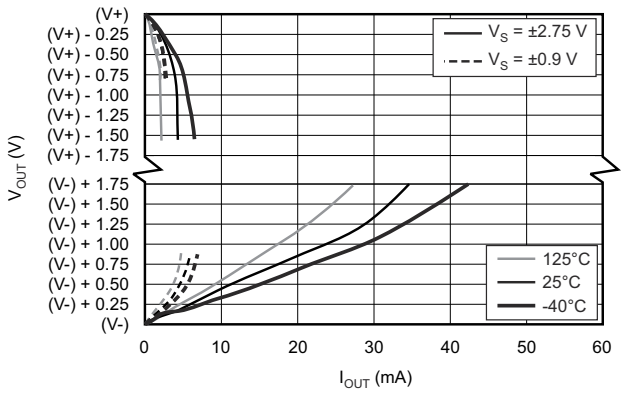


图 6-29. Output Voltage Swing vs Output Current

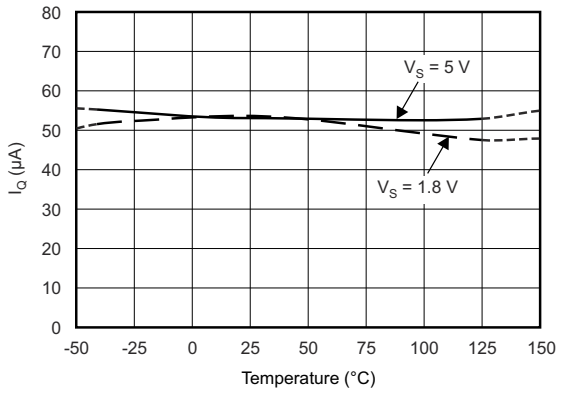


图 6-30. Quiescent Current vs Temperature

6.6 Typical Characteristics (continued)

at T_A = 25°C, V_S = 5 V, R_L = 10 kΩ, V_{REF} = midsupply, and G = 1 (unless otherwise noted)

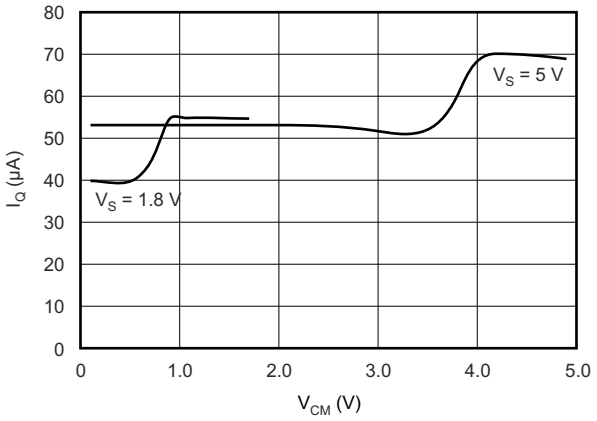


图 6-31. Quiescent Current vs Common-Mode Voltage


Copyright © 2023 Texas Instruments Incorporated

7 Detailed Description

7.1 Overview

The INA333-Q1 is a monolithic instrumentation amplifier (INA) based on the precision zero-drift INA333-Q1 (operational amplifier) core. The INA333-Q1 also integrates laser-trimmed resistors to maintain excellent common-mode rejection and low gain error. The combination of the zero-drift amplifier core and the precision resistors allows this device to achieve outstanding dc precision, and makes the INA333-Q1 an excellent choice for many 3.3-V and 5-V automotive applications.

7.2 Functional Block Diagram

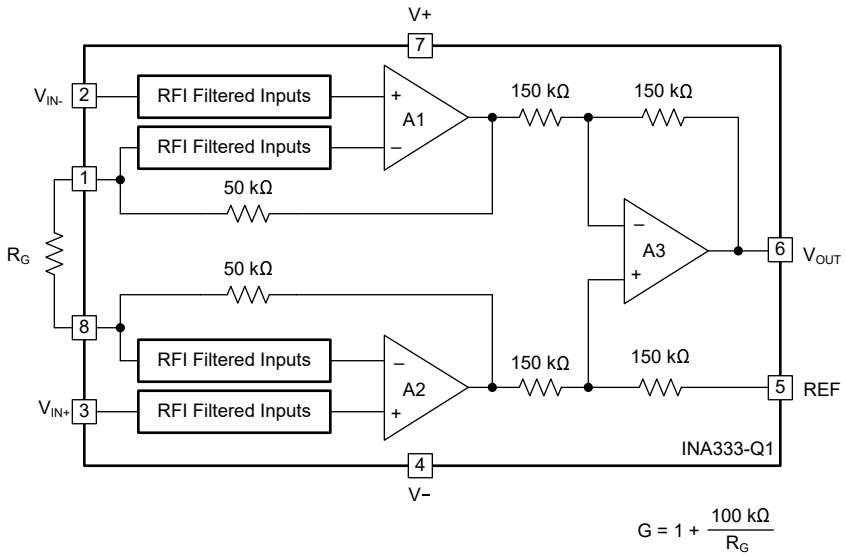

7.3 Feature Description

7.3.1 Internal Offset Correction

The INA333-Q1 internal operational amplifiers use an autocalibration technique with a time-continuous, 350-kHz operational amplifier in the signal path. The amplifier is zero-corrected every 8 µs using a proprietary technique. At power up, the amplifier requires approximately 100 µs to achieve the specified V_{OS} accuracy. This design has no aliasing or flicker noise.

7.3.2 Input Protection

The input pins of the INA333-Q1 are protected with internal diodes connected to the power-supply rails. These diodes clamp and prevent the applied signal from damaging the input circuitry. If the input signal voltage exceeds the power supplies by greater than 0.3 V, limit the input signal current to less than 10 mA to protect the internal clamp diodes. This current limiting is generally done with a series input resistor. Some signal sources are inherently current-limited and do not require limiting resistors.

7.4 Device Functional Modes

The INA333-Q1 has a single functional mode, and is operational when the power-supply voltage is greater than 1.8 V. The recommended maximum specified power-supply voltage for the INA333-Q1 is 5.5 V.

Copyright © 2023 Texas Instruments Incorporated

8 Application and Implementation

备注

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI’s customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

8.1 Application Information

The INA333-Q1 measures small differential voltages with high common-mode voltage developed between the noninverting and inverting input. The high input impedance makes the INA333-Q1 a great choice for a wide range of applications. The ability to set the reference pin to adjust the functionality of the output signal offers additional flexibility that is practical for multiple configurations.

8.1.1 Input Common-Mode Range

The linear input voltage range of the input circuitry of the INA333-Q1 is from approximately 0.1 V below the positive supply voltage to 0.1 V above the negative supply. As a differential input voltage causes the output voltage to increase, however, the linear input range is limited by the output voltage swing of amplifiers A1 and A2. Thus, the linear common-mode input range is related to the output voltage of the complete amplifier. This behavior also depends on supply voltage; see 图 6-20 to 图 6-23 in 节 *6.6*.

Input overload conditions can produce an output voltage that appears normal. For example, if an input overload condition drives both input amplifiers to the respective positive output swing limit, the difference voltage measured by the output amplifier is near zero. The output of the INA333-Q1 is near 0 V even though both inputs are overloaded.

Copyright © 2023 Texas Instruments Incorporated

8.2 Typical Application

图 8-1 shows the basic connections required for operation of the INA333-Q1. Good layout practice mandates the use of bypass capacitors placed close to the device pins as shown.

The output of the INA333-Q1 is referred to the output reference (REF) pin, which is normally grounded. This connection must be low-impedance to maintain good common-mode rejection. Although 15 Ω or less of stray resistance can be tolerated while maintaining specified CMRR, small stray resistances of tens of ohms in series with the REF pin can cause noticeable degradation in CMRR.

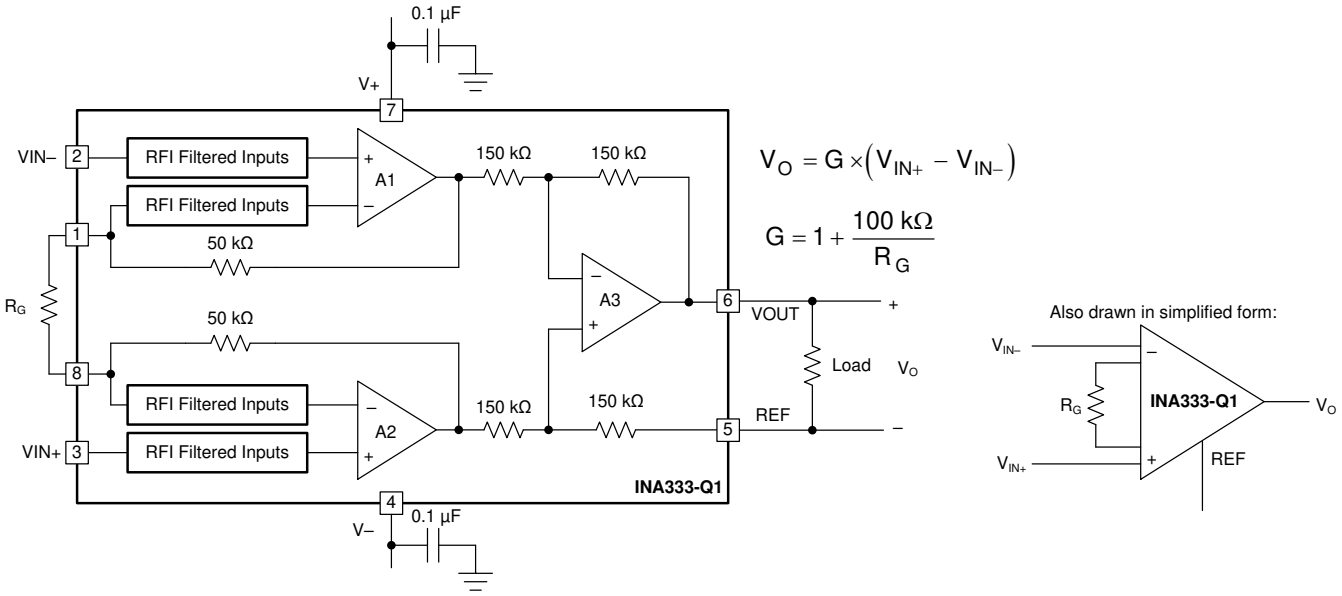


图 8-1. Basic Connections

8.2.1 Design Requirements

The device can be configured to monitor the input differential voltage when the gain of the input signal is set by external resistor RG. The output signal references to the REF pin. The most common application is where the output is referenced to ground when no input signal is present by connecting the REF pin to ground. When the input signal increases, the output voltage at the OUT pin also increases.

8.2.2 Detailed Design Procedure

8.2.2.1 Setting the Gain

The gain of the INA333-Q1 is set by a single external resistor, R_G, connected between pins 1 and 8. The value of R_G is selected according to 方程式 1:

$$G = 1 + (100\ k\Omega / R_G) \quad (1)$$

表 8-1 lists several commonly-used gains and resistor values. The 100 kΩ in 方程式 1 comes from the sum of the two internal feedback resistors of A_1 and A_2. These on-chip resistors are laser trimmed to accurate absolute values. The accuracy and temperature coefficient of these resistors are included in the gain accuracy and drift specifications of the INA333-Q1.

Copyright © 2023 Texas Instruments Incorporated

The stability and temperature drift of the external gain setting resistor, R_G, also affects gain. The contribution of R_G to gain accuracy and drift can be directly inferred from 方程式 1. Low resistor values required for high gain can make wiring resistance important. Sockets add to the wiring resistance and contribute additional gain error (possibly an unstable gain error) in gains of approximately 100 or greater. To maintain stability, avoid parasitic capacitance greater than a few picofarads at the R_G connections. Careful matching of any parasitics on both R_G pins maintains optimal CMRR over frequency.

表 8-1. Commonly Used Gains and Resistor Values

DESIRED GAIN	R_G (Ω)	NEAREST 1% R_G (Ω)
1	NC(1)	NC
2	100k	100k
5	25k	24.9k
10	11.1k	11k
20	5.26k	5.23k
50	2.04k	2.05
100	1.01k	1k
200	502.5	499
500	200.4	200
1000	100.1	100

(1) NC denotes no connection. When using the SPICE model, the simulation does not converge unless a resistor is connected to the R_G pins; use a very large resistor value.

8.2.2.2 Offset Trimming

Most applications require no external offset adjustment. However, if necessary, adjustments can be made by applying a voltage to the REF pin. 图 8-2 shows an optional circuit for trimming the output offset voltage. The voltage applied to REF pin is summed at the output. The operational amplifier buffer provides low impedance at the REF pin to preserve good common-mode rejection.

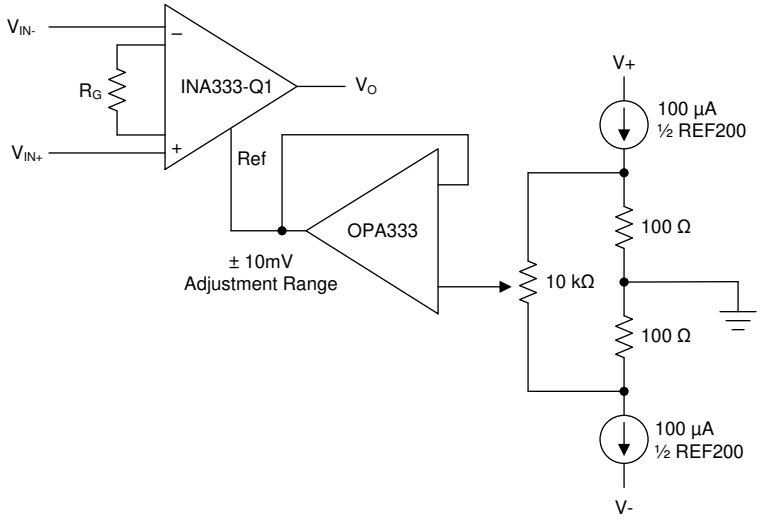


图 8-2. Optional Trimming of Output Offset Voltage

Copyright © 2023 Texas Instruments Incorporated

8.2.2.3 Noise Performance

The autocalibration technique used by the INA333-Q1 results in reduced low frequency noise, typically only 50 nV/ $\sqrt{Hz}$ (G = 100). The spectral noise density is shown in detail in 图 6-8. The low-frequency noise of the device is approximately 1 μV_{PP} measured from 0.1 Hz to 10 Hz (G = 100).

8.2.2.4 Input Bias Current Return Path

The input impedance of the INA333-Q1 is extremely high; approximately 100 GΩ. However, a path must be provided for the input bias current of both inputs. This input bias current is typically ±70 pA. High input impedance means that this input bias current changes very little with varying input voltage.

Input circuitry must provide a path for this input bias current for proper operation. 图 8-3 shows various provisions for an input bias current path. Without a bias current path, the inputs float to a potential that exceeds the common-mode range of the device, and the input amplifiers saturate. If the differential source resistance is low, the bias current return path can be connected to one input (see the thermocouple example in 图 8-3). With higher source impedance, use two equal resistors to provide a balanced input with the possible advantages of a lower input offset voltage as a result of bias current, and improved high-frequency common-mode rejection.

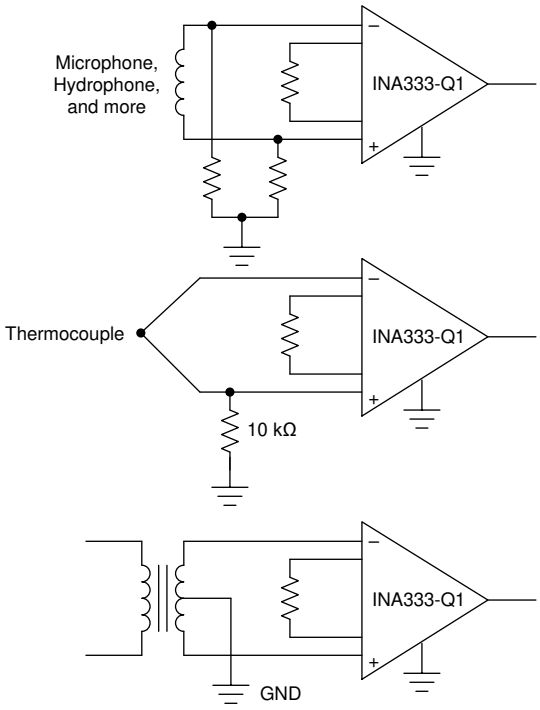


图 8-3. Providing an Input Common-Mode Current Path

8.2.2.5 Low Voltage Operation


The INA333-Q1 can be operated on power supplies as low as ±0.9 V. Most parameters vary only slightly throughout this supply voltage range; see 节 6.6. Operation at a very-low supply voltage requires careful attention to make sure that the input voltages remain within the linear range. Voltage swing requirements of internal nodes limit the input common-mode range with low power-supply voltage. 图 6-20 to 图 6-23 show the range of linear operation for various supply voltages and gains.

8.2.2.6 Single-Supply Operation

The INA333-Q1 can be used on single power supplies of 1.8 V to 5.5 V. 图 8-4 shows a basic single-supply circuit. The output REF pin is connected to midsupply. Zero differential input voltage demands an output voltage of midsupply. Actual output voltage swing is limited to approximately 50 mV more than ground, when the load is referred to ground as shown. 图 6-29 shows how the output voltage swing varies with output current.

With single-supply operation, V_{IN+} and V_{IN-} must both be 0.1 V greater than ground for linear operation. For instance, the inverting input cannot be connected to ground to measure a voltage connected to the noninverting input.

To show the issues affecting low-voltage operation, consider the circuit in 图 8-4 that shows the device operating from a single 3-V supply. A resistor in series with the low side of the bridge makes sure that the bridge output voltage is within the common-mode range of the amplifier inputs.

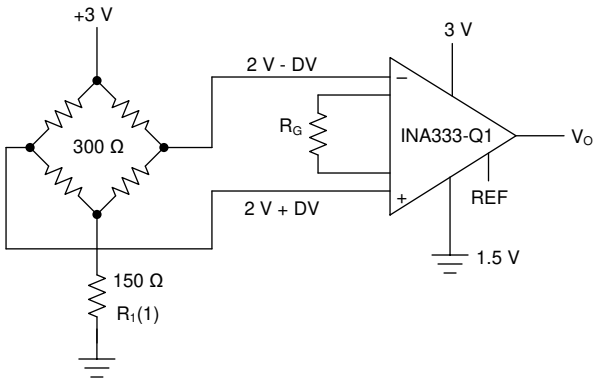

(1) R_1 creates proper common-mode voltage, only for low-voltage operation; see 节 8.2.2.6.

图 8-4. Single-Supply Bridge Amplifier

Copyright © 2023 Texas Instruments Incorporated

8.2.3 Application Curves

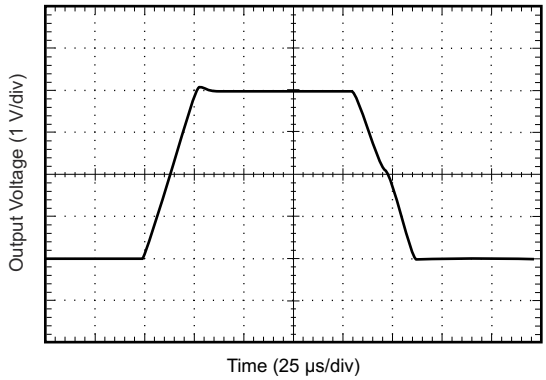


图 8-5. Large Signal Response

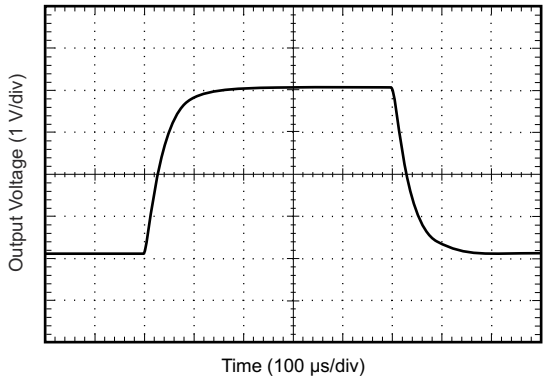


图 8-6. Large-Signal Step Response

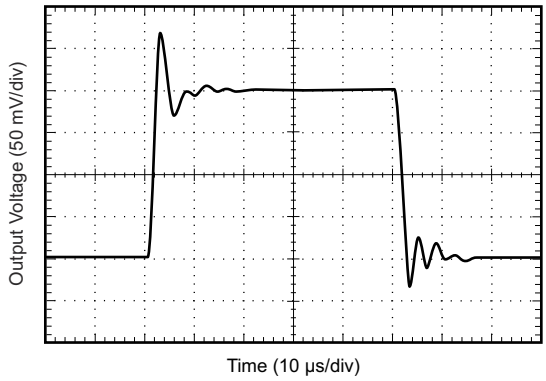


图 8-7. Small-Signal Step Response

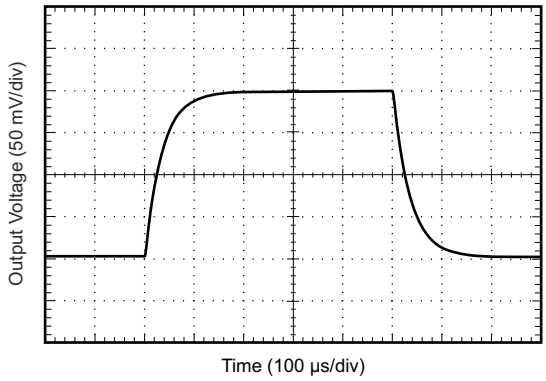


图 8-8. Small-Signal Step Response

Copyright © 2023 Texas Instruments Incorporated

8.3 Power Supply Recommendations

The minimum power supply voltage for the INA333-Q1 is 1.8 V, and the maximum power supply voltage is 5.5 V; for specified performance, 3.3 V to 5 V is recommended. Add a bypass capacitor at the input to compensate for the layout and power supply source impedance.

8.4 Layout

8.4.1 Layout Guidelines

Attention to good layout practices is always recommended.

- Keep traces short.
- When possible, use a printed-circuit-board (PCB) ground plane with surface-mount components placed as close to the device pins as possible.
- Place a 0.1- μ F bypass capacitor closely across the supply pins.

Apply these guidelines throughout the analog circuit to improve performance and provide benefits such as reducing the electromagnetic-interference (EMI) susceptibility.

Instrumentation amplifiers vary in susceptibility to radio-frequency interference (RFI). RFI can generally be identified as a variation in offset voltage or dc signal levels with changes in the interfering RF signal. The INA333-Q1 has been specifically designed to minimize susceptibility to RFI by incorporating passive RC filters with an 8-MHz corner frequency at the V_{IN+} and V_{IN-} inputs. As a result, the INA333-Q1 demonstrates remarkably low sensitivity compared to previous-generation devices. Strong RF fields can continue to cause varying offset levels, however, and can require additional shielding.

8.4.2 Layout Example

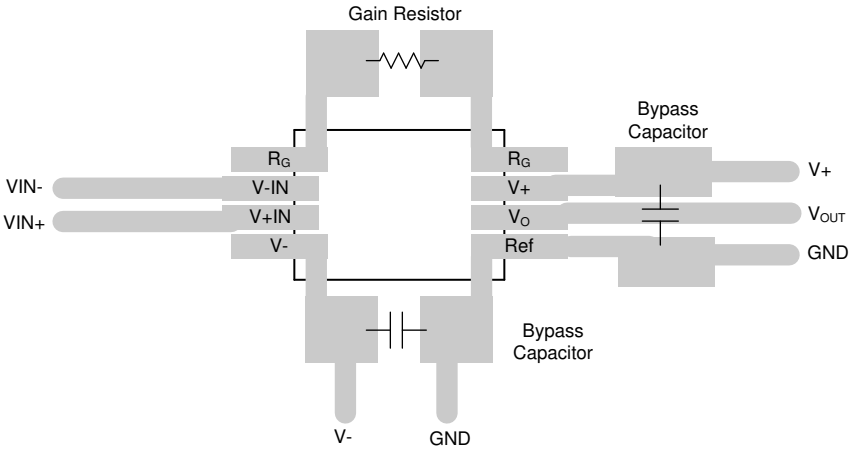


图 8-9. Layout Example

Copyright © 2023 Texas Instruments Incorporated

9 Device and Documentation Support

9.1 Device Support

9.1.1 Development Support

9.1.1.1 TINA-TI Simulation Software (Free Download)

TINA™ is a simple, powerful, and easy-to-use circuit simulation program based on a SPICE engine. TINA-TI™ is a free, fully functional version of the TINA software, preloaded with a library of macromodels in addition to a range of both passive and active models. TINA-TI provides all the conventional dc, transient, and frequency domain analysis of SPICE as well as additional design capabilities.


Available as a free download from the Design tools and simulation web page, TINA-TI simulation software offers extensive post-processing capability that allows users to format results in a variety of ways. Virtual instruments offer the ability to select input waveforms and probe circuit nodes, voltages, and waveforms, creating a dynamic quick-start tool.

Virtual instruments offer users the ability to select input waveforms and probe circuit nodes, voltages, and waveforms, creating a dynamic quick-start tool.

图 9-1 shows example TINA-TI circuits for the device that can be used to develop, modify, and assess the circuit design for specific applications. Links to download these simulation files are given below.

备注

These files require that either the TINA software (from DesignSoft) or TINA-TI software be installed. Download the free TINA-TI software from the TINA-TI folder.

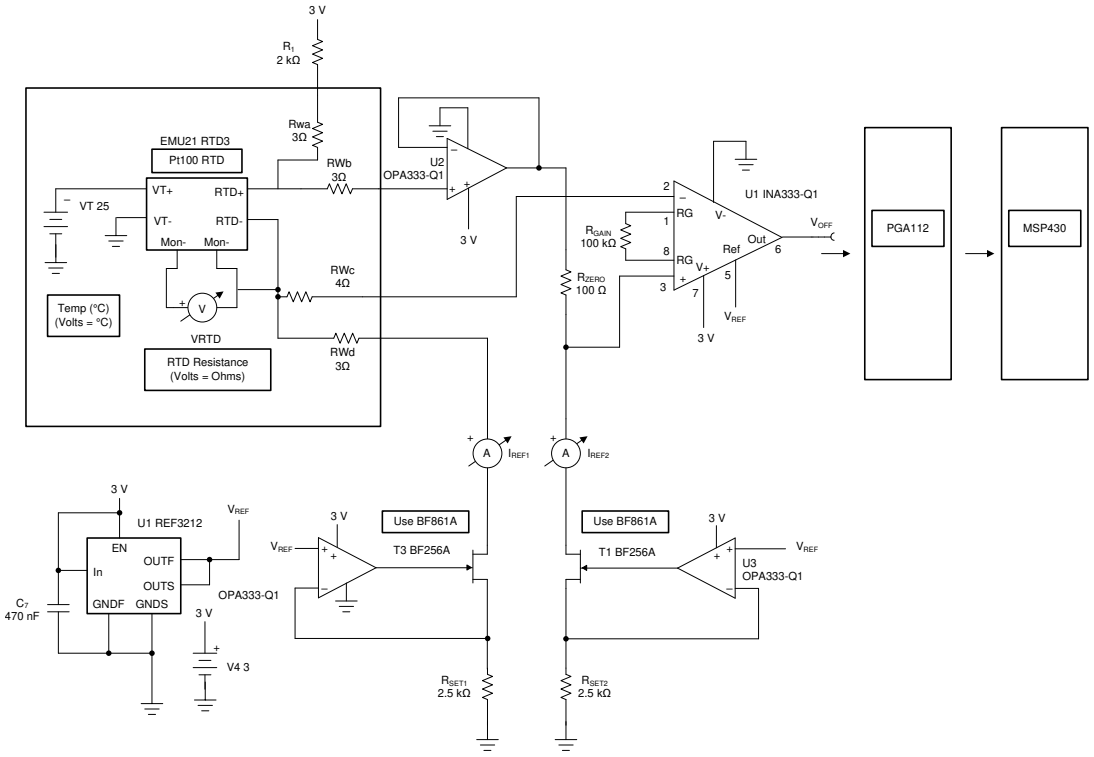

NOTE: RWa, RWb, RWc, and RWd simulate wire resistance. These resistors are included to show the four-wire sense technique immunity to line mismatches. This method assumes the use of a four-wire RTD.

图 9-1. Four-Wire, 3-V Conditioner for a PT100 RTD With Programmable Gain Acquisition System

Download the TINA-TI simulation file for this circuit with the following link: *PT100 RTD*.

9.2 Documentation Support

9.2.1 Related Documentation

For related documentation see the following:

- Texas Instruments, *OPA188-Q1 Precision, Low-Noise, Rail-to-Rail Output, 36-V, Zero-Drift, Automotive-Grade Operational Amplifier* data sheet
- Texas Instruments, *OPA333-Q1 1.8-V microPower CMOS Operational Amplifier Zero-Drift Series* data sheet
- Texas Instruments, *Circuit board layout techniques*

9.3 接收文档更新通知

要接收文档更新通知，请导航至 ti.com 上的器件产品文件夹。点击 *订阅更新* 进行注册，即可每周接收产品信息更改摘要。有关更改的详细信息，请查看任何已修订文档中包含的修订历史记录。

9.4 支持资源

TI E2E™ 支持论坛是工程师的重要参考资料，可直接从专家获得快速、经过验证的解答和设计帮助。搜索现有解答或提出自己的问题可获得所需的快速设计帮助。

链接的内容由各个贡献者“按原样”提供。这些内容并不构成 TI 技术规范，并且不一定反映 TI 的观点；请参阅 TI 的《使用条款》。

9.5 Trademarks

TINA™ is a trademark of DesignSoft, Inc.
TINA-TI™ and TI E2E™ are trademarks of Texas Instruments.
所有商标均为其各自所有者的财产。

9.6 静电放电警告



静电放电 (ESD) 会损坏这个集成电路。德州仪器 (TI) 建议通过适当的预防措施处理所有集成电路。如果不遵守正确的处理和安装程序，可能会损坏集成电路。

ESD 的损坏小至导致微小的性能降级，大至整个器件故障。精密的集成电路可能更容易受到损坏，这是因为非常细微的参数更改都可能会导致器件与其发布的规格不相符。

9.7 术语表

TI 术语表　　本术语表列出并解释了术语、首字母缩略词和定义。

10 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

Copyright © 2023 Texas Instruments Incorporated

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package | Pins	Package qty | Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
INA333QDGKRQ1	Active	Production	VSSOP (DGK) | 8	2500 | LARGE T&R	Yes	NIPDAUAG	Level-2-260C-1 YEAR	-40 to 125	333Q
INA333QDGKRQ1.A	Active	Production	VSSOP (DGK) | 8	2500 | LARGE T&R	Yes	NIPDAUAG	Level-2-260C-1 YEAR	-40 to 125	333Q

(1) **Status:** For more details on status, see our product life cycle.

(2) **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

(3) **RoHS values:** Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

(4) **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

(5) **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

(6) **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

OTHER QUALIFIED VERSIONS OF INA333-Q1 :


- Catalog : INA333

NOTE: Qualified Version Definitions:


- Catalog - TI's standard catalog product

TAPE AND REEL INFORMATION

REEL DIMENSIONS

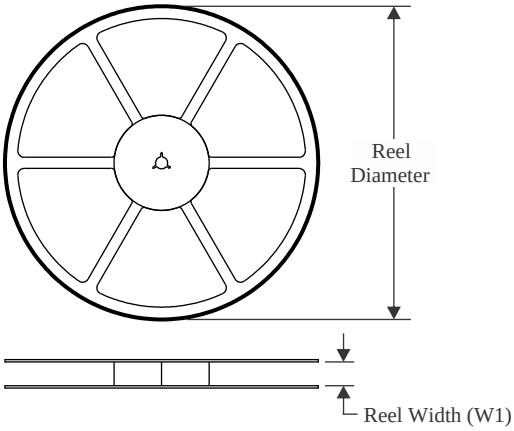


TAPE DIMENSIONS

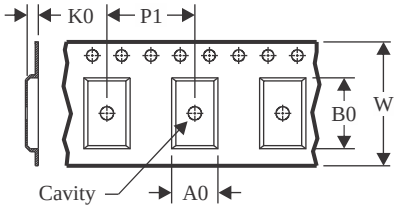

A0	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers


QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

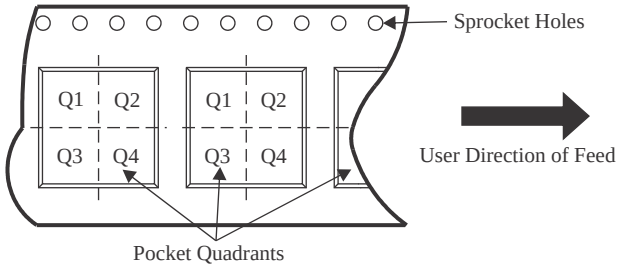

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
INA333QDGKRQ1	VSSOP	DGK	8	2500	330.0	12.4	5.3	3.4	1.4	8.0	12.0	Q1

TAPE AND REEL BOX DIMENSIONS

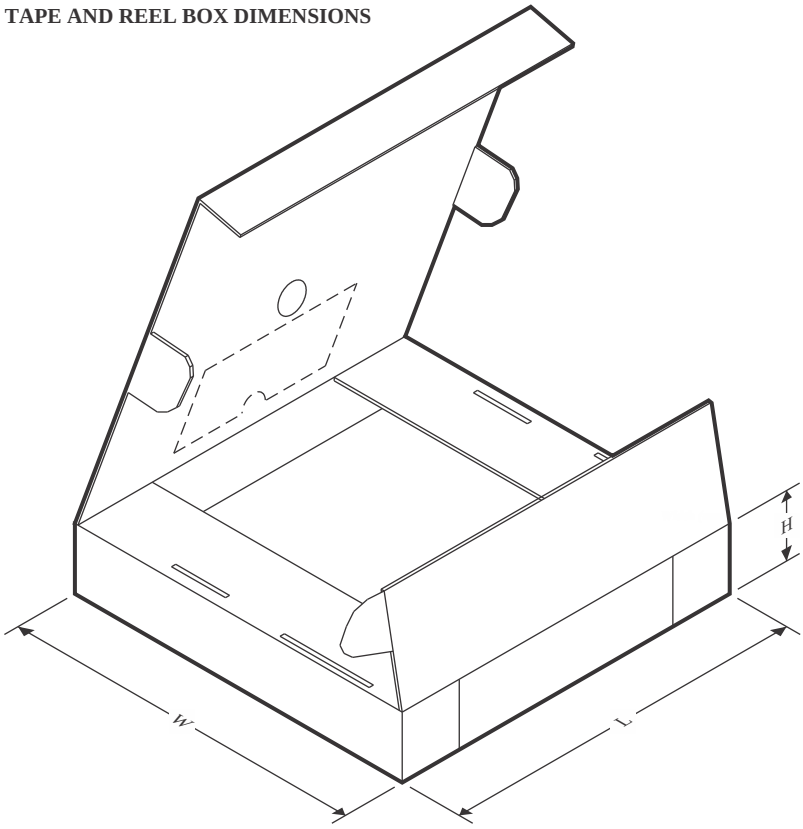

*All dimensions are nominal


Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
INA333QDGKRQ1	VSSOP	DGK	8	2500	366.0	364.0	50.0

PACKAGE OUTLINE

DGK0008A

VSSOP - 1.1 mm max height


SMALL OUTLINE PACKAGE

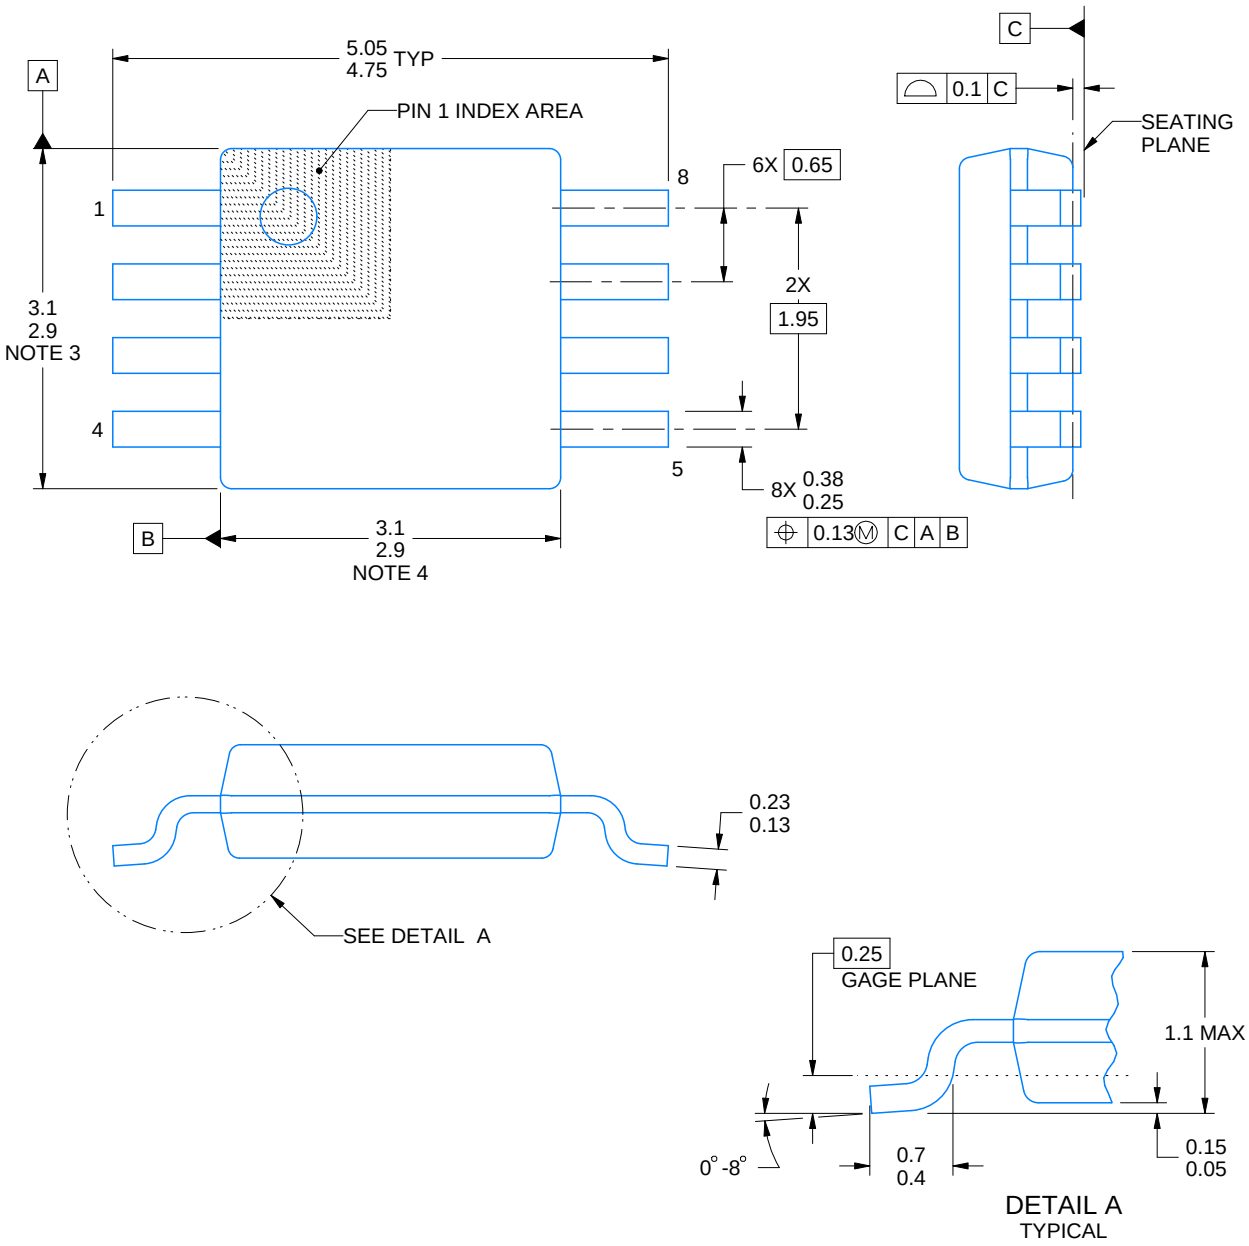


PowerPAD is a trademark of Texas Instruments.

NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
5. Reference JEDEC registration MO-187.

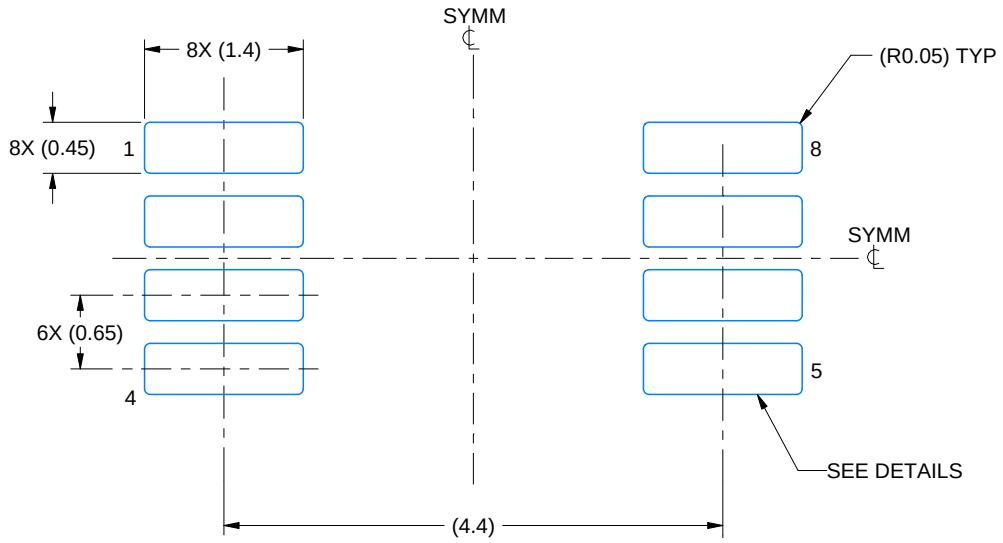

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE: 15X

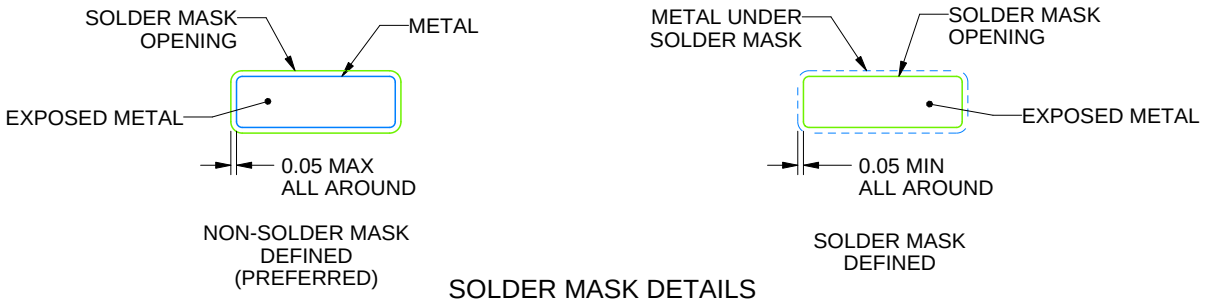


SOLDER MASK DETAILS

4214862/A 04/2023

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.
8. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.
9. Size of metal pad may vary due to creepage requirement.

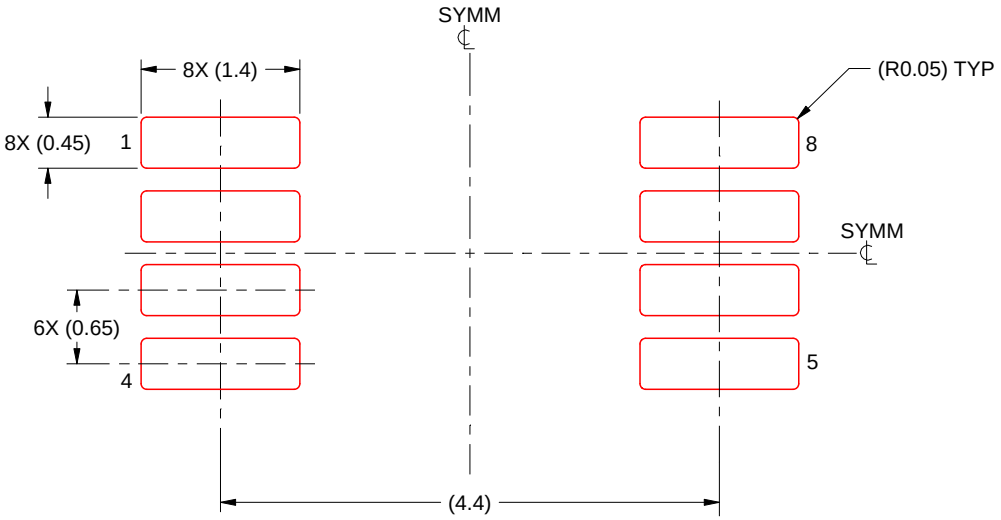

SOLDER PASTE EXAMPLE
SCALE: 15X

4214862/A 04/2023

NOTES: (continued)

11. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
12. Board assembly site may have different recommendations for stencil design.

重要通知和免责声明

TI“按原样”提供技术和可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证没有瑕疵且不做出任何明示或暗示的担保，包括但不限于对适销性、与某特定用途的适用性或不侵犯任何第三方知识产权的暗示担保。

这些资源可供使用 TI 产品进行设计的熟练开发人员使用。您将自行承担以下全部责任：(1) 针对您的应用选择合适的 TI 产品，(2) 设计、验证并测试您的应用，(3) 确保您的应用满足相应标准以及任何其他安全、安保法规或其他要求。

这些资源如有变更，恕不另行通知。TI 授权您仅可将这些资源用于研发本资源所述的 TI 产品的相关应用。严禁以其他方式对这些资源进行复制或展示。您无权使用任何其他 TI 知识产权或任何第三方知识产权。对于因您对这些资源的使用而对 TI 及其代表造成的任何索赔、损害、成本、损失和债务，您将全额赔偿，TI 对此概不负责。

TI 提供的产品受 TI 销售条款)、TI 通用质量指南 或 ti.com 上其他适用条款或 TI 产品随附的其他适用条款的约束。TI 提供这些资源并不会扩展或以其他方式更改 TI 针对 TI 产品发布的适用的担保或担保免责声明。 除非德州仪器 (TI) 明确将某产品指定为定制产品或客户特定产品，否则其产品均为按确定价格收入目录的标准通用器件。

TI 反对并拒绝您可能提出的任何其他或不同的条款。

版权所有 © 2025，德州仪器 (TI) 公司

最后更新日期：2025 年 10 月