


# TPS62816-Q1 采用 3mm x 2mm 可湿性侧面 QFN 封装的 2.7V 至 6V、6A 汽车类降压转换器

## 1 特性

- 符合面向汽车应用的 AEC-Q100 标准
  - 器件温度等级 1：
    - 40°C 至 +125°C T<sub>A</sub>
- 提供功能安全型
  - 可帮助进行功能安全系统设计的文档
- 输入电压范围：2.7V 至 6V
- 静态电流：26μA (典型值)
- 输出电压范围为 0.6V 至 5.5V
- 输出电压精度为 ±1% (PWM 操作)
- 可调软启动
- 强制 PWM 或 PWM/PFM 操作
- 可调开关频率为 1.8MHz 至 4MHz
- 精密使能输入可实现
  - 用户定义的欠压锁定
  - 准确排序
- 100% 占空比模式
- 有源输出放电
- 展频时钟 - 可选
- 具有窗口比较器的电源正常输出
- 封装具有可湿性侧面
- T<sub>J</sub> = -40°C 至 150°C

## 2 应用

- ADAS 传感器融合
- 环视 ECU
- 数字驾驶舱
- 外部放大器

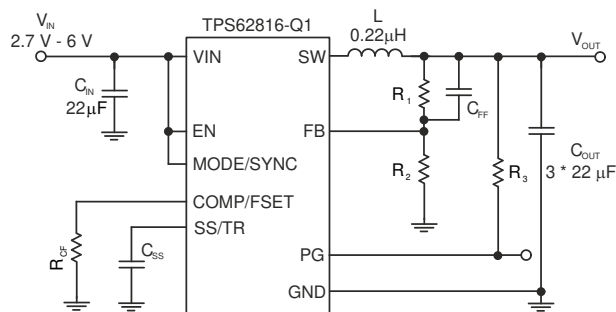

典型应用原理图

## 3 说明


TPS62816-Q1 是一款易于使用的引脚对引脚高效同步降压直流/直流转换器。它基于峰值电流模式控制拓扑，专为信息娱乐系统和高级驾驶辅助系统等汽车应用而设计。低阻开关可支持高达 6A 的持续输出电流。用户可通过外部方式在 1.8MHz 至 4MHz 范围内调节开关频率，亦可在该频率范围内将其同步至外部时钟。在 PWM/PFM 模式下，TPS62816-Q1 会在轻负载情况下自动进入省电模式，从而在整个负载范围内维持高效率。TPS62816-Q1 可在 PWM 模式下提供 1% 的输出电压精度，这有助于实现具有高输出电压精度的电源设计。通过 SS/TR 引脚，可设置启动时间或跟踪向外部源提供的输出电压。此特性可实现不同电源轨的外部时序控制并限制启动期间的浪涌电流。

TPS62816-Q1 是一个可调节版本，采用了具有可湿性侧面的 3mm x 2mm VQFN 封装。

### 器件信息

| 器件型号        | 封装 <sup>(1)</sup> | 封装尺寸 (标称值)      |
|-------------|-------------------|-----------------|
| TPS62816-Q1 | VQFN              | 3.00mm × 2.00mm |

(1) 如需了解所有可用封装，请参阅产品说明书末尾的可订购产品附录。

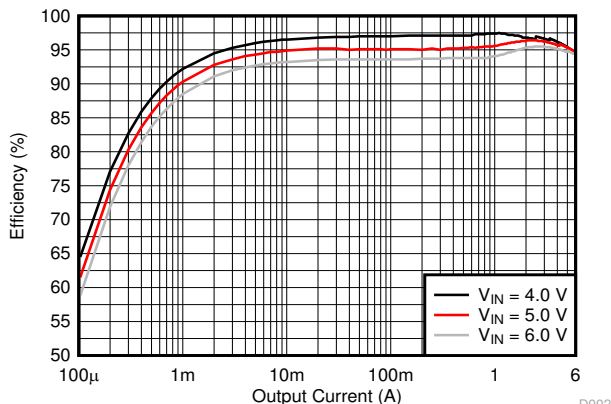

效率与输出电流间的关系；  
V<sub>OUT</sub> = 3.3V ; PWM/PFM ; f<sub>s</sub> = 2.25MHz

D002



## Table of Contents

|                                                  |          |                                                                  |           |
|--------------------------------------------------|----------|------------------------------------------------------------------|-----------|
| <b>1 特性</b> .....                                | <b>1</b> | <b>10 Application and Implementation</b> .....                   | <b>15</b> |
| <b>2 应用</b> .....                                | <b>1</b> | 10.1 Application Information.....                                | 15        |
| <b>3 说明</b> .....                                | <b>1</b> | 10.2 Typical Application.....                                    | 16        |
| <b>4 Revision History</b> .....                  | <b>2</b> | 10.3 System Examples.....                                        | 27        |
| <b>5 Device Comparison Table</b> .....           | <b>3</b> | <b>11 Power Supply Recommendations</b> .....                     | <b>30</b> |
| <b>6 Pin Configuration and Functions</b> .....   | <b>3</b> | <b>12 Layout</b> .....                                           | <b>31</b> |
| <b>7 Specifications</b> .....                    | <b>4</b> | 12.1 Layout Guidelines.....                                      | 31        |
| 7.1 Absolute Maximum Ratings.....                | 4        | 12.2 Layout Example.....                                         | 31        |
| 7.2 ESD Ratings.....                             | 4        | <b>13 Device and Documentation Support</b> .....                 | <b>32</b> |
| 7.3 Recommended Operating Conditions.....        | 4        | 13.1 Device Support.....                                         | 32        |
| 7.4 Thermal Information.....                     | 5        | 13.2 Documentation Support.....                                  | 32        |
| 7.5 Electrical Characteristics.....              | 5        | 13.3 接收文档更新通知.....                                               | 32        |
| 7.6 Typical Characteristics.....                 | 7        | 13.4 支持资源.....                                                   | 32        |
| <b>8 Parameter Measurement Information</b> ..... | <b>8</b> | 13.5 Trademarks.....                                             | 32        |
| <b>9 Detailed Description</b> .....              | <b>9</b> | 13.6 Electrostatic Discharge Caution.....                        | 32        |
| 9.1 Overview.....                                | 9        | 13.7 术语表.....                                                    | 32        |
| 9.2 Functional Block Diagram.....                | 9        | <b>14 Mechanical, Packaging, and Orderable Information</b> ..... | <b>32</b> |
| 9.3 Feature Description.....                     | 9        |                                                                  |           |
| 9.4 Device Functional Modes.....                 | 12       |                                                                  |           |

## 4 Revision History

注：以前版本的页码可能与当前版本的页码不同

| <b>Changes from Revision * (March 2020) to Revision A (December 2021)</b> | <b>Page</b> |
|---------------------------------------------------------------------------|-------------|
| • 将文档状态从“预告信息”更改为“量产数据” .....                                             | <b>1</b>    |

## 5 Device Comparison Table

| DEVICE NUMBER    | V <sub>OUT</sub> DISCHARGE | FOLDBACK CURRENT LIMIT | SPREAD SPECTRUM CLOCKING (SSC) | OUTPUT VOLTAGE |
|------------------|----------------------------|------------------------|--------------------------------|----------------|
| TPS62816QWRWYRQ1 | ON                         | OFF                    | by COMP/FSET pin               | adjustable     |

## 6 Pin Configuration and Functions

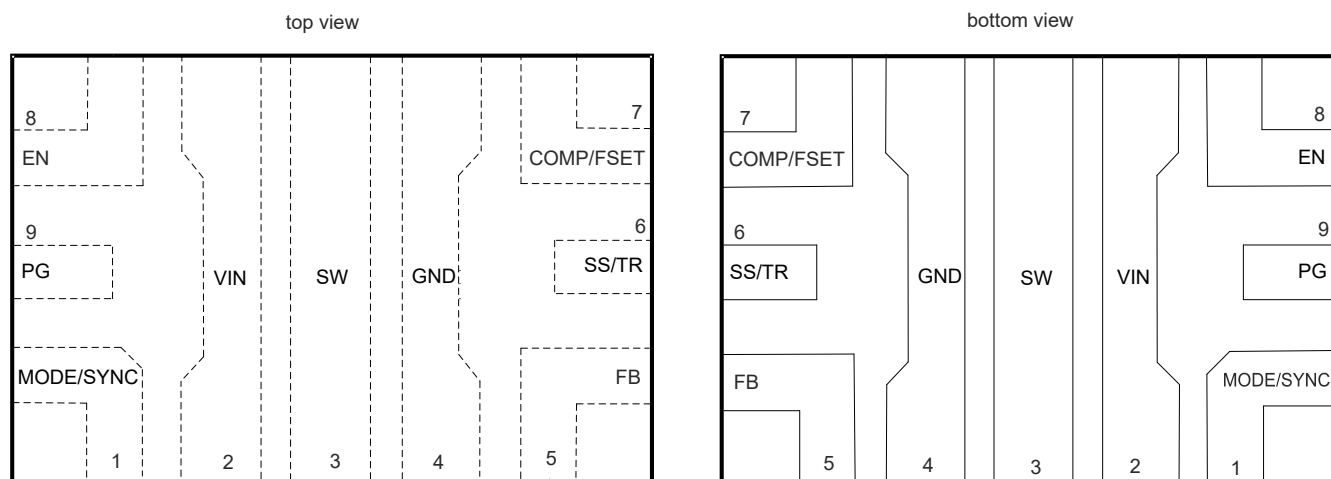


图 6-1. 9-Pin VQFN RWY Package (Top View)

表 6-1. Pin Functions

| PIN       |     | I/O | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                          |
|-----------|-----|-----|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| NAME      | NO. |     |                                                                                                                                                                                                                                                                                                                                                                                                      |
| EN        | 8   | I   | This is the enable pin of the device. Connect to logic low to disable the device. Pull high to enable the device. Do not leave this pin unconnected.                                                                                                                                                                                                                                                 |
| FB        | 5   | I   | Voltage feedback input. Connect the resistive output voltage divider to this pin.                                                                                                                                                                                                                                                                                                                    |
| GND       | 4   |     | Ground pin                                                                                                                                                                                                                                                                                                                                                                                           |
| MODE/SYNC | 1   | I   | The device runs in PFM/PWM mode when this pin is pulled low. When the pin is pulled high, the device runs in forced PWM mode. Do not leave this pin unconnected. The mode pin can also be used to synchronize the device to an external frequency. See the <i>Electrical Characteristics</i> for the detailed specification for the digital signal applied to this pin for external synchronization. |
| COMP/FSET | 7   | I   | Device compensation and frequency set input. A resistor from this pin to GND defines the compensation of the control loop as well as the switching frequency if not externally synchronized.                                                                                                                                                                                                         |
| PG        | 9   | O   | Open-drain power-good output                                                                                                                                                                                                                                                                                                                                                                         |
| SS/TR     | 6   | I   | Soft-start / tracking pin. An external capacitor connected from this pin to GND defines the rise time for the internal reference voltage. The pin can also be used as an input for tracking and sequencing. See 节 10.                                                                                                                                                                                |
| SW        | 3   | O   | This is the switch pin of the converter and is connected to the internal power MOSFETs.                                                                                                                                                                                                                                                                                                              |
| VIN       | 2   |     | Power supply input. Make sure the input capacitor is connected as close as possible between the VIN pin and PGND.                                                                                                                                                                                                                                                                                    |

## 7 Specifications

### 7.1 Absolute Maximum Ratings

over operating temperature range (unless otherwise noted)<sup>(1)</sup>

|                            |                                         | MIN   | MAX                   | UNIT |
|----------------------------|-----------------------------------------|-------|-----------------------|------|
| Pin voltage <sup>(2)</sup> | V <sub>IN</sub>                         | – 0.3 | 6.5                   | V    |
|                            | SW (DC)                                 | – 0.3 | V <sub>IN</sub> + 0.3 |      |
|                            | SW (AC, less than 10 ns) <sup>(3)</sup> | – 3   | 10                    |      |
|                            | FB                                      | – 0.3 | 4                     |      |
|                            | COMP/FSET, PG, SS/TR                    | – 0.3 | V <sub>IN</sub> + 0.3 |      |
|                            | EN, MODE/SYNC                           | – 0.3 | 6.5                   |      |
| T <sub>stg</sub>           | Storage temperature                     | – 65  | 150                   | °C   |

(1) Stresses beyond those listed under *Absolute Maximum Rating* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

(2) All voltage values are with respect to the network ground terminal

(3) While switching

### 7.2 ESD Ratings

|                    |                         |                                                                                        | VALUE | UNIT |
|--------------------|-------------------------|----------------------------------------------------------------------------------------|-------|------|
| V <sub>(ESD)</sub> | Electrostatic discharge | Human body model (HBM), per AEC Q100-002 HBM ESD classification level 2 <sup>(1)</sup> | ±2000 | V    |
|                    |                         | Charged device model (CDM), per AEC Q100-011 CDM ESD classification level C5           | ±750  |      |

(1) AEC Q100-002 indicates that HBM stressing shall be in accordance with the ANSI/ESDA/JEDEC JS-001 specification.

### 7.3 Recommended Operating Conditions

Over operating temperature range (unless otherwise noted)

|                      |                                             | MIN  | NOM  | MAX | UNIT |
|----------------------|---------------------------------------------|------|------|-----|------|
| V <sub>IN</sub>      | Input voltage range                         | 2.7  |      | 6   | V    |
| V <sub>OUT</sub>     | Output voltage range                        | 0.6  |      | 5.5 | V    |
| L                    | Effective inductance                        | 0.15 | 0.22 | 0.3 | μH   |
| C <sub>OUT</sub>     | Effective output capacitance <sup>(1)</sup> | 32   | 66   | 470 | μF   |
| C <sub>IN</sub>      | Effective input capacitance <sup>(1)</sup>  | 5    | 10   |     | μF   |
| R <sub>CF</sub>      |                                             | 4.5  |      | 100 | kΩ   |
| I <sub>SINK_PG</sub> | Sink current at PG pin                      | 0    |      | 2   | mA   |
| T <sub>J</sub>       | Junction temperature                        | – 40 |      | 150 | °C   |

(1) The values given for all the capacitors in the table are effective capacitance, which includes the DC bias effect. Due to the DC bias effect of ceramic capacitors, the effective capacitance is lower than the nominal value when a voltage is applied. Please check the manufacturer's DC bias curves for the effective capacitance versus DC voltage applied. Further restrictions may apply. Please see the feature description for COMP/FSET about the output capacitance versus compensation setting and output voltage.

## 7.4 Thermal Information

| THERMAL METRIC <sup>(1)</sup> |                                              | TPS62816-Q1 | TPS62816-Q1 | UNIT |
|-------------------------------|----------------------------------------------|-------------|-------------|------|
|                               |                                              | RWY (JEDEC) | RWY (EVM)   |      |
|                               |                                              | 9 PINS      | 9 PINS      |      |
| $R_{\theta JA}$               | Junction-to-ambient thermal resistance       | 71          | 48          | °C/W |
| $R_{\theta JC(top)}$          | Junction-to-case (top) thermal resistance    | 37          | n/a         | °C/W |
| $R_{\theta JB}$               | Junction-to-board thermal resistance         | 16.4        | n/a         | °C/W |
| $\Psi_{JT}$                   | Junction-to-top characterization parameter   | 0.9         | n/a         | °C/W |
| $\Upsilon_{JB}$               | Junction-to-board characterization parameter | 16.1        | n/a         | °C/W |
| $R_{\theta JC(bot)}$          | Junction-to-case (bottom) thermal resistance | n/a         | n/a         | °C/W |

(1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.

## 7.5 Electrical Characteristics

Over operating junction temperature range ( $T_J = -40^{\circ}\text{C}$  to  $+150^{\circ}\text{C}$ ) and  $V_{IN} = 2.7\text{ V}$  to  $6\text{ V}$ . Typical values at  $V_{IN} = 5\text{ V}$  and  $T_J = 25^{\circ}\text{C}$ . (unless otherwise noted)

| PARAMETER                    |                                                        | TEST CONDITIONS                                                                                            | MIN  | TYP     | MAX  | UNIT          |
|------------------------------|--------------------------------------------------------|------------------------------------------------------------------------------------------------------------|------|---------|------|---------------|
| <b>SUPPLY</b>                |                                                        |                                                                                                            |      |         |      |               |
| $I_Q$                        | Quiescent current                                      | $EN = V_{IN}$ , no load, device not switching, $T_J = 125^{\circ}\text{C}$ , $MODE = \text{GND}$           |      |         | 36   | $\mu\text{A}$ |
| $I_Q$                        | Quiescent current                                      | $EN = V_{IN}$ , no load, device not switching, $MODE = \text{GND}$ , $V_{OUT} = 0.6\text{ V}$              |      | 26      | 50   | $\mu\text{A}$ |
| $I_{SD}$                     | Shutdown current                                       | $EN = \text{GND}$ , at $T_J = 125^{\circ}\text{C}$                                                         |      |         | 90   | $\mu\text{A}$ |
| $I_{SD}$                     | Shutdown current                                       | $EN = \text{GND}$ , nominal value at $T_J = 25^{\circ}\text{C}$ , max value at $T_J = 150^{\circ}\text{C}$ |      | 2.2     | 230  | $\mu\text{A}$ |
| $V_{UVLO}$                   | Undervoltage lockout threshold                         | $V_{IN}$ rising                                                                                            | 2.45 | 2.6     | 2.7  | V             |
|                              |                                                        | $V_{IN}$ falling                                                                                           | 2.1  | 2.5     | 2.6  | V             |
| $T_{JSD}$                    | Thermal shutdown threshold                             | $T_J$ rising                                                                                               |      | 180     |      | °C            |
|                              | Thermal shutdown hysteresis                            | $T_J$ falling                                                                                              |      | 15      |      | °C            |
| <b>CONTROL and INTERFACE</b> |                                                        |                                                                                                            |      |         |      |               |
| $V_{IH,EN}$                  | Input threshold voltage at EN, rising edge             |                                                                                                            | 1.05 | 1.1     | 1.15 | V             |
| $V_{IL,EN}$                  | Input threshold voltage at EN, falling edge            |                                                                                                            | 0.96 | 1.0     | 1.05 | V             |
| $V_{IH}$                     | High-level input-threshold voltage at $MODE/SYNC$      |                                                                                                            | 1.1  |         |      | V             |
| $I_{IH,EN}$                  | Input leakage current into EN                          | $V_{IH} = V_{IN}$ or $V_{IL} = \text{GND}$                                                                 |      |         | 125  | nA            |
| $V_{IL}$                     | Low-level input-threshold voltage at $MODE/SYNC$       |                                                                                                            |      |         | 0.3  | V             |
| $I_{IH}$                     | Input leakage current into $MODE/SYNC$                 |                                                                                                            |      |         | 250  | nA            |
| $t_{Delay}$                  | Enable delay time                                      | Time from EN high to device starts switching; $V_{IN}$ applied already                                     | 135  | 270     | 520  | $\mu\text{s}$ |
| $t_{Ramp}$                   | Output voltage ramp time, SS/TR pin open               | $I_{OUT} = 0\text{ mA}$ , time from device starts switching to power good; device not in current limit     | 90   | 150     | 220  | $\mu\text{s}$ |
| $I_{SS/TR}$                  | SS/TR source current                                   |                                                                                                            | 8    | 10      | 12   | $\mu\text{A}$ |
| $R_{DIS}$                    | Internal discharge resistance on SS/TR when EN = low   |                                                                                                            | 0.7  | 1.1     | 1.5  | k $\Omega$    |
|                              | Tracking gain                                          | $V_{FB} / V_{SS/TR}$                                                                                       |      | 1       |      |               |
|                              | Tracking offset                                        | $V_{FB}$ when $V_{SS/TR} = 0\text{ V}$                                                                     |      | $\pm 1$ |      | mV            |
| $f_{SYNC}$                   | Frequency range on $MODE/SYNC$ pin for synchronization |                                                                                                            | 1.8  |         | 4    | MHz           |

Over operating junction temperature range ( $T_J = -40^{\circ}\text{C}$  to  $+150^{\circ}\text{C}$ ) and  $V_{IN} = 2.7\text{ V}$  to  $6\text{ V}$ . Typical values at  $V_{IN} = 5\text{ V}$  and  $T_J = 25^{\circ}\text{C}$ . (unless otherwise noted)

| PARAMETER     |                                                   | TEST CONDITIONS                                                                                                | MIN   | TYP      | MAX  | UNIT             |
|---------------|---------------------------------------------------|----------------------------------------------------------------------------------------------------------------|-------|----------|------|------------------|
|               | Duty cycle of synchronization signal at MODE/SYNC |                                                                                                                | 20    |          | 80   | %                |
|               | Time to lock to external frequency                |                                                                                                                |       | 50       |      | $\mu\text{s}$    |
|               | resistance from COMP/FSET to GND for logic low    | Internal frequency setting with $f = 2.25\text{ MHz}$                                                          | 0     |          | 2.5  | $\text{k}\Omega$ |
|               | Voltage on COMP/FSET for logic high               | internal frequency setting with $f = 2.25\text{ MHz}$                                                          |       | $V_{IN}$ |      | V                |
| $V_{TH\_PG}$  | UVP power good threshold voltage; dc level        | rising ( $\%V_{FB}$ )                                                                                          | 92%   | 95%      | 98%  |                  |
| $V_{TH\_PG}$  | UVP power good threshold voltage; dc level        | falling ( $\%V_{FB}$ )                                                                                         | 87%   | 90%      | 93%  |                  |
| $V_{TH\_PG}$  | OVP power good threshold voltage; dc level        | rising ( $\%V_{FB}$ )                                                                                          | 107%  | 110%     | 113% |                  |
|               | OVP power good threshold voltage; dc level        | falling ( $\%V_{FB}$ )                                                                                         | 104%  | 107%     | 111% |                  |
| $V_{OL\_PG}$  | Low-level output voltage at PG                    | $I_{SINK\_PG} = 2\text{ mA}$                                                                                   |       | 0.01     | 0.3  | V                |
| $I_{IH\_PG}$  | Input leakage current into PG                     | $V_{PG} = 5\text{ V}$                                                                                          |       |          | 100  | nA               |
| $t_{PG}$      | PG deglitch time                                  | For a high level to low level transition on the power good output                                              |       | 40       |      | $\mu\text{s}$    |
| <b>OUTPUT</b> |                                                   |                                                                                                                |       |          |      |                  |
| $V_{FB}$      | Feedback voltage                                  |                                                                                                                |       | 0.6      |      | V                |
| $I_{IH\_FB}$  | Input leakage current into FB                     | $V_{FB} = 0.6\text{ V}$                                                                                        |       | 1        | 70   | nA               |
| $V_{FB}$      | Feedback voltage accuracy                         | PWM, $V_{IN} \geq V_{OUT} + 1\text{ V}$                                                                        | - 1%  |          | 1%   |                  |
| $V_{FB}$      | Feedback voltage accuracy                         | PFM, $V_{IN} \geq V_{OUT} + 1\text{ V}$ , $V_{OUT} \geq 1.5\text{ V}$ , $C_{o,eff} \geq 47\text{ }\mu\text{F}$ | - 1%  |          | 2%   |                  |
| $V_{FB}$      | Feedback voltage accuracy                         | PFM, $V_{IN} \geq V_{OUT} + 1\text{ V}$ , $V_{OUT} < 1.5\text{ V}$ , $C_{o,eff} \geq 68\text{ }\mu\text{F}$    | - 1%  |          | 2.5% |                  |
| $V_{FB}$      | Feedback voltage accuracy with voltage tracking   | $V_{IN} \geq V_{OUT} + 1\text{ V}$ , $V_{SS/TR} = 0.3\text{ V}$ , PWM mode                                     | - 5%  |          | 5%   |                  |
|               | Load regulation                                   | PWM                                                                                                            |       | 0.05     |      | %/A              |
|               | Line regulation                                   | PWM, $I_{OUT} = 1\text{ A}$ , $V_{IN} \geq V_{OUT} + 1\text{ V}$                                               |       | 0.02     |      | %/V              |
| $R_{DIS}$     | Output discharge resistance                       |                                                                                                                |       |          | 50   | $\Omega$         |
| $f_{SW}$      | PWM switching frequency range                     | MODE = high, see the FSET pin functionality about setting the switching frequency                              | 1.8   | 2.25     | 4    | MHz              |
| $f_{SW}$      | PWM switching frequency                           | With COMP/FSET tied to GND or $V_{IN}$                                                                         | 2.08  | 2.25     | 2.4  | MHz              |
| $f_{SW}$      | PWM switching frequency tolerance                 | using a resistor from COMP/FSET to GND                                                                         | - 12% |          | 12%  |                  |
| $t_{on,min}$  | Minimum on time of high-side FET                  | $V_{IN} \geq 3.3\text{ V}$ , $T_J = -40^{\circ}\text{C}$ to $125^{\circ}\text{C}$                              |       | 45       | 67   | ns               |
| $t_{on,min}$  | Minimum on time of low-side FET                   |                                                                                                                |       | 15       |      | ns               |
| $R_{DS(ON)}$  | High-side FET on-resistance                       | $V_{IN} \geq 5\text{ V}$                                                                                       |       | 11       | 26   | $\text{m}\Omega$ |
|               | Low-side FET on-resistance                        | $V_{IN} \geq 5\text{ V}$                                                                                       |       | 9        | 19   | $\text{m}\Omega$ |
| $I_{IH}$      | High-side MOSFET leakage current                  |                                                                                                                |       | 0.01     | 230  | $\mu\text{A}$    |
| $I_{IH}$      | Low-side MOSFET leakage current                   | $V(SW) = 6\text{ V}$                                                                                           |       | 0.01     | 290  | $\mu\text{A}$    |
| $I_{IH}$      | SW leakage                                        | $V(SW) = 0.6\text{ V}$ , current into SW pin                                                                   | -0.05 |          | 30   | $\mu\text{A}$    |
| $I_{LIMH}$    | High-side FET switch current limit                | DC value, $V_{IN} = 3\text{ V}$ to $6\text{ V}$                                                                | 7.3   | 9.2      | 10.4 | A                |

Over operating junction temperature range ( $T_J = -40^{\circ}\text{C}$  to  $+150^{\circ}\text{C}$ ) and  $V_{IN} = 2.7\text{ V}$  to  $6\text{ V}$ . Typical values at  $V_{IN} = 5\text{ V}$  and  $T_J = 25^{\circ}\text{C}$ . (unless otherwise noted)

| PARAMETER    | TEST CONDITIONS                     | MIN      | TYP | MAX | UNIT |
|--------------|-------------------------------------|----------|-----|-----|------|
| $I_{LIMNEG}$ | Low-side FET negative current limit | DC value | -3  |     | A    |

## 7.6 Typical Characteristics

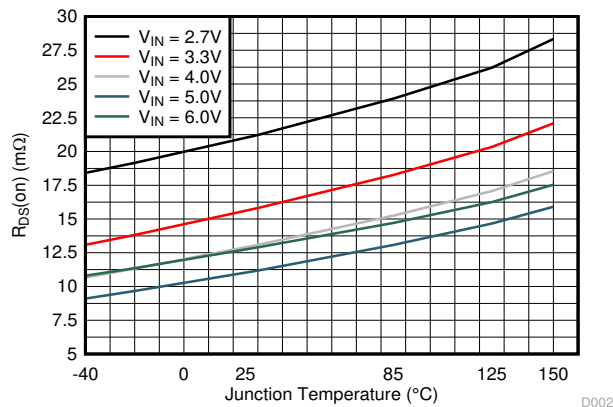


图 7-1.  $R_{DS(ON)}$  of High-Side Switch

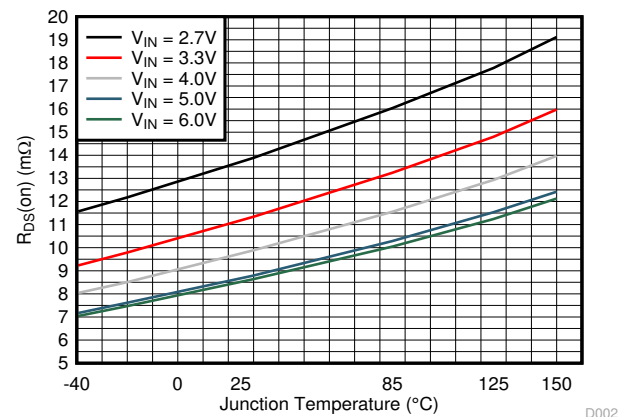


图 7-2.  $R_{DS(ON)}$  of Low-Side Switch

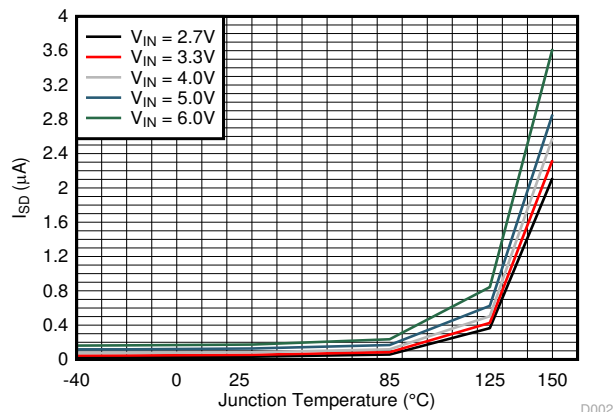


图 7-3. Shutdown Current vs Temperature

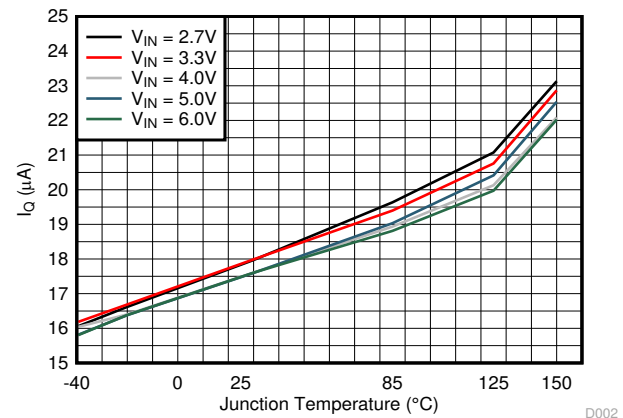


图 7-4. Quiescent Current vs Temperature

## 8 Parameter Measurement Information

The graphs in this data sheet have been taken based on the schematic and BOM as listed in 表 8-1 if not otherwise mentioned in the plots.

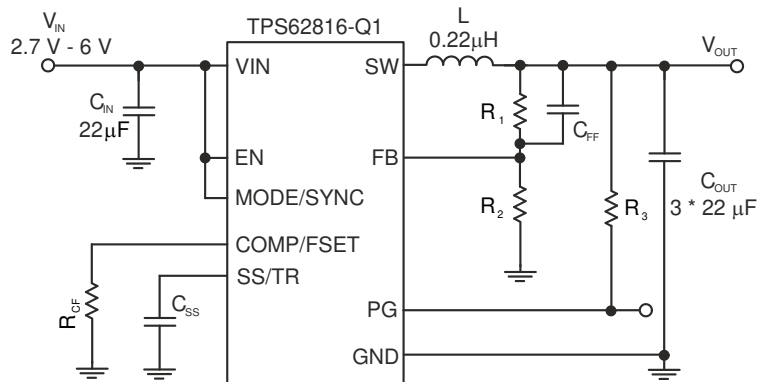


图 8-1. Measurement Setup for TPS62816-Q1

表 8-1. List of Components

| REFERENCE                                     | DESCRIPTION                           | MANUFACTURER <sup>(1)</sup> |
|-----------------------------------------------|---------------------------------------|-----------------------------|
| IC                                            | TPS62816-Q1                           | Texas Instruments           |
| L                                             | 0.25-μH inductor; XGL4020-251ME       | Coilcraft                   |
| C <sub>IN</sub>                               | 22 μF / 10 V; GCM31CR71A226KE02L      | Murata                      |
| C <sub>OUT</sub> for V <sub>OUT</sub> = 0.6 V | 5 × 22 μF / 10 V; GCM31CR71A226KE02L  | Murata                      |
| C <sub>OUT</sub> for V <sub>OUT</sub> ≥ 1 V   | 3 × 22 μF / 10 V; GCM31CR71A226KE02L  | Murata                      |
| C <sub>SS</sub>                               | 15 nF (equal to 0.9-ms start-up ramp) | any                         |
| R <sub>CF</sub>                               | 8.06 kΩ                               | any                         |
| C <sub>FF</sub>                               | 10 pF                                 | any                         |
| R <sub>1</sub>                                | Depending on V <sub>OUT</sub>         | any                         |
| R <sub>2</sub>                                | Depending on V <sub>OUT</sub>         | any                         |
| R <sub>3</sub>                                | 100 kΩ                                | any                         |

(1) See the [Third Party-Products Disclaimer](#).



The precise enable input provides a user-programmable undervoltage lockout by adding a resistor divider to the input of the EN pin.

The enable input threshold for a falling edge is typically 100 mV lower than the rising edge threshold. The TPS62816-Q1 starts operation when the rising threshold is exceeded. For proper operation, the EN pin must be terminated and must not be left floating. Pulling the EN pin low forces the device into shutdown, with a shutdown current of typically 1  $\mu$ A. In this mode, the internal high-side and low-side MOSFETs are turned off and the entire internal control circuitry is switched off.

### 9.3.2 COMP/FSET

This pin allows the user to set two different parameters independently:

- Internal compensation settings for the control loop (three settings available)
- The switching frequency in PWM mode from 1.8 MHz to 4 MHz
- Enable/ disable spread spectrum clocking (SSC)

A resistor from COMP/FSET to GND changes the compensation as well as the switching frequency. The change in compensation allows the user to adopt the device to different values of output capacitance. The resistor must be placed close to the pin to keep the parasitic capacitance on the pin to a minimum. The compensation setting is sampled at the start-up of the converter, so a change in the resistor during operation only has an effect on the switching frequency, but not on the compensation.

To save external components, the pin can also be directly tied to VIN or GND to set a pre-defined switching frequency or compensation. Do not leave the pin floating.

The switching frequency has to be selected based on the input voltage and the output voltage to meet the specifications for the minimum on time and minimum off time.

Example:  $V_{IN} = 5\text{ V}$ ,  $V_{OUT} = 1\text{ V}$  --> duty cycle (DC) =  $1\text{ V} / 5\text{ V} = 0.2$

- with  $t_{on} = DC \times T$  -->  $t_{on,min} = 1/f_{s,max} \times DC$
- -->  $f_{s,max} = 1/t_{on,min} \times DC = 1/0.075\text{ }\mu\text{s} \times 0.2 = 2.6\text{ MHz}$

The compensation range has to be chosen based on the minimum capacitance used. The capacitance can be increased from the minimum value as given in 表 9-1, up to the maximum of 470  $\mu$ F in all of the three compensation ranges. If the capacitance of an output changes during operation, for example, when load switches are used to connect or disconnect parts of the circuitry, the compensation has to be chosen for the minimum capacitance on the output. With large output capacitance, the compensation must be done based on that large capacitance to get the best load transient response. Compensating for large output capacitance but placing less capacitance on the output can lead to instability.

The switching frequency for the different compensation setting is determined by the following equations.

For compensation (comp) setting 1 with spread spectrum clocking (SSC) disabled:

$$R_{CF}(k\Omega) = \frac{18\text{MHz} \cdot k\Omega}{f_s(\text{MHz})} \quad (1)$$

For compensation (comp) setting 1 with spread spectrum clocking (SSC) enabled:

$$R_{CF}(k\Omega) = \frac{60\text{MHz} \cdot k\Omega}{f_s(\text{MHz})} \quad (2)$$

For compensation (comp) setting 2 with spread spectrum clocking (SSC) disabled:

$$R_{CF}(k\Omega) = \frac{180MHz \cdot k\Omega}{f_s(MHz)} \quad (3)$$

**表 9-1. Switching Frequency and Compensation**

| COMPENSATION                                                                                   | R <sub>CF</sub>                  | SWITCHING FREQUENCY                                                        | MINIMUM OUTPUT CAPACITANCE                   |
|------------------------------------------------------------------------------------------------|----------------------------------|----------------------------------------------------------------------------|----------------------------------------------|
| for smallest output capacitance<br>(comp setting 1)<br>SSC disabled                            | 10 k $\Omega$ ... 4.5 k $\Omega$ | 1.8 MHz (10 k $\Omega$ ) ... 4 MHz (4.5 k $\Omega$ )<br>according to 方程式 1 | 32 $\mu$ F $\times$ V / V <sub>OUT</sub> [V] |
| for smallest output capacitance<br>(comp setting 1)<br>SSC enabled                             | 33 k $\Omega$ ... 15 k $\Omega$  | 1.8 MHz (33 k $\Omega$ ) ... 4 MHz (15 k $\Omega$ )<br>according to 方程式 2  | 32 $\mu$ F $\times$ V / V <sub>OUT</sub> [V] |
| for best transient response<br>(larger output capacitance)<br>(comp setting 2)<br>SSC disabled | 100 k $\Omega$ ... 45 k $\Omega$ | 1.8 MHz (100 k $\Omega$ ) ... 4 MHz (45 k $\Omega$ )<br>according to 方程式 3 | 72 $\mu$ F $\times$ V / V <sub>OUT</sub> [V] |
| for smallest output capacitance<br>(comp setting 1)<br>SSC disabled                            | tied to GND                      | internally fixed 2.25 MHz                                                  | 32 $\mu$ F $\times$ V / V <sub>OUT</sub> [V] |
| for best transient response<br>(larger output capacitance)<br>(comp setting 2)<br>SSC enabled  | tied to V <sub>IN</sub>          | internally fixed 2.25 MHz                                                  | 72 $\mu$ F $\times$ V / V <sub>OUT</sub> [V] |

The minimum output capacitance required for stability depends on the output voltage as stated in 表 9-1. Refer to 节 10.1.2.2.2 for further details on the output capacitance required depending on the output voltage.

A too-high resistor value for R<sub>CF</sub> is decoded as "tied to V<sub>IN</sub>" and a value below the lowest range is decoded as "tied to GND". The minimum output capacitance in 表 9-1 is for capacitors close to the output of the device. If the capacitance is distributed, a lower compensation setting can be required.

### 9.3.3 MODE/SYNC

When MODE/SYNC is set low, the device operates in PWM or PFM mode depending on the output current. The MODE/SYNC pin forces PWM mode when set high. The pin also allows the user to apply an external clock in a frequency range from 1.8 MHz to 4 MHz for external synchronization. Similar to COMP/FSET, the specifications for the minimum on time and minimum off time have to be observed when setting the external frequency. For use with external synchronization on the MODE/SYNC pin, the internal switching frequency must be set by R<sub>CF</sub> to a similar value than the externally applied clock. This ensures that if the external clock fails, the switching frequency stays in the same range. When there is no resistor from COMP/FSET to GND but the pin is pulled high or low, external synchronization is not possible.

### 9.3.4 Spread Spectrum Clocking (SSC)

The device offers spread spectrum clocking as an option, set by the COMP/FSET pin. When SSC is enabled, the switching frequency is randomly changed in PWM mode when the internal clock is used. The frequency variation is typically between the nominal switching frequency and up to 288 kHz above the nominal switching frequency. When the device is externally synchronized by applying a clock signal to the MODE/SYNC pin, the TPS62816-Q1 follows the external clock and the internal spread spectrum block is turned off. SSC is also disabled during soft start.

### 9.3.5 Undervoltage Lockout (UVLO)

If the input voltage drops, the undervoltage lockout prevents mis-operation of the device by switching off both of the power FETs. When enabled, the device is fully operational for input voltages above the rising UVLO threshold and turns off if the input voltage trips below the threshold for a falling supply voltage.

### 9.3.6 Power Good Output (PG)

Power good is an open-drain output driven by a window comparator. PG is held low when the device is disabled, in undervoltage lockout, and thermal shutdown. When the output voltage is in regulation hence, within the window defined in the electrical characteristics, the output is high impedance.

表 9-2. PG Status

| EN   | DEVICE STATUS                                                                                   | PG STATE       |
|------|-------------------------------------------------------------------------------------------------|----------------|
| X    | $V_{IN} < 2\text{ V}$                                                                           | undefined      |
| low  | $V_{IN} \geq 2\text{ V}$                                                                        | low            |
| high | $2\text{ V} \leq V_{IN} \leq \text{UVLO}$ OR in thermal shutdown OR $V_{OUT}$ not in regulation | low            |
| high | $V_{OUT}$ in regulation                                                                         | high impedance |

### 9.3.7 Thermal Shutdown

The junction temperature ( $T_J$ ) of the device is monitored by an internal temperature sensor. If  $T_J$  exceeds  $170^\circ\text{C}$  (typical), the device goes into thermal shutdown. Both the high-side and low-side power FETs are turned off and PG goes low. When  $T_J$  decreases below the hysteresis amount of typically  $15^\circ\text{C}$ , the converter resumes normal operation, beginning with soft start. During a PFM pause, the thermal shutdown is not active. After a PFM pause, the device needs up to  $9\text{ }\mu\text{s}$  to detect a too-high junction temperature. If the PFM burst is shorter than this delay, the device does not detect a too-high junction temperature.

## 9.4 Device Functional Modes

### 9.4.1 Pulse Width Modulation (PWM) Operation

The TPS62816-Q1 has two operating modes: Forced PWM mode as discussed in this section and PWM/PFM as discussed in 节 9.4.2.

With the MODE/SYNC pin set to high, the TPS62816-Q1 operates with pulse width modulation in continuous conduction mode (CCM). The switching frequency is either defined by a resistor from the COMP pin to GND or by an external clock signal applied to the MODE/SYNC pin. With an external clock applied to MODE/SYNC, the TPS62816-Q1 follows the frequency applied to the pin. In general, the frequency range in forced PWM mode is 1.8 MHz to 4 MHz. However, the frequency needs to be in a range the TPS62816-Q1 can operate at, taking the minimum on time into account.

### 9.4.2 Power Save Mode Operation (PWM/PFM)

When the MODE/SYNC pin is low, power save mode is allowed. The device operates in PWM mode as long as the peak inductor current is above the PFM threshold of approximately 1.8 A. When the peak inductor current drops below the PFM threshold, the device starts to skip switching pulses. In power save mode, the switching frequency decreases with the load current maintaining high efficiency. In addition, the frequency set with the resistor on COMP/FSET must be in a range of 1.8 MHz to 3.5 MHz. The high-side switch in a PFM pulse is turned on until the inductor current reaches its peak current limit.

### 9.4.3 100% Duty-Cycle Operation

The duty cycle of a buck converter operated in PWM mode is given as  $D = V_{OUT} / V_{IN}$ . The duty cycle increases as the input voltage comes close to the output voltage and the off time gets smaller. When the minimum off time of typically 10 ns is reached, the TPS62816-Q1 skips switching cycles while it approaches 100% mode. In 100% mode, it keeps the high-side switch on continuously. The high-side switch stays turned on as long as the output voltage is below the target. In 100% mode, the low-side switch is turned off. The maximum dropout voltage in 100% mode is the product of the on-resistance of the high-side switch plus the series resistance of the inductor and the load current.

### 9.4.4 Current Limit and Short Circuit Protection

The TPS62816-Q1 is protected against overload and short circuit events. If the inductor current exceeds the current limit  $I_{LIMH}$ , the high-side switch is turned off and the low-side switch is turned on to ramp down the

inductor current. The high-side switch turns on again only if the current in the low-side switch has decreased below the low-side current limit. Due to internal propagation delay, the actual current can exceed the static current limit. The dynamic current limit is given as:

$$I_{peak(typ)} = I_{LIMH} + \frac{V_L}{L} \cdot t_{PD} \quad (4)$$

where:

- $I_{LIMH}$  is the static current limit as specified in the electrical characteristics
- $L$  is the effective inductance at the peak current
- $V_L$  is the voltage across the inductor ( $V_{IN} - V_{OUT}$ )
- $t_{PD}$  is the internal propagation delay of typically 50 ns

The current limit can exceed static values, especially if the input voltage is high and very small inductances are used. The dynamic high-side switch peak current can be calculated as follows:

$$I_{peak(typ)} = I_{LIMH} + \frac{V_{IN} - V_{OUT}}{L} \cdot 50ns \quad (5)$$

#### 9.4.5 Foldback Current Limit and Short Circuit Protection

This is valid for devices where foldback current limit is enabled.

When the device detects current limit for more than 1024 subsequent switching cycles, it reduces the current limit from its nominal value to a typical peak current of 3.7 A. Foldback current limit is left when the current limit indication goes away. For the case that device operation continues in current limit, it would, after 3072 switching cycles, try again full current limit for again 1024 switching cycles.

#### 9.4.6 Output Discharge

The purpose of the discharge function is to ensure a defined down-ramp of the output voltage when the device is being disabled, but also to keep the output voltage close to 0 V when the device is off. The output discharge feature is only active once the TPS62816-Q1 has been enabled at least once since the supply voltage was applied. The discharge function is enabled as soon as the device is disabled, in thermal shutdown, or in undervoltage lockout. The minimum supply voltage required for the discharge function to remain active typically is 2 V. Output discharge is not activated during a current limit or foldback current limit event.

#### 9.4.7 Soft Start/Tracking (SS/TR)

The internal soft-start circuitry controls the output voltage slope during start-up. This avoids excessive inrush current and ensures a controlled output voltage rise time. It also prevents unwanted voltage drops from high impedance power sources or batteries. When EN is set high to start operation, the device starts switching after a delay of about 200  $\mu$ s, then the internal reference and hence  $V_{OUT}$  rises with a slope controlled by an external capacitor connected to the SS/TR pin.

Leaving the SS/TR pin disconnected provides the fastest start-up ramp with 150  $\mu$ s typically. A capacitor connected from SS/TR to GND is charged with 10  $\mu$ A by an internal current source during soft start until it reaches the reference voltage of 0.6 V. The capacitance required to set a certain ramp-time ( $t_{ramp}$ ), therefore, is:

$$C_{ss}[nF] = 10\mu A \cdot t_{ramp}[ms] / 0.6V \quad (6)$$

If the device is set to shutdown (EN = GND), undervoltage lockout, or thermal shutdown, an internal resistor pulls the SS/TR pin to GND to ensure a proper low level. Returning from those states causes a new startup sequence.

A voltage applied at SS/TR can be used to track a master voltage. The output voltage follows this voltage in both directions up and down in forced PWM mode. In PFM mode, the output voltage decreases based on the load current. The SS/TR pin must not be connected to the SS/TR pin of other devices. An external voltage applied on

SS/TR is internally clamped to the feedback voltage (0.6 V). It is recommended to set the target for the external voltage on SS/TR slightly above the feedback voltage. Given the tolerances of the resistor divider  $R_5$  and  $R_6$  on SS/TR, this makes sure the device "switches" to the internal reference voltage when the power-up sequencing is finished. See [图 10-57](#).

## 10 Application and Implementation

### Note

以下应用部分中的信息不属于 TI 器件规格的范围，TI 不担保其准确性和完整性。TI 的客户应负责确定器件是否适用于其应用。客户应验证并测试其设计，以确保系统功能。

### 10.1 Application Information

#### 10.1.1 Programming the Output Voltage

The output voltage of the TPS62816-Q1 is adjustable. It can be programmed for output voltages from 0.6 V to 5.5 V using a resistor divider from VOUT to GND. The voltage at the FB pin is regulated to 600 mV. The value of the output voltage is set by the selection of the resistor divider from [方程式 7](#). It is recommended to choose resistor values that allow a current of at least 2 µA, meaning the value of R<sub>2</sub> must not exceed 400 kΩ. Lower resistor values are recommended for the highest accuracy and most robust design.

$$R_1 = R_2 \cdot \left( \frac{V_{OUT}}{V_{FB}} - 1 \right) \quad (7)$$

#### 10.1.2 External Component Selection

##### 10.1.2.1 Inductor Selection

The TPS62816-Q1 is designed for a nominal 0.22-µH inductor with a switching frequency of typically 2.25 MHz. Larger values can be used to achieve a lower inductor current ripple, but they can have a negative impact on efficiency and transient response. Smaller values than 0.22 µH cause a larger inductor current ripple, which causes larger negative inductor current in forced PWM mode at low or no output current. For a higher or lower nominal switching frequency, the inductance must be changed accordingly. See the *Recommended Operating Conditions* for details.

The inductor selection is affected by several effects like the following:

- Inductor ripple current
- Output ripple voltage
- PWM-to-PFM transition point
- Efficiency

In addition, the inductor selected has to be rated for appropriate saturation current and DC resistance (DCR). [方程式 8](#) calculates the maximum inductor current.

$$I_{L(max)} = I_{OUT(max)} + \frac{\Delta I_{L(max)}}{2} \quad (8)$$

$$\Delta I_{L(max)} = \frac{V_{OUT} \cdot \left( 1 - \frac{V_{OUT}}{V_{IN}} \right)}{L_{min}} \cdot \frac{1}{f_{SW}} \quad (9)$$

where:

- I<sub>L(max)</sub> is the maximum inductor current.
- Δ I<sub>L(max)</sub> is the peak-to-peak inductor ripple current.
- L<sub>min</sub> is the minimum inductance at the operating point.

**表 10-1. Typical Inductors**

| TYPE          | INDUCTANCE [µH] | CURRENT [A] <sup>(1)</sup> | NOMINAL SWITCHING FREQUENCY | DIMENSIONS [L × W × H] mm | MANUFACTURER <sup>(2)</sup> |
|---------------|-----------------|----------------------------|-----------------------------|---------------------------|-----------------------------|
| XEL4020-201ME | 0.20 µH, ±20%   | 14                         | 2.25 MHz                    | 4 × 4 × 2.1               | Coilcraft                   |

表 10-1. Typical Inductors (continued)

| TYPE          | INDUCTANCE [ $\mu$ H]    | CURRENT [A] <sup>(1)</sup> | NOMINAL SWITCHING FREQUENCY | DIMENSIONS [L × W × H] mm | MANUFACTURER <sup>(2)</sup> |
|---------------|--------------------------|----------------------------|-----------------------------|---------------------------|-----------------------------|
| XGL4020-251ME | 0.25 $\mu$ H, $\pm 20\%$ | 12                         | 2.25 MHz                    | 4 × 4 × 2.1               | Coilcraft                   |
| XEL4030-201ME | 0.20 $\mu$ H, $\pm 20\%$ | 17                         | 2.25 MHz                    | 4 × 4 × 3.2               | Coilcraft                   |

(1) Lower of  $I_{RMS}$  at 20°C rise or  $I_{SAT}$  at 20% drop.

(2) See the [Third Party-Products Disclaimer](#).

Calculating the maximum inductor current using the actual operating conditions gives the minimum saturation current of the inductor needed. A margin of about 20% is recommended to add. A larger inductor value is also useful to get lower ripple current, but increases the transient response time and size as well.

### 10.1.2.2 Capacitor Selection

#### 10.1.2.2.1 Input Capacitor

For most applications, 22  $\mu$ F nominal is sufficient and is recommended. The input capacitor buffers the input voltage for transient events and also decouples the converter from the supply. A low-ESR multilayer ceramic capacitor (MLCC) is recommended for the best filtering and must be placed between VIN and GND as close as possible to those pins.

#### 10.1.2.2.2 Output Capacitor

The architecture of the TPS62816-Q1 allows the use of tiny ceramic output capacitors with low equivalent series resistance (ESR). These capacitors provide low output voltage ripple and are recommended. To keep its low resistance up to high frequencies and to get narrow capacitance variation with temperature, it is recommended to use dielectric X7R, X7T, or equivalent. Using a higher value has advantages, like smaller voltage ripple and a tighter DC output accuracy in Power Save mode. The COMP/FSET pin allows the user to select two different compensation settings based on the minimum capacitance used on the output. The maximum capacitance is 470  $\mu$ F in any of the compensation settings.

The minimum capacitance required on the output depends on the compensation setting and output voltage.

For output voltages below 1 V, the minimum increases linearly from 32  $\mu$ F at 1 V to 53  $\mu$ F at 0.6 V with the compensation setting for smallest output capacitance. Other compensation ranges are equivalent. See [表 9-1](#) for details.

## 10.2 Typical Application

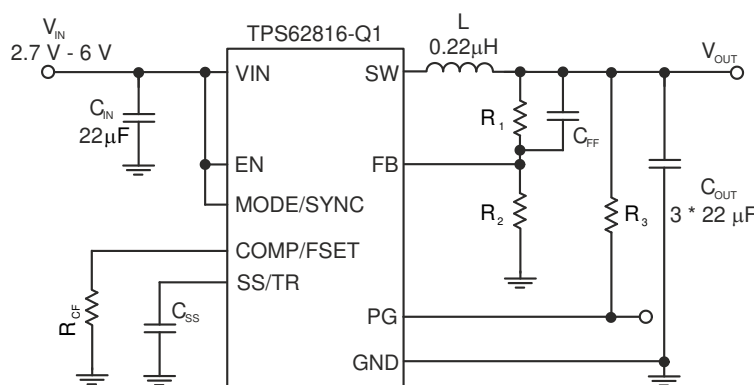


图 10-1. Typical Application

### 10.2.1 Design Requirements

The design guidelines provide a component selection to operate the device within the recommended operating conditions.

## 10.2.2 Detailed Design Procedure

$$R_1 = R_2 \cdot \left( \frac{V_{OUT}}{V_{FB}} - 1 \right) \quad (10)$$

With  $V_{FB} = 0.6 \text{ V}$ :

**表 10-2. Setting the Output Voltage**

| NOMINAL OUTPUT VOLTAGE<br>$V_{OUT}$ | $R_1$           | $R_2$           | $C_{FF}$ | EXACT OUTPUT VOLTAGE |
|-------------------------------------|-----------------|-----------------|----------|----------------------|
| 0.8 V                               | 16.9 k $\Omega$ | 51 k $\Omega$   | 15 pF    | 0.7988 V             |
| 1.0 V                               | 20 k $\Omega$   | 30 k $\Omega$   | 13 pF    | 1.0 V                |
| 1.1 V                               | 39.2 k $\Omega$ | 47 k $\Omega$   | 6.8 pF   | 1.101 V              |
| 1.2 V                               | 68 k $\Omega$   | 68 k $\Omega$   | 3.9 pF   | 1.2 V                |
| 1.5 V                               | 76.8 k $\Omega$ | 51 k $\Omega$   | 3.3 pF   | 1.5 V                |
| 1.8 V                               | 80.6 k $\Omega$ | 40.2 k $\Omega$ | 3.3 pF   | 1.803 V              |
| 2.5 V                               | 47.5 k $\Omega$ | 15 k $\Omega$   | 5.6 pF   | 2.5 V                |
| 3.3 V                               | 88.7 k $\Omega$ | 19.6 k $\Omega$ | 3 pF     | 3.315 V              |

The maximum value for the feedforward capacitor  $C_{FF}$  at minimum output capacitance is determined by [方程式 11](#):

$$C_{FF,max}(F) = 2.661 \times 10^{-7} F \times \Omega / R_1 (\Omega) \quad (11)$$

### 10.2.3 Application Curves

All plots have been taken with a nominal switching frequency of 2.25 MHz when set to PWM mode, unless otherwise noted. The BOM is according to 表 8-1.

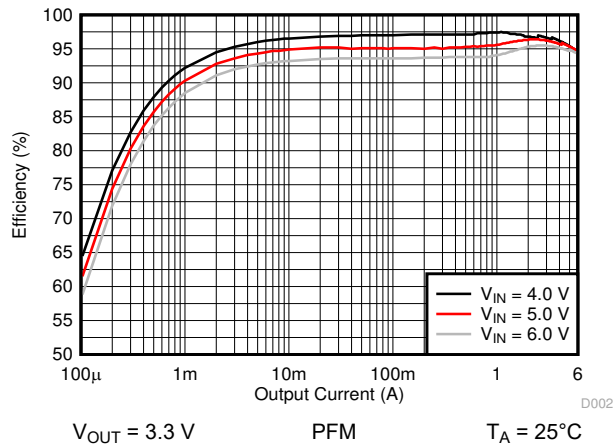


图 10-2. Efficiency Versus Output Current

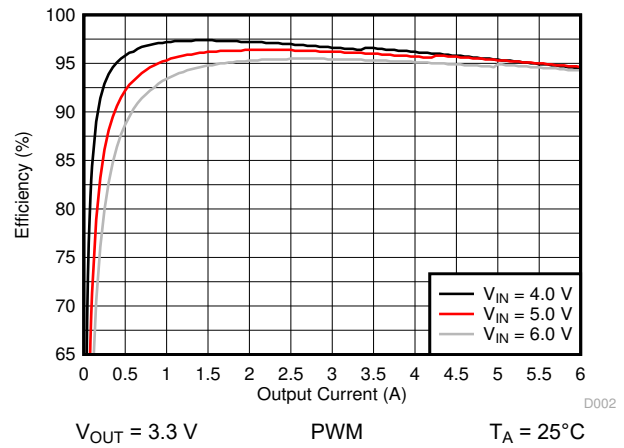


图 10-3. Efficiency Versus Output Current

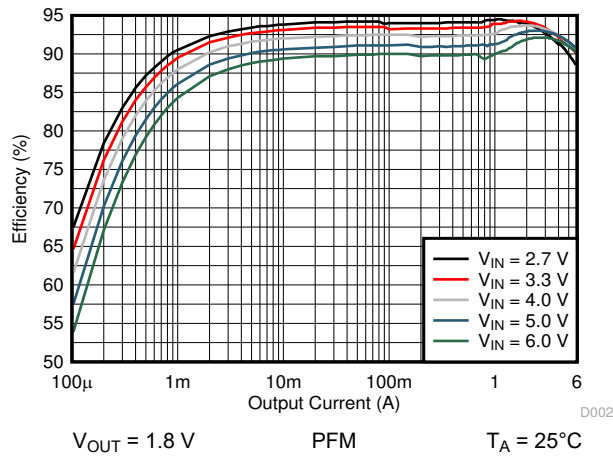


图 10-4. Efficiency Versus Output Current

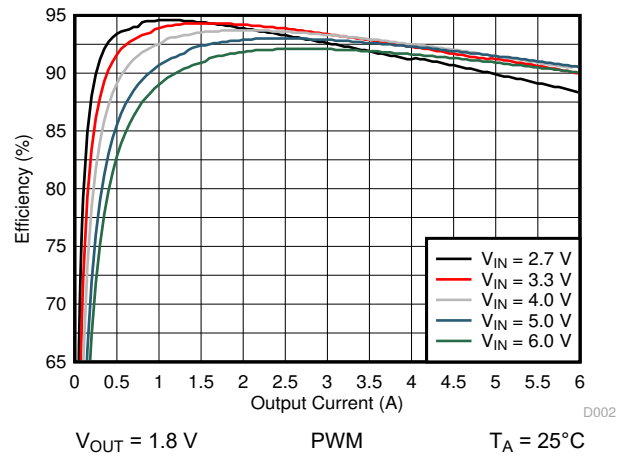


图 10-5. Efficiency Versus Output Current

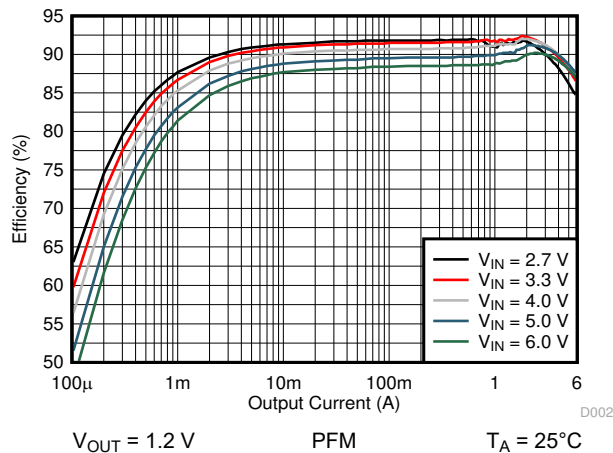


图 10-6. Efficiency Versus Output Current

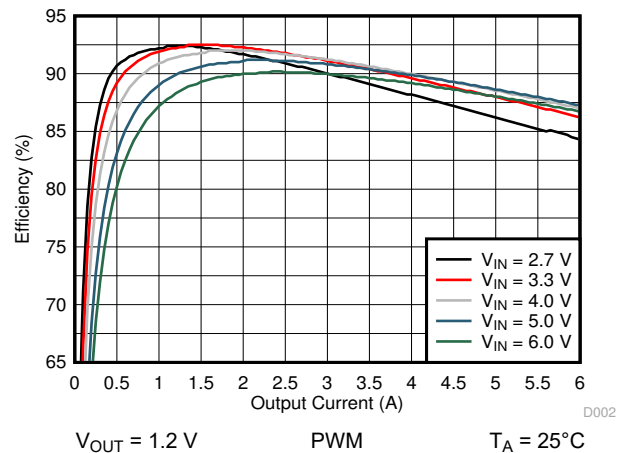


图 10-7. Efficiency Versus Output Current

### 10.2.3 Application Curves (continued)

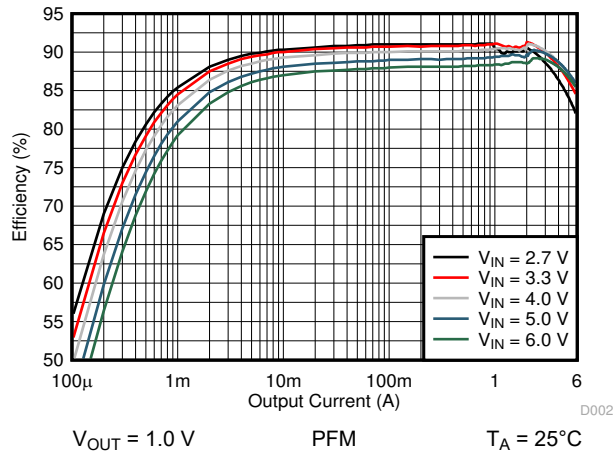


图 10-8. Efficiency Versus Output Current

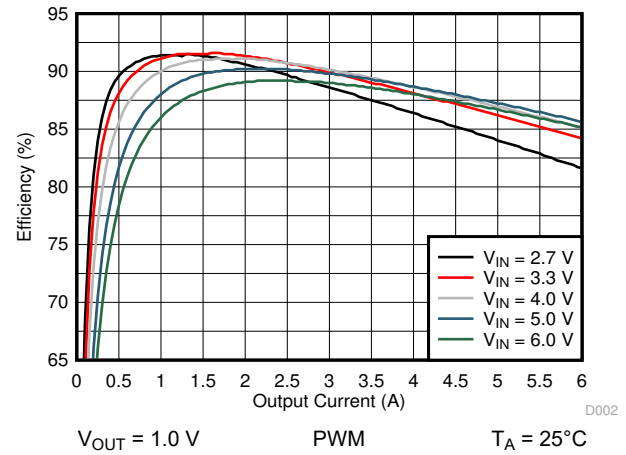


图 10-9. Efficiency Versus Output Current

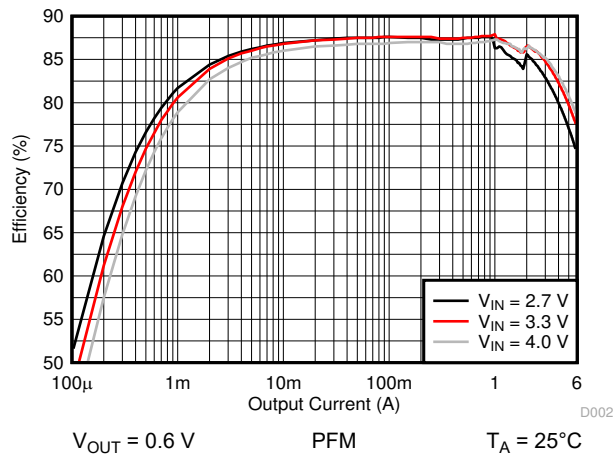


图 10-10. Efficiency Versus Output Current

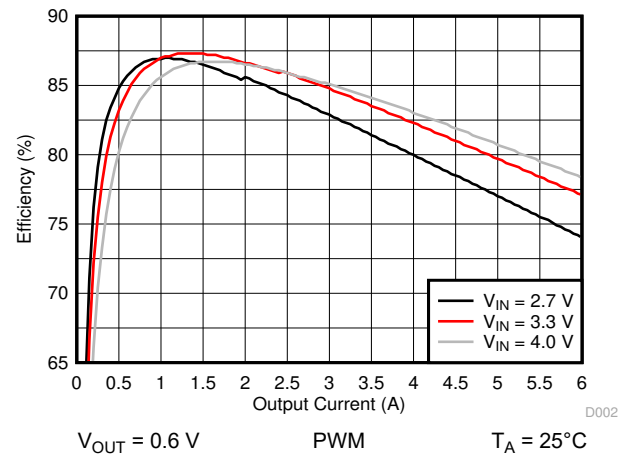


图 10-11. Efficiency Versus Output Current

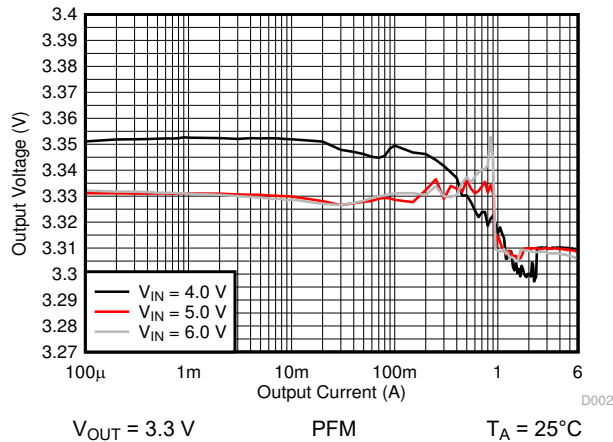


图 10-12. Output Voltage Versus Output Current

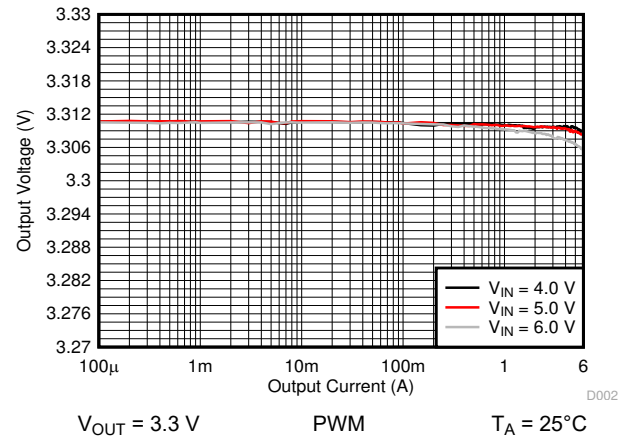


图 10-13. Output Voltage Versus Output Current

### 10.2.3 Application Curves (continued)

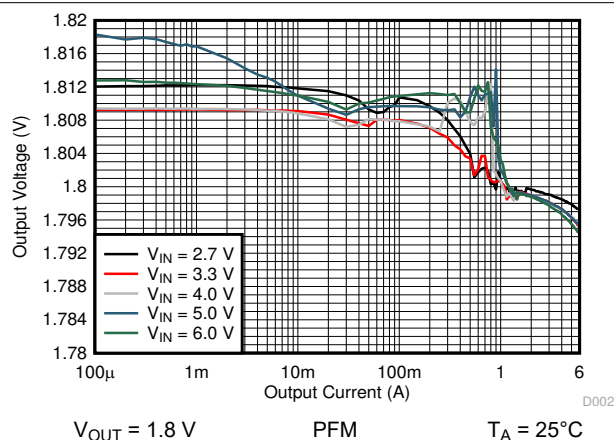


图 10-14. Output Voltage Versus Output Current

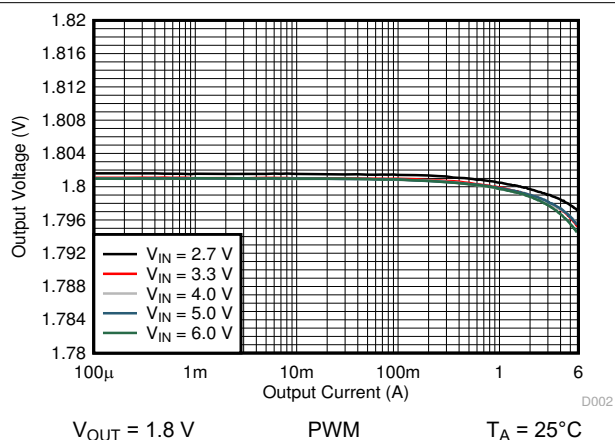


图 10-15. Output Voltage Versus Output Current

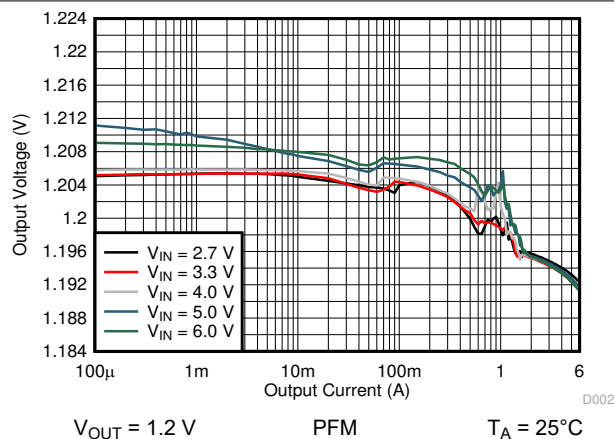


图 10-16. Output Voltage Versus Output Current

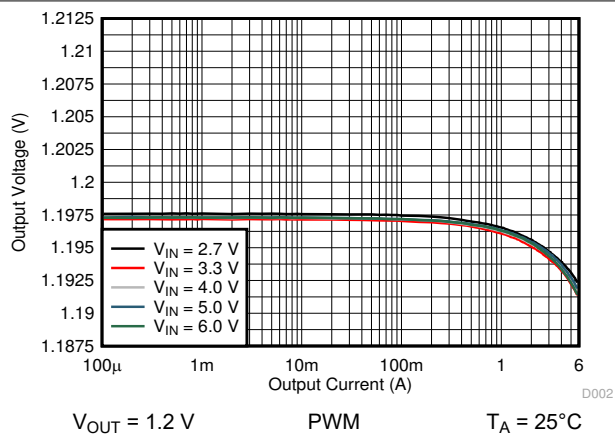


图 10-17. Output Voltage Versus Output Current

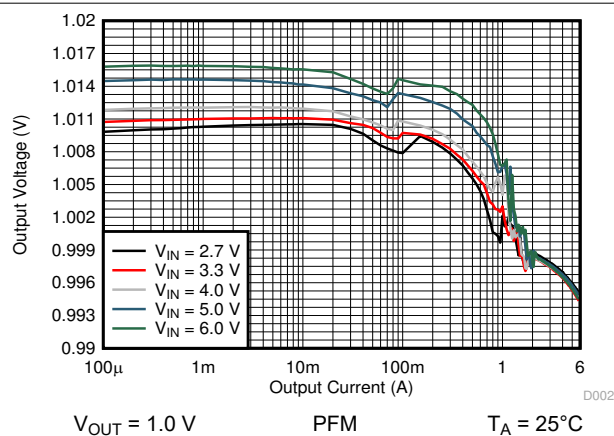


图 10-18. Output Voltage Versus Output Current

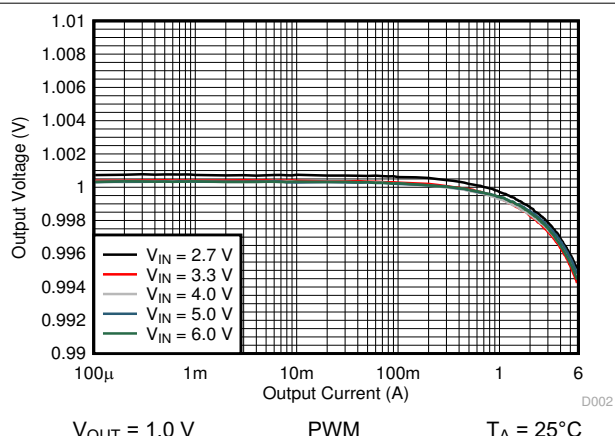


图 10-19. Output Voltage Versus Output Current

## 10.2.3 Application Curves (continued)

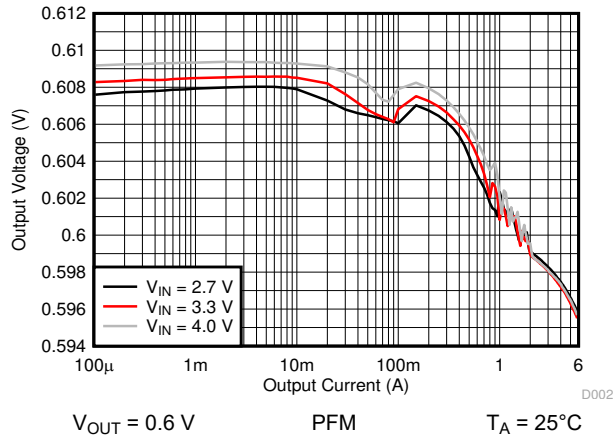


图 10-20. Output Voltage Versus Output Current

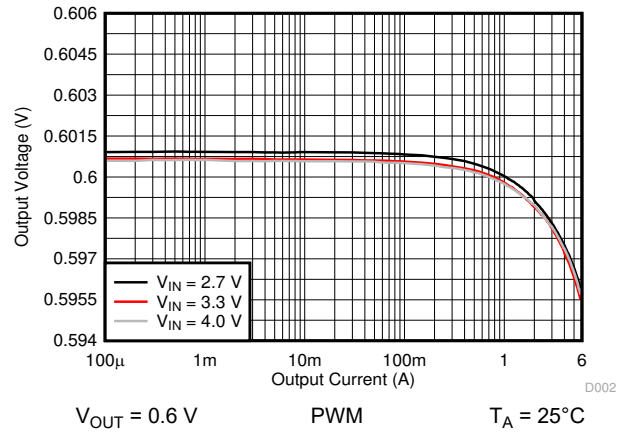


图 10-21. Output Voltage Versus Output Current

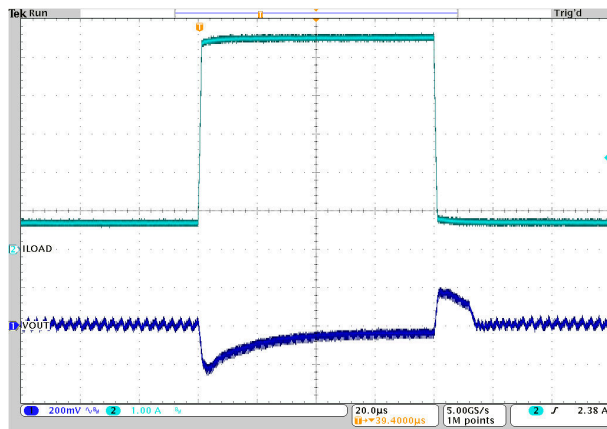


图 10-22. Load Transient Response

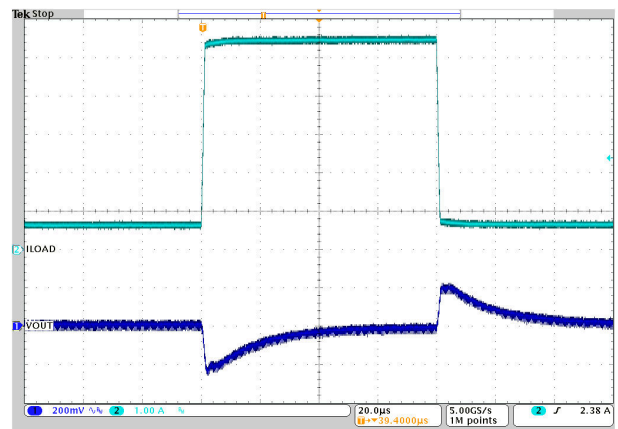


图 10-23. Load Transient Response

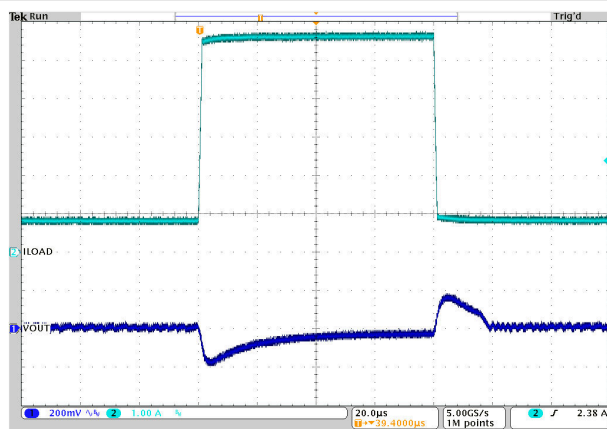


图 10-24. Load Transient Response


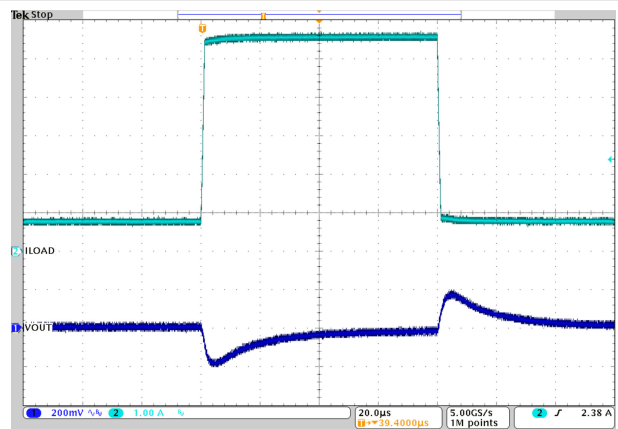



图 10-25. Load Transient Response

## 10.2.3 Application Curves (continued)

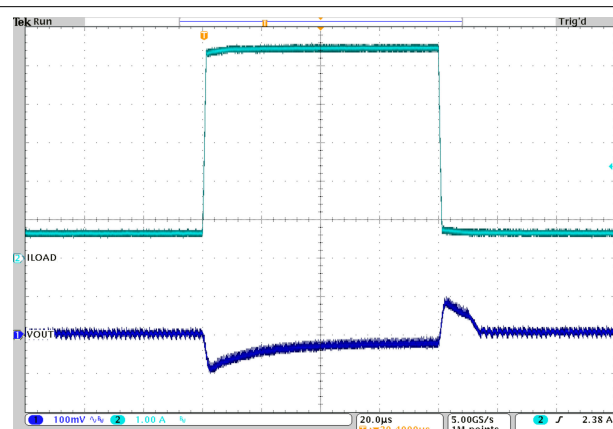


$V_{OUT} = 1.2\text{ V}$  PFM  $T_A = 25^\circ\text{C}$   
 $V_{IN} = 5.0\text{ V}$   $I_{OUT} = 0.6\text{ A to } 5.4\text{ A to } 0.6\text{ A}$

图 10-26. Load Transient Response

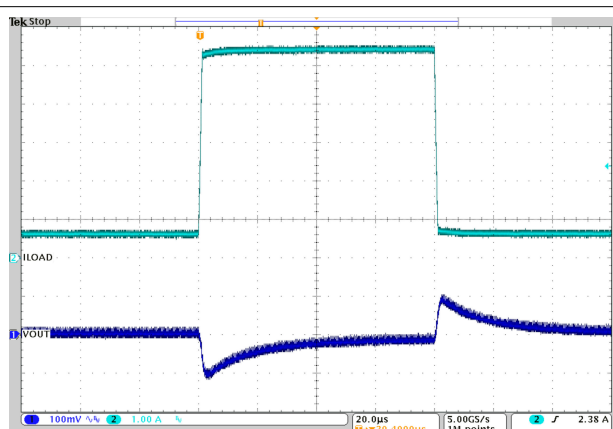


$V_{OUT} = 1.2\text{ V}$  PWM  $T_A = 25^\circ\text{C}$   
 $V_{IN} = 5.0\text{ V}$   $I_{OUT} = 0.6\text{ A to } 5.4\text{ A to } 0.6\text{ A}$

图 10-27. Load Transient Response

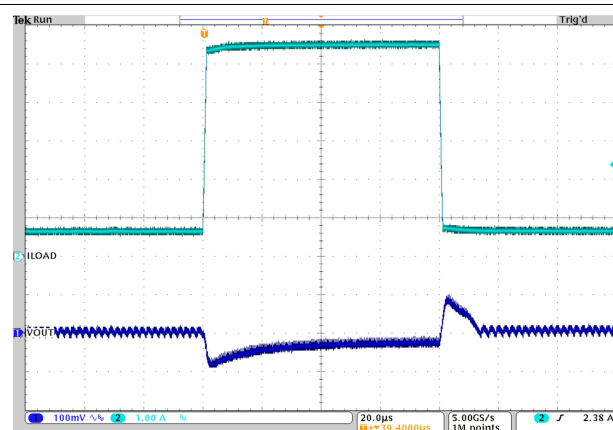


$V_{OUT} = 1.0\text{ V}$  PFM  $T_A = 25^\circ\text{C}$   
 $V_{IN} = 5.0\text{ V}$   $I_{OUT} = 0.6\text{ A to } 5.4\text{ A to } 0.6\text{ A}$

图 10-28. Load Transient Response

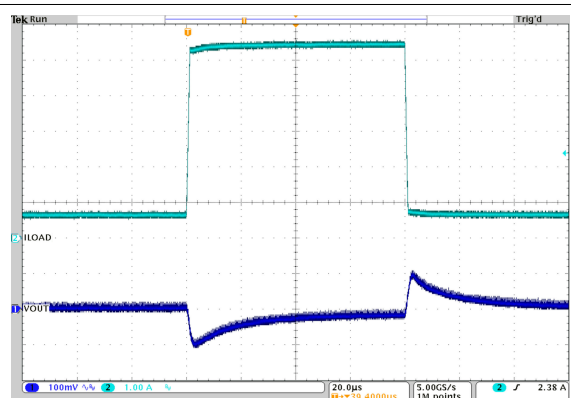


$V_{OUT} = 1.0\text{ V}$  PWM  $T_A = 25^\circ\text{C}$   
 $V_{IN} = 5.0\text{ V}$   $I_{OUT} = 0.6\text{ A to } 5.4\text{ A to } 0.6\text{ A}$

图 10-29. Load Transient Response

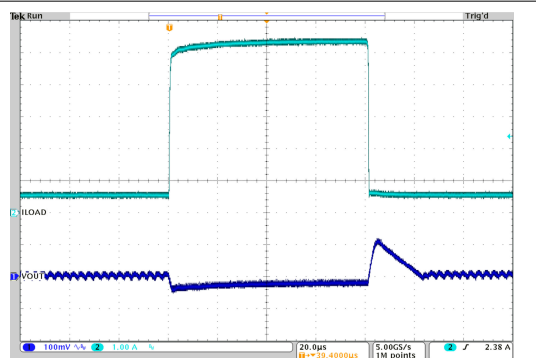

$V_{OUT} = 0.6\text{ V}$  PFM  $T_A = 25^\circ\text{C}$   
 $V_{IN} = 3.3\text{ V}$   $I_{OUT} = 0.6\text{ A to } 5.4\text{ A to } 0.6\text{ A}$


图 10-30. Load Transient Response

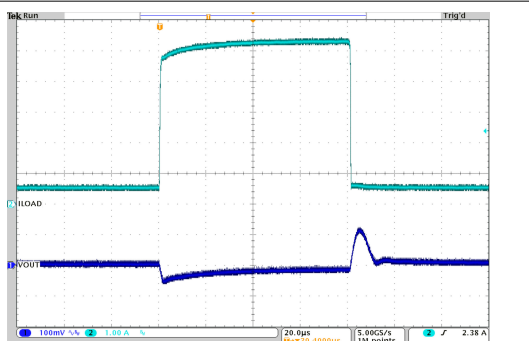

$V_{OUT} = 0.6\text{ V}$  PWM  $T_A = 25^\circ\text{C}$   
 $V_{IN} = 3.3\text{ V}$   $I_{OUT} = 0.6\text{ A to } 5.4\text{ A to } 0.6\text{ A}$


图 10-31. Load Transient Response

### 10.2.3 Application Curves (continued)

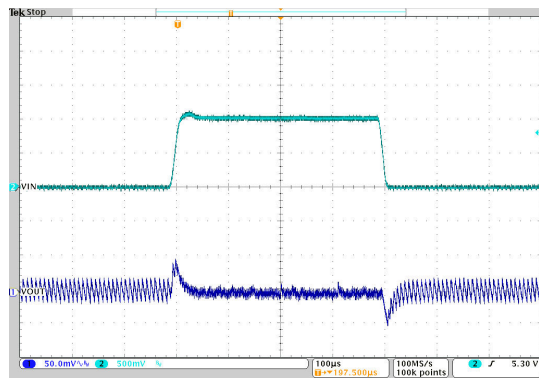


$V_{OUT} = 3.3\text{ V}$       PFM       $T_A = 25^\circ\text{C}$   
 $I_{OUT} = 0.2\text{ A}$        $V_{IN} = 4.5\text{ V to } 5.5\text{ V to } 4.5\text{ V}$

图 10-32. Line Transient Response

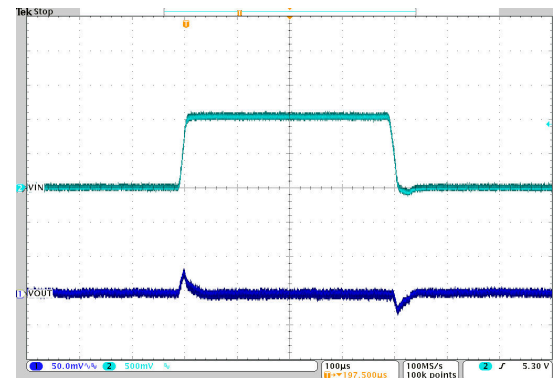


$V_{OUT} = 3.3\text{ V}$       PWM       $T_A = 25^\circ\text{C}$   
 $I_{OUT} = 6\text{ A}$        $V_{IN} = 4.5\text{ V to } 5.5\text{ V to } 4.5\text{ V}$

图 10-33. Line Transient Response

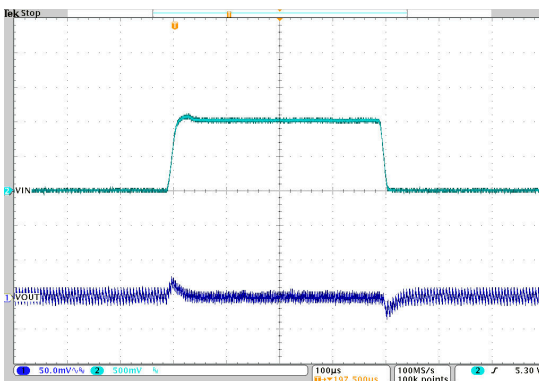


$V_{OUT} = 1.8\text{ V}$       PFM       $T_A = 25^\circ\text{C}$   
 $I_{OUT} = 0.2\text{ A}$        $V_{IN} = 4.5\text{ V to } 5.5\text{ V to } 4.5\text{ V}$

图 10-34. Line Transient Response

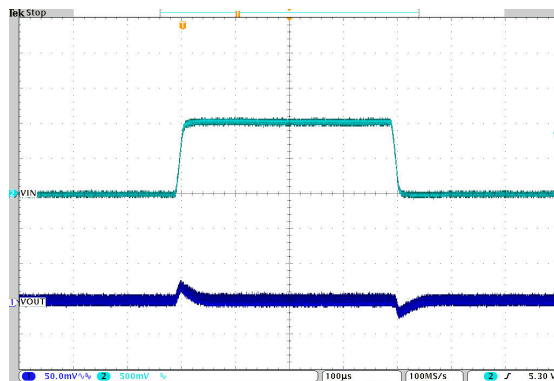


$V_{OUT} = 1.8\text{ V}$       PWM       $T_A = 25^\circ\text{C}$   
 $I_{OUT} = 6\text{ A}$        $V_{IN} = 4.5\text{ V to } 5.5\text{ V to } 4.5\text{ V}$

图 10-35. Line Transient Response

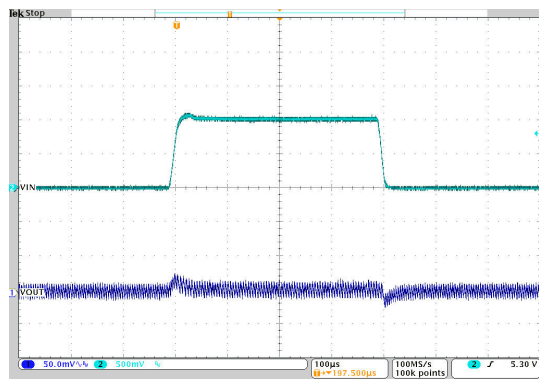

$V_{OUT} = 1.2\text{ V}$       PFM       $T_A = 25^\circ\text{C}$   
 $I_{OUT} = 0.2\text{ A}$        $V_{IN} = 4.5\text{ V to } 5.5\text{ V to } 4.5\text{ V}$


图 10-36. Line Transient Response

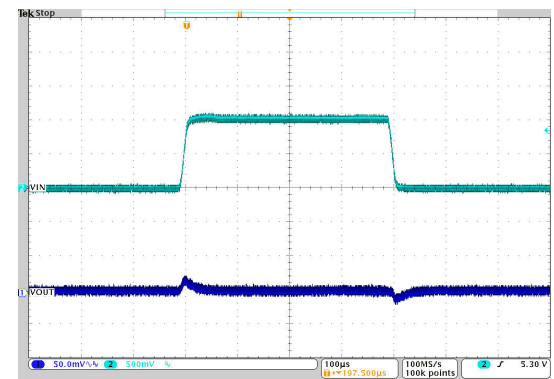

$V_{OUT} = 1.2\text{ V}$       PWM       $T_A = 25^\circ\text{C}$   
 $I_{OUT} = 6\text{ A}$        $V_{IN} = 4.5\text{ V to } 5.5\text{ V to } 4.5\text{ V}$


图 10-37. Line Transient Response

## 10.2.3 Application Curves (continued)

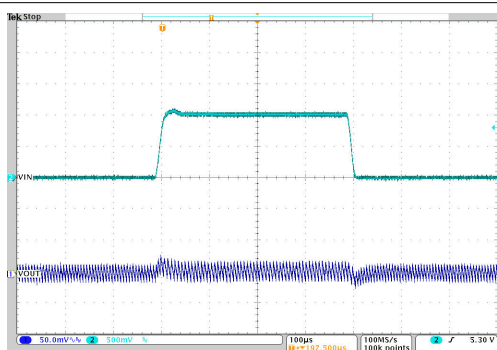


$V_{OUT} = 1.0\text{ V}$       PFM       $T_A = 25^\circ\text{C}$   
 $I_{OUT} = 0.2\text{ A}$        $V_{IN} = 4.5\text{ V to } 5.5\text{ V to } 4.5\text{ V}$

图 10-38. Line Transient Response

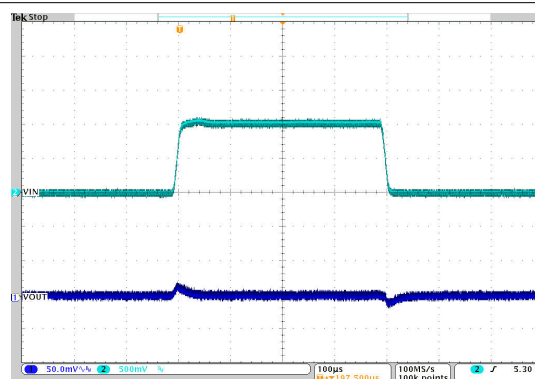


$V_{OUT} = 1.0\text{ V}$       PWM       $T_A = 25^\circ\text{C}$   
 $I_{OUT} = 6\text{ A}$        $V_{IN} = 4.5\text{ V to } 5.5\text{ V to } 4.5\text{ V}$

图 10-39. Line Transient Response

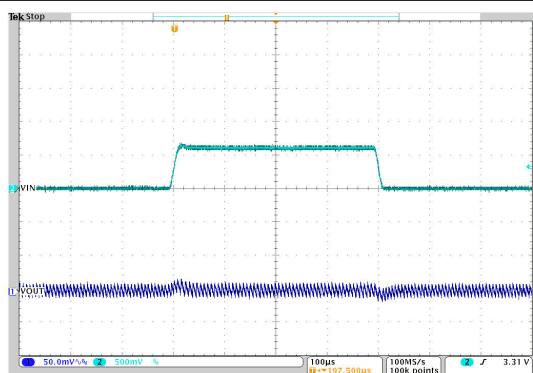


$V_{OUT} = 0.6\text{ V}$       PFM       $T_A = 25^\circ\text{C}$   
 $I_{OUT} = 0.2\text{ A}$        $V_{IN} = 3.0\text{ V to } 3.6\text{ V to } 3.0\text{ V}$

图 10-40. Line Transient Response

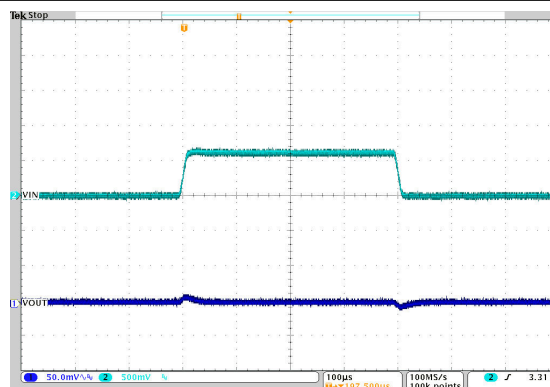


$V_{OUT} = 0.6\text{ V}$       PWM       $T_A = 25^\circ\text{C}$   
 $I_{OUT} = 6\text{ A}$        $V_{IN} = 3.0\text{ V to } 3.6\text{ V to } 3.0\text{ V}$

图 10-41. Line Transient Response

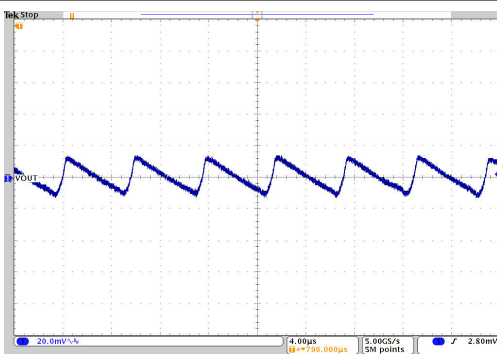

$V_{OUT} = 3.3\text{ V}$       PFM       $T_A = 25^\circ\text{C}$   
 $V_{IN} = 5\text{ V}$        $I_{OUT} = 0.2\text{ A}$


图 10-42. Output Voltage Ripple

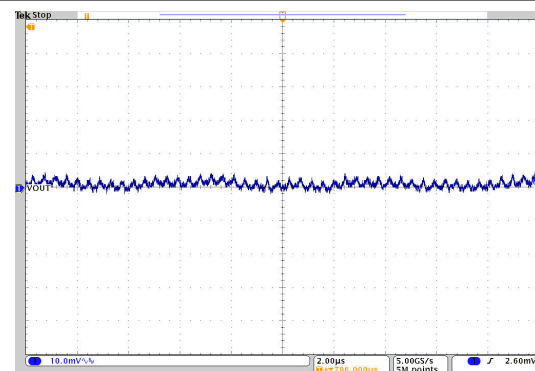

$V_{OUT} = 3.3\text{ V}$       PWM       $T_A = 25^\circ\text{C}$   
 $V_{IN} = 5\text{ V}$        $I_{OUT} = 6\text{ A}$


图 10-43. Output Voltage Ripple

### 10.2.3 Application Curves (continued)

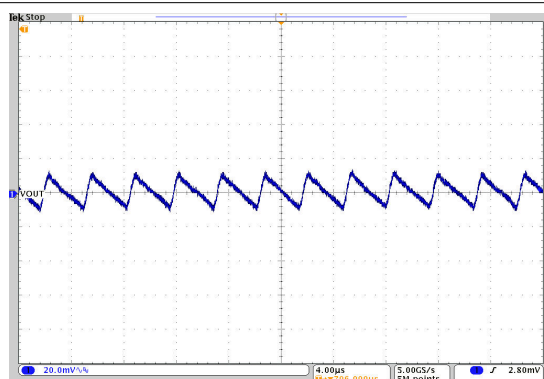


$V_{OUT} = 1.8\text{ V}$  PFM  $T_A = 25^\circ\text{C}$   
 $V_{IN} = 5\text{ V}$   $I_{OUT} = 0.2\text{ A}$

图 10-44. Output Voltage Ripple

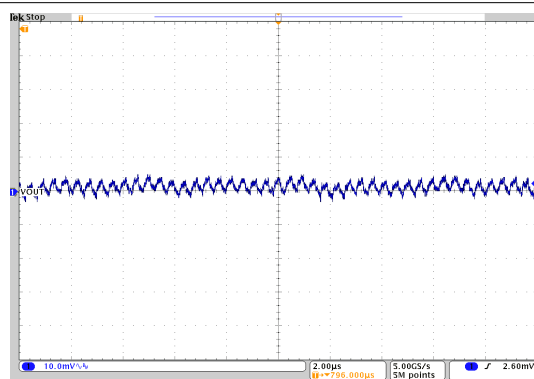


$V_{OUT} = 1.8\text{ V}$  PWM  $T_A = 25^\circ\text{C}$   
 $V_{IN} = 5\text{ V}$   $I_{OUT} = 6\text{ A}$

图 10-45. Output Voltage Ripple

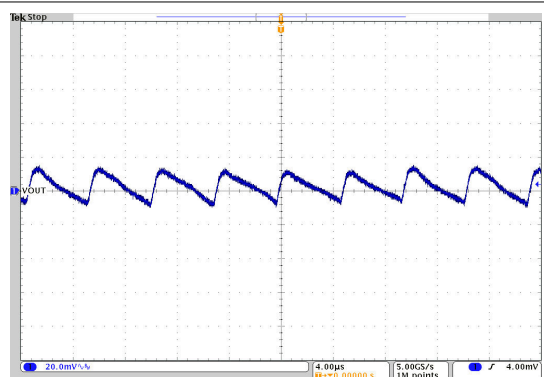


$V_{OUT} = 1.2\text{ V}$  PFM  $T_A = 25^\circ\text{C}$   
 $V_{IN} = 5\text{ V}$   $I_{OUT} = 0.2\text{ A}$

图 10-46. Output Voltage Ripple

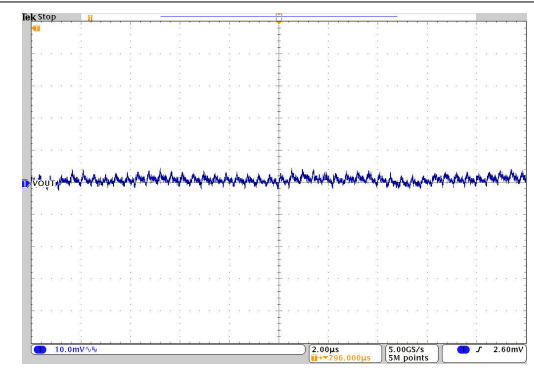


$V_{OUT} = 1.2\text{ V}$  PWM  $T_A = 25^\circ\text{C}$   
 $V_{IN} = 5\text{ V}$   $I_{OUT} = 6\text{ A}$

图 10-47. Output Voltage Ripple

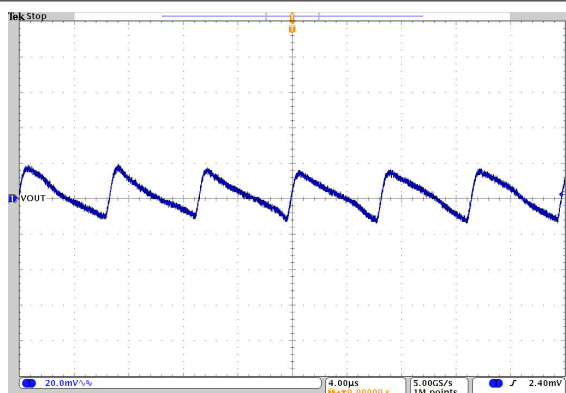

$V_{OUT} = 1.0\text{ V}$  PFM  $T_A = 25^\circ\text{C}$   
 $V_{IN} = 5\text{ V}$   $I_{OUT} = 0.2\text{ A}$


图 10-48. Output Voltage Ripple

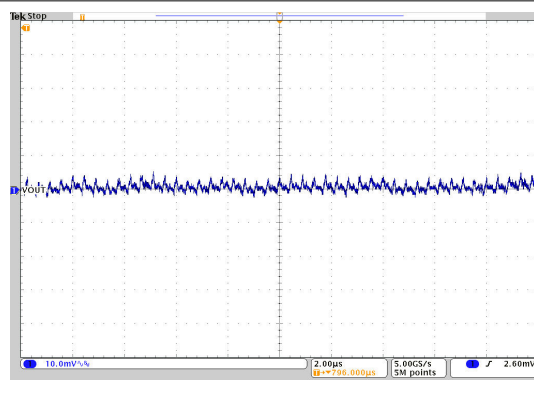

$V_{OUT} = 1.0\text{ V}$  PWM  $T_A = 25^\circ\text{C}$   
 $V_{IN} = 5\text{ V}$   $I_{OUT} = 6\text{ A}$


图 10-49. Output Voltage Ripple

## 10.2.3 Application Curves (continued)

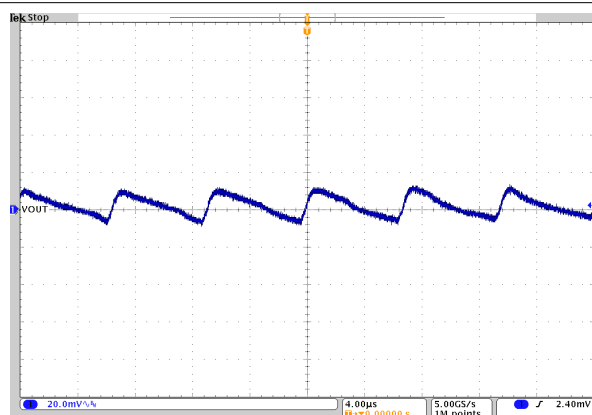


$V_{OUT} = 0.6\text{ V}$  PFM  $T_A = 25^\circ\text{C}$   
 $V_{IN} = 3.3\text{ V}$   $I_{OUT} = 0.2\text{ A}$

图 10-50. Output Voltage Ripple

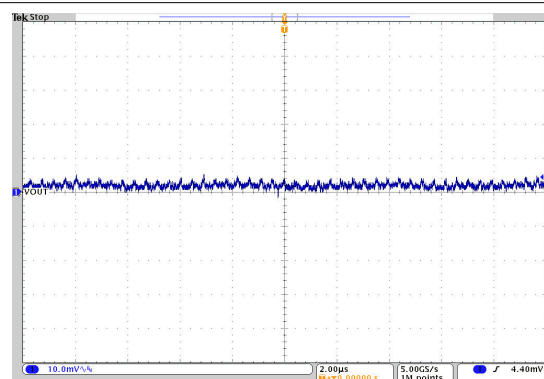


$V_{OUT} = 0.6\text{ V}$  PWM  $T_A = 25^\circ\text{C}$   
 $V_{IN} = 3.3\text{ V}$   $I_{OUT} = 6\text{ A}$

图 10-51. Output Voltage Ripple

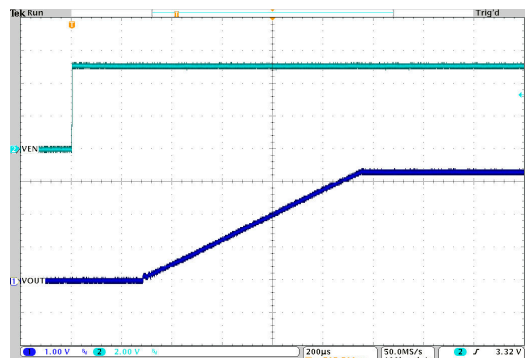


$V_{OUT} = 3.3\text{ V}$  PWM or PFM  $T_A = 25^\circ\text{C}$   
 $V_{IN} = 5\text{ V}$   $C_{SS} = 15\text{ nF}$   $I_{OUT} = 6\text{ A}$

图 10-52. Start-Up Timing

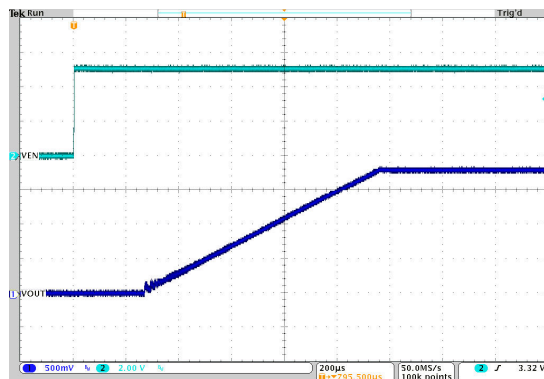


$V_{OUT} = 1.8\text{ V}$  PWM or PFM  $T_A = 25^\circ\text{C}$   
 $V_{IN} = 5\text{ V}$   $C_{SS} = 15\text{ nF}$   $I_{OUT} = 6\text{ A}$

图 10-53. Start-Up Timing

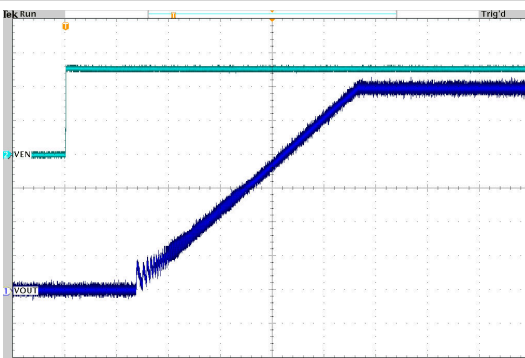

$V_{OUT} = 1.2\text{ V}$  PWM or PFM  $T_A = 25^\circ\text{C}$   
 $V_{IN} = 5\text{ V}$   $C_{SS} = 15\text{ nF}$   $I_{OUT} = 6\text{ A}$


图 10-54. Start-Up Timing

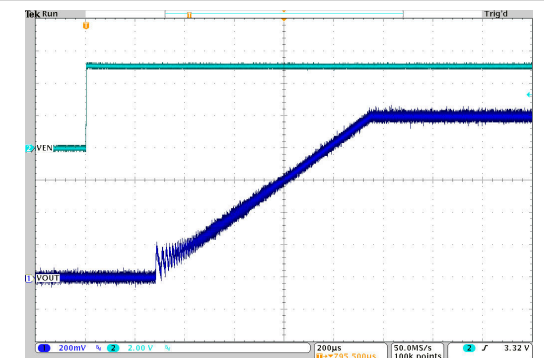

$V_{OUT} = 1.0\text{ V}$  PWM or PFM  $T_A = 25^\circ\text{C}$   
 $V_{IN} = 5\text{ V}$   $C_{SS} = 15\text{ nF}$   $I_{OUT} = 6\text{ A}$

图 10-55. Start-Up Timing

### 10.2.3 Application Curves (continued)

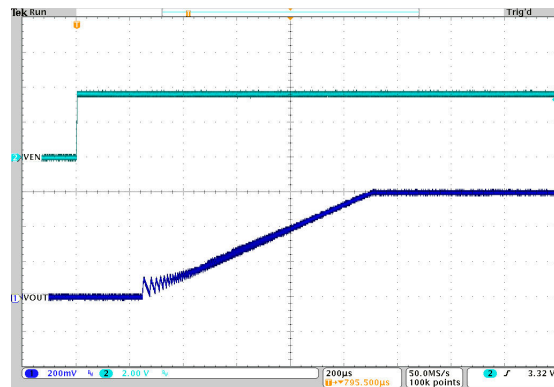

$V_{OUT} = 0.6\text{ V}$       PWM or PFM       $T_A = 25^\circ\text{C}$   
 $V_{IN} = 3.3\text{ V}$        $C_{SS} = 15\text{ nF}$        $I_{OUT} = 6\text{ A}$

图 10-56. Start-Up Timing

## 10.3 System Examples

### 10.3.1 Voltage Tracking

The TPS62816-Q1 follows the voltage applied to the SS/TR pin. A voltage ramp on SS/TR to 0.6 V ramps the output voltage according to the 0.6-V feedback voltage.

Tracking the 3.3 V of the primary device such that both rails reach their target voltage at the same time, requires a resistor divider on SS/TR of the secondary device equal to the output voltage divider of the primary device. The output current of 10  $\mu\text{A}$  on the SS/TR pin causes an offset voltage on the resistor divider formed by  $R_5$  and  $R_6$ . The equivalent resistance of  $R_5 \parallel R_6$  must therefore be kept below 4 k $\Omega$ . The current from SS/TR causes a slightly higher voltage across  $R_6$  than 0.6 V, which is desired because the secondary device switches to its internal reference as soon as the voltage at SS/TR is higher than 0.6 V.

In case both devices need to run in forced PWM mode, it is recommended to tie the MODE pin of the secondary device to the output voltage or the power good signal of the primary device. The TPS62816-Q1 has a duty cycle limitation defined by the minimum on time. For tracking down to low output voltages, the secondary device cannot follow once the minimum duty cycle is reached. Enabling PFM mode while tracking is in progress allows the user to ramp down the output voltage close to 0 V.

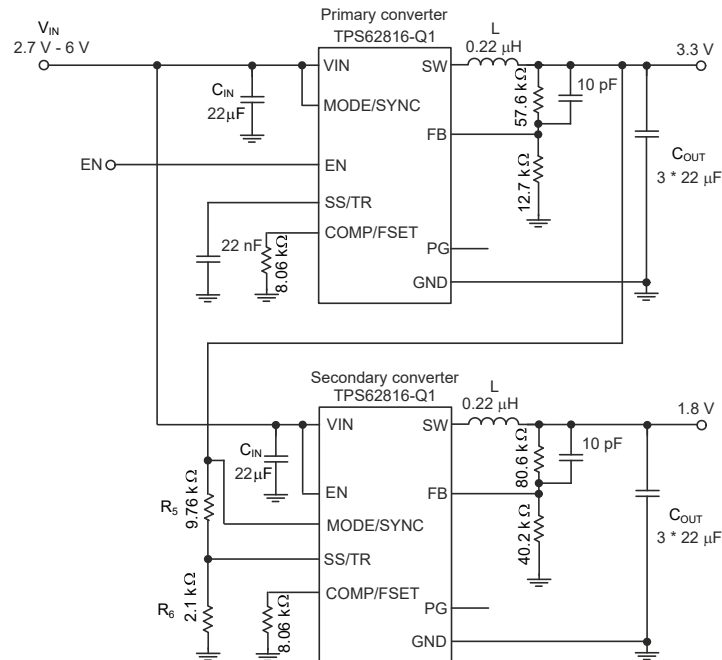


图 10-57. Schematic for Output Voltage Tracking

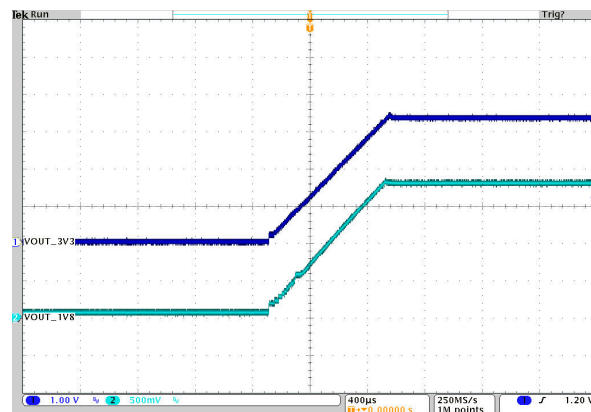


图 10-58. Scope Plot for Output Voltage Tracking

### 10.3.2 Synchronizing to an External Clock

The TPS62816-Q1 can be externally synchronized by applying an external clock on the MODE/SYNC pin. There is no need for any additional circuitry as long as the input signal meets the requirements given in the electrical specifications. The clock can be applied or removed during operation, allowing the user to switch from an externally defined fixed frequency to power save mode or to internal fixed-frequency operation. The value of the  $R_{CF}$  resistor must be chosen such that the internally defined frequency and the externally applied frequency are close to each other. This ensures a smooth transition from internal to external frequency and vice versa.

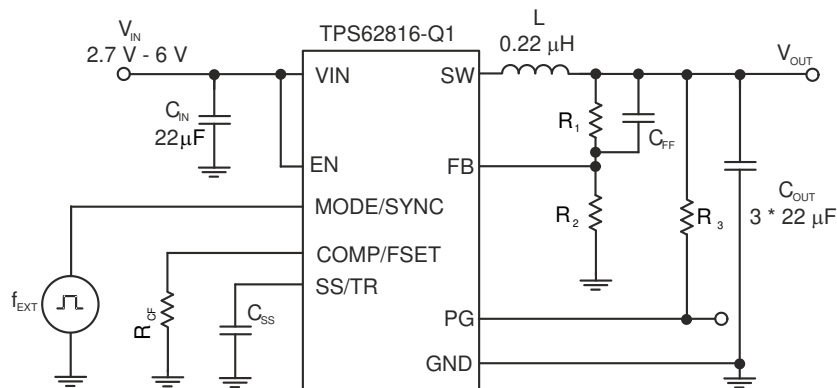


**图 10-59. Schematic Using External Synchronization**

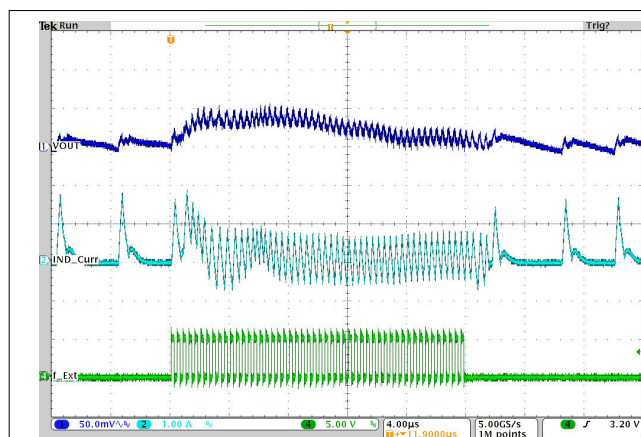


**图 10-60. Switching from External Synchronization to Power Save Mode (PFM)**

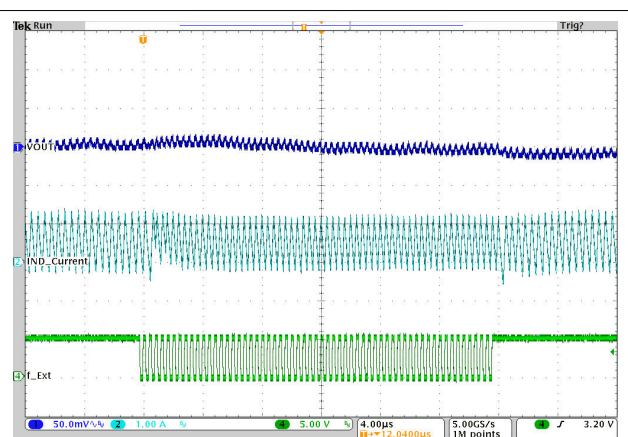


**图 10-61. Switching from External Synchronization to Internal Fixed Frequency**

### 10.3.3 Compensation Settings

The TPS62816-Q1 offers two different compensation settings using the COMP/FSET pin. This allows the user to optimize the device regarding its transient response. For applications with no high requirements on transient response, a small output capacitance is desired for small size and low cost. In such cases, COMP1 must be used so the TPS62816-Q1 is stable with as low as 32  $\mu$ F of output capacitance. When the load is very dynamic, adding output capacitance improves transient response, but its effect is limited since this also reduces the cross-over frequency of the control loop. For such cases, COMP2 must be used as it increases the bandwidth, but requires a larger output capacitance for stable operation. The following scope plots are taken for the same conditions, but differ in the compensation setting. Since COMP2 demands 72-  $\mu$ F minimum output capacitance for stability, both plots were both taken with 72  $\mu$ F on the output to allow the user to compare the results. One plot was taken for the COMP1 ( $R_{CF} = 8.06 \text{ k}\Omega$ ) and one for the COMP2 ( $R_{CF} = 80.6 \text{ k}\Omega$ ) compensation setting. The scope plots show that for the same output capacitance of 72  $\mu$ F, the transient response for COMP2 is improved over the COMP1 setting.

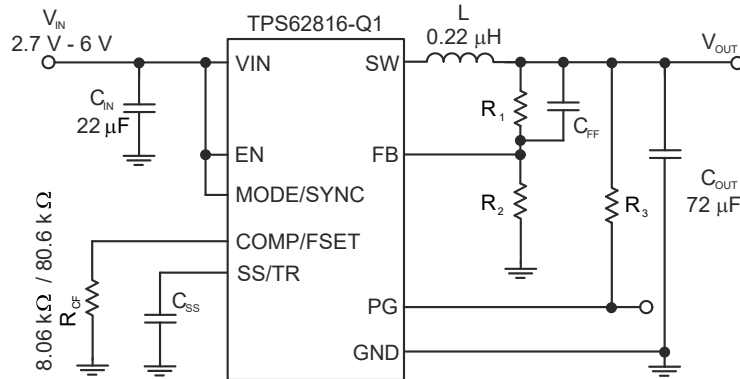


图 10-62. Schematic

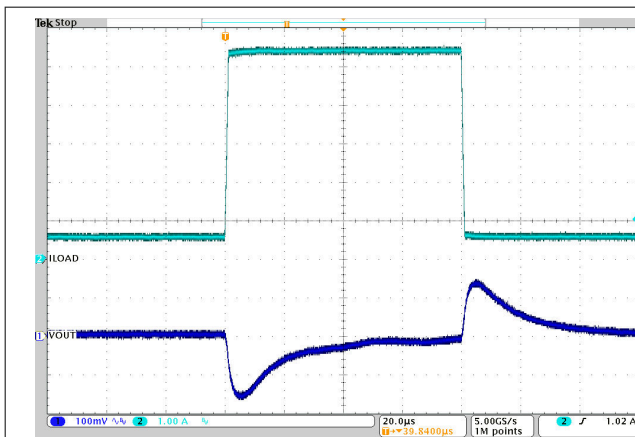


图 10-63. Load Transient Response with Setting COMP1

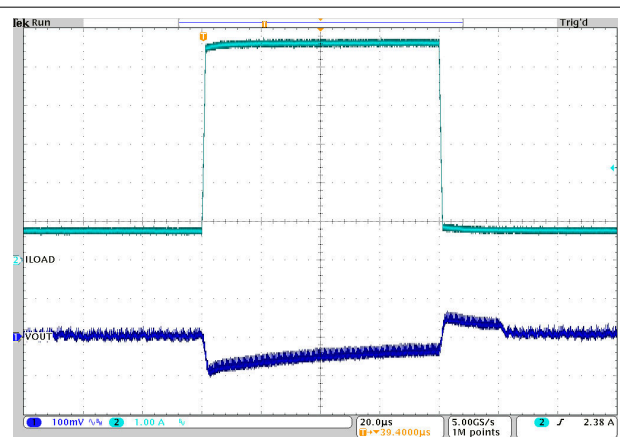


图 10-64. Load Transient Response with Setting COMP2

## 11 Power Supply Recommendations

The TPS62816-Q1 device family does not have special requirements for its input power supply. The output current of the input power supply needs to be rated according to the supply voltage, output voltage, and output current of the TPS62816-Q1.

## 12 Layout

### 12.1 Layout Guidelines

A proper layout is critical for the operation of a switched mode power supply, even more at high switching frequencies. Therefore, the PCB layout of the TPS62816-Q1 demands careful attention to ensure operation and to get the performance specified. A poor layout can lead to issues like the following:

- Poor regulation (both line and load)
- Stability and accuracy weaknesses
- Increased EMI radiation
- Noise sensitivity

See [节 12.2](#) for the recommended layout of the TPS62816-Q1, which is designed for common external ground connections. The input capacitor must be placed as close as possible between the VIN and GND pin.

Provide low inductive and resistive paths for loops with high di/dt. Therefore, paths conducting the switched load current must be as short and wide as possible. Provide low capacitive paths (with respect to all other nodes) for wires with high dv/dt. Therefore, the input and output capacitance must be placed as close as possible to the IC pins and parallel wiring over long distances and narrow traces must be avoided. Loops that conduct an alternating current must outline an area as small as possible, since this area is proportional to the energy radiated.

Sensitive nodes like FB need to be connected with short wires and not nearby high dv/dt signals (for example, SW). Since they carry information about the output voltage, they must be connected as close as possible to the actual output voltage (at the output capacitor). The capacitor on the SS/TR pin as well as the FB resistors,  $R_1$  and  $R_2$ , must be kept close to the IC and connect directly to those pins and the system ground plane.

The package uses the pins for power dissipation. Thermal vias on the VIN and GND pins help to spread the heat into the PCB.

The recommended layout is implemented on the EVM and shown in the [TPS62816EVM-140 Evaluation Module User's Guide](#).

### 12.2 Layout Example

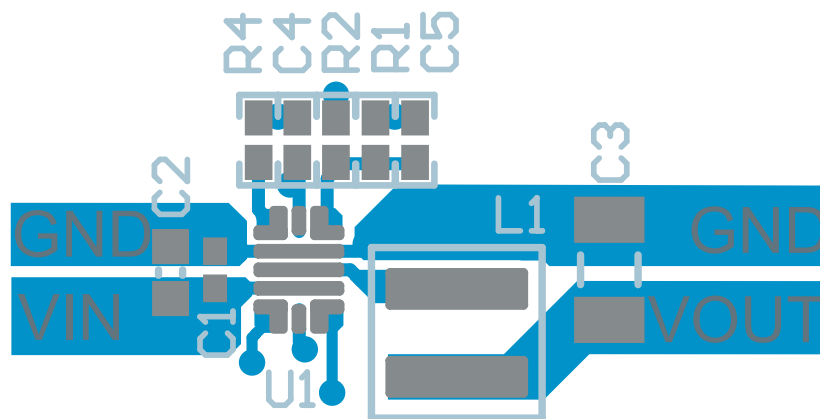


图 12-1. Layout Example

## 13 Device and Documentation Support

### 13.1 Device Support

#### 13.1.1 第三方产品免责声明

TI 发布的与第三方产品或服务有关的信息，不能构成与此类产品或服务或保修的适用性有关的认可，不能构成此类产品或服务单独或与任何 TI 产品或服务一起的表示或认可。

### 13.2 Documentation Support

#### 13.2.1 Related Documentation

For related documentation, see the following:

Texas Instruments, [TPS62816EVM-140 Evaluation Module User's Guide](#)

### 13.3 接收文档更新通知

要接收文档更新通知，请导航至 [ti.com](#) 上的器件产品文件夹。点击 [订阅更新](#) 进行注册，即可每周接收产品信息更改摘要。有关更改的详细信息，请查看任何已修订文档中包含的修订历史记录。

### 13.4 支持资源

**TI E2E™ 支持论坛** 是工程师的重要参考资料，可直接从专家获得快速、经过验证的解答和设计帮助。搜索现有解答或提出自己的问题可获得所需的快速设计帮助。

链接的内容由各个贡献者“按原样”提供。这些内容并不构成 TI 技术规范，并且不一定反映 TI 的观点；请参阅 TI 的《使用条款》。

### 13.5 Trademarks

TI E2E™ is a trademark of Texas Instruments.

所有商标均为其各自所有者的财产。

### 13.6 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

### 13.7 术语表

**TI 术语表** 本术语表列出并解释了术语、首字母缩略词和定义。

## 14 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

PACKAGING INFORMATION

| Orderable part number | Status<br>(1) | Material type<br>(2) | Package   Pins    | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6) |
|-----------------------|---------------|----------------------|-------------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| TPS62816QWRWYRQ1      | Active        | Production           | VQFN-HR (RWY)   9 | 3000   LARGE T&R      | Yes         | NIPDAU   SN                          | Level-2-260C-1 YEAR               | -40 to 125   | 816Q                |
| TPS62816QWRWYRQ1.A    | Active        | Production           | VQFN-HR (RWY)   9 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 125   | 816Q                |


- <sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).
- <sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.
- <sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.
- <sup>(4)</sup> **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.
- <sup>(5)</sup> **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.
- <sup>(6)</sup> **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:**The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.


## TAPE AND REEL INFORMATION

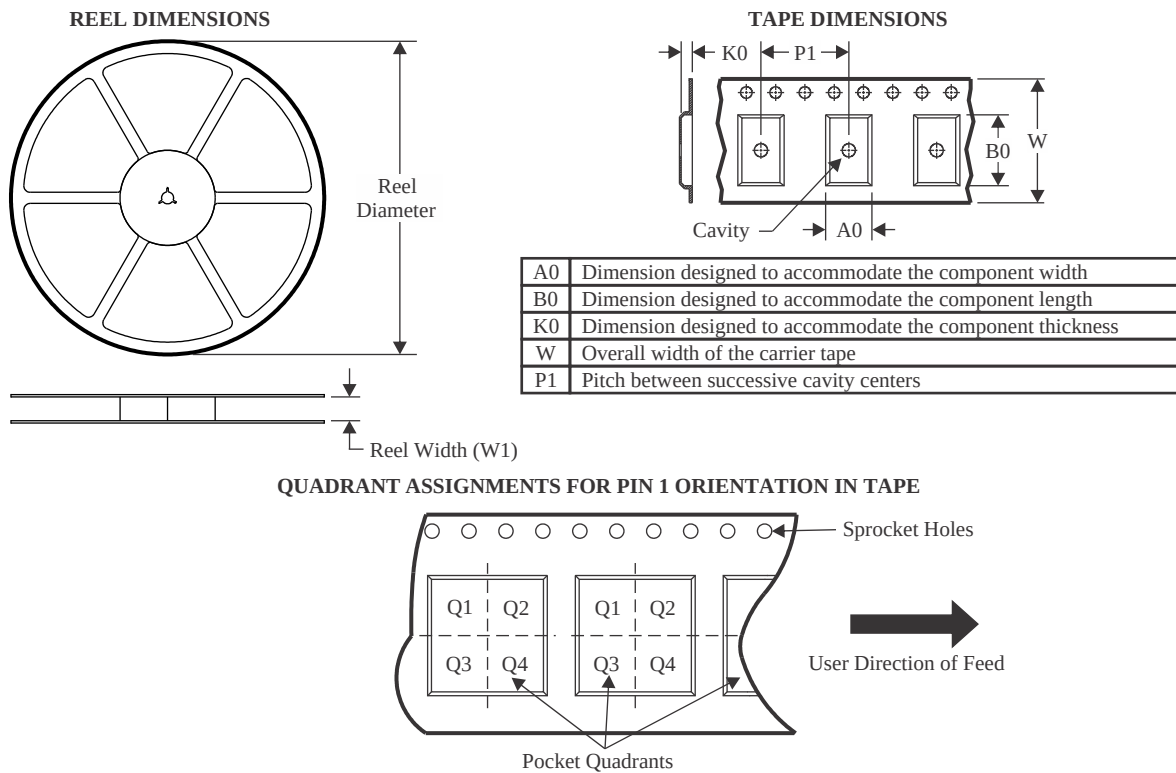

\*All dimensions are nominal

| Device           | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|------------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| TPS62816QWRWYRQ1 | VQFN-HR      | RWY             | 9    | 3000 | 180.0              | 8.4                | 2.25    | 3.25    | 1.05    | 4.0     | 8.0    | Q1            |
| TPS62816QWRWYRQ1 | VQFN-HR      | RWY             | 9    | 3000 | 180.0              | 8.4                | 2.3     | 3.2     | 1.0     | 4.0     | 8.0    | Q1            |

## TAPE AND REEL BOX DIMENSIONS

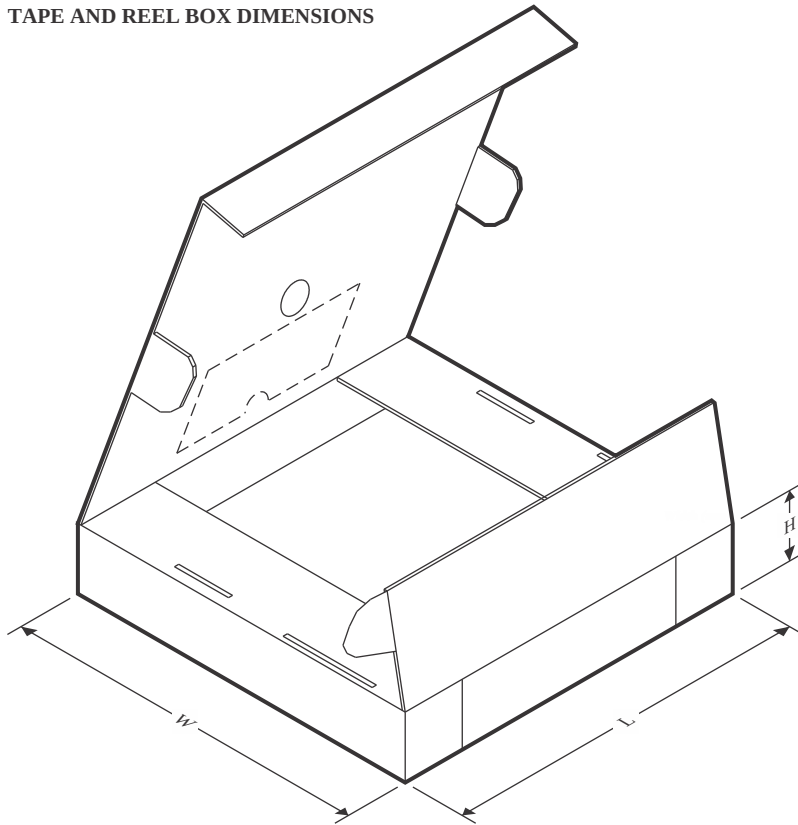

\*All dimensions are nominal

| Device           | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|------------------|--------------|-----------------|------|------|-------------|------------|-------------|
| TPS62816QWRWYRQ1 | VQFN-HR      | RWY             | 9    | 3000 | 210.0       | 185.0      | 35.0        |
| TPS62816QWRWYRQ1 | VQFN-HR      | RWY             | 9    | 3000 | 213.0       | 191.0      | 35.0        |

## GENERIC PACKAGE VIEW


**RWY 9**

**VQFN-HR - 1 mm max height**

2 x 3, 0.5 mm pitch

PLASTIC QUAD FLATPACK - NO LEAD

This image is a representation of the package family, actual package may vary.  
Refer to the product data sheet for package details.

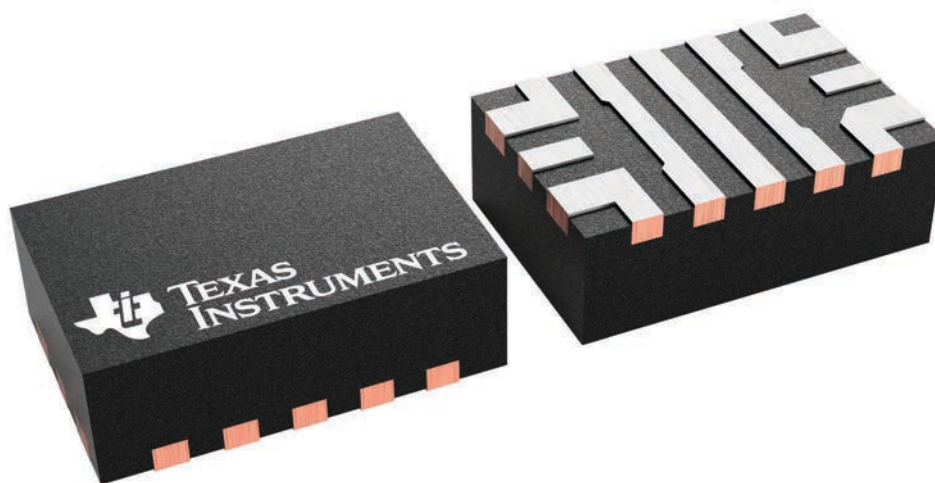


4226729/A




RWY0009A

## VQFN-HR - 1 mm max height

PLASTIC QUAD FLATPACK - NO LEAD

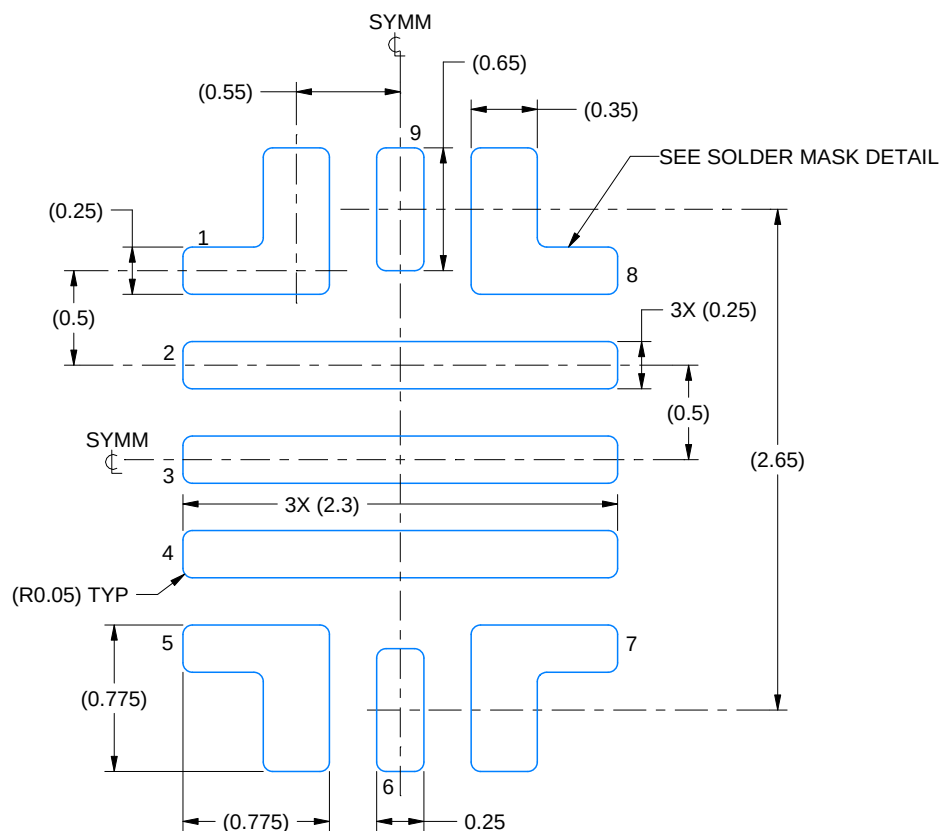

LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE: 25X

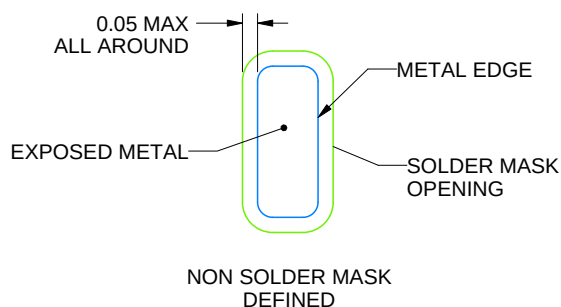

### SOLDER MASK DETAIL

4224015/B 01/2018

NOTES: (continued)


3. This package is designed to be soldered to thermal pads on the board. For more information, see Texas Instruments literature number SLUA271 ([www.ti.com/lit/sluea271](http://www.ti.com/lit/sluea271)).
4. Vias are optional depending on application, refer to device data sheet. It is recommended that vias under paste be filled, plugged or tented.

# EXAMPLE STENCIL DESIGN

RWY0009A

VQFN-HR - 1 mm max height

PLASTIC QUAD FLATPACK - NO LEAD

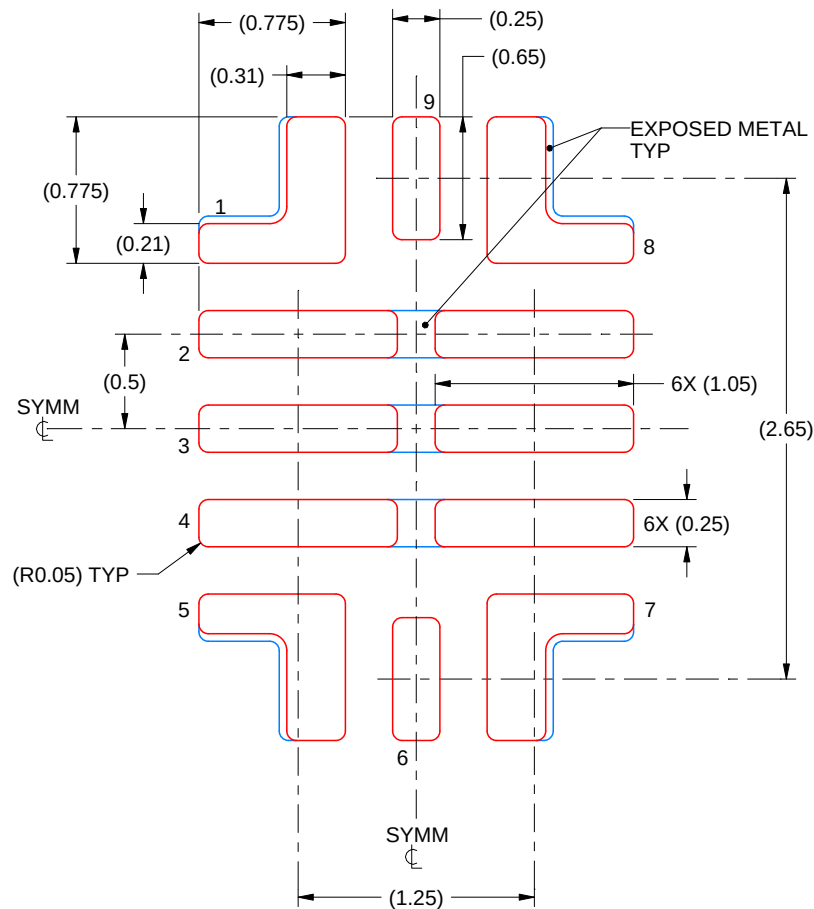

SOLDER PASTE EXAMPLE  
BASED ON 0.1 mm THICK STENCIL  
PADS 1, 5, 7 & 8:  
90% PRINTED SOLDER COVERAGE BY AREA UNDER PACKAGE  
SCALE: 25X

4224015/B 01/2018

NOTES: (continued)

5. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.


RWY0009C



# PACKAGE OUTLINE

## VQFN-HR - 1 mm max height

PLASTIC QUAD FLATPACK - NO LEAD

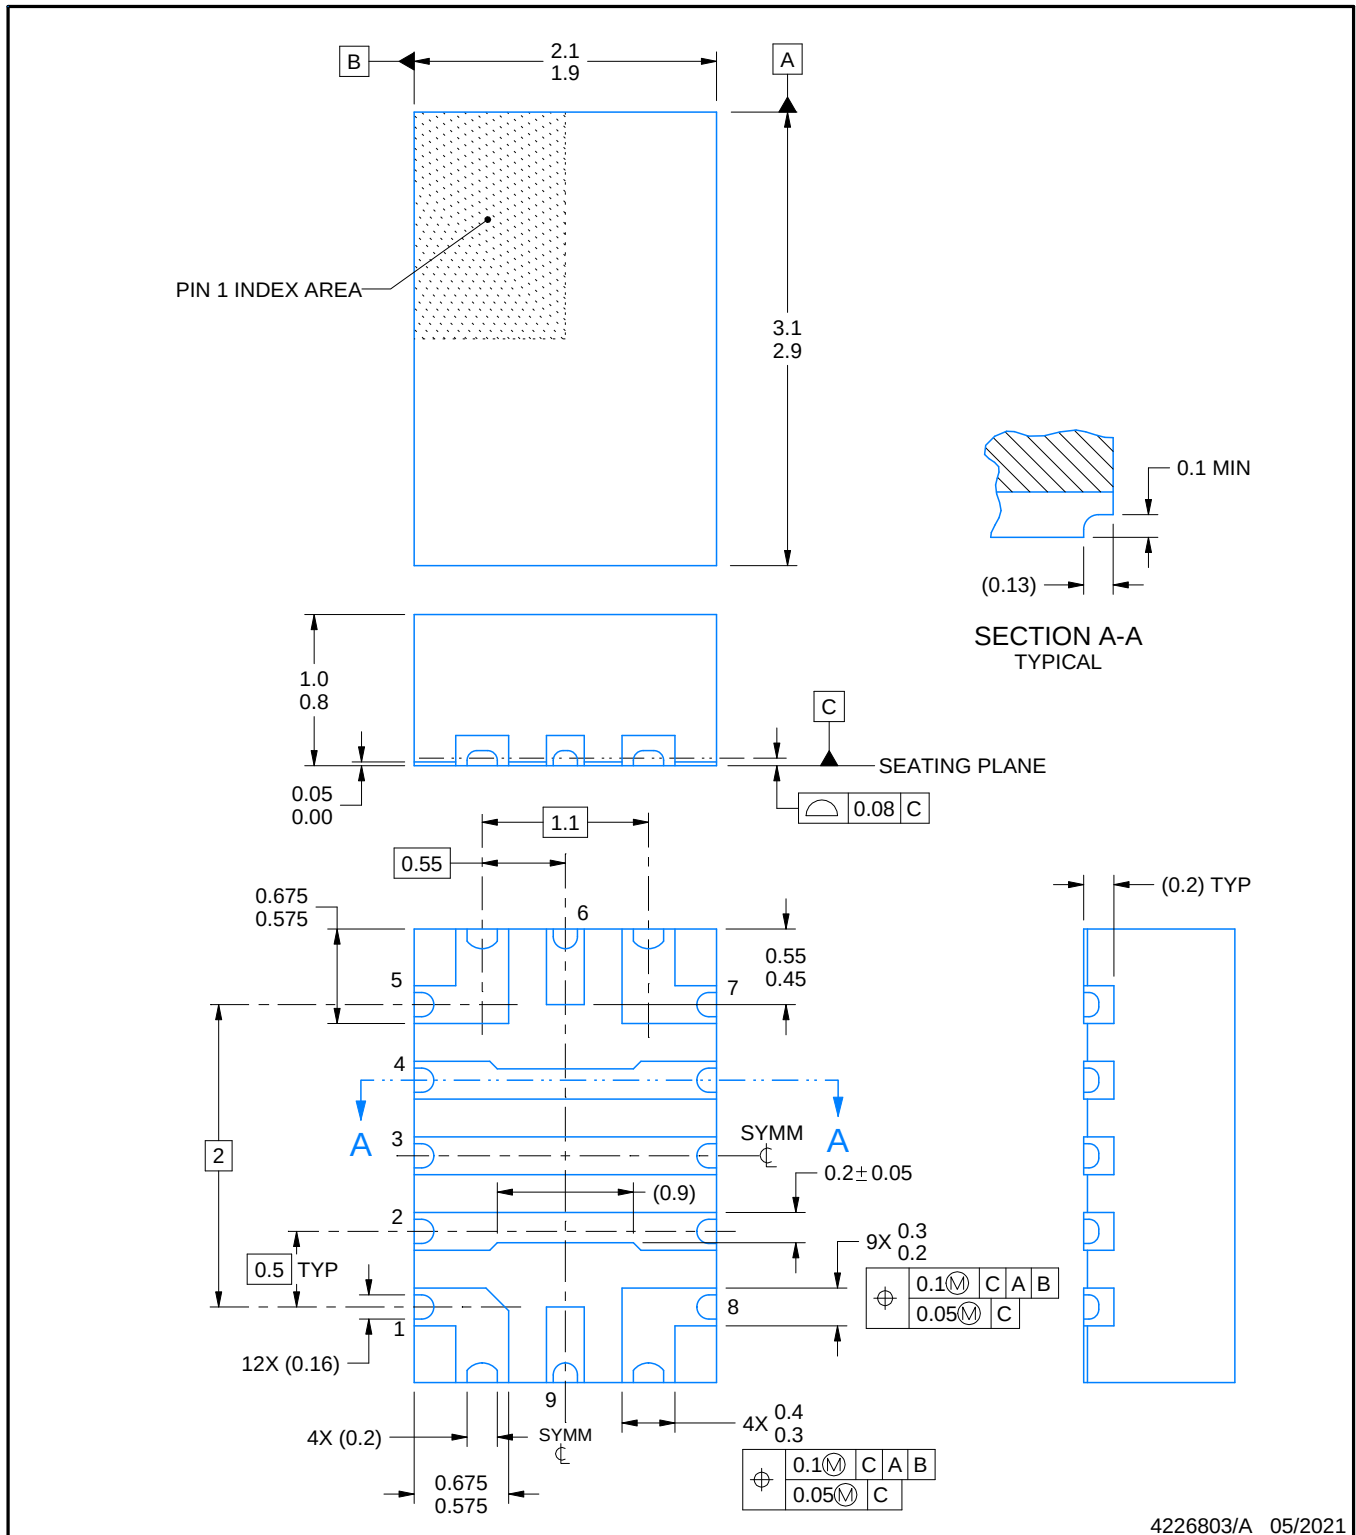

NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.

# EXAMPLE BOARD LAYOUT


RWY0009C

VQFN-HR - 1 mm max height

PLASTIC QUAD FLATPACK - NO LEAD

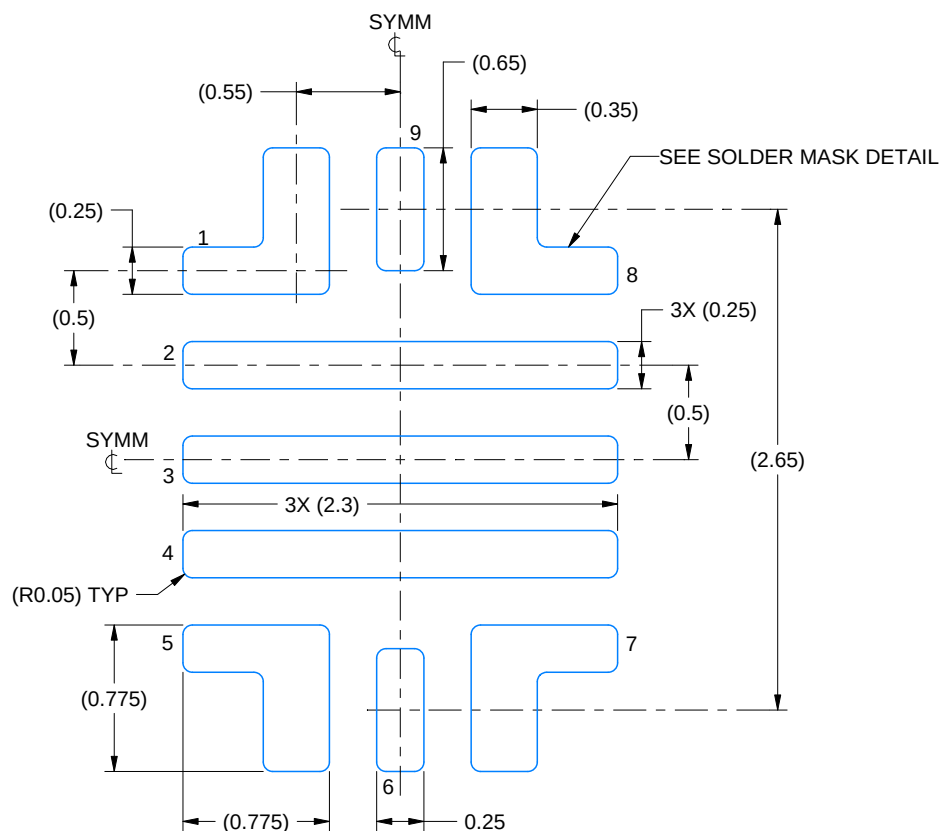

LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE: 25X

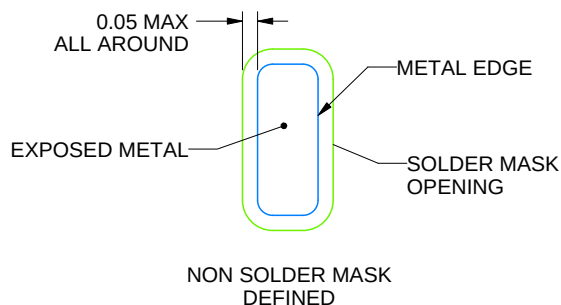

SOLDER MASK DETAIL

4226803/A 05/2021

NOTES: (continued)


- This package is designed to be soldered to thermal pads on the board. For more information, see Texas Instruments literature number SLUA271 ([www.ti.com/lit/sluea271](http://www.ti.com/lit/sluea271)).
- Vias are optional depending on application, refer to device data sheet. It is recommended that vias under paste be filled, plugged or tented.

# EXAMPLE STENCIL DESIGN

RWY0009C

VQFN-HR - 1 mm max height

PLASTIC QUAD FLATPACK - NO LEAD

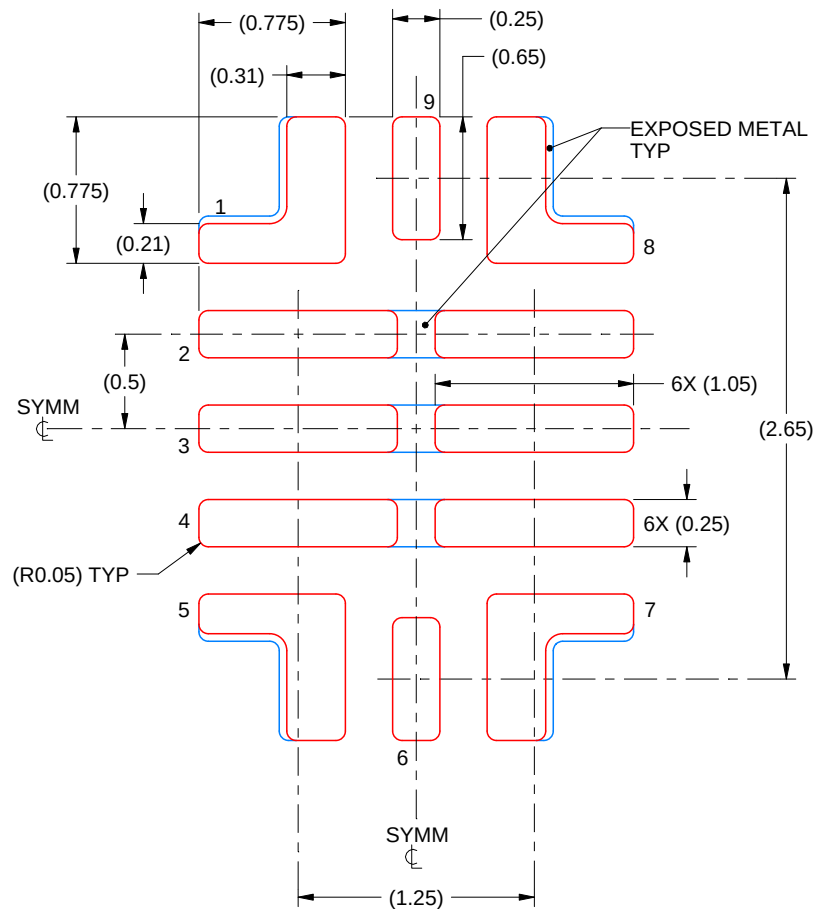

SOLDER PASTE EXAMPLE  
BASED ON 0.1 mm THICK STENCIL  
PADS 1, 5, 7 & 8:  
90% PRINTED SOLDER COVERAGE BY AREA UNDER PACKAGE  
SCALE: 25X

4226803/A 05/2021

NOTES: (continued)

5. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

## 重要通知和免责声明

TI“按原样”提供技术和可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证没有瑕疵且不做任何明示或暗示的担保，包括但不限于对适销性、与某特定用途的适用性或不侵犯任何第三方知识产权的暗示担保。

这些资源可供使用 TI 产品进行设计的熟练开发人员使用。您将自行承担以下全部责任：(1) 针对您的应用选择合适的 TI 产品，(2) 设计、验证并测试您的应用，(3) 确保您的应用满足相应标准以及任何其他安全、安保法规或其他要求。

这些资源如有变更，恕不另行通知。TI 授权您仅可将这些资源用于研发本资源所述的 TI 产品的相关应用。严禁以其他方式对这些资源进行复制或展示。您无权使用任何其他 TI 知识产权或任何第三方知识产权。对于因您对这些资源的使用而对 TI 及其代表造成的任何索赔、损害、成本、损失和债务，您将全额赔偿，TI 对此概不负责。

TI 提供的产品受 [TI 销售条款](#)、[TI 通用质量指南](#) 或 [ti.com](#) 上其他适用条款或 TI 产品随附的其他适用条款的约束。TI 提供这些资源并不会扩展或以其他方式更改 TI 针对 TI 产品发布的适用的担保或担保免责声明。除非德州仪器 (TI) 明确将某产品指定为定制产品或客户特定产品，否则其产品均为按确定价格收入目录的标准通用器件。

TI 反对并拒绝您可能提出的任何其他或不同的条款。

版权所有 © 2026，德州仪器 (TI) 公司

最后更新日期：2025 年 10 月