

# TPS65251 4.5V 至 18V 输入、高电流、同步降压、具有集成 FET 的三个降压转换器

## 1 特性

- 宽输入电源电压范围 (4.5V 至 18V)
- 0.8V、1% 精度的电压基准
- 持续负载电流: 3A (降压开关 1), 2A (降压开关 2 和 3)
- 最大电流: 3.5A (降压开关 1), 2.5A (降压开关 2 和 3)
- 可调开关频率为 300kHz 至 2.2MHz (由外部电阻设置)
- 专用于每个降压开关的使能引脚
- 用于振荡器的外部同步引脚
- 外部使能/排序和软启动引脚
- 通过外部电阻器设置的可调电流限制
- 软启动引脚
- 具有简单补偿电路的电流模式控制
- 电源正常状态指示
- 适合轻载条件的可选低功耗工作模式
- 40 引脚 6mm × 6mm RHA VQFN 封装

## 2 应用

- 机顶盒
- Blu-Ray DVD
- DVR
- 数字电视 (DTV)
- 汽车音频/视频
- 监控摄像机

## 3 说明

TPS65251 具有三个宽输入范围的高效同步降压转换器。这款转换器设计用于简化其应用,同时使得设计人员能够根据目标应用来优化他们的用法。

这款转换器可在 5V、9V、12V 或 15V 系统下工作,并且集成有功率晶体管。可使用外部电阻分压器将输出电压设置为 0.8V 与输入电源电压值之间的任意值。每个转换器均具有以下引脚:使能引脚,可针对排序用途而延迟启动;软启动引脚,可通过选择软启动电容器来调节软启动时间;电流限制 (RLIMx) 引脚,使设计人员能够通过选择外部电阻器来调节电流限制并能够优化电感器的选择。转换器的电流模式控制功能可简化 RC 补偿。


转换器的开关频率可根据需要选择通过 ROSC 引脚所连接的外部电阻器来设置,或者与 SYNC 引脚所连接的外部时钟同步。开关稳压器设计为在 300kHz 至 2.2MHz 频率范围内运行。降压转换器 1 与降压转换器 2 和 3 之间呈 180° 异相运行 (降压转换器 2 和 3 同相运行) 最大限度地降低了输入滤波器要求。

器件信息<sup>(1)</sup>

| 器件型号     | 封装        | 封装尺寸 (标称值)      |
|----------|-----------|-----------------|
| TPS65251 | VQFN (40) | 6.00mm × 6.00mm |

(1) 如需了解所有可用封装,请参阅数据表末尾的可订购产品附录。

典型应用原理图

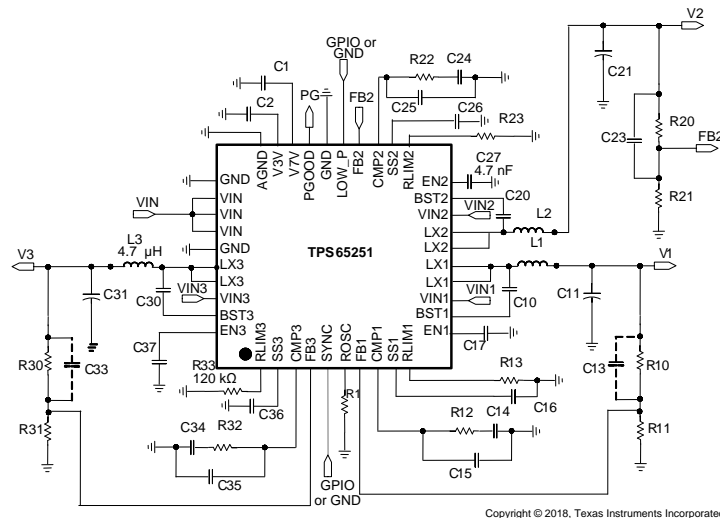

## 目录

|          |                                              |           |           |                                             |           |
|----------|----------------------------------------------|-----------|-----------|---------------------------------------------|-----------|
| 1        | 特性 .....                                     | 1         | 8.4       | Device Functional Modes .....               | 15        |
| 2        | 应用 .....                                     | 1         | <b>9</b>  | <b>Application and Implementation</b> ..... | <b>17</b> |
| 3        | 说明 .....                                     | 1         | 9.1       | Application Information .....               | 17        |
| 4        | 修订历史记录 .....                                 | 2         | 9.2       | Typical Application .....                   | 17        |
| 5        | 说明 (续) .....                                 | 3         | <b>10</b> | <b>Power Supply Recommendations</b> .....   | <b>24</b> |
| 6        | <b>Pin Configuration and Functions</b> ..... | <b>3</b>  | <b>11</b> | <b>Layout</b> .....                         | <b>24</b> |
| 7        | <b>Specifications</b> .....                  | <b>5</b>  | 11.1      | Layout Guidelines .....                     | 24        |
| 7.1      | Absolute Maximum Ratings .....               | 5         | 11.2      | Layout Example .....                        | 25        |
| 7.2      | ESD Ratings .....                            | 5         | 11.3      | Power Dissipation .....                     | 25        |
| 7.3      | Recommended Operating Conditions .....       | 5         | <b>12</b> | <b>器件和文档支持</b> .....                        | <b>27</b> |
| 7.4      | Thermal Information .....                    | 5         | 12.1      | 接收文档更新通知 .....                              | 27        |
| 7.5      | Electrical Characteristics .....             | 6         | 12.2      | 社区资源 .....                                  | 27        |
| 7.6      | Typical Characteristics .....                | 8         | 12.3      | 商标 .....                                    | 27        |
| <b>8</b> | <b>Detailed Description</b> .....            | <b>11</b> | 12.4      | 静电放电警告 .....                                | 27        |
| 8.1      | Overview .....                               | 11        | 12.5      | Glossary .....                              | 27        |
| 8.2      | Functional Block Diagram .....               | 11        | <b>13</b> | <b>机械、封装和可订购信息</b> .....                    | <b>27</b> |
| 8.3      | Feature Description .....                    | 12        |           |                                             |           |

## 4 修订历史记录

注：之前版本的页码可能与当前版本有所不同。

| <b>Changes from Revision F (July 2015) to Revision G</b>                                                                                               | <b>Page</b> |
|--------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|
| • Changed the values for Voltage at LX1, LX2, LX3 From: MIN = -1 V, MAX = 20 V To: MIN = -3 V, MAX = 23 V in the <i>Absolute Maximum Ratings</i> ..... | <b>5</b>    |

| <b>Changes from Revision E (December 2014) to Revision F</b>                                                                            | <b>Page</b> |
|-----------------------------------------------------------------------------------------------------------------------------------------|-------------|
| • Changed the MAX value for Voltage at VIN1, VIN2, VIN3, LX1, LX2, LX3 From: 18 V To: 20 V in the <i>Absolute Maximum Ratings</i> ..... | <b>5</b>    |
| • 添加 <a href="#">社区资源</a> .....                                                                                                         | <b>27</b>   |


| <b>Changes from Revision D (December 2012) to Revision E</b>                                | <b>Page</b> |
|---------------------------------------------------------------------------------------------|-------------|
| • 已添加 引脚配置和功能部分, ESD 额定值表, 特性说明部分、器件功能模式、应用和实施部分、电源建议部分、布局部分、器件和文档支持部分以及机械、封装和可订购信息部分 ..... | <b>1</b>    |

## 5 说明 (续)

TPS65251 具有 监控电路，可监控每个转换器输出。电源排序完成后会将 PGOOD 引脚置为有效，并报告所有 PG 信号，期间耗时为一段可选的复位结束时间。PGOOD 信号的极性为高电平有效。

TPS65251 还具有 轻载脉冲跳跃模式 (PSM)，通过将 LOW\_P 引脚连接至 V3V 即可启用该模式。当主机处理器处于待机（低活动状态）模式时，PSM 模式允许降低提供给系统的输入功率。

## 6 Pin Configuration and Functions

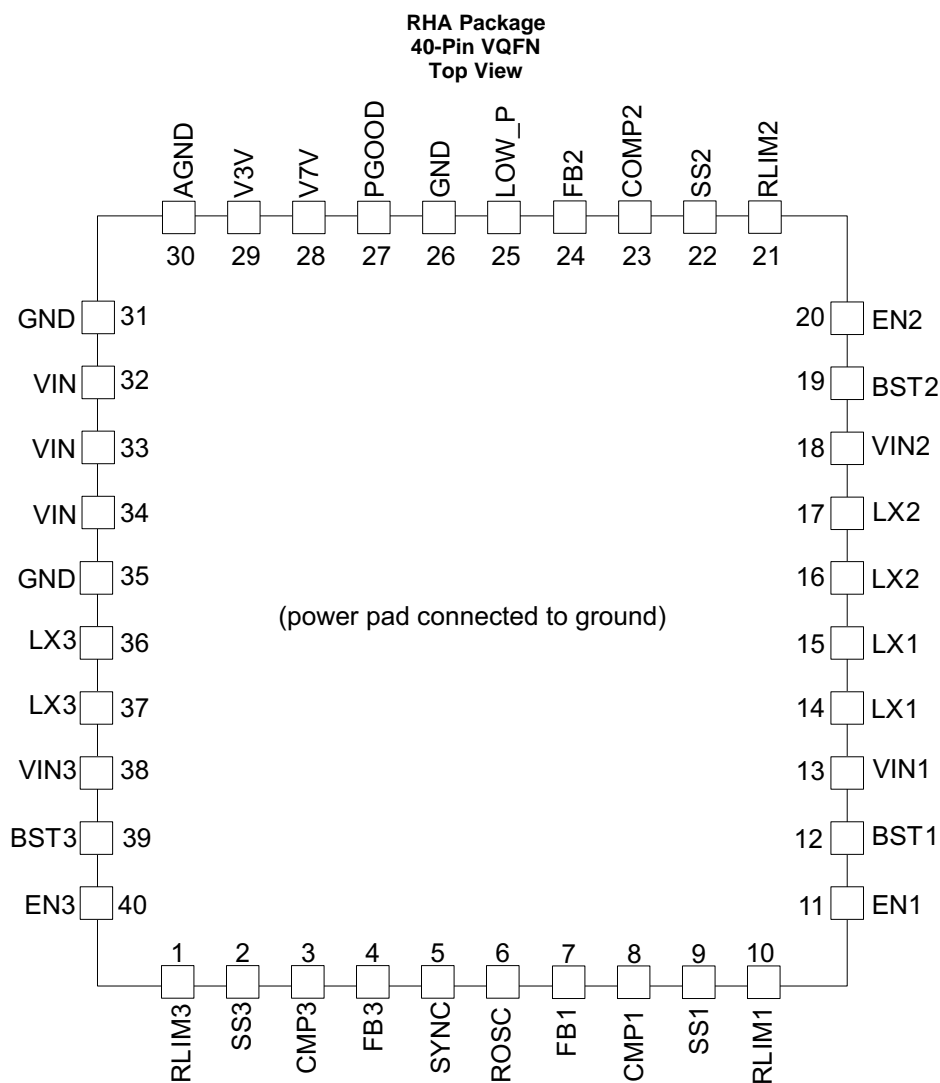

**Pin Functions**

| PIN   |     | I/O | DESCRIPTION                                                                                                                    |
|-------|-----|-----|--------------------------------------------------------------------------------------------------------------------------------|
| NAME  | NO. |     |                                                                                                                                |
| RLIM3 | 1   | I   | Current limit setting for Buck 3. Fit a resistor from this pin to ground to set the peak current limit on the output inductor. |
| SS3   | 2   | I   | Soft-start pin for Buck 3. Fit a small ceramic capacitor to this pin to set the converter soft-start time.                     |
| COMP3 | 3   | O   | Compensation for Buck 3. Fit a series RC circuit to this pin to complete the compensation circuit of this converter.           |
| FB3   | 4   | I   | Feedback input for Buck 3. Connect a divider set to 0.8V from the output of the converter to ground.                           |

**Pin Functions (continued)**

| PIN   |     | I/O | DESCRIPTION                                                                                                                                                                                                                         |
|-------|-----|-----|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| NAME  | NO. |     |                                                                                                                                                                                                                                     |
| SYNC  | 5   | I   | Synchronous clock input. If there is a sync clock in the system, connect to the pin. When not used connect to GND.                                                                                                                  |
| ROSC  | 6   | I   | Oscillator set. This resistor sets the frequency of internal autonomous clock. If external synchronization is used resistor should be fitted and set to about 70% of external clock frequency.                                      |
| FB1   | 7   | I   | Feedback pin for Buck 1. Connect a divider set to 0.8 V from the output of the converter to ground.                                                                                                                                 |
| COMP1 | 8   | O   | Compensation pin for Buck 1. Fit a series RC circuit to this pin to complete the compensation circuit of this converter.                                                                                                            |
| SS1   | 9   | I   | Soft-start pin for Buck 1. Fit a small ceramic capacitor to this pin to set the converter soft-start time.                                                                                                                          |
| RLIM1 | 10  | I   | Current limit setting pin for Buck 1. Fit a resistor from this pin to ground to set the peak current limit on the output inductor.                                                                                                  |
| EN1   | 11  | I   | Enable pin for Buck 1. A low level signal on this pin disables it. If pin is left open a weak internal pullup to V3V will allow for automatic enable. For a delayed start-up add a small ceramic capacitor from this pin to ground. |
| BST1  | 12  | I   | Bootstrap capacitor for Buck 1. Fit a 47-nF ceramic capacitor from this pin to the switching node.                                                                                                                                  |
| VIN1  | 13  | I   | Input supply for Buck 1. Fit a 10- $\mu$ F ceramic capacitor close to this pin.                                                                                                                                                     |
| LX1   | 14  | O   | Switching node for Buck 1                                                                                                                                                                                                           |
|       | 15  |     |                                                                                                                                                                                                                                     |
| LX2   | 16  | O   | Switching node for Buck 2                                                                                                                                                                                                           |
|       | 17  |     |                                                                                                                                                                                                                                     |
| VIN2  | 18  | I   | Input supply for Buck 2. Fit a 10- $\mu$ F ceramic capacitor close to this pin.                                                                                                                                                     |
| BST2  | 19  | I   | Bootstrap capacitor for Buck 2. Fit a 47-nF ceramic capacitor from this pin to the switching node.                                                                                                                                  |
| EN2   | 20  | I   | Enable pin for Buck 2. A low level signal on this pin disables it. If pin is left open a weak internal pullup to V3V will allow for automatic enable. For a delayed start-up add a small ceramic capacitor from this pin to ground. |
| RLIM2 | 21  | I   | Current limit setting for Buck 2. Fit a resistor from this pin to ground to set the peak current limit on the output inductor.                                                                                                      |
| SS2   | 22  | I   | Soft-start pin for Buck 2. Fit a small ceramic capacitor to this pin to set the converter soft-start time.                                                                                                                          |
| COMP2 | 23  | O   | Compensation pin for Buck 2. Fit a series RC circuit to this pin to complete the compensation circuit of this converter                                                                                                             |
| FB2   | 24  | I   | Feedback input for Buck 2. Connect a divider set to 0.8 V from the output of the converter to ground.                                                                                                                               |
| LOW_P | 25  | I   | Low-power operation mode (active high) input for TPS65251                                                                                                                                                                           |
| GND   | 26  |     | Ground pin                                                                                                                                                                                                                          |
| PGOOD | 27  | O   | Powergood. Open-drain output asserted after all converters are sequenced and within regulation. Polarity is factory selectable (active high default).                                                                               |
| V7V   | 28  | O   | Internal supply. Connect a 10- $\mu$ F ceramic capacitor from this pin to ground.                                                                                                                                                   |
| V3V   | 29  | O   | Internal supply. Connect a 3.3- $\mu$ F to 10- $\mu$ F ceramic capacitor from this pin to ground.                                                                                                                                   |
| AGND  | 30  |     | Analog ground. Connect all GND pins and the power pad together.                                                                                                                                                                     |
| GND   | 31  |     | Ground pin                                                                                                                                                                                                                          |
| VIN   | 32  | I   | Input supply                                                                                                                                                                                                                        |
| VIN   | 33  | I   | Input supply                                                                                                                                                                                                                        |
| VIN   | 34  | I   | Input supply                                                                                                                                                                                                                        |
| GND   | 35  |     | Ground pin                                                                                                                                                                                                                          |
| LX3   | 36  | O   | Switching node for Buck 3                                                                                                                                                                                                           |
|       | 37  |     |                                                                                                                                                                                                                                     |
| VIN3  | 38  |     | Input supply for Buck 3. Fit a 10- $\mu$ F ceramic capacitor close to this pin.                                                                                                                                                     |
| BST3  | 39  | I   | Bootstrap capacitor for Buck 3. Fit a 47-nF ceramic capacitor from this pin to the switching node.                                                                                                                                  |
| EN3   | 40  | I   | Enable pin for Buck 3. A low level signal on this pin disables it. If pin is left open a weak internal pullup to V3V will allow for automatic enable. For a delayed start-up add a small ceramic capacitor from this pin to ground. |
| PAD   | —   | —   | Power pad. Connect to ground.                                                                                                                                                                                                       |

## 7 Specifications

### 7.1 Absolute Maximum Ratings

over operating free-air temperature (unless otherwise noted)<sup>(1)</sup>

|                  |                                                                                                             | MIN  | MAX | UNIT |
|------------------|-------------------------------------------------------------------------------------------------------------|------|-----|------|
|                  | Voltage at VIN1, VIN2, VIN3, LX1, LX2, LX3                                                                  | -0.3 | 20  | V    |
|                  | Voltage at LX1, LX2, LX3 (maximum withstand voltage transient < 10 ns)                                      | -3   | 23  | V    |
|                  | Voltage at BST1, BST2, BST3, referenced to Lx pin                                                           | -0.3 | 7   | V    |
|                  | Voltage at V7V, COMP1, COMP2, COMP3                                                                         | -0.3 | 7   | V    |
|                  | Voltage at V3V, RLIM1, RLIM2, RLIM3, EN1, EN2, EN3, SS1, SS2, SS3, FB1, FB2, FB3, PGOOD, SYNC, ROOSC, LOW_P | -0.3 | 3.6 | V    |
|                  | Voltage at AGND, GND                                                                                        | -0.3 | 0.3 | V    |
| T <sub>J</sub>   | Operating virtual junction temperature                                                                      | -40  | 125 | °C   |
| T <sub>stg</sub> | Storage temperature                                                                                         | -55  | 150 | °C   |

- (1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions* is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

### 7.2 ESD Ratings

|                    |                         | VALUE                                                                          | UNIT  |
|--------------------|-------------------------|--------------------------------------------------------------------------------|-------|
| V <sub>(ESD)</sub> | Electrostatic discharge | Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001 <sup>(1)</sup>              | ±2000 |
|                    |                         | Charged-device model (CDM), per JEDEC specification JESD22-C101 <sup>(2)</sup> | ±500  |

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.

- (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

### 7.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

|                |                         | MIN | MAX | UNIT |
|----------------|-------------------------|-----|-----|------|
| VIN            | Input operating voltage | 4.5 | 18  | V    |
| T <sub>J</sub> | Junction temperature    | -40 | 125 | °C   |

### 7.4 Thermal Information

| THERMAL METRIC <sup>(1)</sup> | TPS65251                                     |      | UNIT |
|-------------------------------|----------------------------------------------|------|------|
|                               | RHA (VQFN)                                   |      |      |
|                               | 40 PINS                                      |      |      |
| R <sub>θJA</sub>              | Junction-to-ambient thermal resistance       | 30   | °C/W |
| R <sub>θJC(top)</sub>         | Junction-to-case (top) thermal resistance    | 25.3 | °C/W |
| R <sub>θJB</sub>              | Junction-to-board thermal resistance         | 73   | °C/W |
| ψ <sub>JT</sub>               | Junction-to-top characterization parameter   | 0.2  | °C/W |
| ψ <sub>JB</sub>               | Junction-to-board characterization parameter | 7.6  | °C/W |
| R <sub>θJC(bot)</sub>         | Junction-to-case (bottom) thermal resistance | 1.9  | °C/W |

- (1) For more information about traditional and new thermal metrics, see the *Semiconductor and IC Package Thermal Metrics* application report, [SPRA953](#).

## 7.5 Electrical Characteristics

 $T_J = -40^{\circ}\text{C}$  to  $125^{\circ}\text{C}$ ,  $V_{IN} = 12\text{ V}$ ,  $f_{SW} = 1\text{ MHz}$  (unless otherwise noted)

| PARAMETER                                                                                                                |                                                         | TEST CONDITIONS                                                                                                                         | MIN                  | TYP  | MAX                  | UNIT          |
|--------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|----------------------|------|----------------------|---------------|
| <b>INPUT SUPPLY UVLO AND INTERNAL SUPPLY VOLTAGE</b>                                                                     |                                                         |                                                                                                                                         |                      |      |                      |               |
| $V_{IN}$                                                                                                                 | Input Voltage range                                     |                                                                                                                                         | 4.5                  |      | 18                   | V             |
| $IDD_{SDN}$                                                                                                              | Shutdown                                                | EN pin = low for all converters                                                                                                         |                      | 1.3  |                      | mA            |
| $IDD_Q$                                                                                                                  | Quiescent, low-power disabled (Lo)                      | Converters enabled, no load<br>Buck 1 = 3.3 V, Buck 2 = 2.5 V,<br>Buck 3 = 7.5 V,<br>$L = 4.7\ \mu\text{H}$ , $f_{SW} = 800\text{ kHz}$ |                      | 20   |                      | mA            |
| $IDD_{Q\_LOW\_P}$                                                                                                        | Quiescent, low-power enabled (Hi)                       | Converters enabled, no load<br>Buck 1 = 3.3 V, Buck 2 = 2.5 V,<br>Buck 3 = 7.5 V,<br>$L = 4.7\ \mu\text{H}$ , $f_{SW} = 800\text{ kHz}$ |                      | 1.5  |                      | mA            |
| $UVLO_{VIN}$                                                                                                             | $V_{IN}$ under voltage lockout                          | Rising $V_{IN}$                                                                                                                         |                      | 4.22 |                      | V             |
|                                                                                                                          |                                                         | Falling $V_{IN}$                                                                                                                        |                      | 4.1  |                      |               |
| $UVLO_{DEGLITCH}$                                                                                                        |                                                         | Both edges                                                                                                                              |                      | 110  |                      | $\mu\text{s}$ |
| $V_{3V}$                                                                                                                 | Internal biasing supply                                 | $I_{LOAD} = 0\text{ mA}$                                                                                                                | 3.2                  | 3.3  | 3.4                  | V             |
| $I_{3V}$                                                                                                                 | Biasing supply output current                           | $V_{IN} = 12\text{ V}$                                                                                                                  |                      |      | 10                   | mA            |
| $V_{7V}$                                                                                                                 | Internal biasing supply                                 | $I_{LOAD} = 0\text{ mA}$                                                                                                                | 5.63                 | 6.25 | 6.88                 | V             |
| $I_{7V}$                                                                                                                 | Biasing supply output current                           | $V_{IN} = 12\text{ V}$                                                                                                                  |                      |      | 10                   | mA            |
| $V7V_{UVLO}$                                                                                                             | UVLO for internal V7V rail                              | Rising V7V                                                                                                                              |                      | 3.8  |                      | V             |
|                                                                                                                          |                                                         | Falling V7V                                                                                                                             |                      | 3.6  |                      |               |
| $V7V_{UVLO\_DEGLITCH}$                                                                                                   |                                                         | Falling edge                                                                                                                            |                      | 110  |                      | $\mu\text{s}$ |
| <b>BUCK CONVERTERS (ENABLE CIRCUIT, CURRENT LIMIT, SOFT-START, SWITCHING FREQUENCY AND SYNC CIRCUIT, LOW-POWER MODE)</b> |                                                         |                                                                                                                                         |                      |      |                      |               |
| $V_{IH}$                                                                                                                 | Enable threshold high                                   | $V3p3 = 3.2\text{ V} - 3.4\text{ V}$ , $V_{ENX}$ rising                                                                                 | 1.55                 |      | 1.82                 | V             |
|                                                                                                                          | Enable high level                                       | External GPIO, $V_{ENX}$ rising                                                                                                         | $0.66 \times V_{3V}$ |      |                      |               |
| $V_{IL}$                                                                                                                 | Enable threshold low                                    | $V3p3 = 3.2\text{ V} - 3.4\text{ V}$ , $V_{ENX}$ falling                                                                                | 0.98                 |      | 1.24                 | V             |
|                                                                                                                          | Enable low level                                        | External GPIO, $V_{ENX}$ falling                                                                                                        |                      |      | $0.33 \times V_{3V}$ |               |
| $R_{EN\_DIS}$                                                                                                            | Enable discharge resistor                               |                                                                                                                                         | -10%                 | 2.1  | 10%                  | k $\Omega$    |
| $ICH_{EN}$                                                                                                               | Pullup current enable pin                               |                                                                                                                                         |                      | 1.1  |                      | $\mu\text{A}$ |
| $t_D$                                                                                                                    | Discharge time enable pins                              | Power-up                                                                                                                                |                      | 10   |                      | ms            |
| $I_{SS}$                                                                                                                 | Soft-start pin current source                           |                                                                                                                                         |                      | 5    |                      | $\mu\text{A}$ |
| $F_{SW\_BK}$                                                                                                             | Converter switching frequency range                     | Set externally with resistor                                                                                                            | 0.3                  |      | 2.2                  | MHz           |
| $R_{FSW}$                                                                                                                | Frequency setting resistor                              | Depending on set frequency                                                                                                              | 50                   |      | 600                  | k $\Omega$    |
| $f_{SW\_TOL}$                                                                                                            | Internal oscillator accuracy                            | $f_{SW} = 800\text{ kHz}$                                                                                                               | -10%                 |      | 10%                  |               |
| $V_{SYNCH}$                                                                                                              | External clock threshold high                           | $V3p3 = 3.3\text{ V}$                                                                                                                   | 1.55                 |      |                      | V             |
| $V_{SYNCL}$                                                                                                              | External clock threshold Low                            | $V3p3 = 3.3\text{ V}$                                                                                                                   |                      |      | 1.24                 | V             |
| $SYNC_{RANGE}$                                                                                                           | Synchronization range                                   |                                                                                                                                         | 0.2                  |      | 2.2                  | MHz           |
| $SYNC_{CLK\_MIN}$                                                                                                        | Sync signal minimum duty cycle                          |                                                                                                                                         | 40%                  |      |                      |               |
| $SYNC_{CLK\_MAX}$                                                                                                        | Sync signal maximum duty cycle                          |                                                                                                                                         |                      |      | 60%                  |               |
| $VIH_{LOW\_P}$                                                                                                           | Low-power mode threshold high                           | $V3p3 = 3.3\text{ V}$ , $V_{ENX}$ rising                                                                                                | 1.55                 |      |                      | V             |
| $VIL_{LOW\_P}$                                                                                                           | Low-power mode threshold Low                            | $V3p3 = 3.3\text{ V}$ , $V_{ENX}$ falling                                                                                               | 0.98                 |      | 1.24                 | V             |
| <b>FEEDBACK, REGULATION, OUTPUT STAGE</b>                                                                                |                                                         |                                                                                                                                         |                      |      |                      |               |
| $V_{FB}$                                                                                                                 | Feedback voltage                                        | $V_{IN} = 12\text{ V}$ , $T_J = 25^{\circ}\text{C}$                                                                                     | -1%                  | 0.8  | 1%                   | V             |
|                                                                                                                          |                                                         | $V_{IN} = 4.5\text{ to }18\text{ V}$                                                                                                    | -2%                  | 0.8  | 2%                   |               |
| $I_{FB}$                                                                                                                 | Feedback leakage current                                |                                                                                                                                         |                      |      | 50                   | nA            |
| $t_{ON\_MIN}$                                                                                                            | Minimum on-time (current sense blanking)                |                                                                                                                                         |                      | 80   | 120                  | ns            |
| $V_{LINEREG}$                                                                                                            | Line regulation - DC<br>$\Delta V_{OUT}/\Delta V_{INB}$ | $V_{INB} = 4.5\text{ to }18\text{ V}$ ,<br>$I_{OUT} = 1000\text{ mA}$                                                                   |                      | 0.5  |                      | % $V_{OUT}$   |
| $V_{LOADREG}$                                                                                                            | Load regulation - DC<br>$\Delta V_{OUT}/\Delta I_{OUT}$ | $I_{OUT} = 10\% - 90\%$<br>$I_{OUT,MAX}$                                                                                                |                      | 0.5  |                      | % $V_{OUT}/A$ |
| <b>MOSFET (BUCK 1)</b>                                                                                                   |                                                         |                                                                                                                                         |                      |      |                      |               |
| H.S. Switch                                                                                                              | Turn-On resistance high-side FET on CH1                 | $V_{IN} = 12\text{ V}$ , $T_J = 25^{\circ}\text{C}$                                                                                     |                      | 95   |                      | m $\Omega$    |
| L.S. Switch                                                                                                              | Turn-On resistance low-side FET on CH1                  | $V_{IN} = 12\text{ V}$ , $T_J = 25^{\circ}\text{C}$                                                                                     |                      | 50   |                      | m $\Omega$    |







## Electrical Characteristics (continued)

 $T_J = -40^{\circ}\text{C}$  to  $125^{\circ}\text{C}$ ,  $V_{IN} = 12\text{ V}$ ,  $f_{SW} = 1\text{ MHz}$  (unless otherwise noted)

| PARAMETER                        |                                                  | TEST CONDITIONS                                                                                           | MIN | TYP  | MAX | UNIT               |
|----------------------------------|--------------------------------------------------|-----------------------------------------------------------------------------------------------------------|-----|------|-----|--------------------|
| <b>MOSFET (BUCK 2)</b>           |                                                  |                                                                                                           |     |      |     |                    |
| H.S. Switch                      | Turn-On resistance high-side FET on CH2          | $V_{IN} = 12\text{ V}$ , $T_J = 25^{\circ}\text{C}$                                                       |     | 120  |     | $\text{m}\Omega$   |
| L.S. Switch                      | Turn-On resistance low-side FET on CH2           | $V_{IN} = 12\text{ V}$ , $T_J = 25^{\circ}\text{C}$                                                       |     | 80   |     | $\text{m}\Omega$   |
| <b>MOSFET (BUCK 3)</b>           |                                                  |                                                                                                           |     |      |     |                    |
| H.S. Switch                      | Turn-On resistance high-side FET on CH3          | $V_{IN} = 12\text{ V}$ , $T_J = 25^{\circ}\text{C}$                                                       |     | 120  |     | $\text{m}\Omega$   |
| L.S. Switch                      | Turn-On resistance low-side FET on CH3           | $V_{IN} = 12\text{ V}$ , $T_J = 25^{\circ}\text{C}$                                                       |     | 80   |     | $\text{m}\Omega$   |
| <b>ERROR AMPLIFIER</b>           |                                                  |                                                                                                           |     |      |     |                    |
| $g_M$                            | Error amplifier transconductance                 | $-2\ \mu\text{A} < I_{COMP} < 2\ \mu\text{A}$                                                             |     | 130  |     | $\mu\text{S}$      |
| $g_{mPS}$                        | COMP to ILX $g_M$                                | ILX = 0.5 A                                                                                               |     | 10   |     | A/V                |
| <b>POWERGOOD RESET GENERATOR</b> |                                                  |                                                                                                           |     |      |     |                    |
| $V_{UV\_BUCKX}$                  | Threshold voltage for buck under voltage         | Output falling (device will be disabled after $t_{ON\_HICCUP}$ )                                          |     | 85%  |     |                    |
|                                  |                                                  | Output rising (PG will be asserted)                                                                       |     | 90%  |     |                    |
| $t_{UV\_deglitch}$               | Deglintch time (both edges)                      | Each buck                                                                                                 |     | 11   |     | ms                 |
| $t_{ON\_HICCUP}$                 | Hiccup mode ON time                              | $V_{UV\_BUCKX}$ asserted                                                                                  |     | 12   |     | ms                 |
| $t_{OFF\_HICCUP}$                | Hiccup mode OFF time before restart is attempted | All converters disabled. Once $t_{OFF\_HICCUP}$ elapses, all converters will go through sequencing again. |     | 15   |     | ms                 |
| $V_{OV\_BUCKX}$                  | Threshold voltage for buck overvoltage           | Output rising (high-side FET will be forced off)                                                          |     | 109% |     |                    |
|                                  |                                                  | Output falling (high-side FET will be allowed to switch)                                                  |     | 107% |     |                    |
| $t_{RP}$                         | Minimum reset period                             | Measured after minimum reset period of all bucks power-up successfully                                    |     | 1    |     | s                  |
| <b>THERMAL SHUTDOWN</b>          |                                                  |                                                                                                           |     |      |     |                    |
| $T_{TRIP}$                       | Thermal shutdown trip point                      | Rising temperature                                                                                        |     | 160  |     | $^{\circ}\text{C}$ |
| $T_{HYST}$                       | Thermal shutdown hysteresis                      | Device restarts                                                                                           |     | 20   |     | $^{\circ}\text{C}$ |
| $T_{TRIP\_DEGLITCH}$             | Thermal shutdown deglitch                        |                                                                                                           |     | 110  |     | $\mu\text{s}$      |
| <b>CURRENT LIMIT PROTECTION</b>  |                                                  |                                                                                                           |     |      |     |                    |
| $RLIM_1$                         | Limit resistance range Buck 1                    |                                                                                                           | 75  |      | 300 | $\text{k}\Omega$   |
| $RLIM_{2\&3}$                    | Limit resistance range Bucks 2 and 3             |                                                                                                           | 100 |      | 300 | $\text{k}\Omega$   |
| $ILIM_1$                         | Buck 1 adjustable current limit range            | $V_{IN} = 12\text{ V}$ , $f_{SW} = 500\text{ kHz}$ , see <a href="#">Figure 17</a>                        | 1.2 |      | 5.5 | A                  |
| $ILIM_2$                         | Buck 2 adjustable current limit range            | $V_{IN} = 12\text{ V}$ , $f_{SW} = 500\text{ kHz}$ , see <a href="#">Figure 18</a>                        | 1   |      | 4.1 | A                  |
| $ILIM_3$                         | Buck 3 adjustable current limit range            | $V_{IN} = 12\text{ V}$ , $f_{SW} = 500\text{ kHz}$ , see <a href="#">Figure 19</a>                        | 1.3 |      | 4.4 | A                  |

## 7.6 Typical Characteristics







$T_A = 25^\circ\text{C}$ ,  $V_{IN} = 12\text{ V}$ ,  $f_{SW} = 500\text{ kHz}$  (unless otherwise noted)

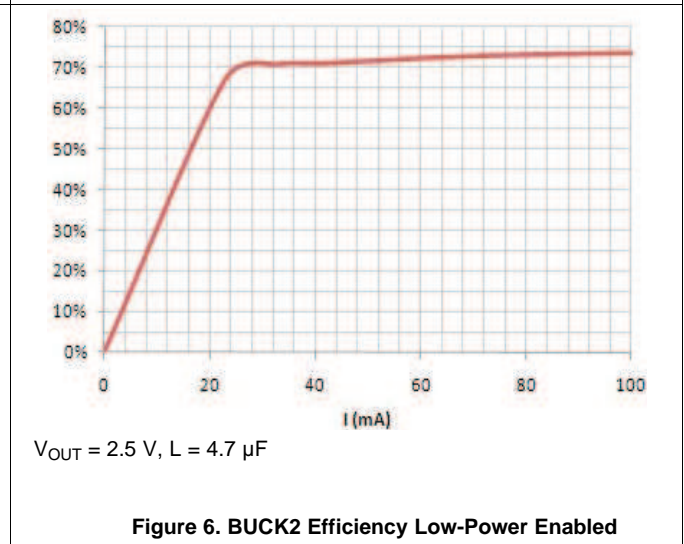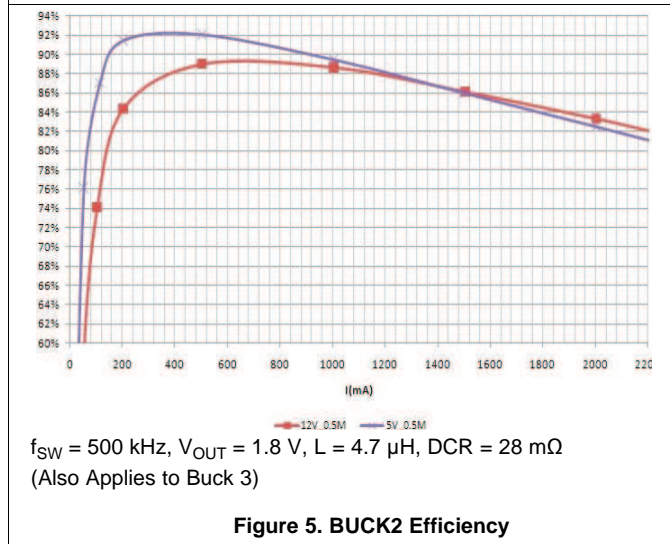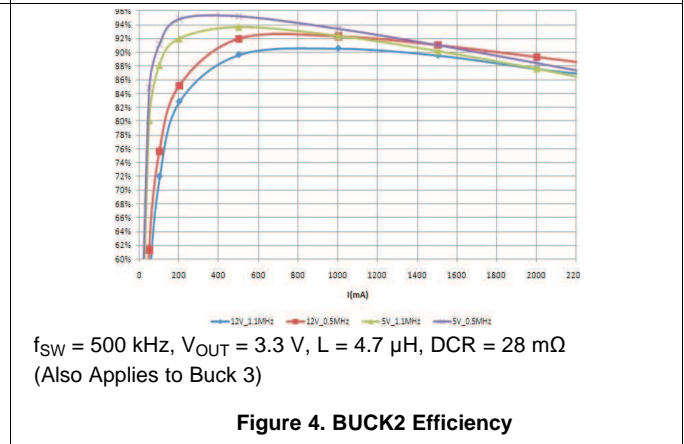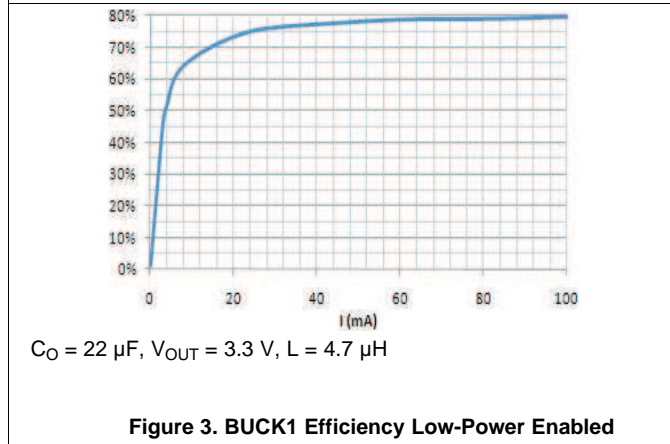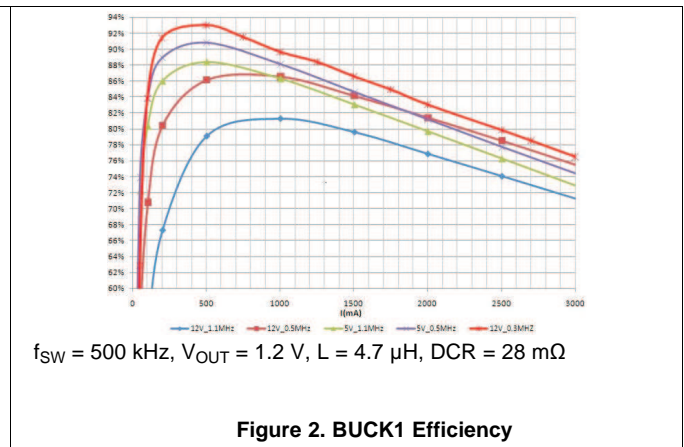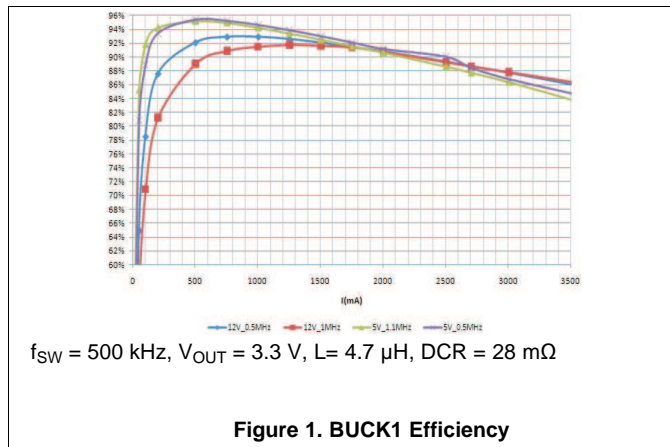





Typical Characteristics (continued)

$T_A = 25^\circ\text{C}$ ,  $V_{IN} = 12\text{ V}$ ,  $f_{SW} = 500\text{ kHz}$  (unless otherwise noted)

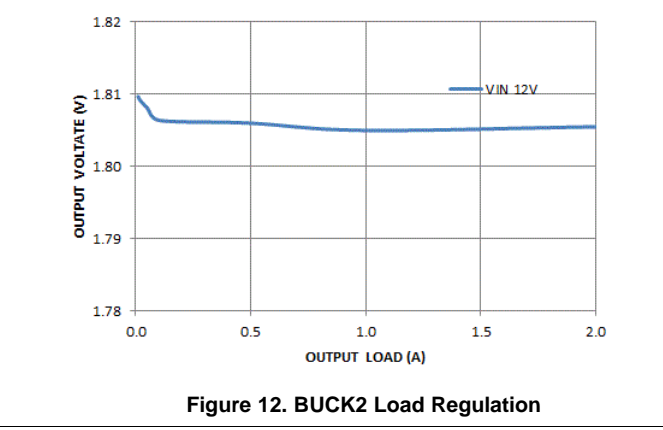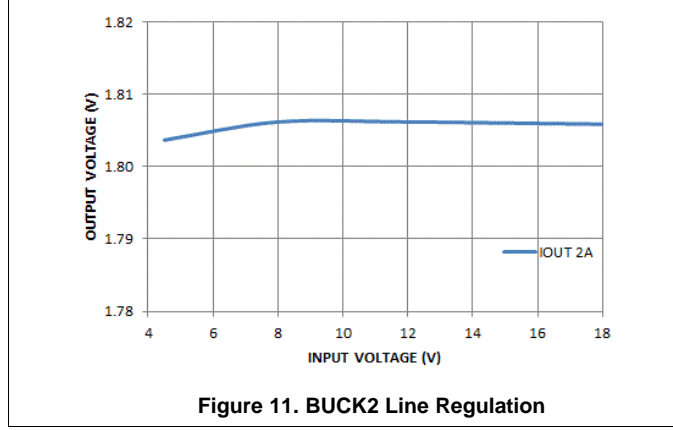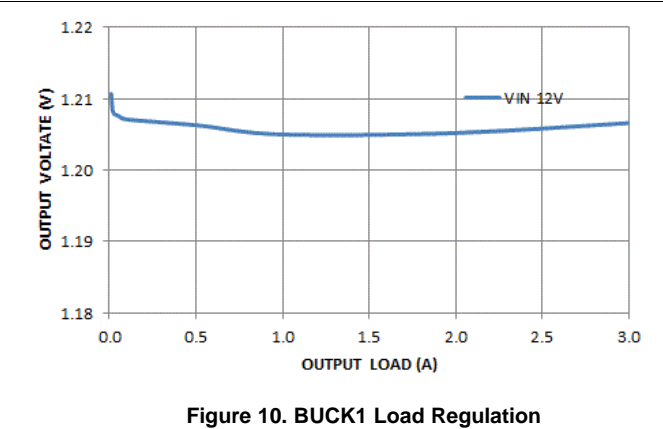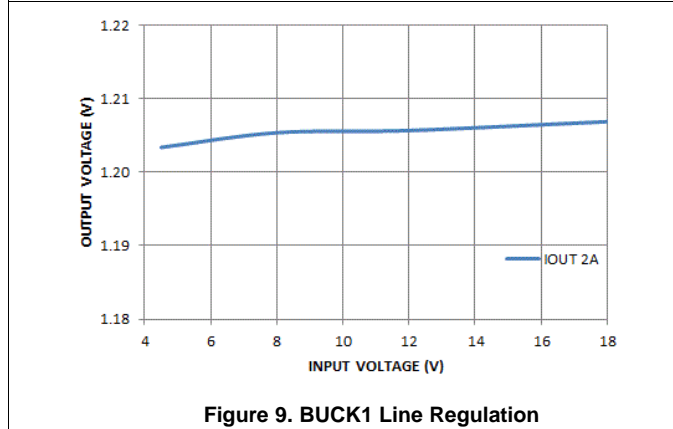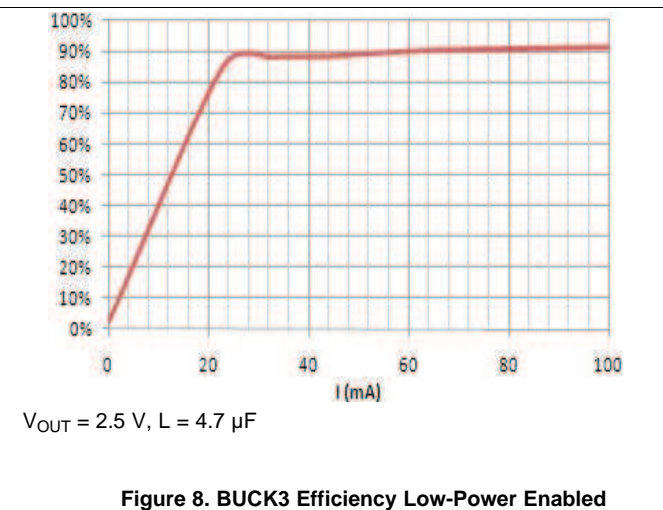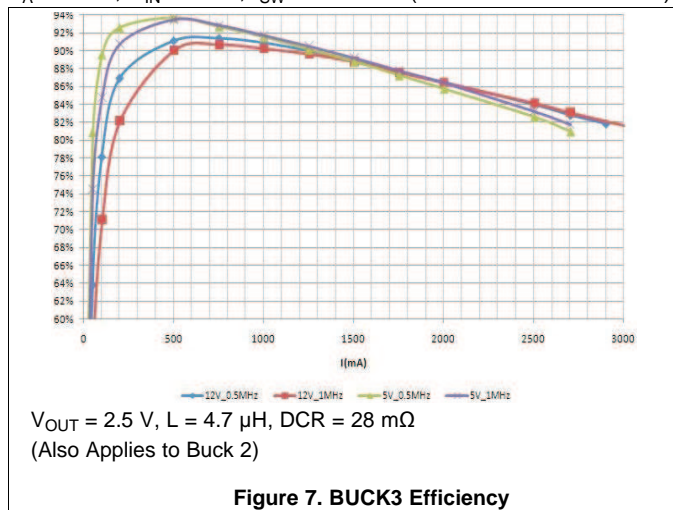

**Typical Characteristics (continued)**

$T_A = 25^\circ\text{C}$ ,  $V_{IN} = 12\text{ V}$ ,  $f_{SW} = 500\text{ kHz}$  (unless otherwise noted)

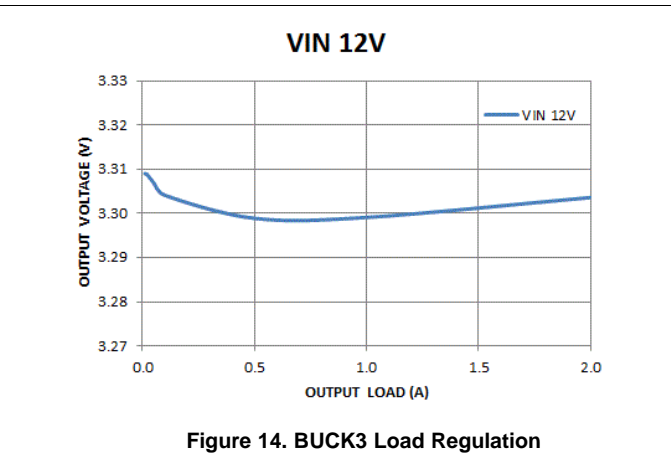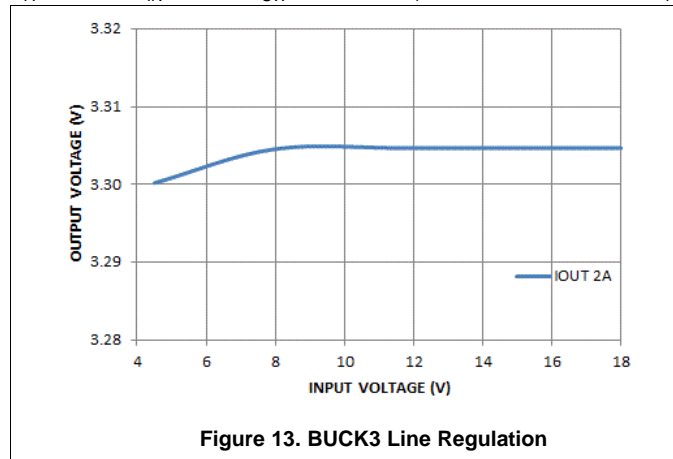

## 8 Detailed Description

### 8.1 Overview

TPS65251 is a power management IC with three step-down buck converters. Both high-side and low-side MOSFETs are integrated to provide fully synchronous conversion with higher efficiency. TPS65251 can support 4.5-V to 18-V input supply, high load current, 300-kHz to 2.2-MHz clocking. The buck converters have an optional PSM mode, which can improve power dissipation during light loads. Alternatively, the device implements a constant frequency mode by connecting the LOW\_P pin to ground. The wide switching frequency of 300 kHz to 2.2 MHz allows for efficiency and size optimization. The switching frequency is adjustable by selecting a resistor to ground on the ROSC pin. The SYNC pin also provides a means to synchronize the power converter to an external signal. Input ripple is reduced by 180 degree out-of-phase operation between Buck 1 and Buck 2. Buck 3 operates in phase with Buck 2.


All three buck converters have peak current mode control which simplifies external frequency compensation. A traditional type II compensation network can stabilize the system and achieve fast transient response. Moreover, an optional capacitor in parallel with the upper resistor of the feedback divider provides one more zero and makes the crossover frequency over 100 kHz.

Each buck converter has an individual current limit, which can be set up by a resistor to ground from the RLIM pin. The adjustable current limiting enables high efficiency design with smaller and less expensive inductors.

The device has two built-in LDO regulators. During a standby mode, the 3.3-V LDO and the 6.5-V LDO can be used to drive MCU and other active loads. By this, the system is able to turn off the three buck converters and improve the standby efficiency.

The device has a powergood comparator monitoring the output voltage. Each converter has its own soft-start and enable pins, which provide independent control and programmable soft-start.

### 8.2 Functional Block Diagram

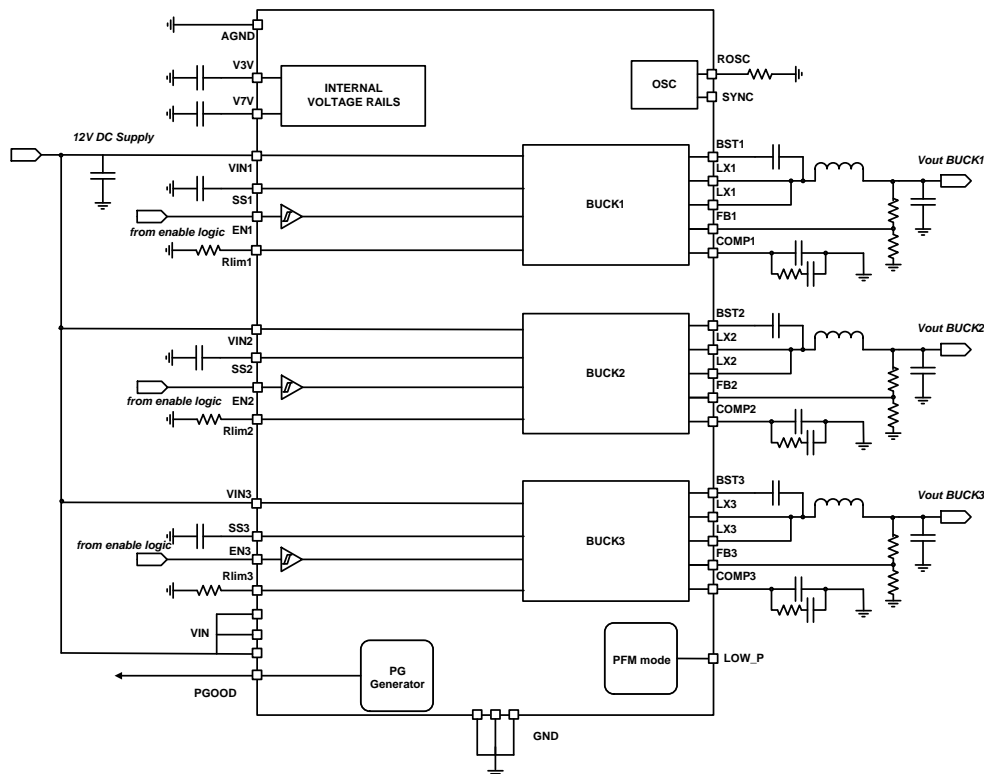


Copyright © 2018, Texas Instruments Incorporated

## 8.3 Feature Description

### 8.3.1 Adjustable Switching Frequency

To select the internal switching frequency connect a resistor from ROSC to ground. [Figure 15](#) shows the required resistance for a given switching frequency.

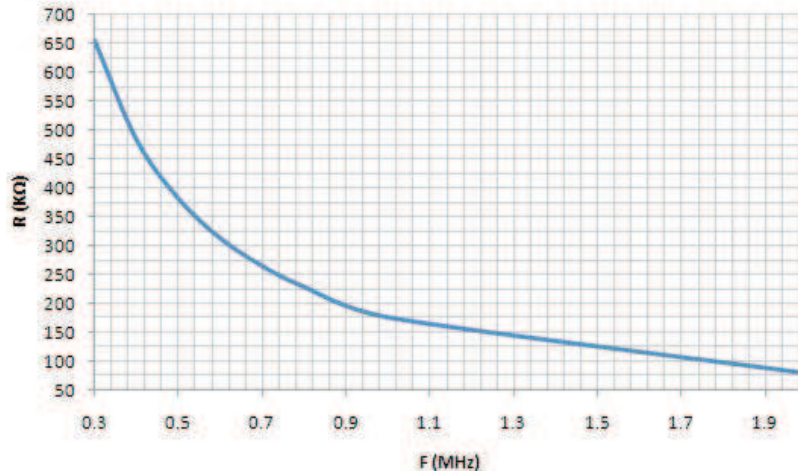

**Figure 15. ROSC vs Switching Frequency**

$$R_{\text{OSC}} (\text{k}\Omega) = 174 \times f (\text{MHz})^{-1.122} \quad (1)$$

For operation at 800 kHz a 230-kΩ resistor is required.

### 8.3.2 Synchronization

The status of the SYNC pin will be ignored during start-up and the TPS65251's control will only synchronize to an external signal after the PGOOD signal is asserted. The status of the SYNC pin will be ignored during start-up and the TPS65251 will only synchronize to an external clock if the PGOOD signal is asserted. When synchronization is applied, the PWM oscillator frequency must be lower than the sync pulse frequency to allow the external signal trumping the oscillator pulse reliably. When synchronization is not applied, the SYNC pin should be connected to ground.

### 8.3.3 Out-of-Phase Operation

Buck 1 has a low conduction resistance compared to Buck 2 and 3. Normally Buck 1 is used to drive higher system loads. Buck 2 and 3 are used to drive some peripheral loads like I/O and line drivers. The combination of loads from Buck 2 and 3 may be on par with the load of Buck 1. To reduce input ripple current, Buck 2 operates in phase with Buck 3; Buck 1 and Buck 2 operate 180° out-of-phase. This enables the system, having less input ripple, to lower component cost, save board space and reduce EMI.

### 8.3.4 Delayed Start-Up

If a delayed start-up is required on any of the buck converters fit a ceramic capacitor to the ENx pins. The delay added is about 1.67 ms per nF connected to the pin. Note that the EN pins have a weak 1-μA pullup to the 3V3 rail.

### 8.3.5 Soft-Start Time

The device has an internal pullup current source of 5 μA that charges an external slow start capacitor to implement a slow start time. [Equation 2](#) shows how to select a slow start capacitor based on an expected slow start time. The voltage reference ( $V_{\text{REF}}$ ) is 0.8 V and the slow start charge current ( $I_{\text{SS}}$ ) is 5 μA. The soft-start circuit requires 1 nF per 200 μs to be connected at the SS pin. A 1-ms soft-start time is implemented for all converters fitting 4.7 nF to the relevant pins.

## Feature Description (continued)

$$t_{SS} \text{ (ms)} = V_{REF} \text{ (V)} \times \left( \frac{C_{SS} \text{ (nF)}}{I_{SS} \text{ (}\mu\text{A)}} \right) \quad (2)$$

### 8.3.6 Adjusting the Output Voltage

The output voltage is set with a resistor divider from the output node to the FB pin. TI recommends to use 1% tolerance or better divider resistors. In order to improve efficiency at light load, start with 40.2 kΩ for the R1 resistor and use the Equation 3 to calculate R2.

$$R2 = R1 \times \left( \frac{0.8 \text{ V}}{V_O - 0.8 \text{ V}} \right) \quad (3)$$

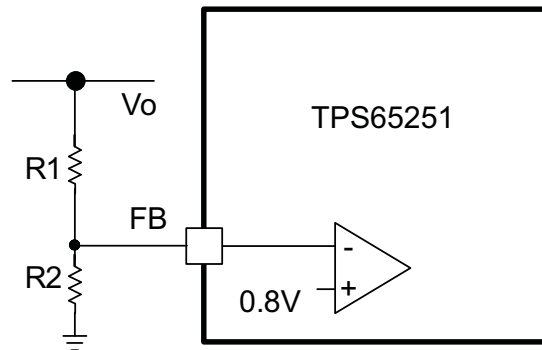


Figure 16. Voltage Divider Circuit

### 8.3.7 Input Capacitor

Use 10-μF X7R/X5R ceramic capacitors at the input of the converter inputs. These capacitors should be connected as close as physically possible to the input pins of the converters.

### 8.3.8 Bootstrap Capacitor

The device has three integrated boot regulators and requires a small ceramic capacitor between the BST and LX pin to provide the gate drive voltage for the high-side MOSFET. The value of the ceramic capacitor should be 0.047 μF. A ceramic capacitor with an X7R or X5R grade dielectric is recommended because of the stable characteristics over temperature and voltage.

### 8.3.9 Error Amplifier

The device has a transconductance error amplifier. The frequency compensation network is connected between the COMP pin and ground.

### 8.3.10 Loop Compensation

TPS65251 is a current mode control DC - DC converter. The error amplifier is a transconductance amplifier with a of 130 μA/V.

### 8.3.11 Slope Compensation

The device has a built-in slope compensation ramp. The slope compensation can prevent subharmonic oscillations in peak current mode control.


### 8.3.12 Powergood

The PGOOD pin is an open-drain output. The PGOOD pin is pulled low when any buck converter is pulled below 85% of the nominal output voltage. The PGOOD is pulled up when all three buck converters' outputs are more than 90% of its nominal output voltage and reset time of 1 second elapses. The polarity of the PGOOD is active high.

## Feature Description (continued)


### 8.3.13 Current Limit Protection

Figure 17 shows the (peak) inductor current limit for Buck 1. The typical limit can be approximated with the following graph.

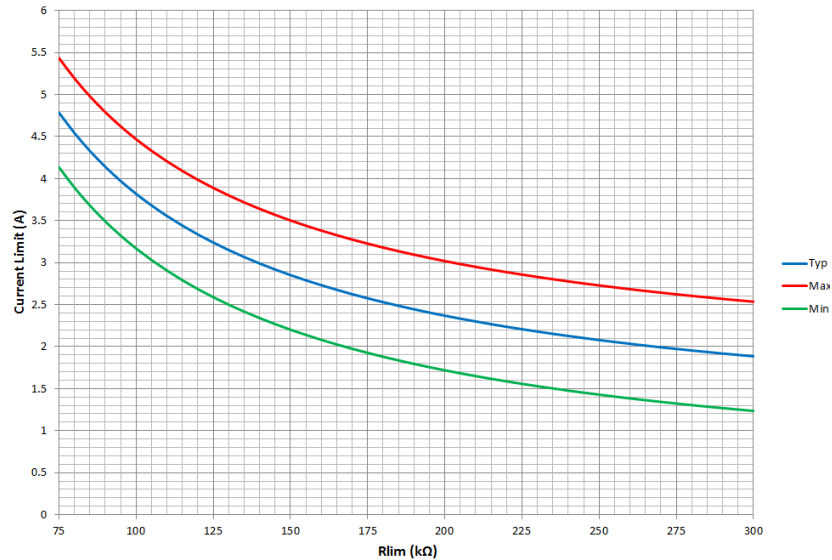

**Figure 17. Buck 1**

Figure 18 shows the (peak) inductor current limit for Buck 2. The typical limit can be approximated with the following graph.

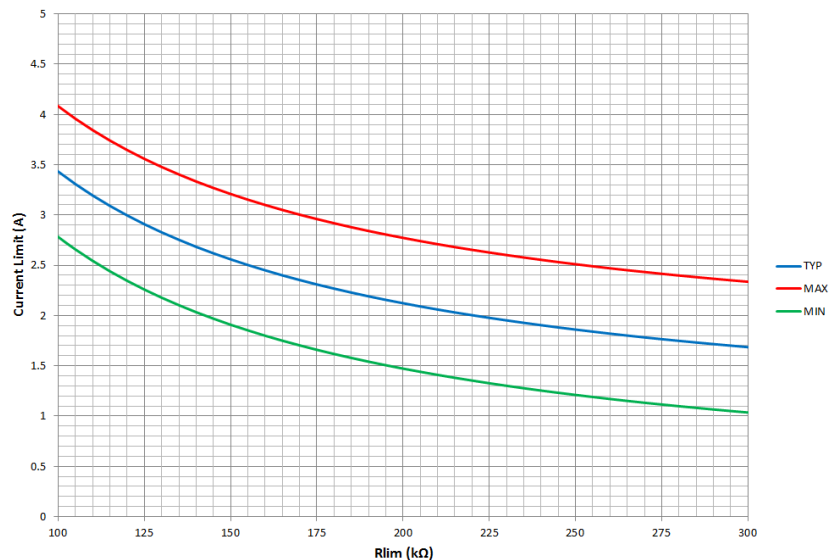

**Figure 18. Buck 2**

Figure 19 shows the (peak) inductor current limit for Buck 3. The typical limit can be approximated with the following graph.

## Feature Description (continued)

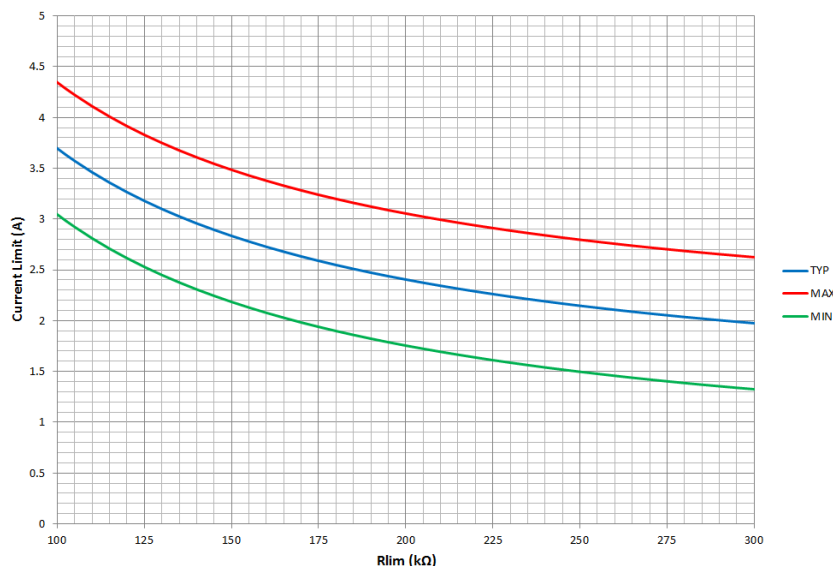


Figure 19. Buck 3

All converters operate in hiccup mode: Once an over-current lasting more than 10 ms is sensed in any of the converters, all the converters will shut down for 10 ms and then the start-up sequencing will be tried again. If the overload has been removed, the converter will ramp up and operate normally. If this is not the case the converter will see another over-current event and shuts-down again repeating the cycle (hiccup) until the failure is cleared.

If an overload condition lasts for less than 10 ms, only the relevant converter affected will go into and out of under-voltage and no global hiccup mode will occur. The converter will be protected by the cycle-by-cycle current limit during that time.

### 8.3.14 Overvoltage Transient Protection

The device incorporates an overvoltage transient protection (OVP) circuit to minimize voltage overshoot. The OVP feature minimizes the output overshoot by implementing a circuit to compare the FB pin voltage to OVP threshold which is 109% of the internal voltage reference. If the FB pin voltage is greater than the OVP threshold, the high-side MOSFET is disabled preventing current from flowing to the output and minimizing output overshoot. When the FB voltage drops below the lower OVP threshold which is 107%, the high-side MOSFET is allowed to turn on the next clock cycle.

### 8.3.15 Thermal Shutdown

The device implements an internal thermal shutdown to protect itself if the junction temperature exceeds 160°C. The thermal shutdown forces the device to stop switching when the junction temperature exceeds thermal trip threshold. Once the die temperature decreases below 140°C, the device reinitiates the power-up sequence. The thermal shutdown hysteresis is 20°C.

## 8.4 Device Functional Modes

### 8.4.1 Low-Power Mode Operation

By pulling the LOW\_P pin high all converters will operate in pulse-skipping mode, greatly reducing the overall power consumption at light and no load conditions. Although each buck converter has a skip comparator that makes sure regulation is not lost when a heavy load is applied and low-power mode is enabled, system design needs to make sure that the LP pin is pulled low for continuous loading in excess of 100 mA.

When low-power is implemented, the peak inductor current used to charge the output capacitor is:

**Device Functional Modes (continued)**

$$I_{LIMIT} = 0.25 \cdot T_{SLEEP\_CLK} \cdot \frac{V_{IN} - V_{OUT}}{L} \quad (4)$$


Where  $T_{SLEEP\_CLK}$  is half of the converter switching period,  $2/f_{SW}$ .

The size of the additional ripple added to the output is:

$$\Delta V_{OUT} = \frac{1}{C} \cdot \left( \frac{L \cdot I_{LIMIT}^2}{2} \cdot \frac{V_{IN}}{V_{OUT} \cdot (V_{IN} - V_{OUT})} - \frac{I_{LOAD}}{f_{SLEEP\_CLK}} \right) \quad (5)$$

And the peak output voltage during low-power operation is:

$$V_{OUT\_PK} = V_{OUT} + \frac{\Delta V_{OUT}}{2} \quad (6)$$



**Figure 20. Peak Output Voltage During Low-Power Operation**



## 9 Application and Implementation

### NOTE


Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

### 9.1 Application Information

The device is triple synchronous step down dc/dc converter. It is typically used to convert a higher dc voltage to lower dc voltages with continuous available output current of 3A/2A/2A.

### 9.2 Typical Application

The following design procedure can be used to select component values for the TPS65251.

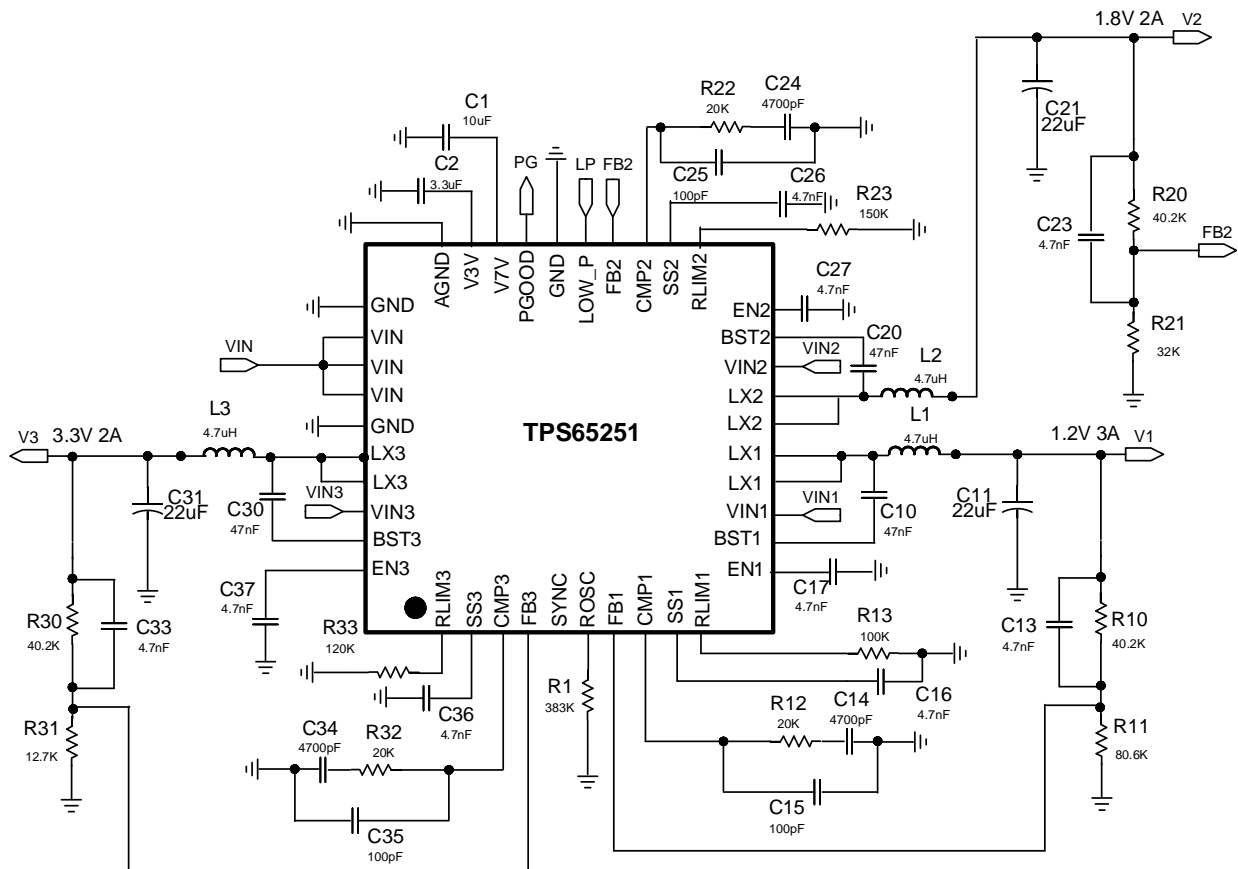

Copyright © 2018, Texas Instruments Incorporated

A. VIN pins require local decoupling capacitors.

Figure 21. Typical Application Circuit

#### 9.2.1 Design Requirements

| DESIGN PARAMETERS                         | VALUE  |
|-------------------------------------------|--------|
| Output voltage                            | 1.2 V  |
| Transient response 0.5-A to 2-A load step | 120 mV |
| Maximum output current                    | 3 A    |

| DESIGN PARAMETERS     | VALUE                     |
|-----------------------|---------------------------|
| Input voltage         | 12 V nom, 9.6 V to 14.4 V |
| Output voltage ripple | < 30 mV p-p               |
| Switching frequency   | 500 kHz                   |

## 9.2.2 Detailed Design Procedure

### 9.2.2.1 Loop Compensation Circuit

A typical compensation circuit could be type II ( $R_c$  and  $C_c$ ) to have a phase margin between 60 and 90 degrees, or type III ( $R_c$ ,  $C_c$  and  $C_{roll}$ ) to improve the converter transient response.  $C_{Roll}$  adds a high frequency pole to attenuate high-frequency noise when needed. It may also prevent noise coupling from other rails if there is possibility of cross coupling in between rails when layout is very compact.

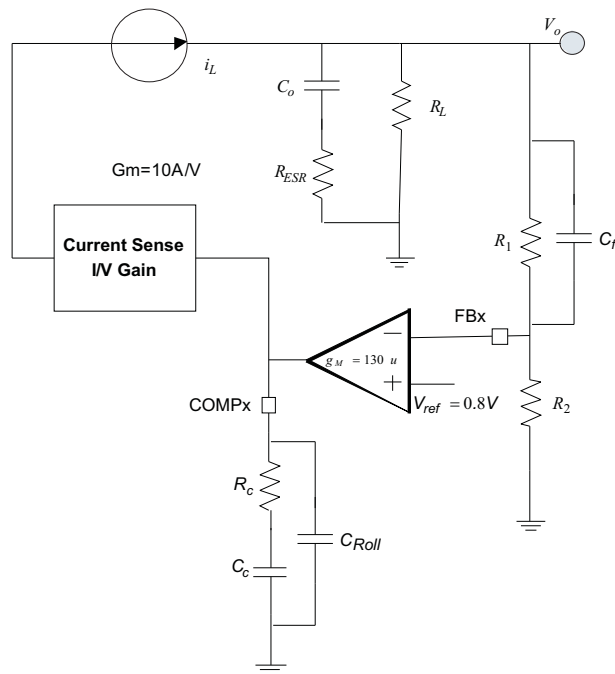


Figure 22. Loop Compensation

To calculate the external compensation components use [Table 1](#):

Table 1. Design Guideline for the Loop Compensation

|                                                                                                                                                                                                                                                                                                                                                               | TYPE II CIRCUIT                                                                                      | TYPE III CIRCUIT                                                            |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|
| Select switching frequency that is appropriate for application depending on L, C sizes, output ripple, EMI concerns and etc. Switching frequencies between 500 kHz and 1 MHz give best trade off between performance and cost. When using smaller L and Cs, switching frequency can be increased. To optimize efficiency, switching frequency can be lowered. |                                                                                                      | Type III circuit recommended for switching frequencies higher than 500 kHz. |
| Select cross over frequency ( $f_c$ ) to be less than 1/5 to 1/10 of switching frequency.                                                                                                                                                                                                                                                                     | Suggested $f_c = f_s/10$                                                                             | Suggested $f_c = f_s/10$                                                    |
| Set and calculate $R_c$ .                                                                                                                                                                                                                                                                                                                                     | $R_c = \frac{2\pi \times f_c \times V_o \times C_o}{g_M \times V_{ref} \times g_{m_{ps}}} \quad (7)$ | $R_c = \frac{2\pi \times f_c \times C_o}{g_M \times g_{m_{ps}}} \quad (8)$  |

**Table 1. Design Guideline for the Loop Compensation (continued)**

|                                                                                                                                                                                                                                   | TYPE II CIRCUIT                                           | TYPE III CIRCUIT                                                       |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------|------------------------------------------------------------------------|
| Calculate $C_c$ by placing a compensation zero at or before the converter dominant pole<br>$f_p = \frac{1}{C_o \times R_L \times 2\pi} \quad (9)$                                                                                 | $C_c = \frac{R_L \times C_o}{R_c} \quad (10)$             | $C_c = \frac{R_L \times C_o}{R_c} \quad (11)$                          |
| Add $C_{Roll}$ if needed to remove large signal coupling to high impedance COMP node. Make sure that<br>$f_{pRoll} = \frac{1}{2 \times \pi \times R_c \times C_{Roll}} \quad (12)$<br>is at least twice the cross over frequency. | $C_{Roll} = \frac{R_{e_{sr}} \times C_o}{R_c} \quad (13)$ | $C_{Roll} = \frac{R_{e_{sr}} \times C_o}{R_c} \quad (14)$              |
| Calculate $C_{ff}$ compensation zero at low frequency to boost the phase margin at the crossover frequency. Make sure that the zero frequency ( $f_{zff}$ is smaller than soft-start equivalent frequency ( $1/T_{ss}$ ).         | NA                                                        | $C_{ff} = \frac{1}{2 \times \pi \times f_{zff} \times R_1} \quad (15)$ |

### 9.2.2.2 Selecting the Switching Frequency

The first step is to decide on a switching frequency for the regulator. Typically, you will want to choose the highest switching frequency possible since this will produce the smallest solution size. The high switching frequency allows for lower valued inductors and smaller output capacitors compared to a power supply that switches at a lower frequency. However, the highest switching frequency causes extra switching losses, which hurt the converter's performance. The converter is capable of running from 300 kHz to 2.2 MHz. Unless a small solution size is an ultimate goal, a moderate switching frequency of 500 kHz is selected to achieve both a small solution size and a high efficiency operation. Using [Figure 15](#),  $R_1$  is determined to be 383 k $\Omega$

### 9.2.2.3 Output Inductor Selection

To calculate the value of the output inductor, use [Equation 16](#).  $KIND$  is a coefficient that represents the amount of inductor ripple current relative to the maximum output current. In general,  $KIND$  is normally from 0.1 to 0.3 for the majority of applications.

For this design example, use  $KIND = 0.2$  and the inductor value is calculated to be 3.6  $\mu$ H. For this design, a nearest standard value was chosen: 4.7  $\mu$ H. For the output filter inductor, it is important that the RMS current and saturation current ratings not be exceeded. The RMS and peak inductor current can be found from [Equation 17](#) and [Equation 18](#).

$$L_o = \frac{V_{in} - V_{out}}{I_o \times K_{ind}} \times \frac{V_{out}}{V_{in} \times f_{sw}} \quad (16)$$

$$I_{ripple} = \frac{V_{in} - V_{out}}{L_o} \times \frac{V_{out}}{V_{in} \times f_{sw}} \quad (17)$$

$$I_{Lrms} = \sqrt{I_o^2 + \frac{1}{12} \times \left( \frac{V_o \times (V_{inmax} - V_o)}{V_{inmax} \times L_o \times f_{sw}} \right)^2} \quad (18)$$

$$I_{Lpeak} = I_{out} + \frac{I_{ripple}}{2} \quad (19)$$

### 9.2.2.4 Output Capacitor

There are two primary considerations for selecting the value of the output capacitor. The output capacitors are selected to meet load transient and output ripple's requirements.

[Equation 20](#) gives the minimum output capacitance to meet the transient specification. For this example,  $L_o = 4.7 \mu$ H,  $\Delta I_{OUT} = 1.5 \text{ A} - 0.75 \text{ A} = 0.75 \text{ A}$  and  $\Delta V_{OUT} = 120 \text{ mV}$ . Using these numbers gives a minimum capacitance of 18  $\mu$ F. A standard 22- $\mu$ F ceramic capacitor is chose in the design.

$$C_o > \frac{\Delta I_{OUT}^2 \times L_o}{V_{out} \times \Delta V_{out}} \quad (20)$$

**Equation 21** calculates the minimum output capacitance needed to meet the output voltage ripple specification. Where  $f_{sw}$  is the switching frequency,  $V_{RIPPLE}$  is the maximum allowable output voltage ripple, and  $I_{RIPPLE}$  is the inductor ripple current. In this case, the maximum output voltage ripple is 30 mV. From **Equation 17**, the output current ripple is 0.46 A. From **Equation 21**, the minimum output capacitance meeting the output voltage ripple requirement is 1.74  $\mu$ F.

$$C_o > \frac{1}{8 \times f_{sw}} \times \frac{1}{\frac{V_{ripple}}{I_{ripple}}} \quad (21)$$

Additional capacitance de-rating for aging, temperature and DC bias should influence this minimum value. For this example, one 22- $\mu$ F, 6.3-V X7R ceramic capacitor with 3 m $\Omega$  of ESR will be used.

### 9.2.2.5 Input Capacitor

A minimum 10- $\mu$ F X7R/X5R ceramic input capacitor is recommended to be added between VIN and GND. These capacitors should be connected as close as physically possible to the input pins of the converters as they handle the RMS ripple current shown in **Equation 22**. For this example,  $I_{OUT} = 3$  A,  $V_{OUT} = 1.2$  V,  $V_{INmin} = 9.6$  V, from **Equation 22**, the input capacitors must support a ripple current of 0.99 A RMS.

$$I_{cirms} = I_{out} \times \sqrt{\frac{V_{out}}{V_{inmin}} \times \frac{(V_{inmin} - V_{out})}{V_{inmin}}} \quad (22)$$

The input capacitance value determines the input ripple voltage of the regulator. The input voltage ripple can be calculated using **Equation 23**. Using the design example values,  $I_{OUTmax} = 3$  A,  $C_{IN} = 10$   $\mu$ F,  $f_{SW} = 500$  kHz, yields an input voltage ripple of 150 mV.

$$\Delta V_{in} = \frac{I_{outmax} \times 0.25}{C_{in} \times f_{sw}} \quad (23)$$

### 9.2.2.6 Soft-Start Capacitor

The soft-start capacitor determines the minimum amount of time it will take for the output voltage to reach its nominal programmed value during power-up. This is useful if the output capacitance is very large and would require large amounts of current to quickly charge the capacitor to the output voltage level.

The soft-start capacitor value can be calculated using **Equation 24**. In this example, the converter's soft-start time is 0.8 ms. In TPS65251,  $I_{ss}$  is 5  $\mu$ A and  $V_{ref}$  is 0.8 V. From **Equation 24**, the soft-start capacitance is 5 nF. A standard 4.7-nF ceramic capacitor is chosen in this design. In this example, C16 is 4.7nF

$$C_{ss}(nF) = \frac{T_{ss}(ms) \times I_{ss}(\mu A)}{V_{ref}(V)} \quad (24)$$

### 9.2.2.7 Bootstrap Capacitor Selection

A 0.047- $\mu$ F ceramic capacitor must be connected between the BST to LX pin for proper operation. It is recommended to use a ceramic capacitor with X5R or better grade dielectric. The capacitor should have 10-V or higher voltage rating.

### 9.2.2.8 Adjustable Current Limiting Resistor Selection

The converter uses the voltage drop on the high-side MOSFET to measure the inductor current. The over current protection threshold can be optimized by changing the trip resistor. **Figure 17** governs the threshold of over current protection for Buck 1. When selecting a resistor, do not exceed the graph limits. In this example, the over current threshold is 3.2 A. In order to prevent a premature limit trip, the minimum line is used and the resistor is 100 k $\Omega$ .

When setting high-side current limit to large current values, ensure that the additional load immediately prior to an overcurrent condition will not cause the switching node voltage to exceed 20 V. Additionally, ensure during worst case operation, with all bucks loaded immediately prior to current limit, the maximum virtual junction temperature of the device does not exceed 125°C.

### 9.2.2.9 Output Voltage and Feedback Resistors Selection

For the example design, 40.2 kΩ was selected for R10. Vout is 1.2 V, Vref = 0.8 V. Using Equation 25, R11 is calculated as 80.4 kΩ. A standard 80.6-kΩ resistor is chose in this design.

$$R11 = \frac{V_{out} - V_{ref}}{V_{ref}} \times R10 \tag{25}$$

### 9.2.2.10 Compensation

A type-II compensation circuit is adequate for the converter to have a phase margin between 60 and 90 degrees. The following equations show the procedure of designing a peak current mode control dc/dc converter.

The compensation design takes the following steps:

1. Set up the anticipated cross-over frequency. In this example, the anticipated cross-over frequency (fc) is 65 kHz. The power stage gain (gm<sub>PS</sub>) is 10 A/V and the GM amplifier gain (g<sub>M</sub>) is 130 μA/V.

$$R12 = \frac{2\pi \times f_c \times V_o \times C_o}{g_M \times V_{ref} \times g_{m_{ps}}} \tag{26}$$

2. Place compensation zero at low frequency to boost the phase margin at the crossover frequency. From the procedures above, the compensation network includes a 20-kΩ resistor (R12) and a 4700-pF capacitor (C1).
3. An additional pole can be added to attenuate high frequency noise.



From the procedures above, the compensation network includes a 20-kΩ resistor (R12) and a 4700-pF capacitor (C14).


### 9.2.2.11 3.3-V and 6.5-V LDO Regulators

The following ceramic capacitor (X7R/X5R) should be connected as close as possible to the described pins:


- 10 μF for V7V pin 28
- 3.3 μF to 10 μF for V3V pin 29

## 9.2.3 Application Curves

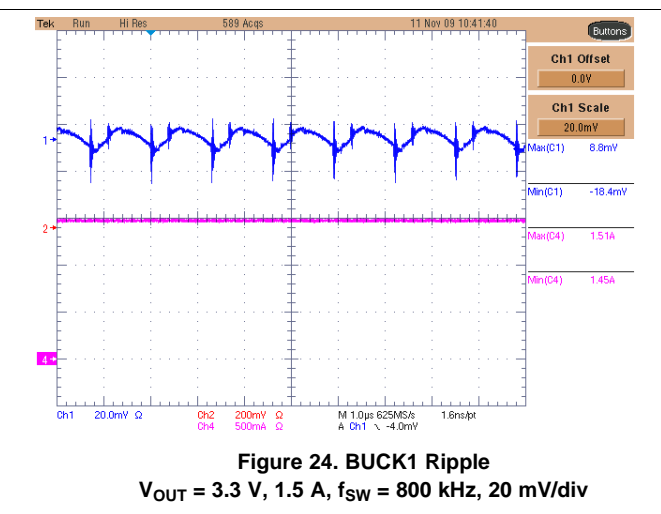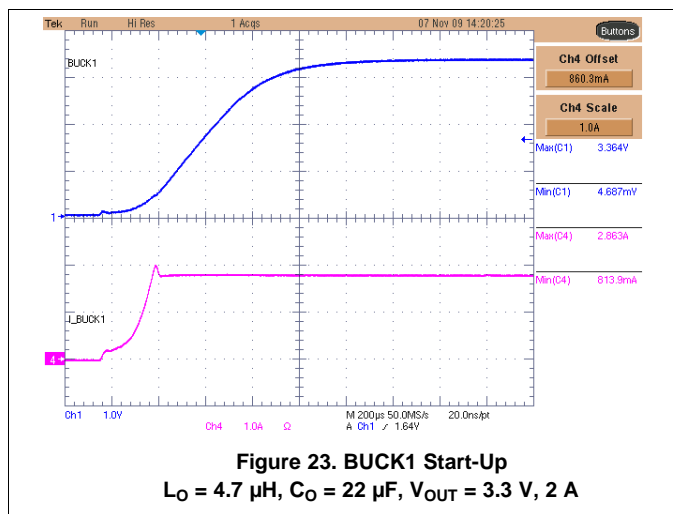


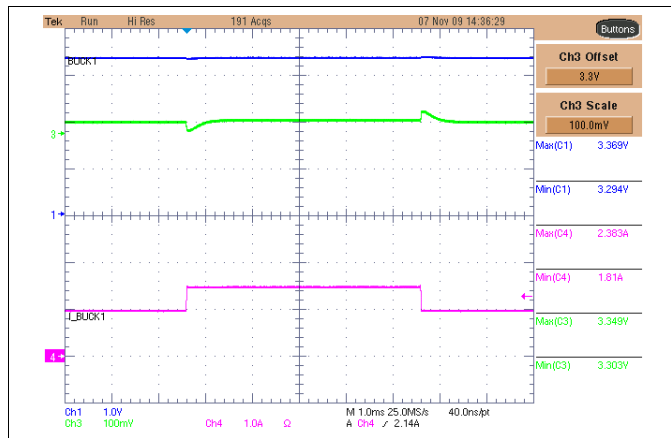


**Figure 25. BUCK1 Transient Load Response**  
 $L_O = 4.7 \mu\text{H}$ ,  $C_O = 22 \mu\text{F}$ ,  $V_{OUT} = 3.3 \text{ V}$ ,  $\Delta I = 1 \text{ A to } 1.5 \text{ A}$ , 100 mV/div

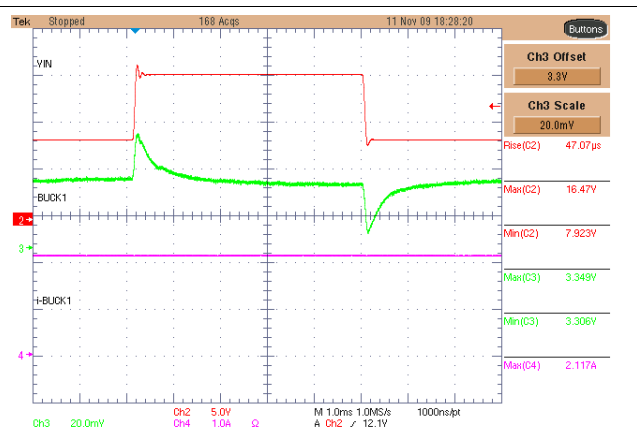


**Figure 26. BUCK1 Transient Supply Response**  
 $L_O = 4.7 \mu\text{H}$ ,  $C_O = 22 \mu\text{F}$ ,  $V_{OUT} = 3.3 \text{ V}$ ,  $\Delta V_{IN} = 8 \text{ V to } 16.5 \text{ V}$ , 20 mV/div

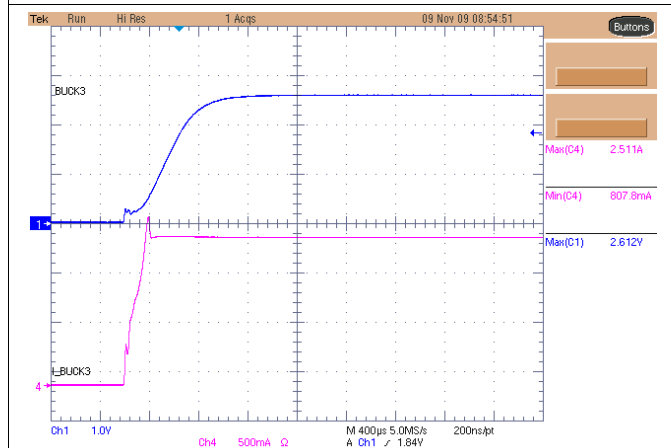


**Figure 27. BUCK2 Start-Up**  
 $L_O = 4.7 \mu\text{H}$ ,  $C_O = 22 \mu\text{F}$ ,  $V_{OUT} = 2.5 \text{ V}$ , 1.5 A

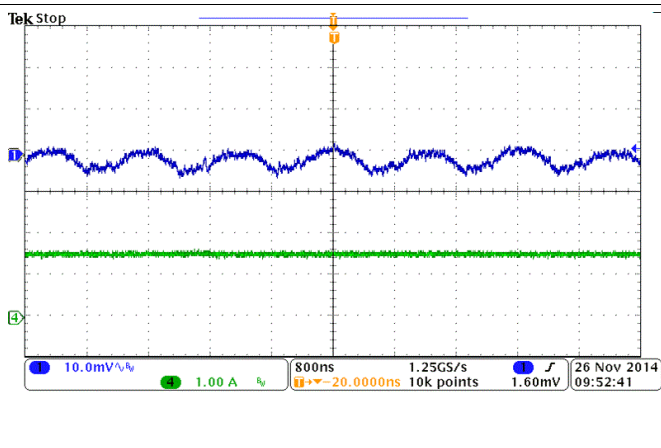





**Figure 28. BUCK2 Ripple**  
 $V_{OUT} = 2.5 \text{ V}$ , 1.5 A,  $f_{SW} = 800 \text{ kHz}$ , 10 mV/div

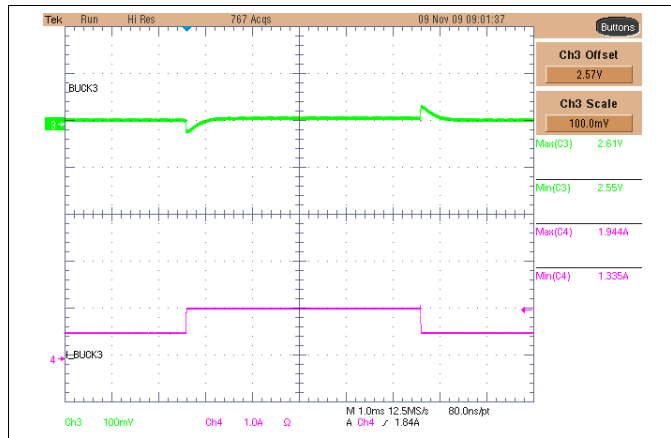

**Figure 29. BUCK2 Transient Load Response**  
 $L_O = 4.7 \mu\text{H}$ ,  $C_O = 22 \mu\text{F}$ ,  $V_{OUT} = 2.5 \text{ V}$ ,  $\Delta I = 1 \text{ A to } 1.5 \text{ A}$

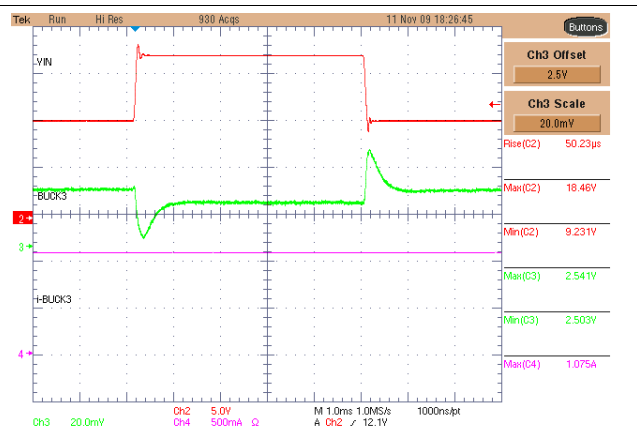

**Figure 30. BUCK2 Transient Supply Response**  
 $L_O = 4.7 \mu\text{H}$ ,  $C_O = 22 \mu\text{F}$ ,  $V_{OUT} = 2.5 \text{ V}$ ,  $\Delta V_{IN} = 9 \text{ V to } 8 \text{ V}$

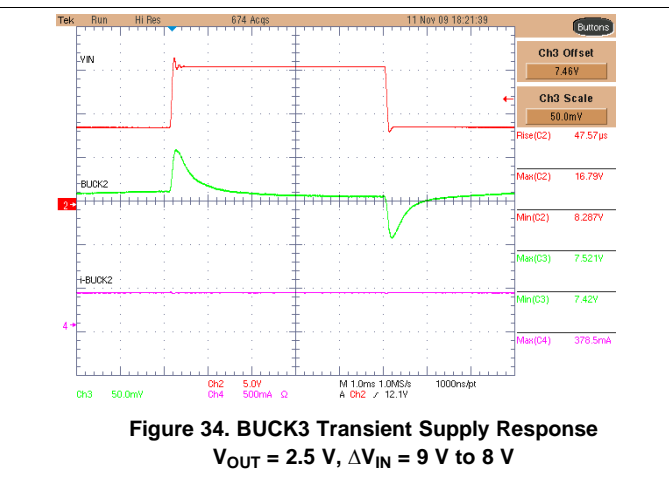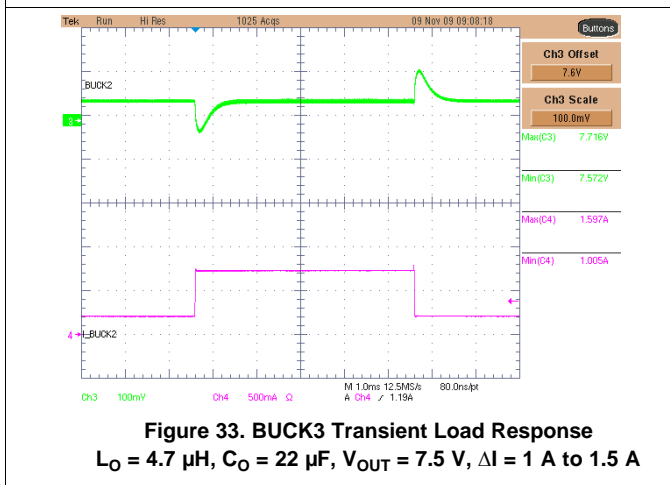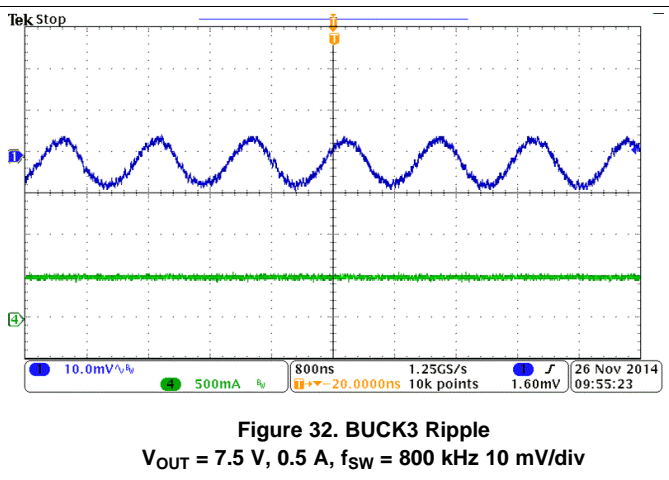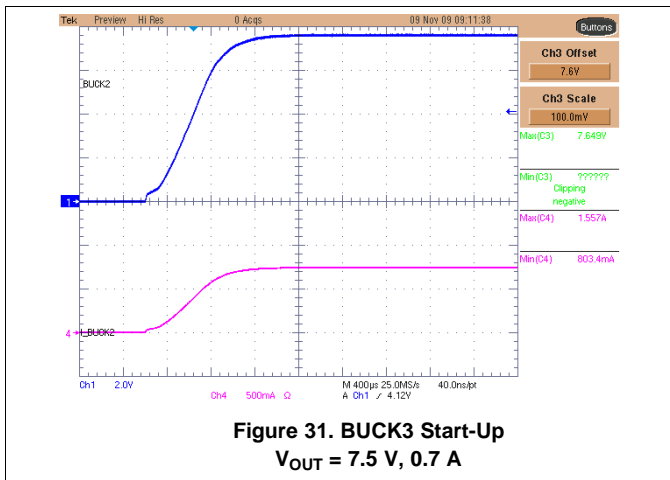

## 10 Power Supply Recommendations

The device is designed to operate from an input voltage supply range between 4.5 V and 18 V. This input power supply should be well regulated. If the input supply is located more than a few inches from the TPS65251 converter, additional bulk capacitance may be required in addition to the ceramic bypass capacitors. An electrolytic capacitor with a value of 47  $\mu$ F is a typical choice.

## 11 Layout

### 11.1 Layout Guidelines

Layout is a critical portion of PMIC designs.

- Place VOUT, and LX on the top layer and an inner power plane for VIN.
- Fit also on the top layer connections for the remaining pins of the PMIC and a large top side area filled with ground.
- The top layer ground area should be connected to the internal ground layer(s) using vias at the input bypass capacitor, the output filter capacitor and directly under the TPS65251 device to provide a thermal path from the Powerpad land to ground.
- The AGND pin should be tied directly to the power pad under the IC and the power pad.
- For operation at full rated load, the top side ground area together with the internal ground plane, must provide adequate heat dissipating area.
- There are several signals paths that conduct fast changing currents or voltages that can interact with stray inductance or parasitic capacitance to generate noise or degrade the power supplies performance. To help eliminate these problems, the VIN pin should be bypassed to ground with a low ESR ceramic bypass capacitor with X5R or X7R dielectric. Care should be taken to minimize the loop area formed by the bypass capacitor connections, the VIN pins, and the ground connections. Since the LX connection is the switching node, the output inductor should be located close to the LX pins, and the area of the PCB conductor minimized to prevent excessive capacitive coupling.
- The output filter capacitor ground should use the same power ground trace as the VIN input bypass capacitor. Try to minimize this conductor length while maintaining adequate width.
- The compensation should be as close as possible to the COMP pins. The COMP and OSC pins are sensitive to noise so the components associated to these pins should be located as close as possible to the IC and routed with minimal lengths of trace.



## 11.2 Layout Example

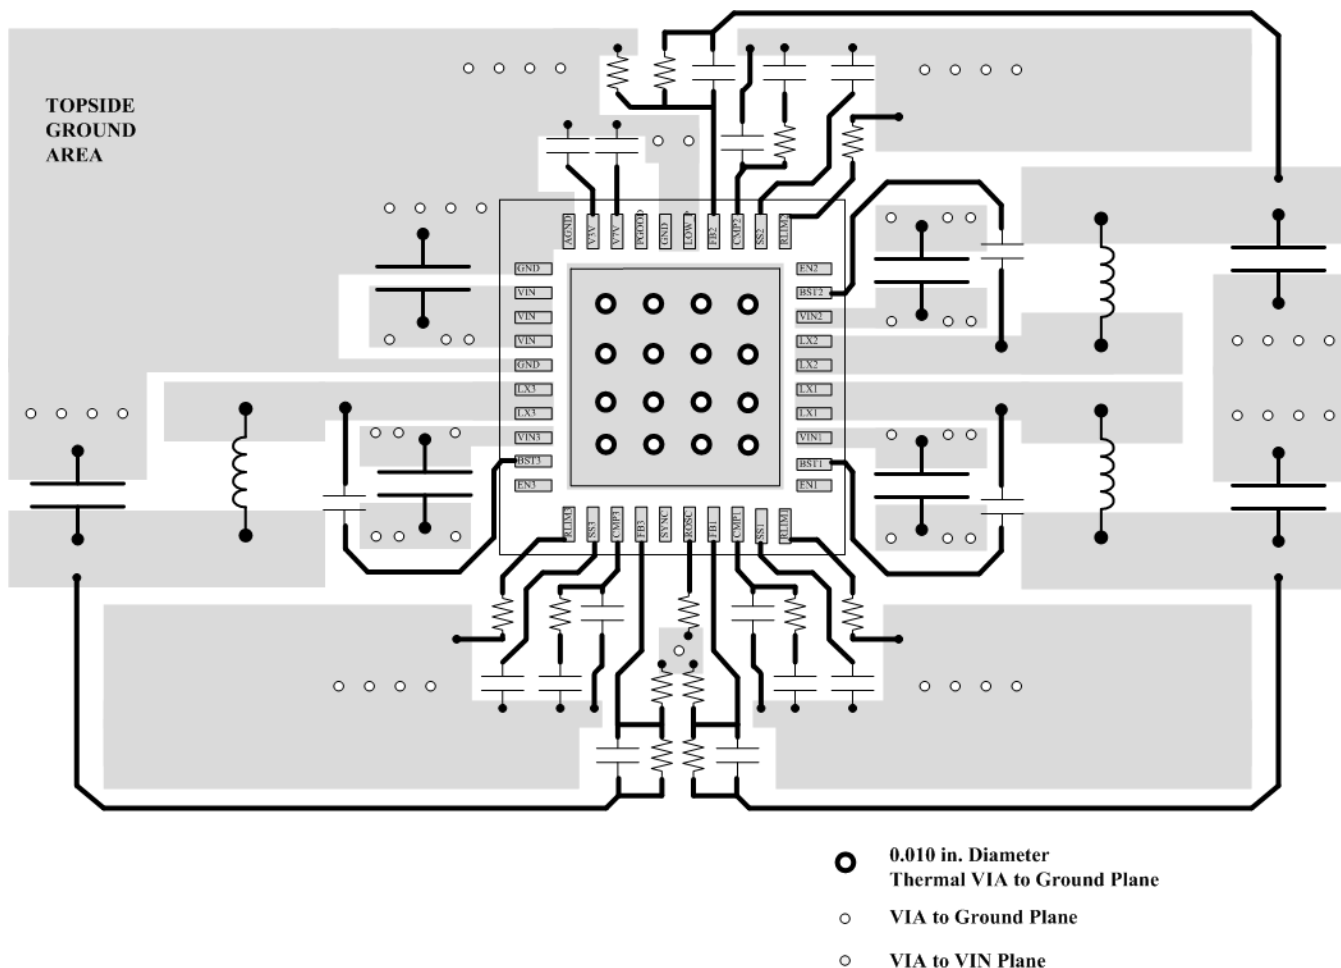


Figure 35. Layout Schematic

## 11.3 Power Dissipation

The total power dissipation inside TPS65251 should not to exceed the maximum allowable junction temperature of 125°C. The maximum allowable power dissipation is a function of the thermal resistance of the package ( $R_{JA}$ ) and ambient temperature.

To calculate the temperature inside the device under continuous loading use the following procedure.


1. Define the set voltage for each converter.
2. Define the continuous loading on each converter. Make sure do not exceed the converter maximum loading.
3. Determine from the graphs below the expected losses (Y axis) in watts per converter inside the device. The losses depend on the input supply, the selected switching frequency, the output voltage and the converter chosen.
4. To calculate the maximum temperature inside the IC use the following formula:

$$T_{HOT\_SPOT} = T_A + P_{DIS} \times R_{\theta JA}$$

where


- $T_A$  is the ambient temperature
- $P_{DIS}$  is the sum of losses in all converters
- $\theta_{JA}$  is the junction to ambient thermal impedance of the device and it is heavily dependant on board layout (27)

Power Dissipation (continued)

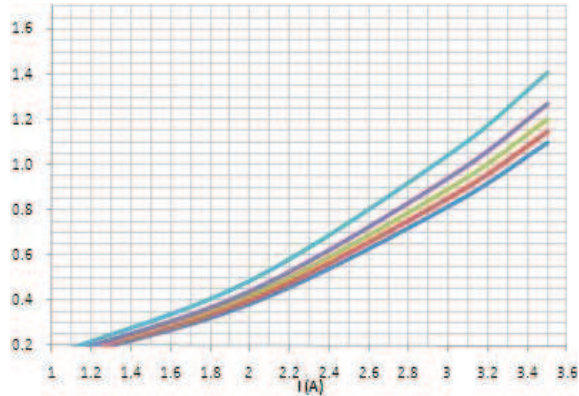


$V_O$  (from top to bottom) = 5 V , 3.3 V, 2.5 V, 1.8 V, 1.2 V

Figure 36. Buck 1 Losses (W) vs Output Current  
 $V_{IN} = 12\text{ V}$ ,  $f_{SW} = 500\text{ kHz}$

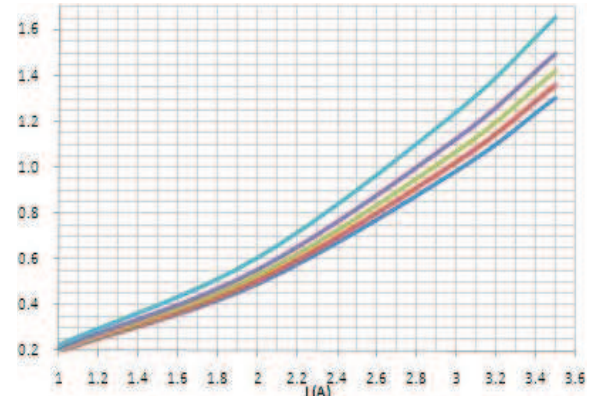


$V_O$  (from top to bottom) = 5 V , 3.3 V, 2.5 V, 1.8 V, 1.2 V

Figure 37. Buck 1 Losses (W) vs Output Current  
 $V_{IN} = 12\text{ V}$ ,  $f_{SW} = 1.1\text{ MHz}$

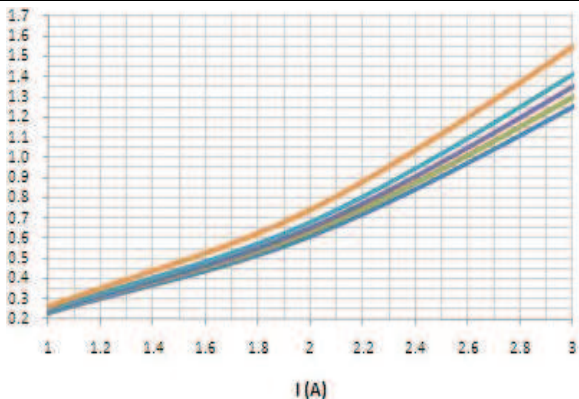

$V_O$  (from top to bottom) = 5 V , 3.3 V, 2.5 V, 1.8 V, 1.2 V

Figure 38. Buck 2 and 3 Losses (W) vs Output Current  
 $V_{IN} = 12\text{ V}$ ,  $f_{SW} = 500\text{ kHz}$

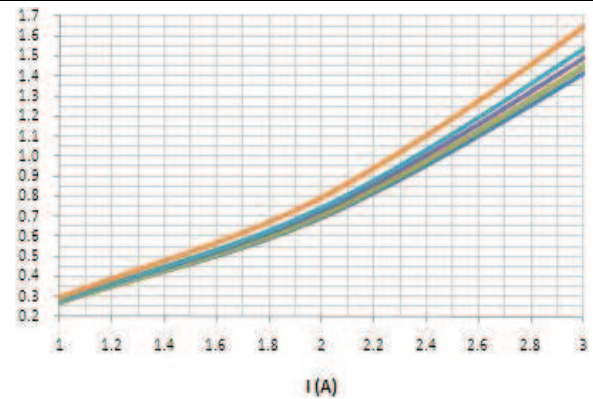

$V_O$  (from top to bottom) = 5 V , 3.3 V, 2.5 V, 1.8 V, 1.2 V

Figure 39. Buck 2 and 3 Losses (W) vs Output Current  
 $V_{IN} = 12\text{ V}$ ,  $f_{SW} = 1.1\text{ MHz}$

## 12 器件和文档支持

### 12.1 接收文档更新通知

要接收文档更新通知，请导航至 [TI.com](http://TI.com) 上的器件产品文件夹。请单击右上角的 [提醒我](#) 进行注册，即可每周接收产品信息更改摘要。有关更改的详细信息，请查看任何已修订文档中包含的修订历史记录。

### 12.2 社区资源

下列链接提供到 TI 社区资源的连接。链接的内容由各个分销商“按照原样”提供。这些内容并不构成 TI 技术规范，并且不一定反映 TI 的观点；请参阅 TI 的 [《使用条款》](#)。

**TI E2E™ 在线社区** [TI 的工程师对工程师 \(E2E\) 社区](#)。此社区的创建目的在于促进工程师之间的协作。在 [e2e.ti.com](http://e2e.ti.com) 中，您可以咨询问题、分享知识、拓展思路并与同行工程师一道帮助解决问题。

**设计支持** [TI 参考设计支持](#) 可帮助您快速查找有帮助的 E2E 论坛、设计支持工具以及技术支持的联系信息。

### 12.3 商标

E2E is a trademark of Texas Instruments.

All other trademarks are the property of their respective owners.

### 12.4 静电放电警告



这些装置包含有限的内置 ESD 保护。存储或装卸时，应将导线一起截短或将装置放置于导电泡棉中，以防止 MOS 门极遭受静电损伤。

### 12.5 Glossary

[SLYZ022](#) — *TI Glossary*.

This glossary lists and explains terms, acronyms, and definitions.

## 13 机械、封装和可订购信息

以下页面包含机械、封装和可订购信息。这些信息是指定器件的最新可用数据。数据如有变更，恕不另行通知和修订此文档。如欲获取此数据表的浏览器版本，请参阅左侧的导航。

**PACKAGING INFORMATION**

| Orderable part number        | Status<br>(1) | Material type<br>(2) | Package   Pins  | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6) |
|------------------------------|---------------|----------------------|-----------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| 905-6525100                  | Active        | Production           | VQFN (RHA)   40 | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-3-260C-168 HR               | -40 to 125   | TPS<br>65251        |
| <a href="#">TPS65251RHAR</a> | Active        | Production           | VQFN (RHA)   40 | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-3-260C-168 HR               | -40 to 125   | TPS<br>65251        |
| TPS65251RHAR.A               | Active        | Production           | VQFN (RHA)   40 | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-3-260C-168 HR               | -40 to 125   | TPS<br>65251        |
| TPS65251RHAR.B               | Active        | Production           | VQFN (RHA)   40 | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-3-260C-168 HR               | -40 to 125   | TPS<br>65251        |
| TPS65251RHARG4               | Active        | Production           | VQFN (RHA)   40 | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-3-260C-168 HR               | -40 to 125   | TPS<br>65251        |
| TPS65251RHARG4.A             | Active        | Production           | VQFN (RHA)   40 | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-3-260C-168 HR               | -40 to 125   | TPS<br>65251        |
| TPS65251RHARG4.B             | Active        | Production           | VQFN (RHA)   40 | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-3-260C-168 HR               | -40 to 125   | TPS<br>65251        |
| <a href="#">TPS65251RHAT</a> | Active        | Production           | VQFN (RHA)   40 | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-3-260C-168 HR               | -40 to 125   | TPS<br>65251        |
| TPS65251RHAT.A               | Active        | Production           | VQFN (RHA)   40 | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-3-260C-168 HR               | -40 to 125   | TPS<br>65251        |
| TPS65251RHAT.B               | Active        | Production           | VQFN (RHA)   40 | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-3-260C-168 HR               | -40 to 125   | TPS<br>65251        |

(1) **Status:** For more details on status, see our [product life cycle](#).

(2) **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

(3) **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

(4) **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.


(5) **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

(6) **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:**The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

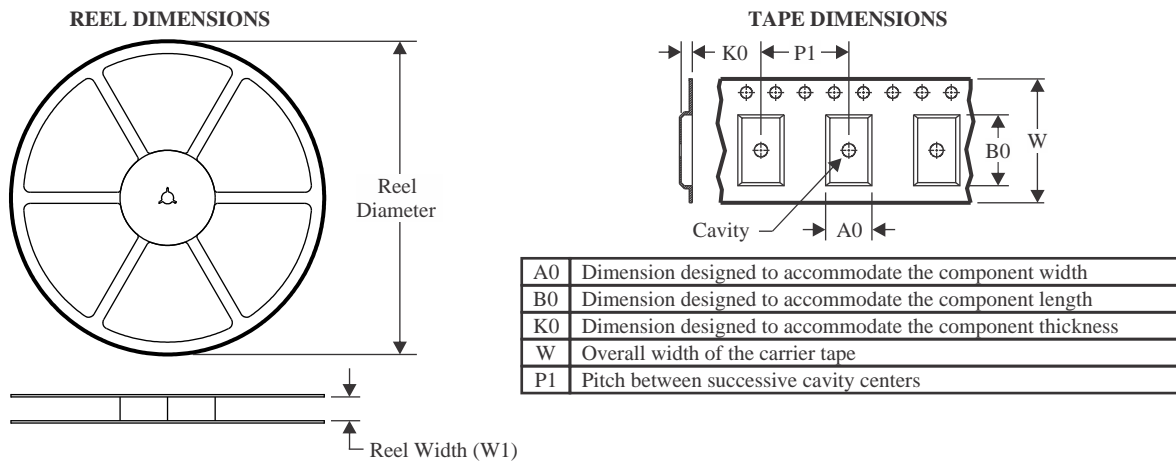**TAPE AND REEL INFORMATION**

**QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE**


\*All dimensions are nominal

| Device         | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|----------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| TPS65251RHAR   | VQFN         | RHA             | 40   | 2500 | 330.0              | 16.4               | 6.3     | 6.3     | 1.1     | 12.0    | 16.0   | Q2            |
| TPS65251RHARG4 | VQFN         | RHA             | 40   | 2500 | 330.0              | 16.4               | 6.3     | 6.3     | 1.1     | 12.0    | 16.0   | Q2            |
| TPS65251RHAT   | VQFN         | RHA             | 40   | 250  | 180.0              | 16.4               | 6.3     | 6.3     | 1.1     | 12.0    | 16.0   | Q2            |

**TAPE AND REEL BOX DIMENSIONS**


\*All dimensions are nominal

| Device         | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|----------------|--------------|-----------------|------|------|-------------|------------|-------------|
| TPS65251RHAR   | VQFN         | RHA             | 40   | 2500 | 367.0       | 367.0      | 38.0        |
| TPS65251RHARG4 | VQFN         | RHA             | 40   | 2500 | 367.0       | 367.0      | 38.0        |
| TPS65251RHAT   | VQFN         | RHA             | 40   | 250  | 210.0       | 185.0      | 35.0        |

## GENERIC PACKAGE VIEW

**RHA 40**

**VQFN - 1 mm max height**

6 x 6, 0.5 mm pitch



PLASTIC QUAD FLATPACK - NO LEAD

This image is a representation of the package family, actual package may vary.  
Refer to the product data sheet for package details.



4225870/A



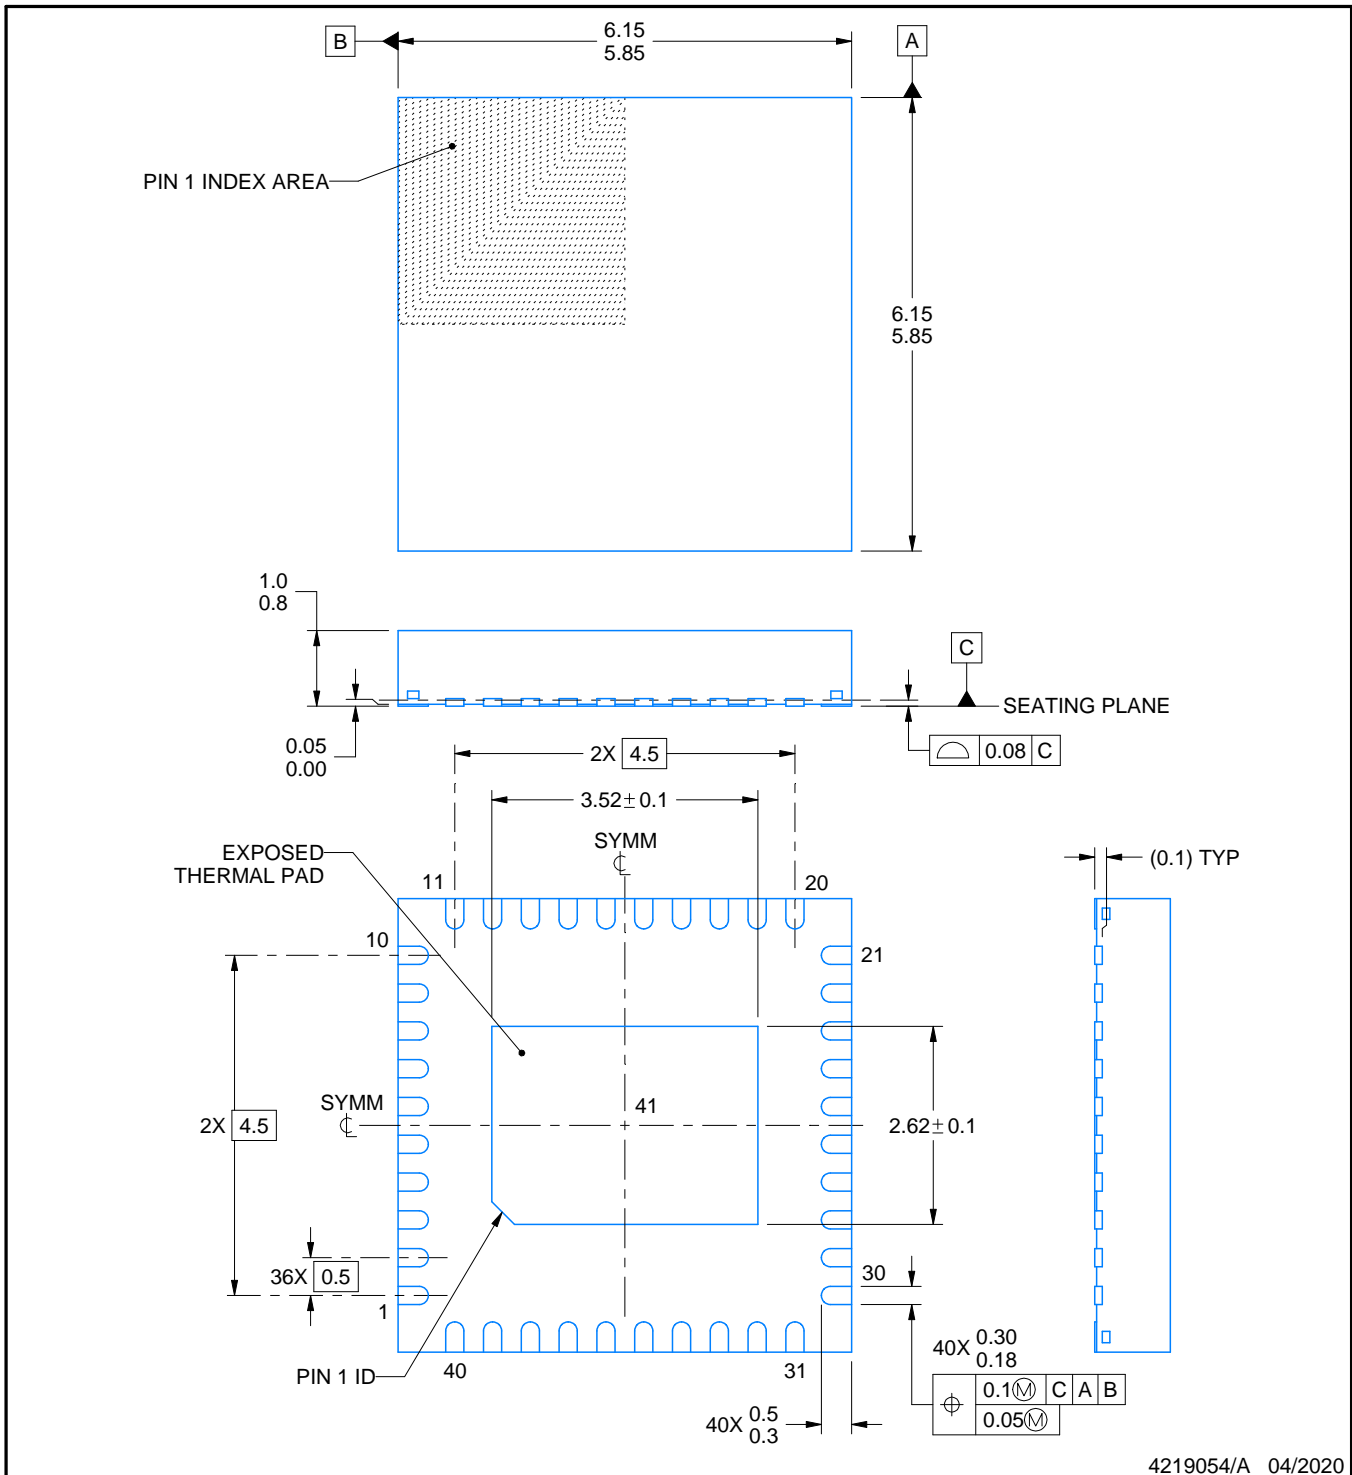

4219054/A 04/2020

NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. The package thermal pad must be soldered to the printed circuit board for thermal and mechanical performance.

# EXAMPLE BOARD LAYOUT


RHA0040E

VQFN - 1 mm max height

PLASTIC QUAD FLATPACK - NO LEAD

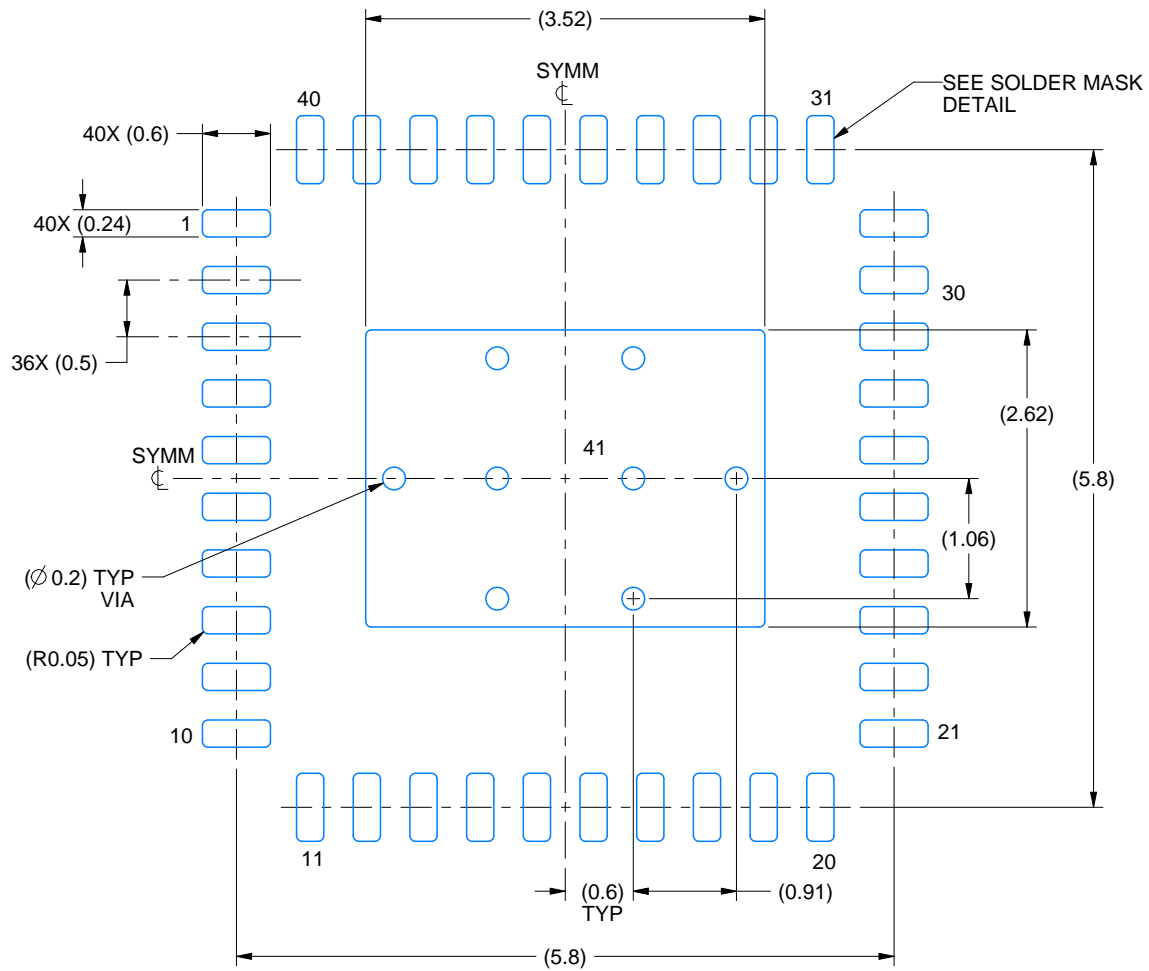

LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE: 15X

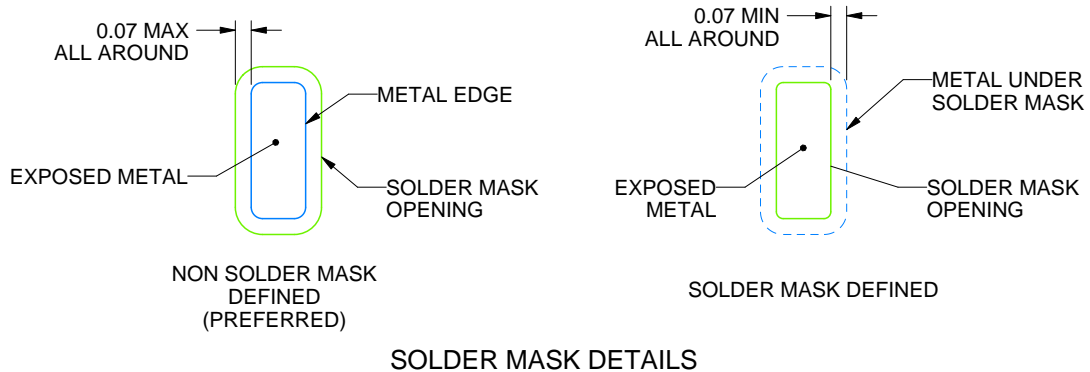

4219054/A 04/2020

NOTES: (continued)


4. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 ([www.ti.com/lit/sluea271](http://www.ti.com/lit/sluea271)).
5. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.

# EXAMPLE STENCIL DESIGN

RHA0040E

VQFN - 1 mm max height

PLASTIC QUAD FLATPACK - NO LEAD

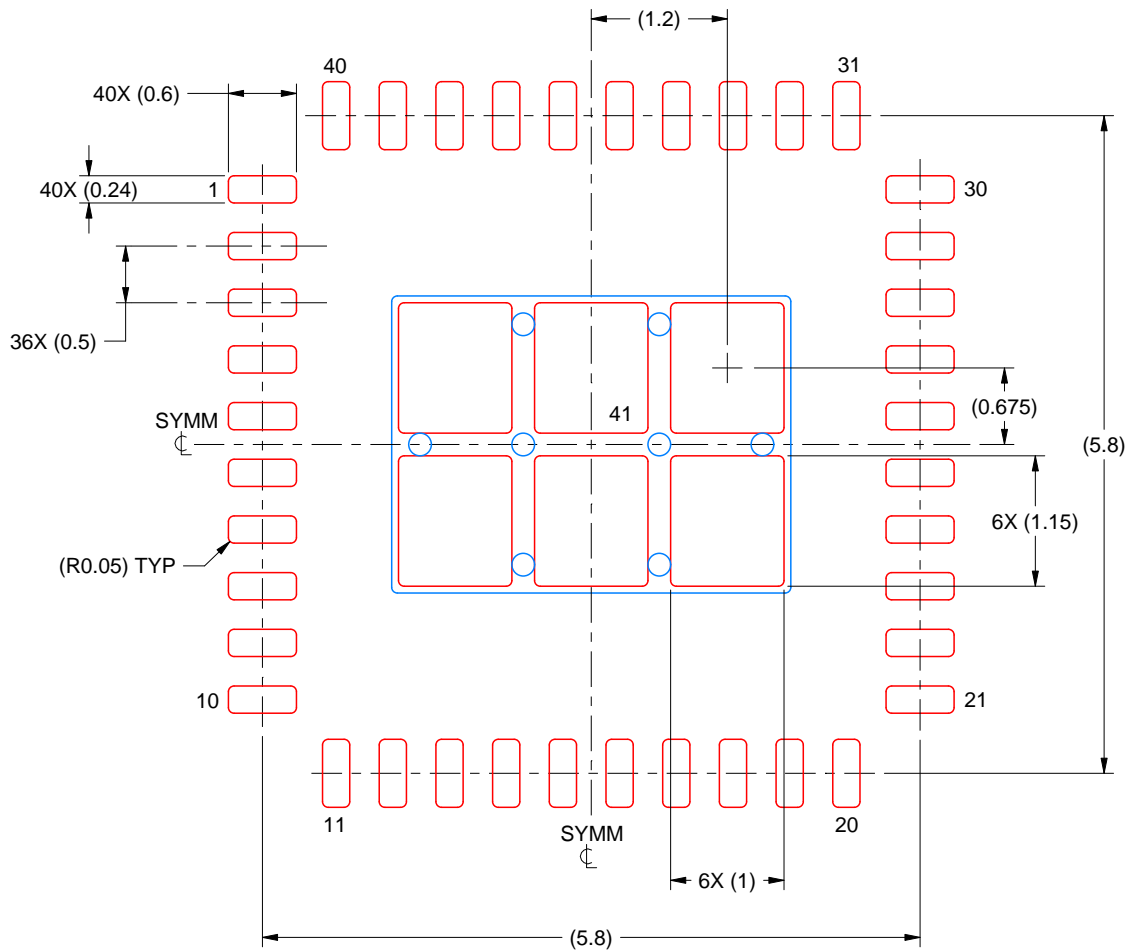

SOLDER PASTE EXAMPLE  
BASED ON 0.125 MM THICK STENCIL  
SCALE: 15X

EXPOSED PAD 41  
75% PRINTED SOLDER COVERAGE BY AREA UNDER PACKAGE

4219054/A 04/2020

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

## 重要通知和免责声明

TI“按原样”提供技术和可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证没有瑕疵且不做任何明示或暗示的担保，包括但不限于对适销性、与某特定用途的适用性或不侵犯任何第三方知识产权的暗示担保。

这些资源可供使用 TI 产品进行设计的熟练开发人员使用。您将自行承担以下全部责任：(1) 针对您的应用选择合适的 TI 产品，(2) 设计、验证并测试您的应用，(3) 确保您的应用满足相应标准以及任何其他安全、安保法规或其他要求。

这些资源如有变更，恕不另行通知。TI 授权您仅可将这些资源用于研发本资源所述的 TI 产品的相关应用。严禁以其他方式对这些资源进行复制或展示。您无权使用任何其他 TI 知识产权或任何第三方知识产权。对于因您对这些资源的使用而对 TI 及其代表造成的任何索赔、损害、成本、损失和债务，您将全额赔偿，TI 对此概不负责。

TI 提供的产品受 [TI 销售条款](#)、[TI 通用质量指南](#) 或 [ti.com](#) 上其他适用条款或 TI 产品随附的其他适用条款的约束。TI 提供这些资源并不会扩展或以其他方式更改 TI 针对 TI 产品发布的适用的担保或担保免责声明。除非德州仪器 (TI) 明确将某产品指定为定制产品或客户特定产品，否则其产品均为按确定价格收入目录的标准通用器件。

TI 反对并拒绝您可能提出的任何其他或不同的条款。

版权所有 © 2025，德州仪器 (TI) 公司

最后更新日期：2025 年 10 月