

# 具有 USB 检测和 1.2A 升压运行的 BQ25611D I<sup>2</sup>C 控制型 3.0A 单节降压电池充电器

## 1 特性

- 高效 1.5MHz 同步开关模式降压充电器
  - 在 2A 电流 (5V 输入) 下具有 92% 的充电效率
  - $\pm 0.4\%$  充电电压调节，阶跃为 10mV
  - 可编程 JEITA 阈值
  - 远程电池检测，可更快地进行充电
- 支持 USB On-The-Go (OTG)，可调输出电压范围为 4.6V 至 5.15V
  - 具有高达 1.2A 输出的升压转换器
  - 在 1A 输出下具有 92% 的升压效率
  - 精确的恒定电流 (CC) 限制
  - 高达 500 $\mu$ F 容性负载的软启动
- 单个输入，支持 USB 输入以及高电压适配器或无线电源
  - 支持 4V 至 13.5V 输入电压范围，绝对最大输入额定值为 22V
  - 130ns 快速关断输入过压保护
  - 通过 I<sup>2</sup>C (100mA 至 3.2A, 100mA/阶跃) 实现可编程输入电流限制 (IINDPM)
  - 通过高达 5.4V 的 VINDPM 阈值自动跟踪电池电压，从而实现最大功率
  - 自动检测 USB SDP、CDP、DCP 以及非标准适配器
- 窄 VDC (NVDC) 电源路径管理
  - 无需电池或使用深度放电的电池即可使系统瞬时启动
- 低 RDSON 19.5m $\Omega$  BATFET，可更大程度地降低充电损耗和延长电池运行时间
  - 用于运输模式的 BATFET 控制、使用和不使用适配器的完全系统复位功能
- 运输模式下的 7 $\mu$ A 低电池泄漏电流
- 在系统待机时具有 9.5 $\mu$ A 的低电池泄漏电流
- 高精度电池充电曲线
  - $\pm 6\%$  充电电流调节
  - $\pm 7.5\%$  输入电流调节
  - $\pm 3\%$  VINDPM 电压调节
  - 用于电池完全充电的可编程充电完成计时器
- 高集成度包括所有 MOSFET、电流感应和环路补偿
- 安全相关认证：
  - 经 IEC 62368-1 CB 认证

## 2 应用

- 手机、平板电脑
- 工业、医疗、便携式电子产品

## 3 说明


BQ25611D 是适用于单节锂离子电池和锂聚合物电池、高度集成的 3A 开关模式电池充电管理和系统电源路径管理器件。该解决方案在系统和电池之间高度集成输入反向阻断 FET (RBFET, Q1)、高侧开关 FET (HSFET, Q2)、低侧开关 FET (LSFET, Q3) 以及电池 FET (BATFET, Q4)。其低阻抗电源路径对开关模式运行效率进行了优化，缩短了电池充电时间并延长了放电阶段的电池运行时间。

BQ25611D 是适用于锂离子电池和锂聚合物电池、高度集成的 3A 开关模式电池充电管理和系统电源路径管理器件。它可为智能手机和平板电脑等各种应用提供快速充电功能和高输入电压。其低阻抗电源路径对开关模式运行效率进行了优化，缩短了电池充电时间并延长了放电阶段的电池运行时间。其输入电压和电流调节和电池远程检测可以为电池提供最大的充电功率。

### 器件信息 (1)

| 器件型号     | 封装        | 封装尺寸 ( 标称值 )    |
|----------|-----------|-----------------|
| BQ25611D | WQFN (24) | 4.00mm x 4.00mm |

(1) 如需了解所有可用封装，请参阅数据表末尾的可订购产品目录。

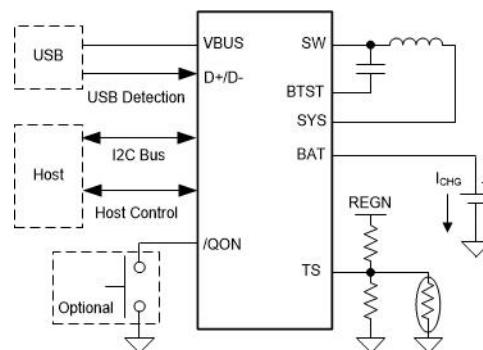

简化版应用



本文档旨在为方便起见，提供有关 TI 产品中文版本的信息，以确认产品的概要。有关适用的官方英文版本的最新信息，请访问 [www.ti.com](http://www.ti.com)，其内容始终优先。TI 不保证翻译的准确性和有效性。在实际设计之前，请务必参考最新版本的英文版本。

## Table of Contents

|   |           |   |           |
|---|-----------|---|-----------|
| <b>1 特性</b>                               | <b>1</b>  | 9.5 Register Maps.....                                    | <b>32</b> |
| <b>2 应用</b>                               | <b>1</b>  | <b>10 Application and Implementation</b>                  | <b>46</b> |
| <b>3 说明</b>                               | <b>1</b>  | 10.1 Application Information.....                         | <b>46</b> |
| <b>4 Revision History</b>                 | <b>2</b>  | 10.2 Typical Application.....                             | <b>46</b> |
| <b>5 说明 (续)</b>                           | <b>3</b>  | 10.3 Application Curves.....                              | <b>49</b> |
| <b>6 Device Comparison Table</b>          | <b>4</b>  | <b>11 Power Supply Recommendations</b>                    | <b>51</b> |
| <b>7 Pin Configuration and Functions</b>  | <b>4</b>  | <b>12 Layout</b>  | <b>51</b> |
| <b>8 Specifications</b>                   | <b>6</b>  | 12.1 Layout Guidelines.....                               | <b>51</b> |
| 8.1 Absolute Maximum Ratings.....         | <b>6</b>  | 12.2 Layout Example.....                                  | <b>51</b> |
| 8.2 ESD Ratings.....                      | <b>6</b>  | <b>13 Device and Documentation Support</b>                | <b>53</b> |
| 8.3 Recommended Operating Conditions..... | <b>6</b>  | 13.1 Device Support.....                                  | <b>53</b> |
| 8.4 Thermal Information.....              | <b>6</b>  | 13.2 Documentation Support.....                           | <b>53</b> |
| 8.5 Electrical Characteristics.....       | <b>7</b>  | 13.3 Receiving Notification of Documentation Updates..... | <b>53</b> |
| 8.6 Timing Requirements.....              | <b>12</b> | 13.4 Support Resources.....                               | <b>53</b> |
| 8.7 Typical Characteristics.....          | <b>14</b> | 13.5 Trademarks.....                                      | <b>53</b> |
| <b>9 Detailed Description</b>             | <b>16</b> | 13.6 Electrostatic Discharge Caution.....                 | <b>53</b> |
| 9.1 Overview.....                         | <b>16</b> | 13.7 Glossary.....  | <b>53</b> |
| 9.2 Functional Block Diagram.....         | <b>16</b> | <b>14 Mechanical, Packaging, and Orderable</b>            |           |
| 9.3 Feature Description.....              | <b>17</b> | <b>Information</b> .....                                  | <b>54</b> |
| 9.4 Device Functional Modes.....          | <b>30</b> |   |           |

## 4 Revision History

### Changes from Revision A (June 2020) to Revision B (September 2020)

|  | Page |
|--|------|
| • 向特性列表添加了“安全相关认证”项目符号.....  | 1    |
| • 更新了整个文档的表、图和交叉参考的编号格式.....   | 1    |
| • Added description about VQON to $\overline{\text{QON}}$ pin description.....     | 4    |
| • Changed max of BAT, SYS from 17 V to 7 V.....                                    | 6    |
| • Changed max of $V_{\text{BAT\_DPL}}$ from 2.62 V to 2.55 V.....                  | 7    |
| • Changed typ of $V_{\text{BAT\_DPL}}$ to 2.40 V.....                              | 7    |
| • Added additional 25°C spec for $V_{\text{BAT\_DPL}}$ .....                       | 7    |
| • Added $I_{\text{HSFET\_OCP}}$ row.....   | 7    |
| • Updated 表 9-2 .....  | 18   |
| • Updated BATFET Full System Reset section.....                                    | 25   |
| • Changed Bits 3-6 description from "Reserved" to "BQ25611D: 1010" in 表 9-19 ..... | 32   |

### Changes from Revision \* (January 2020) to Revision A (June 2020)

|   | Page |
|---|------|
| • Changed max of $V_{\text{REG\_ACC}}$ at 4.19 V from 4.206 V to 4.200 V..... | 7    |

## 5 说明 (续)

该解决方案在系统和电池之间高度集成输入反向阻断 FET ( RBFET , Q1 )、高侧开关 FET ( HSFET , Q2 )、低侧开关 FET ( LSFET , Q3 ) 以及电池 FET ( BATFET , Q4 )。它还集成了自举二极管以进行高侧栅极驱动，从而简化系统设计。I<sup>2</sup>C 串行接口和充电和系统设置使该器件成为一款真正灵活的解决方案。

该器件支持多种输入源，包括标准 USB 主机端口、USB 充电端口、兼容 USB 的高电压适配器和无线电源。该器件符合 USB 2.0 和 USB 3.0 电源规格，具有输入电流和电压调节功能。该器件从系统检测电路 ( 如 USB PHY 器件 ) 获取结果。

该器件通过单个电感器将降压充电器和升压稳压器集成在一个解决方案中。通过提供 5V 电压 ( 可调 4.6V/4.75V/5V/5.15V )，恒定电流限值高达 1.2A，该器件可符合 USB On-the-Go (OTG) 运行功率额定值规格。

在应用适配器时，电源路径管理将系统电压调节至稍高于电池电压的水平，但不会降至 3.5V 最小系统电压 ( 可编程 ) 以下。借助于这个特性，即使在电池电量完全耗尽或者电池被拆除时，系统也能保持运行。当达到输入电流限值或电压限值时，电源路径管理会自动减小充电电流。随着系统负载持续增加，电池开始放电，直到满足系统电源需求。该补充模式可防止输入源过载。

此器件在无需软件控制情况下启动并完成一个充电周期。它感应电池电压并通过三个阶段为电池充电：预充电、恒定电流和恒定电压。在充电周期的末尾，当充电电流低于预设限值并且电池电压高于再充电阈值时，充电器自动终止。如果已完全充电的电池降至再充电阈值以下，则充电器自动启动另一个充电周期。

此充电器提供针对电池充电和系统运行的多种安全特性，其中包括电池负温度系数热敏电阻监视、充电安全性计时器和过压/过流保护。当结温超过 110°C 时，热调节会减小充电电流。状态寄存器报告充电状态和任何故障状况。借助 I<sup>2</sup>C , VBUS\_GD 位指示电源是否正常，当故障发生时，INT 输出会立即通知主机。

该器件还提供用于 BATFET 使能和复位控制的 QON 引脚，以退出低功耗出厂模式或完全系统复位功能。

BQ25611D 器件采用 24 引脚 4mm × 4mm × 0.75mm 薄型 WQFN 封装。

## 6 Device Comparison Table

|  | BQ25601                                  | BQ25601D                                 | BQ25611D   |
|--|--|--|--|
| Programmable Charge Voltage                      | 3.856 - 4.624 V, 32 mV per step          | 3.856 - 4.624 V, 32 mV per step          | 3.5 - 4.3 V (100 mV per step); 4.3 - 4.52 V (10 mV per step) |
| D+/D- USB Detection                              | No                                       | Yes                                      | Yes  |
| Default $I_{CHG}$                                | 2.04 A                                   | 2.04 A                                   | 1 A  |
| Default $V_{ACOV}$                               | 6.4 V                                    | 6.4 V                                    | 14.2 V   |
| VBUS OVP reaction-time                           | 200 ns                                   | 200 ns                                   | 130 ns   |
| Battery remote sensing with open/short detection | No                                       | No                                       | Yes  |
| TS profile                                       | JEITA, with fixed temperature thresholds | JEITA, with fixed temperature thresholds | JEITA, with adjustable temperature thresholds                |
| TS ignore bit                                    | No                                       | No                                       | Yes  |
| Charge safety timer                              | 5hr, 10 hr (default)                     | 5 hr, 10 hr (default)                    | 20 hr, 10 hr (default)                                       |
| Allow QON fire when adapter is present           | No                                       | No                                       | Yes  |
| Deglitch time for chagre termination             | 250 ms                                   | 250 ms                                   | 50 ms  |

## 7 Pin Configuration and Functions

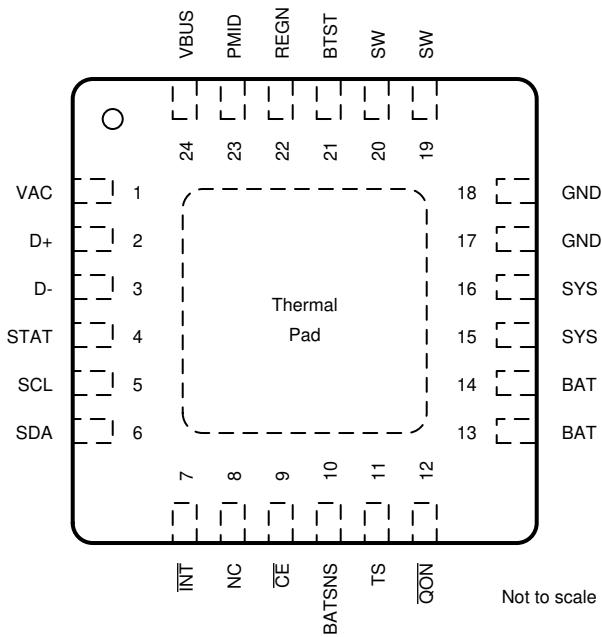


图 7-1. RTW Package 24-Pin WQFN Top View

### Pin Functions

| PIN    |     | TYPE <sup>(1)</sup> | DESCRIPTION   |
|--------|-----|---------------------|---|
| NAME   | NO. |                     |   |
| BAT    | 13  | P                   | Battery connection point to the positive terminal of the battery pack. The internal current sensing resistor is connected between SYS and BAT. Connect a 10 $\mu$ F <sup>(2)</sup> closely to the BAT pin.  |
|        | 14  |                     |   |
| BATSNS | 10  | AI                  | Battery voltage sensing pin for charge voltage regulation. In order to minimize the parasitic trace resistance during charging, BATSNS pin is connected to the positive terminal of battery pack as close as possible. If BATSNS pin is open or short to ground, BATSNS_STAT bit is set to 1 and charger regulates the battery voltage through BAT pin. |
| BTST   | 21  | P                   | PWM high side driver positive supply. Internally, the BTST is connected to the cathode of the boot-strap diode. Connect the 0.047- $\mu$ F bootstrap capacitor <sup>(2)</sup> from SW to BTST.  |

| PIN         |          | TYPE <sup>(1)</sup> | DESCRIPTION   |
|-------------|----------|---------------------|---|
| NAME        | NO.      |                     |   |
| CE          | 9        | DI                  | Charge enable pin. When this pin is driven LOW, battery charging is enabled.  |
| D+          | 2        | AIO                 | Positive line of the USB data line pair. D+/D- based USB host/charging port detection. The detection includes data contact detection (DCD), primary and secondary detection in BC1.2 and nonstandard adaptors.  |
| D-          | 3        | AIO                 | Negative line of the USB data line pair. D+/D- based USB host/charging port detection. The detection includes data contact detection (DCD), primary and secondary detection in BC1.2 and nonstandard adaptors.  |
| GND         | 17<br>18 | —                   | Ground.   |
| INT         | 7        | DO                  | Open-drain interrupt output. Connect the INT to a logic rail through a 10-kΩ resistor. The INT pin sends an active low, 256-μs pulse to the host to report charger device status and fault.   |
| NC          | 8        | —                   | Not connected.  |
| PMID        | 23       | P                   | Connected to the drain of the reverse blocking MOSFET (RBFET) and the drain of HSFET. Place a 10-μF capacitor <sup>(2)</sup> on PMID to GND.  |
| QON         | 12       | DI                  | BATFET enable/reset control input. When the BATFET is in ship mode, a logic LOW of $t_{SHIPMODE}$ duration turns on BATFET to exit ship mode. When the BATFET is not in ship mode, a logic LOW of $t_{QON_RST}$ (minimum 8 s) duration resets SYS (system power) by turning BATFET off for $t_{BATFET_RST}$ (minimum 250 ms) and then re-enables BATFET to provide full system power reset. The host chooses the BATFET reset function with VBUS unplugged or not through I <sup>2</sup> C bit BATFET_RST_WVBUS. The pin is pulled up to $V_{QON}$ through 200 kΩ to maintain default HIGH logic during ship mode. It has an internal clamp to 6.5 V. QON pin is pulled through 200-kΩ resistor to $V_{QON}$ . $V_{QON}$ is supplied from VBUS minus 2 diode voltage drop or from VBAT minus 1 diode voltage drop. It has an internal voltage clamp to 6.5 V. |
| REGN        | 22       | P                   | PWM low side driver positive supply output. Internally, REGN is connected to the anode of the boot-strap diode. Connect a 4.7-μF (10-V rating) ceramic capacitor <sup>(2)</sup> from REGN to analog GND. The capacitor should be placed close to the IC.  |
| SCL         | 5        | DI                  | I <sup>2</sup> C interface clock. Connect SCL to the logic rail through a 10-kΩ resistor.   |
| SDA         | 6        | DIO                 | I <sup>2</sup> C interface data. Connect SDA to the logic rail through a 10-kΩ resistor.  |
| STAT        | 4        | DO                  | Open-drain interrupt output. Connect the STAT pin to a logic rail via 10-kΩ resistor. The STAT pin indicates charger status.<br>Charge in progress: LOW.<br>Charge complete or charger in SLEEP mode: HIGH.<br>Charge suspend (fault response): blink at 1 Hz.  |
| SW          | 19<br>20 | P                   | Switching node connecting to output inductor. Internally, SW is connected to the source of the n-channel HSFET and the drain of the n-channel LSFET. Connect the 0.047-μF bootstrap capacitor <sup>(2)</sup> from SW to BTST.   |
| SYS         | 15<br>16 | P                   | System output connection point. The internal current sensing resistor is connected between SYS and BAT. Connect a 10 μF (min) <sup>(2)</sup> closely to the SYS pin.  |
| TS          | 11       | AI                  | Battery temperature qualification voltage input. Connect a negative temperature coefficient thermistor (NTC). Program temperature window with a resistor divider from REGN to TS to GND. Charge and boost mode suspended when TS pin voltage is out of range. When TS pin is not used, connect a 10-kΩ resistor from REGN to TS and a 10-kΩ resistor from TS to GND or set TS_IGNORE to HIGH to ignore TS pin. It is recommended to use a 103AT-2 thermistor.   |
| VAC         | 1        | P                   | Input voltage sensing. This pin must be tied to VBUS.   |
| VBUS        | 24       | P                   | Charger input voltage. The internal n-channel reverse block MOSFET (RBFET) is connected between VBUS and PMID with VBUS on source. Place a 1-μF ceramic capacitor <sup>(2)</sup> from VBUS to GND and place it as close as possible to the device.  |
| Thermal Pad | —        | P                   | Ground reference for the device that is also the thermal pad used to conduct heat from the device. This connection serves two purposes. The first purpose is to provide an electrical ground connection for the device. The second purpose is to provide a low thermal-impedance path from the device die to the PCB. This pad should be tied externally to a ground plane.   |

(1) AI = Analog Input, AO = Analog Output, AIO = Analog Input Output, DI = Digital input, DO = Digital Output, DIO = Digital Input Output, P = Power

(2) All capacitors are ceramic unless otherwise specified

## 8 Specifications

### 8.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)<sup>(1)</sup>

|                     |  | MIN   | MAX | UNIT |
|---------------------|--|-------|-----|------|
| Voltage             | VAC (converter not switching)                  | - 2   | 22  | V    |
| Voltage             | VBUS (converter not switching)                 | -2    | 22  | V    |
| Voltage             | PMID (converter not switching)                 | - 0.3 | 22  | V    |
| Voltage             | SW   | - 0.3 | 16  | V    |
| Voltage             | BAT, SYS (converter not switching)             | - 0.3 | 7   | V    |
| Voltage             | BTST   | - 0.3 | 22  | V    |
| Voltage             | BATSNS (converter not switching)               | - 0.3 | 7   | V    |
| Voltage             | D+. D-, STAT, SCL, SDA, INT, CE, TS, QON, REGN | - 0.3 | 7   | V    |
| Output Sink Current | STAT, INT                                      |       | 6   | mA   |
| T <sub>J</sub>      | Junction temperature                           | - 40  | 150 | °C   |
| T <sub>stg</sub>    | Storage temperature                            | - 55  | 150 | °C   |

(1) Stresses beyond those listed under *Absolute Maximum Rating* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Condition*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

### 8.2 ESD Ratings

|                    |                         | VALUE  | UNIT       |
|--------------------|-------------------------|--|------------|
| V <sub>(ESD)</sub> | Electrostatic discharge | Human body model (HBM), per ANSI/ESDA/JEDEC JS-001, all pins <sup>(1)</sup>              | ±2000<br>V |
|                    |                         | Charged device model (CDM), per JEDEC specification JESD22-C101, all pins <sup>(2)</sup> |            |

(1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.

(2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

### 8.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

|                   |                       | MIN  | NOM  | MAX | UNIT |
|-------------------|-----------------------|------|------|-----|------|
| V <sub>VBUS</sub> | Input voltage         | 4    | 13.5 | V   |      |
| V <sub>BAT</sub>  | Battery voltage       |      | 4.52 | V   |      |
| I <sub>VBUS</sub> | Input current         |      | 3.2  | A   |      |
| I <sub>sw</sub>   | Output current (SW)   |      | 3.2  | A   |      |
| I <sub>BAT</sub>  | Fast charging current |      | 3    | A   |      |
|                   | RMS discharge current |      | 6    | A   |      |
| T <sub>A</sub>    | Ambient temperature   | - 40 | 85   | °C  |      |

### 8.4 Thermal Information

| THERMAL METRIC <sup>(1)</sup> |  | BQ25611D   | UNIT |
|-------------------------------|--|------------|------|
|                               |  | RTW (WQFN) |      |
|                               |  | 24 Pins    |      |
| R <sub>θ JA</sub>             | Junction-to-ambient thermal resistance (JEDEC <sup>(1)</sup> ) | 35.6       | °C/W |
| R <sub>θ JC(top)</sub>        | Junction-to-case (top) thermal resistance                      | 22.7       | °C/W |

## 8.4 Thermal Information (continued)

| THERMAL METRIC <sup>(1)</sup> |  | BQ25611D   | UNIT |
|-------------------------------|--|------------|------|
|                               |  | RTW (WQFN) |      |
|                               |  | 24 Pins    |      |
| $R_{\theta JB}$               | Junction-to-board thermal resistance         | 11.9       | °C/W |
| $\Psi_{JT}$                   | Junction-to-top characterization parameter   | 0.2        | °C/W |
| $\Psi_{JB}$                   | Junction-to-board characterization parameter | 1.2        | °C/W |
| $R_{\theta JC(bot)}$          | Junction-to-case (bottom) thermal resistance | 2.6        | °C/W |

(1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics application report](#).

## 8.5 Electrical Characteristics

$V_{VBUS\_UVLOZ} < V_{VBUS} < V_{VBUS\_OV}$  and  $V_{VBUS} > V_{BAT} + V_{SLEEP}$ ,  $T_J = -40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$ , and  $T_J = 25^{\circ}\text{C}$  for typical values (unless otherwise noted)

| PARAMETER                 | TEST CONDITIONS  | MIN   | TYP   | MAX  | UNIT  |    |
|---------------------------|--|---|-------|------|-------|----|
| <b>QUIESCENT CURRENTS</b> |  |   |       |      |       |    |
| $I_{Q\_BAT}$              | $V_{BAT} = 4.5\text{ V}$ , VBUS floating or VBUS = 0V - 5 V, SCL, SDA = 0 V or 1.8 V, $T_J < 85^{\circ}\text{C}$ , BATFET enabled  |   | 9.5   | 15   | µA    |    |
| $I_{SHIP\_BAT}$           | $V_{BAT} = 4.5\text{ V}$ , VBUS floating or VBUS = 0V - 5 V, SCL, SDA = 0 V or 1.8 V, $T_J < 85^{\circ}\text{C}$ , BATFET disabled |   | 7     | 9.5  | µA    |    |
| $I_{VBUS}$                | Input current (VBUS) in buck mode when converter is switching  | $V_{BUS}=5\text{ V}$ , charge disabled, converter switching, ISYS = 0 A                                 |       | 2.3  | mA    |    |
| $I_{HIZ\_VBUS}$           | Quiescent input current in HIZ   | $V_{AC}/VBUS = 5\text{ V}$ , HIZ mode, no battery   | 37    | 50   | µA    |    |
|                           |  | $V_{AC}/VBUS = 12\text{ V}$ , HIZ mode, no battery  | 68    | 90   | µA    |    |
| $I_{BST}$                 | Quiescent battery current (BATSNS, BAT, SYS, SW) in boost mode when converter is switching   | $V_{BAT} = 4.5\text{ V}$ , VBUS = 5 V, boost mode enabled, converter switching, $I_{PMID} = 0\text{ A}$ |       | 2.4  | mA    |    |
| <b>VBUS / VBAT SUPPLY</b> |  |   |       |      |       |    |
| $V_{VBUS\_OP}$            | VBUS operating range   |   | 4     | 13.5 | V     |    |
| $V_{VBUS\_UVLOZ}$         | VBUS rising for active I2C, no battery   | VBUS rising   |       | 3.3  | 3.7   | V  |
| $V_{VBUS\_UVLO}$          | VBUS falling to turnoff I2C, no battery  | VBUS falling  |       | 3    | 3.3   | V  |
| $V_{VBUS\_PRESENT}$       | VBUS to enable REGN  | VBUS rising   |       | 3.65 | 3.9   | V  |
| $V_{VBUS\_PRESENTZ}$      | VBUS to disable REGN   | VBUS falling  |       | 3.15 | 3.4   | V  |
| $V_{SLEEP}$               | Enter Sleep mode threshold   | $V_{BUS}$ falling, $V_{BUS} - V_{BAT}$ , $V_{BAT} = 4\text{ V}$   | 15    | 60   | 110   | mV |
| $V_{SLEEPZ}$              | Exit Sleep mode threshold  | $V_{BUS}$ rising, $V_{BUS} - V_{BAT}$ , $V_{BAT} = 4\text{ V}$  | 115   | 220  | 340   | mV |
| $V_{ACOV}$                | VAC overvoltage rising threshold to turn off switching   | VAC rising, OVP[1:0]=00   | 5.45  | 5.85 | 6.07  | V  |
|                           |  | VAC rising, OVP[1:0]=01   | 6.1   | 6.4  | 6.75  | V  |
|                           |  | VAC rising, OVP[1:0]=10   | 10.45 | 11   | 11.55 | V  |
|                           |  | VAC rising, OVP[1:0]=11 (default)   | 13.5  | 14.2 | 14.85 | V  |
|                           | VAC overvoltage falling threshold to resume switching  | VAC falling, OVP[1:0]=00  | 5.2   | 5.6  | 5.8   | V  |
|                           |  | VAC falling, OVP[1:0]=01  | 5.8   | 6.2  | 6.45  | V  |
|                           |  | VAC falling, OVP[1:0]=10  | 10    | 10.7 | 11.1  | V  |
|                           |  | VAC falling, OVP[1:0]=11 (default)  | 13    | 13.9 | 14.5  | V  |
| $V_{BAT\_UVLOZ}$          | BAT voltage for active I2C, no VBUS  | VBAT rising   | 2.5   |      |       | V  |

## 8.5 Electrical Characteristics (continued)

$V_{VBUZ\_UVLOZ} < V_{VBUZ} < V_{VBUZ\_OV}$  and  $V_{VBUZ} > V_{BAT} + V_{SLEEP}$ ,  $T_J = -40^\circ\text{C}$  to  $+125^\circ\text{C}$ , and  $T_J = 25^\circ\text{C}$  for typical values (unless otherwise noted)

| PARAMETER                    | TEST CONDITIONS  | MIN  | TYP                      | MAX  | UNIT             |    |
|------------------------------|--|--|--------------------------|------|------------------|----|
| $V_{BAT\_DPLZ}$              | BAT depletion rising threshold to turn on BATFET           | VBAT rising  | 2.35                     | 2.8  | V                |    |
| $V_{BAT\_DPL}$               | BAT depletion falling threshold to turn off BATFET         | VBAT falling   | 2.18                     | 2.40 | 2.55             | V  |
| $V_{BAT\_DPL}$               | BAT depletion falling threshold to turn off BATFET         | VBAT falling   | $T_J = 25^\circ\text{C}$ |      | V                |    |
| $V_{POORSRC}$                | Bad adapter detection threshold                            | VBUS falling   | 3.75                     | 3.9  | 4.0              | V  |
| <b>POWER-PATH MANAGEMENT</b> |  |  |                          |      |                  |    |
| $V_{SYS\_MIN}$               | Typical minimum system regulation voltage                  | VBAT=3.2 V < $SYS\_MIN = 3.5$ V, $ISYS = 0$ A  | 3.5                      | 3.65 | V                |    |
| $V_{SYS\_OVP}$               | System overvoltage threshold                               | $VREG = 4.35$ V, Charge disabled, $ISYS = 0$ A   | 4.7                      |      | V                |    |
| $R_{ON\_RBFET}$              | Blocking FET on-resistance                                 |  | 45                       |      | $\text{m}\Omega$ |    |
| $R_{ON\_HSFET}$              | High-side switching FET on-resistance                      |  | 62                       |      | $\text{m}\Omega$ |    |
| $R_{ON\_LSFET}$              | Low-side switching FET on-resistance                       |  | 71                       |      | $\text{m}\Omega$ |    |
| $V_{BATFET\_FWD}$            | BATFET forward voltage in supplement mode                  | BAT discharge current 10 mA, converter running   | 30                       |      | mV               |    |
| <b>BATTERY CHARGER</b>       |  |  |                          |      |                  |    |
| $V_{REG\_RANGE}$             | Typical charge voltage regulation range                    |  | 3.49                     | 4.51 | V                |    |
| $V_{REG\_STEP}$              | Typical charge voltage step                                | $4.29$ V < $VREG < 4.51$ V   | 10                       |      | mV               |    |
| $V_{REG\_ACC}$               | Charge voltage accuracy                                    | $VREG = 4.09$ V, $T_J = -40^\circ\text{C} - 85^\circ\text{C}$  | 4.073                    | 4.09 | 4.106            | V  |
| $V_{REG\_ACC}$               | Charge voltage accuracy                                    | $VREG = 4.19$ V, $T_J = -40^\circ\text{C} - 85^\circ\text{C}$  | 4.173                    | 4.19 | 4.200            | V  |
| $V_{REG\_ACC}$               | Charge voltage accuracy                                    | $VREG = 4.35$ V, $T_J = -40^\circ\text{C} - 85^\circ\text{C}$  | 4.332                    | 4.35 | 4.367            | V  |
| $V_{REG\_ACC}$               | Charge voltage accuracy                                    | $VREG = 4.45$ V, $T_J = -40^\circ\text{C} - 85^\circ\text{C}$  | 4.432                    | 4.45 | 4.468            | V  |
| $I_{CHG\_RANGE}$             | Typical charge current regulation range                    |  | 0                        | 3    | A                |    |
| $I_{CHG\_STEP}$              | Typical charge current regulation step                     |  | 60                       |      | mA               |    |
| $I_{CHG\_ACC}$               | Fast charge current regulation accuracy                    | $I_{CHG} = 0.24$ A, $VBAT = 3.1$ V or $3.8$ V, $T_J = -40^\circ\text{C} - 85^\circ\text{C}$            | 0.2112                   | 0.24 | 0.2688           | A  |
|                              |  | $I_{CHG} = 0.72$ A, $VBAT = 3.1$ V or $3.8$ V, $T_J = -40^\circ\text{C} - 85^\circ\text{C}$            | 0.6768                   | 0.72 | 0.7632           | A  |
|                              |  | $I_{CHG} = 1.38$ A, $VBAT = 3.1$ V or $3.8$ V, $T_J = -40^\circ\text{C} - 85^\circ\text{C}$            | 1.2972                   | 1.38 | 1.4628           | A  |
| $I_{PRECHG\_RANGE}$          | Typical pre-charge current range                           |  | 60                       | 780  | mA               |    |
| $I_{PRECHG\_STEP}$           | Typical pre-charge current step                            |  | 60                       |      | mA               |    |
| $I_{PRECHG\_ACC}$            | Precharge current accuracy                                 | $VBAT = 2.6$ V, $I_{PRECHG} = 120$ mA  | 102                      | 120  | 138              | mA |
|                              |  | $VBAT = 2.6$ V, $I_{PRECHG} = 240$ mA  | 204                      | 240  | 276              | mA |
| $I_{TERM\_RANGE}$            | Typical termination current range                          |  | 60                       | 780  | mA               |    |
| $I_{TERM\_STEP}$             | Typical termination current step                           |  | 60                       |      | mA               |    |
| $I_{TERM\_ACC}$              | Termination current accuracy                               | $I_{TERM} = 180$ mA, $I_{CHG} > 780$ mA, $VREG = 4.35$ V, $T_J = -40^\circ\text{C} - 85^\circ\text{C}$ | 162                      | 180  | 192              | mA |
|                              |  | $I_{TERM} = 60$ mA, $I_{CHG} < 780$ mA, $VREG = 4.35$ V, $T_J = -40^\circ\text{C} - 85^\circ\text{C}$  | 42                       | 60   | 78               | mA |
| $V_{BAT\_SHORTZ}$            | Battery short voltage rising threshold to start pre-charge | VBAT rising  | 2.13                     | 2.25 | 2.35             | V  |

## 8.5 Electrical Characteristics (continued)

$V_{VBUS\_UVLOZ} < V_{VBUS} < V_{VBUS\_OV}$  and  $V_{VBUS} > V_{BAT} + V_{SLEEP}$ ,  $T_J = -40^\circ\text{C}$  to  $+125^\circ\text{C}$ , and  $T_J = 25^\circ\text{C}$  for typical values (unless otherwise noted)

| PARAMETER                                 |  | TEST CONDITIONS   | MIN   | TYP   | MAX   | UNIT             |
|---|--|---|-------|-------|-------|------------------|
| $V_{BAT\_SHORT}$                          | Battery short voltage falling threshold to stop pre-charge | VBAT falling  | 1.85  | 2     | 2.15  | V                |
| $I_{BAT\_SHORT}$                          | Battery short trickle charging current                     | $VBAT < V_{BAT\_SHORTZ}$  | 70    | 90    | 110   | mA               |
| $V_{BATLOWV}$                             | Battery LOWV rising threshold to start fast-charge         | VBAT rising   | 3     | 3.12  | 3.24  | V                |
|   | Battery LOWV falling threshold to stop fast-charge         | VBAT falling  | 2.7   | 2.8   | 2.9   | V                |
| $V_{RECHG}$                               | Battery recharge threshold                                 | $V_{RECHG}=0$ , VBAT falling (default)                                      | 90    | 120   | 150   | mV               |
|   |  | $V_{RECHG}=1$ , VBAT falling  | 185   | 210   | 245   | mV               |
| $I_{SYS\_LOAD}$                           | System discharge load current during SYSOVP                |   |       | 30    |       | mA               |
| $R_{ON\_BATFET}$                          | Battery FET on-resistance                                  | $T_J = -40^\circ\text{C} - 85^\circ\text{C}$                                | 19.5  | 26    |       | $\text{m}\Omega$ |
|   |  | $T_J = -40^\circ\text{C} - 125^\circ\text{C}$                               | 19.5  | 30    |       | $\text{m}\Omega$ |
| <b>BATTERY OVER-VOLTAGE PROTECTION</b>    |  |   |       |       |       |                  |
| $V_{BAT\_OVP}$                            | Battery overvoltage rising threshold                       | VBAT rising, as percentage of VREG  | 103   | 104   | 105   | %                |
|   | Battery overvoltage falling threshold                      | VBAT falling, as percentage of VREG   | 101   | 102   | 103   | %                |
| <b>INPUT VOLTAGE / CURRENT REGULATION</b> |  |   |       |       |       |                  |
| $V_{INDPM\_RANGE}$                        | Typical input voltage regulation range                     |   | 3.9   |       | 5.4   | V                |
| $V_{INDPM\_STEP}$                         | Typical input voltage regulation step                      |   |       | 100   |       | mV               |
| $V_{INDPM\_ACC}$                          | Typical input voltage regulation accuracy                  |   | 4.365 | 4.5   | 4.635 | V                |
| $V_{INDPM\_TRACK}$                        | VINDPM threshold to track battery voltage                  | $VBAT = 4.35 \text{ V}$ , $VINDPM\_BAT\_TRACK = VBAT + 200 \text{ mV}$      | 4.45  | 4.55  | 4.74  | V                |
| $I_{INDPM\_RANGE}$                        | Typical input current regulation range                     |   | 0.1   |       | 3.2   | A                |
| $I_{INDPM\_STEP}$                         | Typical input current regulation step                      |   |       | 100   |       | mA               |
| $I_{INDPM\_ACC}$                          | Input current regulation accuracy                          | $IINDPM = 500 \text{ mA}$ ( $T_J = -40^\circ\text{C} - 85^\circ\text{C}$ )  | 450   | 465   | 500   | mA               |
| $I_{INDPM\_ACC}$                          | Input current regulation accuracy                          | $IINDPM = 900 \text{ mA}$ ( $T_J = -40^\circ\text{C} - 85^\circ\text{C}$ )  | 750   | 835   | 900   | mA               |
| $I_{INDPM\_ACC}$                          | Input current regulation accuracy                          | $IINDPM = 1500 \text{ mA}$ ( $T_J = -40^\circ\text{C} - 85^\circ\text{C}$ ) | 1300  | 1390  | 1500  | mA               |
| <b>D+ / D- Detection</b>                  |  |   |       |       |       |                  |
| $V_{DP\_SRC}$                             | D+ line source voltage                                     |   | 500   | 600   | 700   | mV               |
| $I_{DP\_SRC}$                             | D+ line data contact detect current source                 | $VD+ = 200 \text{ mV}$ ,  | 7     | 10    | 14    | $\mu\text{A}$    |
| $I_{DP\_SINK}$                            | D+ line sink current                                       | $VD+ = 500 \text{ mV}$ ,  | 50    | 100   | 150   | $\mu\text{A}$    |
| $V_{DP\_DAT\_REF}$                        | D+ line data detect voltage                                | D+ pin Rising,  | 250   |       | 400   | mV               |
| $V_{DP\_LGC\_LOW}$                        | D+ line logic low.   | D+ pin Rising,  |       |       | 800   | mV               |
| $R_{DP\_DWN}$                             | D+ line pull-down resistance                               | $VD+ = 500 \text{ mV}$  |       | 14.25 |       | $\text{k}\Omega$ |
| $I_{D+\_LKG}$                             | Leakage current into D+ line                               | Pull up to 1.8 V  | -1    |       | 1     | $\mu\text{A}$    |
| $V_{DM\_SRC}$                             | D- line source voltage                                     |   | 500   | 600   | 700   | mV               |
| $I_{DM\_SINK}$                            | D- line sink current                                       | $VD- = 500 \text{ mV}$ ,  | 50    | 100   | 150   | $\mu\text{A}$    |
| $V_{DM\_DAT\_REF}$                        | D- line data detect voltage                                | D- pin Rising,  | 250   |       | 400   | mV               |
| $R_{DM\_DWN}$                             | D- line pull-down resistance                               | $VD- = 500 \text{ mV}$  |       | 14.25 |       | $\text{k}\Omega$ |

## 8.5 Electrical Characteristics (continued)

$V_{VBUS\_UVLOZ} < V_{VBUS} < V_{VBUS\_OV}$  and  $V_{VBUS} > V_{BAT} + V_{SLEEP}$ ,  $T_J = -40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$ , and  $T_J = 25^{\circ}\text{C}$  for typical values (unless otherwise noted)

| PARAMETER        | TEST CONDITIONS                                     | MIN              | TYP  | MAX  | UNIT          |
|------------------|---|------------------|------|------|---------------|
| $I_{D\_LKG}$     | Leakage current into D- line                        | Pull up to 1.8 V | - 1  | 1    | $\mu\text{A}$ |
| $V_{D+/D-\_2p8}$ | D+/D- comparator threshold for non-standard adapter |                  | 2.55 | 2.85 | V             |
| $V_{D+/D-\_2p0}$ | D+/D- comparator threshold for non-standard adapter |                  | 1.85 | 2.15 | V             |
| $V_{D+/D-\_1p2}$ | D+/D- comparator threshold for non-standard adapter |                  | 1.05 | 1.35 | V             |

### THERMAL REGULATION AND THERMAL SHUTDOWN

|            |  |                        |     |                    |
|------------|--|------------------------|-----|--------------------|
| $T_{REG}$  | Junction temperature regulation accuracy | TREG = 90°C            | 90  | $^{\circ}\text{C}$ |
|            |  | TREG = 110°C           | 110 | $^{\circ}\text{C}$ |
| $T_{SHUT}$ | Thermal Shutdown Rising threshold        | Temperature Increasing | 150 | $^{\circ}\text{C}$ |
|            | Thermal Shutdown Falling threshold       | Temperature Decreasing | 130 | $^{\circ}\text{C}$ |

### CHARGE MODE THERMISTOR COMPARATOR (JEITA 616J or HOT/COLD 616)

|                  |   |   |       |       |       |   |
|------------------|---|---|-------|-------|-------|---|
| $V_{T1\_RISE\%}$ | TS pin voltage rising threshold, Charge suspended above this voltage.                           | As Percentage to REGN (0°C w/ 103AT)            | 72.4  | 73.3  | 74.2  | % |
| $V_{T1\_FALL\%}$ | TS pin voltage falling threshold. Charge re-enabled to 20% of ICHG and VREG below this voltage. | As Percentage to REGN                           | 71.5  | 72    | 72.5  | % |
| $V_{T2\_RISE\%}$ | TS pin voltage rising threshold, Charge back to 20% of ICHG and VREG above this voltage.        | As Percentage to REGN, JEITA_T2 = 5°C w/ 103AT  | 70.25 | 70.75 | 71.25 | % |
|                  |   | As Percentage to REGN, JEITA_T2 = 10°C w/ 103AT | 67.75 | 68.25 | 68.75 | % |
|                  |   | As Percentage to REGN, JEITA_T2 = 15°C w/ 103AT | 64.75 | 65.25 | 65.75 | % |
|                  |   | As Percentage to REGN, JEITA_T2 = 20°C w/ 103AT | 61.75 | 62.25 | 62.75 | % |
| $V_{T2\_FALL\%}$ | TS pin voltage falling threshold. Charge back to ICHG and VREG below this voltage.              | As Percentage to REGN, JEITA_T2=5°C w/ 103AT    | 68.7  | 69.2  | 69.7  | % |
|                  |   | As Percentage to REGN, JEITA_T2=10°C w/ 103AT   | 66.45 | 66.95 | 67.45 | % |
|                  |   | As Percentage to REGN, JEITA_T2=15°C w/ 103AT   | 63.7  | 64.2  | 64.7  | % |
|                  |   | As Percentage to REGN, JEITA_T2=20°C w/ 103AT   | 60.7  | 61.2  | 61.7  | % |
| $V_{T3\_FALL\%}$ | TS pin voltage falling threshold. Charge to ICHG and 4.1V below this voltage.                   | As Percentage to REGN, JEITA_T3=40°C w/ 103AT   | 47.75 | 48.25 | 48.75 | % |
|                  |   | As Percentage to REGN, JEITA_T3=45°C w/ 103AT   | 44.25 | 44.75 | 45.25 | % |
|                  |   | As Percentage to REGN, JEITA_T3=50°C w/ 103AT   | 40.2  | 40.7  | 41.2  | % |
|                  |   | As Percentage to REGN, JEITA_T3=55°C w/ 103AT   | 37.2  | 37.7  | 38.2  | % |

## 8.5 Electrical Characteristics (continued)

$V_{VBUS\_UVLOZ} < V_{VBUS} < V_{VBUS\_OV}$  and  $V_{VBUS} > V_{BAT} + V_{SLEEP}$ ,  $T_J = -40^\circ\text{C}$  to  $+125^\circ\text{C}$ , and  $T_J = 25^\circ\text{C}$  for typical values (unless otherwise noted)

| PARAMETER  | TEST CONDITIONS   | MIN  | TYP  | MAX  | UNIT |     |
|--|---|--|------|------|------|-----|
| $V_{T3\_RISE\%}$                                   | As Percentage to REGN, JEITA_T3 = $40^\circ\text{C}$ w/ 103AT                     | 48.8   | 49.3 | 49.8 | %    |     |
|  | As Percentage to REGN, JEITA_T3 = $45^\circ\text{C}$ w/ 103AT                     | 45.3   | 45.8 | 46.3 | %    |     |
|  | As Percentage to REGN, JEITA_T3 = $50^\circ\text{C}$ w/ 103AT                     | 41.3   | 41.8 | 42.3 | %    |     |
|  | As Percentage to REGN, JEITA_T3 = $55^\circ\text{C}$ w/ 103AT                     | 38.5   | 39   | 39.5 | %    |     |
| $V_{T5\_FALL\%}$                                   | TS pin voltage falling threshold, charge suspended below this voltage.            | As Percentage to REGN ( $60^\circ\text{C}$ w/ 103AT)                   | 33.7 | 34.2 | 35.1 | %   |
| $V_{T5\_RISE\%}$                                   | TS pin voltage rising threshold. Charge back to ICHG and 4.1V above this voltage. | As Percentage to REGN  | 35   | 35.5 | 36   | %   |
| <b>BOOST MODE THERMISTOR COMPARATOR (HOT/COLD)</b> |   |  |      |      |      |     |
| $V_{BCOLD\_RISE\%}$                                | TS pin voltage rising threshold, boost mode is suspended above this voltage.      | As Percentage to REGN ( $-19.5^\circ\text{C}$ w/ 103AT)                | 79.5 | 80   | 80.5 | %   |
| $V_{BCOLD\_FALL\%}$                                | TS pin voltage falling threshold  | As Percentage to REGN ( $0^\circ\text{C}$ w/ 103AT)                    |      | 72   |      | %   |
| $V_{BHOT\_FALL\%}$                                 | TS pin voltage threshold. boost mode is suspended below this voltage.             | As Percentage to REGN, ( $64^\circ\text{C}$ w/ 103AT)                  | 30.2 | 31.2 | 32.2 | %   |
| $V_{BHOT\_RISE\%}$                                 | TS pin voltage rising threshold   | As Percentage to REGN, ( $55^\circ\text{C}$ w/ 103AT), REG0C[1:0] = 11 |      | 39   |      | %   |
| <b>SWITCHING CONVERTER</b>                         |   |  |      |      |      |     |
| $F_{SW}$   | PWM switching frequency   | Oscillator frequency   | 1.32 | 1.5  | 1.68 | MHz |
| $D_{MAX}$  | Maximum PWM Duty Cycle  |  |      | 97   |      | %   |
| <b>BOOST MODE CONVERTER</b>                        |   |  |      |      |      |     |
| $V_{BST\_BAT}$                                     | Battery voltage exiting boost mode  | BAT falling  | 2.4  | 2.5  | 2.6  | V   |
| $V_{BST\_RANGE}$                                   | Typical boost mode voltage regulation range                                       |  | 4.6  |      | 5.15 | V   |
| $V_{BST\_ACC}$                                     | Boost mode voltage regulation accuracy  | $IV_{BUS} = 0 \text{ A}$ , $BOOST\_V = 5 \text{ V}$                    | 4.85 | 5    | 5.15 | V   |
| $I_{BST\_RANGE}$                                   | Typical boost mode current regulation   |  | 0.5  |      | 1.2  | A   |
| $I_{BST\_ACC}$                                     | Boost mode maximum output current limit   |  | 1.2  | 1.4  | 1.6  | A   |
| $I_{BST\_OCP\_Q1}$                                 | Boost mode battery discharge current clamp on RBFET Q1                            | $BOOST\_LIM = 0.5 \text{ A}$   | 0.5  |      | 0.72 | A   |
| $I_{SYS\_OCP\_Q4}$                                 | Boost mode battery discharge current clamp on BATFET Q4                           |  | 9    | 10   |      | A   |
| <b>REGN LDO</b>                                    |   |  |      |      |      |     |
| $V_{REGN}$   | REGN LDO output voltage   | $V_{VBUS} = 5 \text{ V}$ , $I_{REGN} = 20 \text{ mA}$                  | 4.58 | 4.7  | 4.8  | V   |
|  |   | $V_{VBUS} = 9 \text{ V}$ , $I_{REGN} = 20 \text{ mA}$                  | 5.6  | 6    | 6.5  | V   |
| $I_{REGN}$   | REGN LDO current limit  | $V_{VBUS} = 5 \text{ V}$ , $V_{REGN} = 3.8 \text{ V}$                  | 50   |      |      | mA  |
| <b>I2C INTERFACE (SCL, SDA)</b>                    |   |  |      |      |      |     |
| $V_{IH}$   | Input high threshold level, SDA and SCL   | Pull up rail 1.8 V   | 1.3  |      |      | V   |
| $V_{IL}$   | Input low threshold level   | Pull up rail 1.8 V   |      | 0.4  |      | V   |

## 8.5 Electrical Characteristics (continued)

$V_{VBUS\_UVLOZ} < V_{VBUS} < V_{VBUS\_OV}$  and  $V_{VBUS} > V_{BAT} + V_{SLEEP}$ ,  $T_J = -40^\circ\text{C}$  to  $+125^\circ\text{C}$ , and  $T_J = 25^\circ\text{C}$  for typical values (unless otherwise noted)


| PARAMETER   |  | TEST CONDITIONS     | MIN | TYP | MAX | UNIT          |
|---|--|---------------------|-----|-----|-----|---------------|
| $V_{OL}$  | Output low threshold level                   | Sink current = 5 mA |     | 0.4 |     | V             |
| $I_{BIAS}$  | High-level leakage current                   | Pull up rail 1.8 V  |     | 1   |     | $\mu\text{A}$ |
| $V_{IH\_SDA}$   | Input high threshold level, SDA              | Pull up rail 1.8 V  | 1.3 |     |     | V             |
| $V_{IL\_SDA}$   | Input low threshold level                    | Pull up rail 1.8 V  |     | 0.4 |     | V             |
| $V_{OL\_SDA}$   | Output low threshold level                   | Sink current = 5 mA |     | 0.4 |     | V             |
| $I_{BIAS\_SDA}$                                       | High-level leakage current                   | Pull up rail 1.8 V  |     | 1   |     | $\mu\text{A}$ |
| $V_{IH\_SCL}$   | Input high threshold level, SDA              | Pull up rail 1.8 V  | 1.3 |     |     | V             |
| $V_{IL\_SCL}$   | Input low threshold level                    | Pull up rail 1.8 V  |     | 0.4 |     | V             |
| $V_{OL\_SCL}$   | Output low threshold level                   | Sink current = 5 mA |     | 0.4 |     | V             |
| $I_{BIAS\_SCL}$                                       | High-level leakage current                   | Pull up rail 1.8 V  |     | 1   |     | $\mu\text{A}$ |
| <b>LOGIC INPUT PIN</b>                                |  |                     |     |     |     |               |
| $V_{IH}$  | Input high threshold level (/CE)             |                     | 1.3 |     |     | V             |
| $V_{IL}$  | Input low threshold level (/CE)              |                     |     | 0.4 |     | V             |
| $I_{IN\_BIAS}$  | High-level leakage current (/CE)             | Pull up rail 1.8 V  |     | 1   |     | $\mu\text{A}$ |
| <b>LOGIC OUTPUT PIN</b>                               |  |                     |     |     |     |               |
| $V_{OL}$  | Output low threshold level (/INT, STAT, /PG) | Sink current = 5 mA |     | 0.4 |     | V             |
| $I_{OUT\_BIAS}$                                       | High-level leakage current (/INT, STAT, /PG) | Pull up rail 1.8 V  |     | 1   |     | $\mu\text{A}$ |
| <b>CHARGE OVERCURRENT COMPARATOR (CYCLE-BY-CYCLE)</b> |  |                     |     |     |     |               |
| $I_{HSFET\_OCP}$                                      | HSFET cycle-by-cycle over-current threshold  |                     | 5.2 | 8.0 |     | A             |

## 8.6 Timing Requirements


|                                   |   | MIN | NOM | MAX | UNIT |
|-----------------------------------|---|-----|-----|-----|------|
| <b>VBUS / VBAT POWER UP</b>       |   |     |     |     |      |
| $t_{VBUS\_OV}$                    | VBUS OVP Reaction-time  |     | 130 |     | ns   |
| $t_{POORSRC}$                     | Bad adapter detection duration  |     | 30  |     | ms   |
| $t_{POORSRC\_RETRY}$              | Bad adapter detection retry wait time   |     | 2   |     | s    |
| <b>BATTERY CHARGER</b>            |   |     |     |     |      |
| $t_{TERM\_DGL}$                   | Deglitch time for charge termination  |     | 30  |     | ms   |
| $t_{RECHG\_DGL}$                  | Deglitch time for recharge threshold  |     | 30  |     | ms   |
| $t_{TOP\_OFF}$                    | Typical top-off timer accuracy $\text{TOP\_OFF\_TIMER}[1:0]=10$   | 24  | 30  | 36  | min  |
| $t_{SAFETY}$                      | Charge safety timer accuracy, $\text{CHG\_TIMER} = 20\text{hr}$   | 17  | 20  | 24  | hr   |
| $t_{SAFETY}$                      | Charge safety timer accuracy, $\text{CHG\_TIMER} = 10\text{hr}$   | 8   | 10  | 12  | hr   |
| <b>QON Timing</b>                 |   |     |     |     |      |
| $t_{SHIPMODE}$                    | QON low time to turn on BATFET and exit shipmode ( $-10^\circ\text{C} \leqslant T_J \leqslant 60^\circ\text{C}$ ) |     | 0.9 | 1.3 | s    |
| $t_{QON\_RST}$                    | QON low time before BATFET full system reset ( $-10^\circ\text{C} \leqslant T_J \leqslant 60^\circ\text{C}$ )     |     | 8   | 12  | s    |
| $t_{BATFET\_RST}$                 | BATFET off time during full system reset ( $-10^\circ\text{C} \leqslant T_J \leqslant 60^\circ\text{C}$ )         |     | 250 | 400 | ms   |
| $t_{BATFET\_DLY}$                 | Delay time before BATFET turn off in ship mode ( $-10^\circ\text{C} \leqslant T_J \leqslant 60^\circ\text{C}$ )   |     | 10  | 15  | s    |
| <b>DIGITAL CLOCK AND WATCHDOG</b> |   |     |     |     |      |
| $f_{LPDIG}$                       | Digital low-power clock (REGN LDO is disabled)  |     | 30  |     | kHz  |

|               |  | MIN | NOM | MAX | UNIT |
|---------------|--|-----|-----|-----|------|
| $f_{DIG}$     | Digital power clock                              |     | 500 |     | kHz  |
| $t_{LP\_WDT}$ | Watchdog Reset time                              |     | 160 |     | s    |
| $t_{WDT}$     | Watchdog Reset time (WATCHDOG REG05[5:4] = 160s) |     | 160 |     | s    |

## 8.7 Typical Characteristics

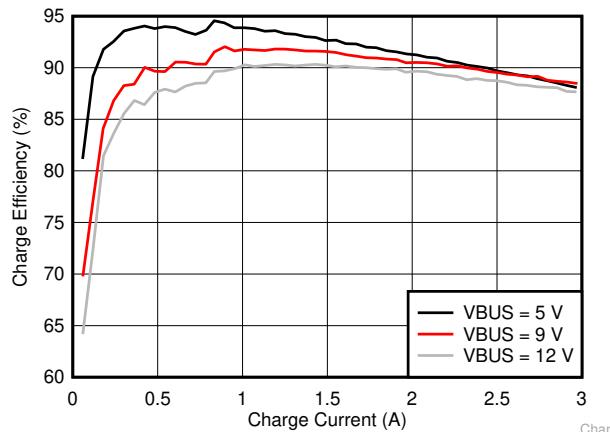

$V_{BUS} = 5 \text{ V}, 9 \text{ V}, 12 \text{ V}$     $V_{BAT} = 3.8 \text{ V}$    Inductor  $1\mu\text{H}$ , DCR =  $14.6 \text{ m}\Omega$

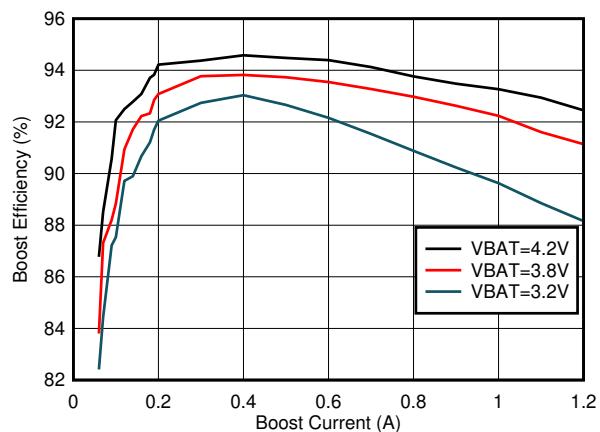

$V_{BAT} = 3.2 \text{ V}, 3.8 \text{ V}, 4.2 \text{ V}$     $V_{BUS} = 5 \text{ V}$    Inductor  $1\mu\text{H}$ , DCR =  $14.6 \text{ m}\Omega$

图 8-1. Charge Efficiency

图 8-2. Boost Efficiency

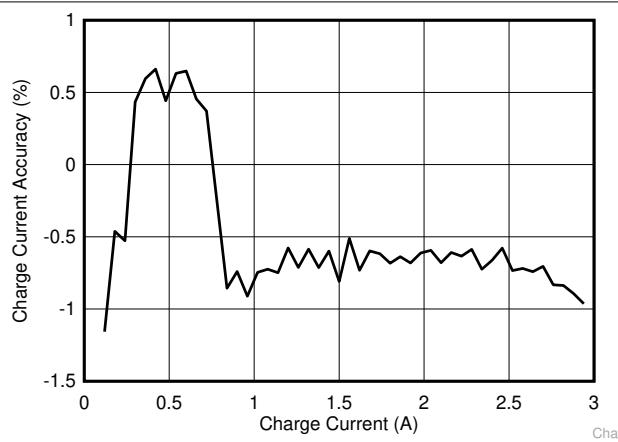


图 8-3. Charge Current Accuracy

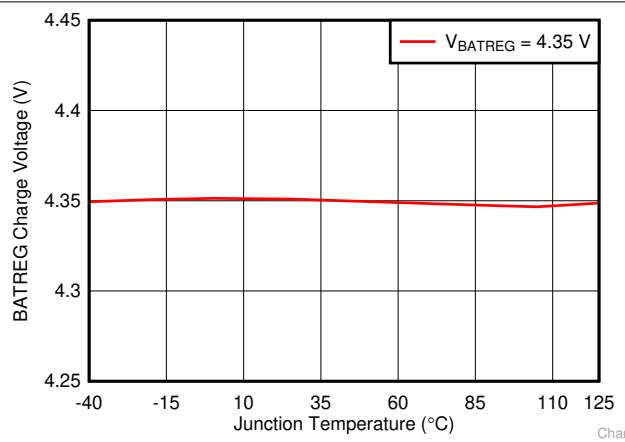


图 8-4. Battery Charge Voltage vs Junction Temperature

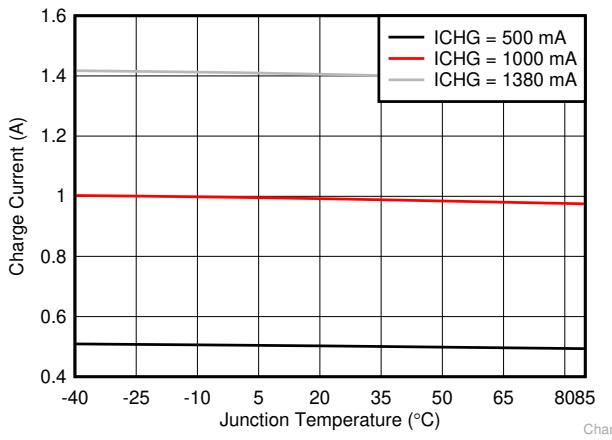


图 8-5. Charge Current vs Junction Temperature

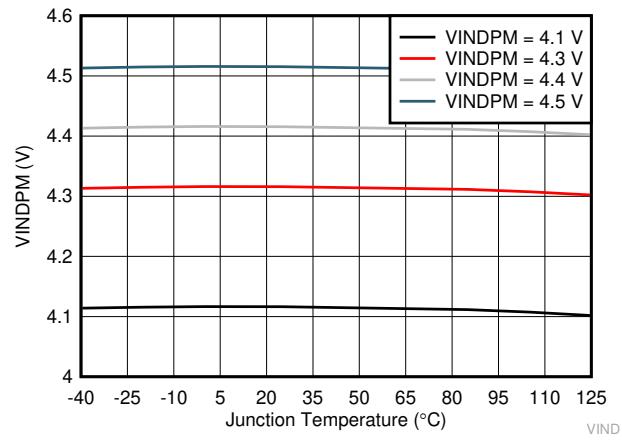


图 8-6. VINDPM vs Junction Temperature

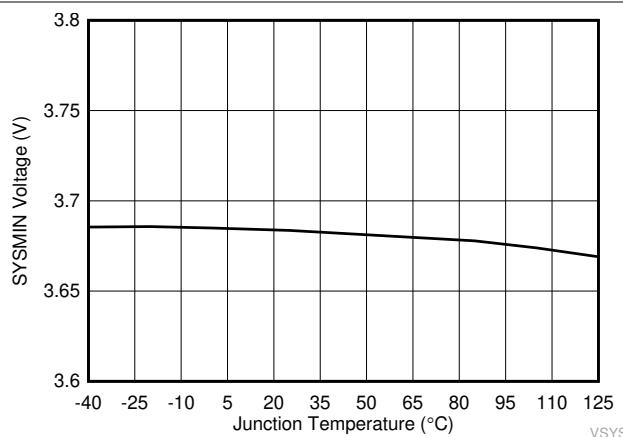


图 8-7. SYSMIN Voltage vs Junction Temperature (VSYs set at 3.5V)

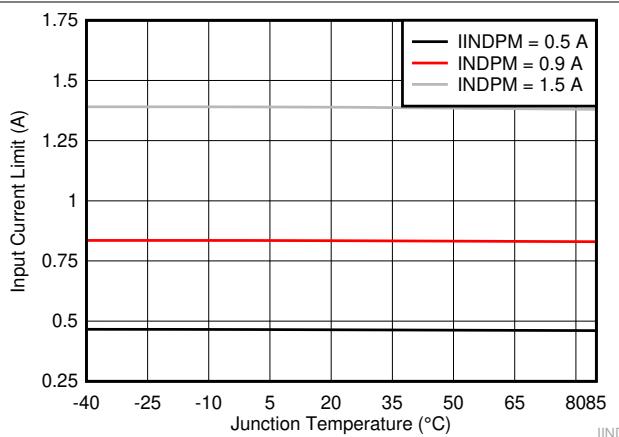


图 8-8. Input Current Limit vs Junction Temperature

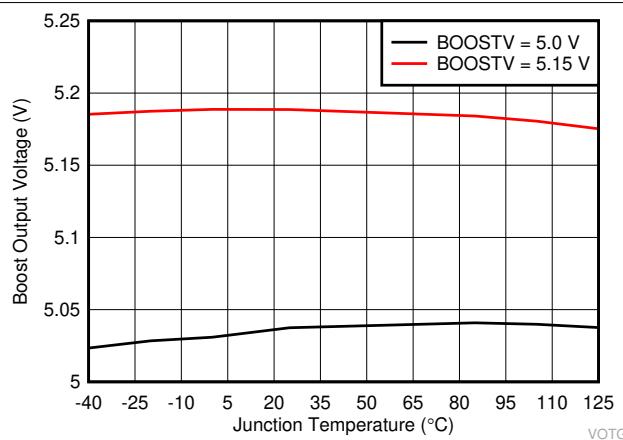


图 8-9. Boost Output Voltage vs Junction Temperature

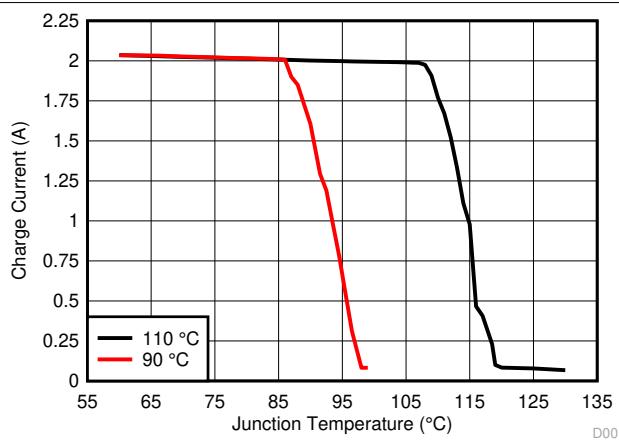



图 8-10. Charge Current vs Junction Temperature

## 9 Detailed Description

## 9.1 Overview

The BQ25611D device is a highly integrated 3.0-A switch-mode battery charger for single cell Li-Ion and Li-polymer battery. It includes the input reverse-blocking FET (RBFET, Q1), high-side switching FET (HSFET, Q2), low-side switching FET (LSFET, Q3), and battery FET (BATFET, Q4), and bootstrap diode for the high-side gate drive.

## 9.2 Functional Block Diagram

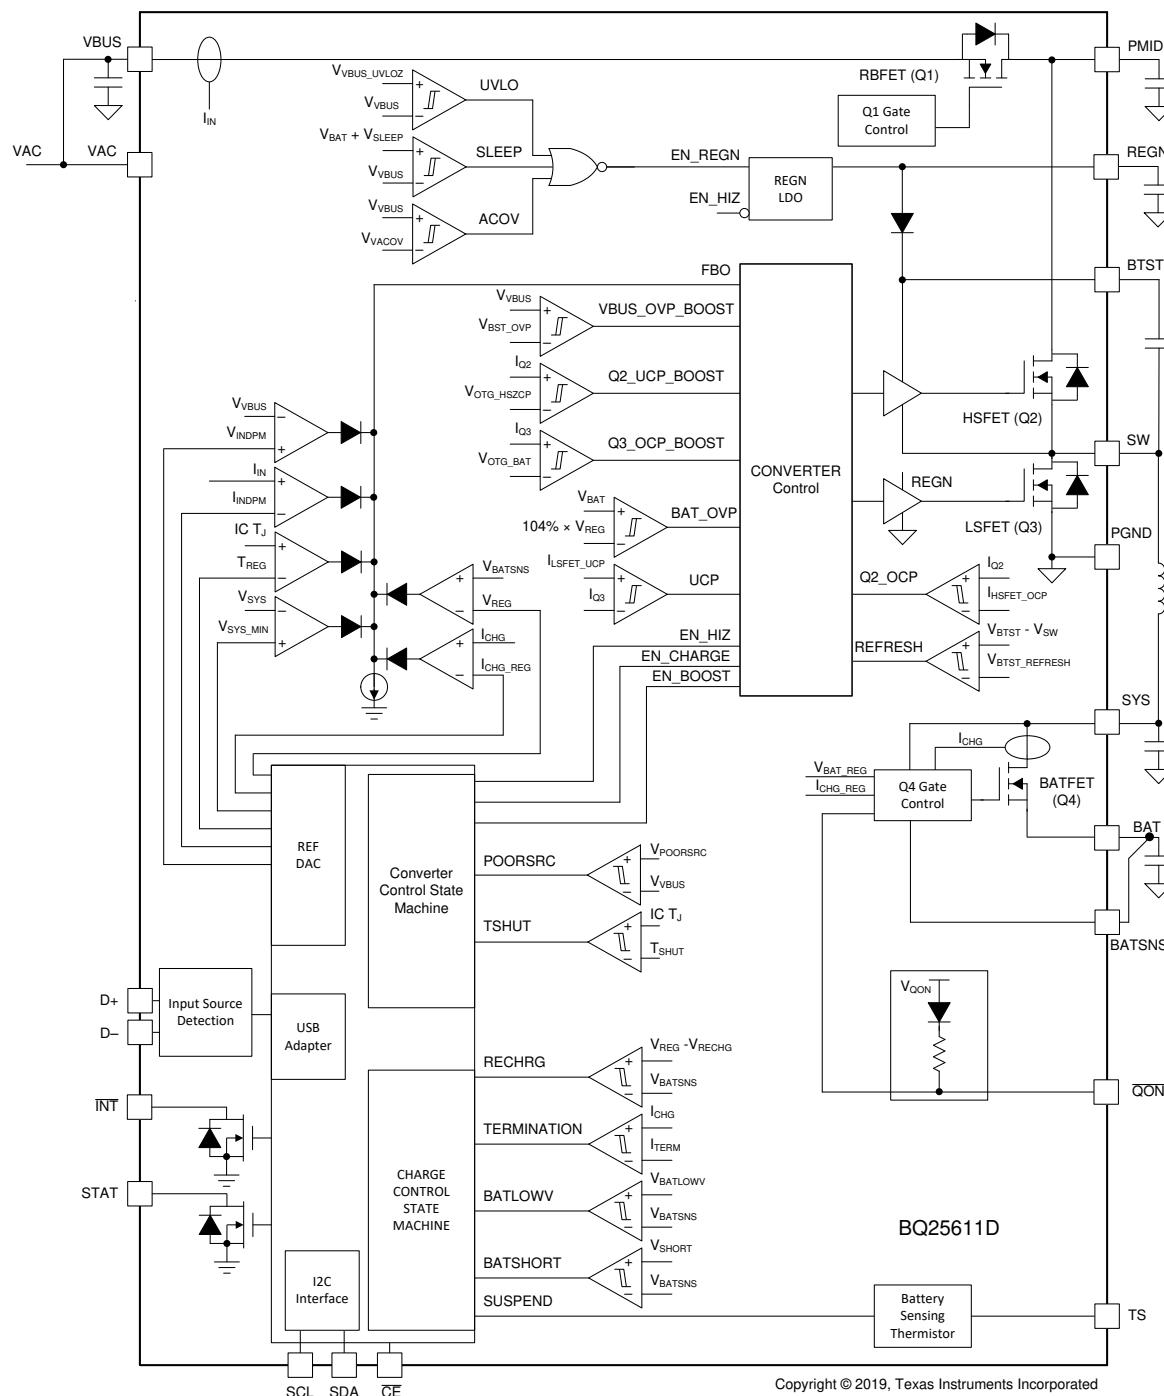

## 9.3 Feature Description

### 9.3.1 Power-On-Reset (POR)

The device powers internal bias circuits from the higher voltage of VBUS and BAT. When  $V_{VBUS}$  rises above  $V_{VBUS\_UVLOZ}$  or  $V_{BAT}$  rises above  $V_{BAT\_UVLOZ}$ , the sleep comparator, battery depletion comparator and BATFET driver are active. I<sup>2</sup>C interface is ready for communication and all the registers are reset to default value. The host can access all the registers after POR.

### 9.3.2 Device Power Up from Battery without Input Source

If only the battery is present and the voltage is above depletion threshold ( $V_{BAT\_DPLZ}$ ), the BATFET turns on and connects the battery to the system. The REGN stays off to minimize the quiescent current. The low  $R_{DS(on)}$  of BATFET and the low quiescent current on BAT minimize the conduction loss and maximize the battery run time.

The device always monitors the discharge current through BATFET. When the system is overloaded or shorted ( $I_{BAT} > I_{SYS\_OCP\_Q4}$ ), the device turns off BATFET immediately until the input source plugs in again.

With I<sup>2</sup>C, when the BATFET turns off due to over-current, the device sets the BATFET\_DIS bit to indicate the BATFET is disabled until the input source plugs in again or one of the methods described in the [节 9.3.7.2](#) section is applied to re-enable BATFET.

### 9.3.3 Power Up from Input Source

When an input source is plugged in, the device checks the input source voltage to turn on the REGN LDO and all the bias circuits. It detects and sets the input current limit before the buck converter is started. The power up sequence from input source is as listed:

1. Power Up REGN LDO, see [Power Up REGN LDO](#) section
2. Poor Source Qualification, see [Poor Source Qualification](#) section
3. Input Source Type Detection is based on D+/D - to set default input current limit (IINDPM threshold), see [Input Source Type Detection \(IINDPPM Threshold\)](#) section
4. Input Voltage Limit Threshold Setting (VINDPM threshold), see [Input Voltage Limit Thresholding Setting \(VINDPM Threshold\)](#) section
5. Power Up Converter, see [Power Up Converter in Buck Mode](#) section

#### 9.3.3.1 Power Up REGN LDO

The REGN LDO supplies internal bias circuits as well as the HSFET and LSFET gate drive. It also provides the bias rail to TS external resistors. The pull-up rail of STAT can be connected to REGN as well. The REGN LDO is enabled when all the below conditions are valid:

- $V_{VBUS} > V_{VBUS\_UVLOZ}$
- In buck mode,  $V_{VBUS} > V_{BAT} + V_{SLEEPZ}$
- In boost mode,  $V_{VBUS} < V_{BAT} + V_{SLEEPZ}$
- After 220-ms delay is completed

During high impedance mode when EN\_HIZ bit is 1, REGN LDO turns off. The battery powers up the system.

#### 9.3.3.2 Poor Source Qualification

After the REGN LDO powers up, the device starts to check current capability of the input source. The first step is poor source detection.

- VBUS voltage above  $V_{POORSRC}$  when pulling  $I_{BADSRC}$  (typical 30 mA)

With I<sup>2</sup>C, once the input source passes poor source detection, the status register bit VBUS\_GD is set to 1 and the INT pin is pulsed to signal to the host.

If the device fails the poor source detection, it repeats poor source qualification every 2 seconds.

### 9.3.3.3 Input Source Type Detection (IINDPM Threshold)

After poor source detection, the device runs input source detection through D+/D- lines. The D+/D- detection follows the USB Battery Charging Specification 1.2 (BC1.2) to detect standard (SDP/CDP/DCP) and non-standard adapters through USB D+/D- lines.

With I<sup>2</sup>C, after input source type detection is completed, an INT pulse is asserted to the host. in addition, the following register bits are updated:

The host can over-write the IINDPM register to change the input current limit if needed.

#### 9.3.3.3.1 D+/D- Detection Sets Input Current Limit

The device contains a D+/D- based input source detection to set the input current limit when a 5-V adapter is plugged-in. The D+/D- detection includes standard USB BC1.2 and non-standard adapters. When an input source is plugged in, the device starts standard USB BC1.2 detection. The USB BC1.2 is capable of identifying Standard Downstream Port (SDP), Charging Downstream Port (CDP) and Dedicated Charging Port (DCP). The non-standard detection is used to distinguish vendor specific adapters (Apple and Samsung) based on their unique dividers on the D+/D- pins. If an adapter is detected as DCP, the input current limit is set at 2.4-A. If an adapter is detected as unknown, the input current limit is set at 0.5 A by ILIM pin.

The secondary detection is used to distinguish two types of charging ports (CDP and DCP). The protocol for secondary detection is as follows:

Most of the time, a CDP requires the portable device (such as smart phone, tablet) to send back an enumeration within 2.5 seconds of CDP plug-in. Otherwise, the port will power cycle back to SDP even the D+/D- detection indicates CDP.

**表 9-1. Non-Standard Adapter Detection**

| NON-STANDARD ADAPTER | D+ THRESHOLD                     | D- THRESHOLD                     | INPUT CURRENT LIMIT (A) |
|----------------------|----------------------------------|----------------------------------|-------------------------|
| Divider 1            | $V_{D+}$ within $V_{D+/D-\_2p8}$ | $V_{D-}$ within $V_{D+/D-\_2p0}$ | 2.1                     |
| Divider 2            | $V_{D+}$ within $V_{D+/D-\_1p2}$ | $V_{D-}$ within $V_{D+/D-\_1p2}$ | 2                       |
| Divider 3            | $V_{D+}$ within $V_{D+/D-\_2p0}$ | $V_{D-}$ within $V_{D+/D-\_2p8}$ | 1                       |
| Divider 4            | $V_{D+}$ within $V_{D+/D-\_2p8}$ | $V_{D-}$ within $V_{D+/D-\_2p8}$ | 2.4                     |

**表 9-2. Input Current Limit Setting from D+/D- Detection**

| D+/D- DETECTION     | INPUT CURRENT LIMIT (IINLIM) |
|---------------------|------------------------------|
| USB SDP (USB500)    | 500 mA                       |
| USB DCP             | 2.4 A                        |
| Divider 3           | 1 A                          |
| Divider 1           | 2.1 A                        |
| Divider 4           | 2.4 A                        |
| Divider 2           | 2 A                          |
| Unknown 5-V Adapter | 500 mA                       |

#### 9.3.3.4 Input Voltage Limit Threshold Setting (VINDPM Threshold)

The device has two modes to set the VINDPM threshold.

- Fixed VINDPM threshold. The VINDPM is in default set at 4.5 V (programmable from 3.9 V to 5.4 V).
- VINDPM threshold tracks the battery voltage to optimize the converter headroom between input and output. When it is enabled in REG07[1:0], the actual input voltage limit is the higher of the VINDPM setting in register and  $V_{BAT}$  + offset voltage in VINDPM\_BAT\_TRACK[1:0].

### 9.3.3.5 Power Up Converter in Buck Mode

After the input current limit is set, the converter is enabled and the HSFET and LSFET start switching. The system voltage is powered from the converter instead of the battery. If battery charging is disabled, the BATFET turns off. Otherwise, the BATFET stays on to charge the battery.

The device provides soft-start when system rail is ramping up. When the system rail is below  $V_{BAT\_SHORT}$ , the input current is limited to the lower of 200-mA or IINDPM register setting. The system load shall be appropriately planned not to exceed the 200-mA IINDPM limit. After the system rises above  $V_{BAT\_SHORTZ}$ , the device input current limit is the value set by the IINDPM register.

As a battery charger, the device deploys a highly efficient 1.5-MHz step-down switching regulator. The fixed frequency oscillator keeps tight control of the switching frequency under all conditions of input voltage, battery voltage, charge current and temperature simplifying output filter design.

The converter supports PFM operation by default for fast transient response during system voltage regulation and better light load efficiency. The PFM\_DIS bit disables PFM operation if system voltage is not in regulation.

### 9.3.3.6 HIZ Mode with Adapter Present

By setting EN\_HIZ bit to 1 with adapter, the device enters high impedance state (HIZ). In HIZ mode, the system is powered from battery even with good adapter present. The device is in the low input quiescent current state with Q1 RBFET, REGN LDO and the bias circuits off.

### 9.3.4 Boost Mode Operation From Battery

The device supports boost converter operation to deliver power from the battery to other portable devices through a USB port. The output voltage is regulated at 5-V (programmable 4.6/4.75/5.0/5.15 V) and output current is up to 1.2 A (programmable 0.5 A/1.2 A) with constant current regulation. The user needs to have at least 350 mV between  $V_{BAT}$  and boost mode regulation voltage ( $V_{BST}$ ) to power up boost mode reliably. For example, BOOSTV[1:0] setting is recommended to be 4.75 V or higher if the battery voltage is 4.4 V.

The boost operation is enabled if the conditions below are valid:

1. Register setting: BATFET\_DIS = 0, CHG\_COFIG = 0 and BST\_CONFIG = 1
2. BAT above  $V_{BST\_BAT}$  set by MIN\_VBAT\_SEL bit,
3. VBUS less than  $V_{BAT} + V_{SLEEP}$  (in sleep mode) before converter starts.
4. Voltage at TS (thermistor) pin, as a percentage of  $V_{REGN}$ , is within acceptable range ( $V_{BHOI\_RISE\%} < V_{TS\%} < V_{BCOLD\_FALL\%}$ )
5. After 30-ms delay from boost mode enable .

During boost mode, the status register VBUS\_STAT bits is set to 111 .

The converter supports PFM operation at light load in boost mode. The PFM\_DIS bit can be used to disable PFM operation in boost configuration.

### 9.3.5 Power Path Management

The device accommodates a wide range of input sources such as USB, wall adapter, or car charger. The device provides automatic power path selection to supply the system (SYS) from the input source (VBUS), battery (BAT), or both.

#### 9.3.5.1 Narrow VDC Architecture

The device deploys Narrow VDC architecture (NVDC) with BATFET separating system from battery. The minimum system voltage is set by SYS\_Min bits. Even with a fully depleted battery, the system is regulated above the minimum system voltage.

When the battery is below the minimum system voltage setting, the BATFET operates in linear mode (LDO mode), and the system is typically 180 mV above the minimum system voltage setting. As the battery voltage rises above the minimum system voltage, the BATFET is fully on and the voltage difference between the system and battery is the  $V_{DS}$  of the BATFET.

When battery charging is disabled and above the minimum system voltage setting or charging is terminated, the system is always regulated at typically 50 mV above the battery voltage. The status register VSYS\_STAT bit goes to 1 when the system is in minimum system voltage regulation.

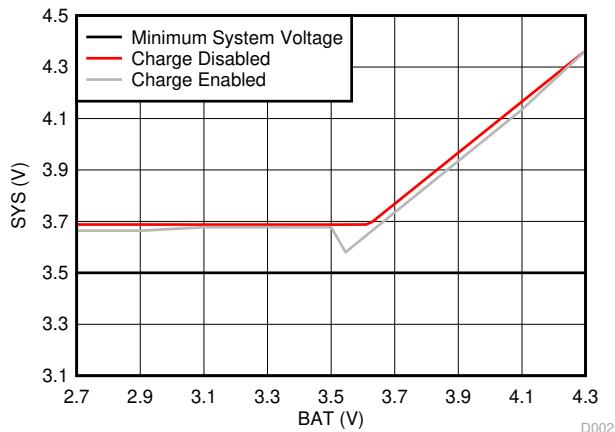


图 9-1. System Voltage vs Battery Voltage

### 9.3.5.2 Dynamic Power Management

To meet the maximum current limit in the USB specification and avoid overloading the adapter, the device features Dynamic Power Management (DPM), which continuously monitors the input current and input voltage. When input source is overloaded, either the current exceeds the input current limit (IINDPM) or the voltage falls below the input voltage limit (VINDPM). The device then reduces the charge current until the input current falls below the input current limit or the input voltage rises above the input voltage limit.

When the charge current is reduced to zero, but the input source is still overloaded, the system voltage starts to drop. Once the system voltage falls below the battery voltage, the device automatically enters the supplement mode where the BATFET turns on and the battery starts discharging so that the system is supported from both the input source and battery.

During DPM mode, the status register bits VINDPM\_STAT or IINDPM\_STAT go to 1.

图 9-2 shows the DPM response with 9-V/1.2-A adapter, 3.2-V battery, 2.8-A charge current and 3.5-V minimum system voltage setting.

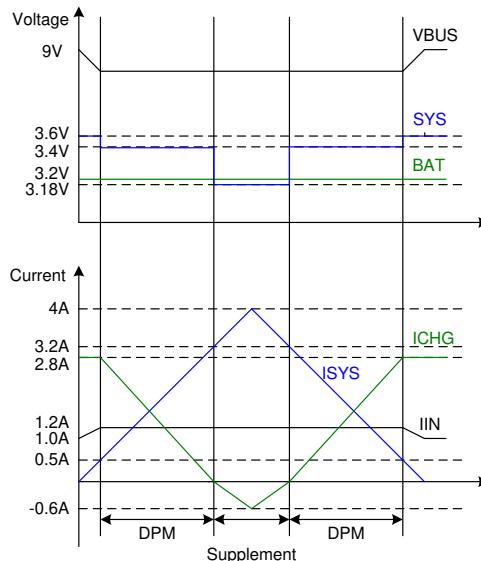
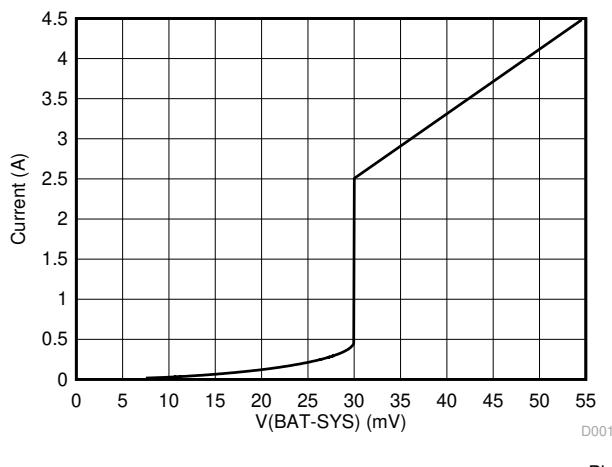


图 9-2. DPM Response

### 9.3.5.3 Supplement Mode

When the system voltage falls below the battery voltage, the BATFET turns on and the BATFET gate is regulated so that the minimum BATFET  $V_{DS}$  stays at 30 mV when the current is low. This prevents oscillation from entering and exiting the supplement mode.

As the discharge current increases, the BATFET gate is regulated with a higher voltage to reduce  $R_{DS(on)}$  until the BATFET is in full conduction. At this point onwards, the BATFET  $V_{DS}$  linearly increases with discharge current. [图 9-3](#) shows the V-I curve of the BATFET gate regulation operation. The BATFET turns off to exit supplement mode when the battery is below battery depletion threshold.



**图 9-3. BAFET V-I Curve**

### 9.3.6 Battery Charging Management

The device charges 1-cell Li-Ion battery with up to 3.0-A charge current for high capacity tablet battery. The 19.5- $\text{m}\Omega$  BATFET improves charging efficiency and minimizes the voltage drop during discharging.

#### 9.3.6.1 Autonomous Charging Cycle

When battery charging is enabled (CHG\_CONFIG bit = 1 and  $\overline{\text{CE}}$  pin is LOW), the device autonomously completes a charging cycle without host involvement. The device default charging parameters are listed in [表 9-3](#). The host configures the power path and charging parameters by writing to the corresponding registers through I<sup>2</sup>C.

**表 9-3. Charging Parameter Default Setting**

| DEFAULT MODE        | BQ25611D |
|---------------------|----------|
| Charging voltage    | 4.20 V   |
| Charging current    | 1.02 A   |
| Pre-charge current  | 180 mA   |
| Termination current | 180 mA   |
| Temperature profile | JEITA    |
| Safety timer        | 10 hours |

A new charge cycle starts when the following conditions are valid:

- Converter starts
- Battery charging is enabled (CHG\_CONFIG bit = 1 and  $I_{CHG}$  register is not 0 mA and  $\overline{\text{CE}}$  is low)
- No thermistor fault on TS. (TS pin can be ignored by setting TS\_IGNORE bit to 1)
- No safety timer fault
- BATFET is not forced to turn off (BATFET\_DIS bit = 0)

The device automatically terminates the charging cycle when the charging current is below the termination threshold, the battery voltage is above the recharge threshold, and the device is not in DPM mode or thermal regulation. When a fully charged battery is discharged below recharge threshold (selectable through VRECHG bit), the device automatically starts a new charging cycle. After the charge is done, toggle  $\overline{CE}$  pin or CHG\_CONFIG bit will initiate a new charging cycle. Adapter removal and replug will also restart a charging cycle.

The STAT output indicates the charging status: charging (LOW), charging complete or charge disable (HIGH) or charging fault (blinking). The status register (CHRG\_STAT) indicates the different charging phases: 00-charging disable, 01-pre-charge, 10-fast charge (CC) and constant voltage (CV), 11-charging done. Once a charging cycle is completed, an  $\overline{INT}$  pulse is asserted to notify the host.

### 9.3.6.2 Battery Charging Profile

The device charges the battery in five phases: battery short, preconditioning, constant current, constant voltage and top-off trickle charging (optional). At the beginning of a charging cycle, the device checks the battery voltage and regulates current and voltage accordingly.

Resistance between charger output and battery cell terminal such as board routing, connector, MOSFETs and sense resistor can force the charging process to move from constant current to constant voltage too early and increase charge time. To speed up the charging cycle, the device provides BATSNS pin to extend the constant current charge time to delivery maximum power to battery. BATSNS pin is connected directly to battery cell terminal to remotely sense battery cell voltage. BATSNS is by default enabled, and can be disabled through BATSNS\_DIS bit. If BATSNS is connected to GND or left floating, the charger regulates BAT pin instead.

表 9-4. Charging Current Setting

| $V_{BAT}$    | CHARGING CURRENT | DEFAULT SETTING | CHRG_STAT |
|--------------|------------------|-----------------|-----------|
| < 2.2 V      | $I_{BAT\_SHORT}$ | 100 mA          | 01        |
| 2.2 V to 3 V | $I_{PRECHG}$     | 180 mA          | 01        |
| > 3 V        | $I_{CHG}$        | 1020 mA         | 10        |

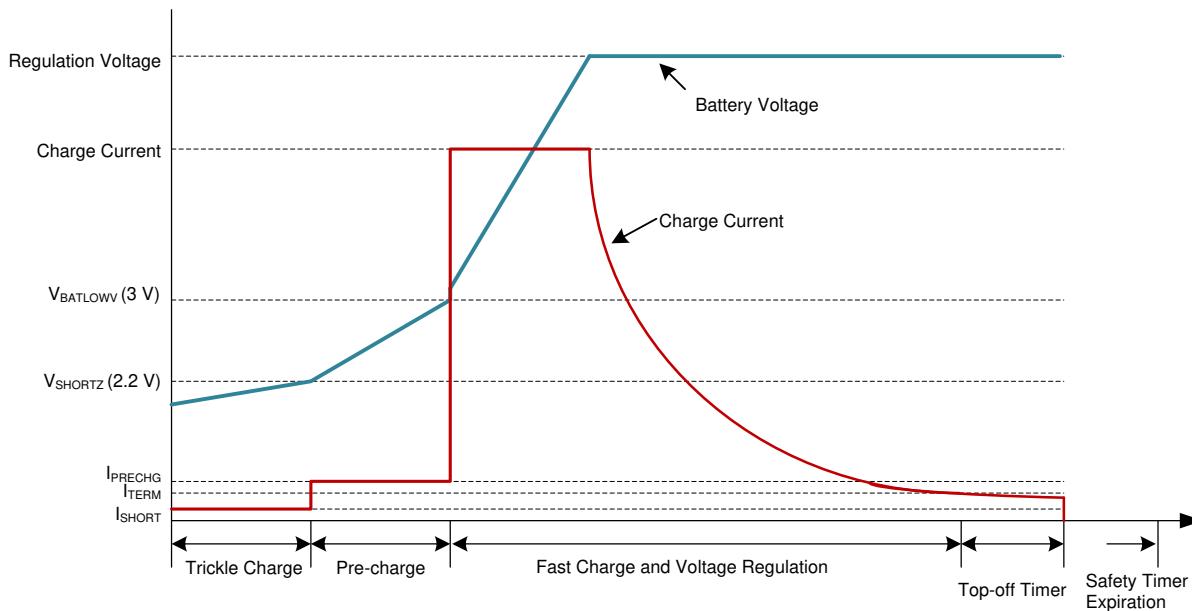


图 9-4. Battery Charging Profile

### 9.3.6.3 Charging Termination

The device terminates a charge cycle when the battery voltage is above the recharge threshold, and the current is below termination current. After the charging cycle is completed, the BATFET turns off. The STAT is asserted HIGH to indicate charging done. The converter keeps running to power the system, and BATFET can turn on again to engage [Supplement Mode](#).

If the device is in IINDPM/VINDPM regulation, or thermal regulation, the actual charging current will be less than the termination value. In this case, termination is temporarily disabled.

When termination occurs, STAT pin goes HIGH. The status register CHRG\_STAT is set to 11, and an  $\overline{\text{INT}}$  pulse is asserted to the host. Termination can be disabled by writing 0 to EN\_TERM bit prior to charge termination.

The termination current is set in REG03[3:0]. Due to the termination current accuracy, the actual termination current may be higher than the termination target. In order to compensate for termination accuracy, a programmable top-off timer can be applied after termination is detected. The top-off timer will follow safety timer constraints, such that if safety timer is suspended, so will the top-off timer. Similarly, if safety timer is doubled, so will the termination top-off timer. TOPOFF\_ACTIVE bit reports whether the top off timer is active or not. The host can read CHRG\_STAT and TOPOFF\_ACTIVE to find out the termination status. STAT pin stays HIGH during top-off timer counting cycle.

Top-off timer gets reset at one of the following conditions:

1. Charge disable to enable
2. Charger enters termination
3. REG\_RST register bit is set

The top-off timer settings are read in once termination is detected by the charger. Programming a top-off timer value (01, 10, 11) after termination will have no effect unless a recharge cycle is initiated. The top-off timer will immediately stop if it is disabled (00). An  $\overline{\text{INT}}$  is asserted to the host when entering top-off timer segment as well as when top-off timer expires.

### 9.3.6.4 Thermistor Qualification

The device provides a single thermistor input for battery temperature monitoring.

#### 9.3.6.4.1 JEITA Guideline Compliance During Charging Mode

To improve the safety of charging Li-ion batteries, the JEITA guideline was released on April 20, 2007. The guideline emphasized the importance of avoiding a high charge current and high charge voltage at certain low and high temperature ranges.

To initiate a charge cycle, the voltage on TS pin, as a percentage of  $V_{REGN}$ , must be within the  $V_{T1\_FALL\%}$  to  $V_{T5\_RISE\%}$  thresholds. If the TS voltage percentage exceeds the T1-T5 range, the controller suspends charging, a TS fault is reported and waits until the battery temperature is within the T1 to T5 range.

At cool temperature (T1-T2), the charge current is reduced to a programmable fast charge current (0%, 20% default, 50%, 100% of  $I_{CHG}$ , by JEITA\_ISET). At warm temperature (T3-T5), the charge voltage is reduced to 4.1 V or kept at  $V_{REG}$  (JEITA\_VSET). and the charge current can be reduced to a programmable level (0%, 20%, 50%, 100% default). Battery termination is disabled in T3-T5. The charger provides more flexible settings on T2 and T3 threshold as well to program the temperature profile beyond JEITA. When the T1 is set to 0°C and T5 is set to 60°C, T2 can be programmed to 5.5°C/10°C(default)/15°C/20°C, and T3 can be programmed to 40°C/45.5°C(default)/50.5°C/54.5°C.

When charger does not need to monitor the NTC, host sets TS\_IGNORE bit to 1 to ignore the TS pin condition during charging and boost mode. If TS\_IGNORE bit is set to 1, TS pin is ignored and the charger ignore TS pin input. In this case, NTC\_FAULT bits are 000 to report normal TS status.

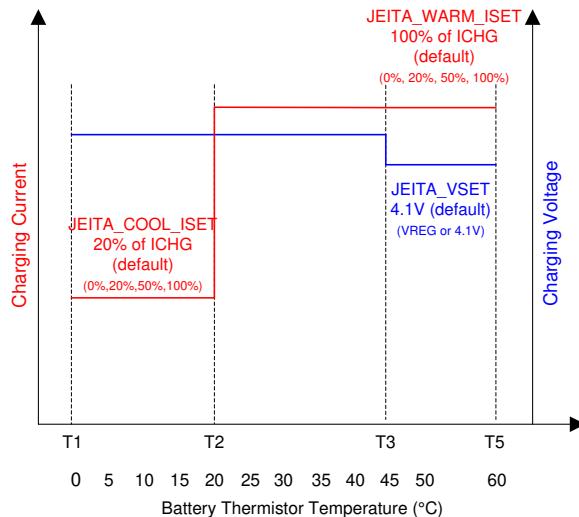


图 9-5. JEITA Profile

方程式 1 through 方程式 2 describe how to calculate resistor divider values on Ts pin.

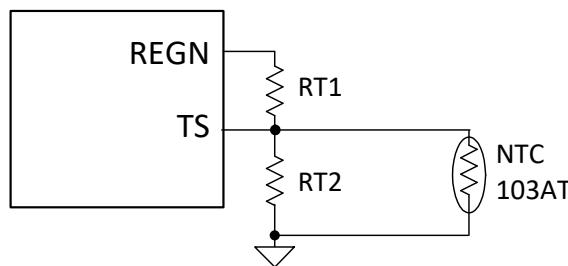


图 9-6. TS Pin Resistor Network

$$RT1 = \frac{\frac{1}{V_{T1\%}} - 1}{\frac{1}{R_{T2}} + \frac{1}{R_{NTC,T1}}} \quad (1)$$

$$RT2 = \frac{R_{NTC,T1} \times R_{NTC,T5} \times \left( \frac{1}{V_{T5\%}} - \frac{1}{V_{T1\%}} \right)}{R_{NTC,T1} \times \left( \frac{1}{V_{T1\%}} - 1 \right) - R_{NTC,T5} \times \left( \frac{1}{V_{T5\%}} - 1 \right)} \quad (2)$$

In the equations above,  $R_{NTC,T1}$  is NTC thermistor resistance value at temperature T1 and  $R_{NTC,T5}$  is NTC thermistor resistance values at temperature T5. Select 0°C to 60°C range for Li-ion or Li-polymer battery then

- $R_{NTC,T1} = 27.28 \text{ K}\Omega$  (0°C)
- $R_{NTC,T5} = 3.02 \text{ K}\Omega$  (60°C)
- $RT1 = 5.3 \text{ K}\Omega$
- $RT2 = 31.14 \text{ K}\Omega$

### 9.3.6.4.2 Boost Mode Thermistor Monitor During Battery Discharge Mode

For battery protection during boost mode, the device monitors the battery temperature to be within the  $V_{BCOLD}$  and  $V_{BHOT}$  thresholds. When  $RT1$  is  $5.3\text{ K}\Omega$  and  $RT2$  is  $31.14\text{ K}\Omega$ ,  $T_{BCOLD}$  default is  $-19.5^\circ\text{C}$  and  $T_{BHOT}$  default is  $64^\circ\text{C}$ . When temperature is outside of the temperature thresholds, the boost mode is suspended. In addition,  $VBUS\_STAT$  bits are set to 000 and  $NTC\_FAULT$  is reported. Once temperature returns within thresholds, boost mode is recovered and  $NTC\_FAULT$  is cleared.

### 9.3.6.5 Charging Safety Timer

The device has a built-in safety timer to prevent extended charging cycle due to abnormal battery conditions. The safety timer is 2 hours when the battery is below  $V_{BATLOWV}$  threshold and 10 hours (10/20 hours in REG05[2]) when the battery is higher than  $V_{BATLOWV}$  threshold. When the safety timer expires, STAT pin is blinking at 1 Hz to report a safety timer expiration fault.

The user can program the fast charge safety timer through I<sup>2</sup>C (CHG\_TIMER bit REG05[2]). When safety timer expires, the fault register CHRG\_FAULT bits (REG09[5:4]) are set to 11 and an INT is asserted to the host. The safety timer (both fast charge and pre-charge) can be disabled through I<sup>2</sup>C by setting EN\_TIMER bit.

During IINDPM/VINDPM regulation, thermal regulation, or JEITA cool/warm when fast charge current is reduced, the safety timer counts at a half clock rate, because the actual charge current is likely below the setting. For example, if the charger is in input current regulation (IINDPM\_STAT = 1) throughout the whole charging cycle, and the safety time is set to 10 hours, the safety timer will expire in 20 hours. This half clock rate feature can be disabled by writing 0 to the TMR2X\_EN bit.

During faults of BAT\_FAULT, NTC\_FAULT that lead to charging suspend, safety timer is suspended as well. Once the fault goes away, timer resumes. If user stops the current charging cycle, and start again, timer gets reset (toggle CE pin or CHG\_CONFIG bit).

## 9.3.7 Ship Mode and QON Pin

### 9.3.7.1 BATFET Disable (Enter Ship Mode)

To extend battery life and minimize power when the system is powered off during system idle, shipping, or storage, the device turns off BATFET so that the system voltage is floating to minimize the battery leakage current. When the host sets the BATFET\_DIS bit, the charger can turn off the BATFET immediately or delay by  $t_{BATFET\_DLY}$  as configured by the BATFET\_DLY bit. To set the device into ship mode with the adapter present, the host has to first set BATFET\_RST\_VBUS to 1 and then BATFET\_DIS to 1. The charger will turn off the BATFET (no charging, no supplement) while the adapter is still attached. When the adapter is removed, the charger will enter ship mode.

### 9.3.7.2 BATFET Enable (Exit Ship Mode)

When the BATFET is disabled (in ship mode) as indicated by setting BATFET\_DIS, one of the following events can enable the BATFET to restore system power:

1. Plug in adapter
2. Clear BATFET\_DIS bit
3. Set REG\_RST bit to reset all registers including BATFET\_DIS bit to default (0)
4. A logic high to low transition on QON pin with  $t_{SHIPMODE}$  deglitch time to enable BATFET to exit ship mode. EN\_HIZ bit is set to 1 (regardless of adapter present or not). Host has to set EN\_HIZ bit to 0 before boost mode enable. Once adapter plugs in, EN\_HIZ will be cleared.

### 9.3.7.3 BATFET Full System Reset

The BATFET functions as a load switch between battery and system when input source is not plugged in. When BATFET\_RST\_EN=1 and BATFET\_DIS=0, BATFET full system reset function is enabled. By changing the state of BATFET from on to off, systems connected to SYS can be effectively forced to have a power-on-reset. The QON pin supports push-button interface to reset system power without host by changing the state of BATFET. Internally, it is pulled up to the  $V_{QON}$  voltage through a  $200\text{-k}\Omega$  resistor.

When the  $\overline{QON}$  pin is driven to logic low for  $t_{QON\_RST}$ , BATFET reset process starts. The BATFET is turned off for  $t_{BATFET\_RST}$  and then it is re-enabled to reset system power. This function can be disabled by setting  $BATFET\_RST\_EN$  bit to 0.

BATFET full system reset functions either with or without adapter present. If  $BATFET\_RST\_WVBUS=1$ , the system reset function starts after  $t_{QON\_RST}$  when  $\overline{QON}$  pin is pushed to LOW. Once the reset process starts, the device first goes into HIZ mode to turn off the converter, and then power cycles BATFET. If  $BATFET\_RST\_WVBUS=0$ , the system reset function doesn't start till  $t_{QON\_RST}$  after  $\overline{QON}$  pin is pushed to LOW and adapter is removed.

After BATFET full system reset is complete, the device will power up again if  $EN\_HIZ$  is not set to 1 before the system reset.

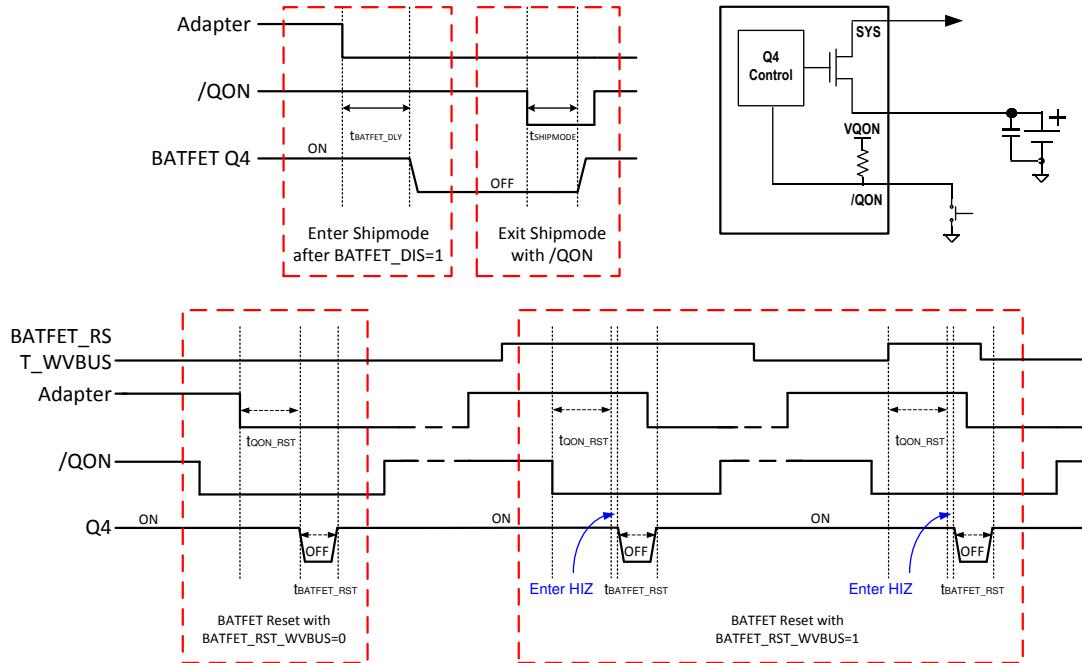


图 9-7. QON Timing

### 9.3.8 Status Outputs ( STAT, INT )

#### 9.3.8.1 Charging Status Indicator (STAT)

The device indicates charging state on the open drain STAT pin. The STAT pin can drive LED.

表 9-5. STAT Pin State

| CHARGING STATE   | STAT INDICATOR   |
|--|------------------|
| Charging in progress (including recharge)  | LOW              |
| Charging termination (top off timer may be running)                                      | HIGH             |
| Sleep mode, charge disable, boost mode   | HIGH             |
| Charge suspend (input over-voltage, TS fault, safety timer fault or system over-voltage) | Blinking at 1 Hz |

#### 9.3.8.2 Interrupt to Host ( INT )

In some applications, the host does not always monitor the charger operation. The  $\overline{INT}$  pulse notifies the host on the device operation. The following events will generate a 256-  $\mu$ s  $\overline{INT}$  pulse.

- Good input source detected
  - $V_{VBUS}$  above battery (not in sleep)
  - $V_{VBUS}$  below  $V_{ACOV}$  threshold

- $V_{VBUS}$  above  $V_{POORSRC}$  (typical 3.8 V) when  $I_{BADSRC}$  (typical 30 mA) current is applied (not a poor source)
- Input adapter removed
- USB/adapter source identified during [Input Source Type Detection \(IINDPM Threshold\)](#).
- Charge complete
- Any FAULT event in REG09
- VINDPM / IINDPM event detected (REG0A[1:0], maskable)
- Top off timer starts and expires

REG09[7:0] and REG0A[6:4] report charger operation faults and status change to the host. When a fault/status change occurs, the charger sends out an  $\overline{INT}$  pulse and keeps the state in REG09[7:0]/REG0A[6:4] until the host reads the registers. Before the host reads REG09[7:0]/REG0A[6:4] and all the ones are cleared, the charger would not send any INT upon new fault/status change. To read the current status, the host has to read REG09/REG0A two times consecutively. The first read reports the pre-existing register status and the second read reports the current register status.

### 9.3.9 Protections

#### 9.3.9.1 Voltage and Current Monitoring in Buck Mode

##### 9.3.9.1.1 Input Over-Voltage Protection (ACOV)

The input voltage is sensed via the VAC pin. The default OVP threshold is 14.2-V, and can be programmed at 5.7 V/6.4 V/11 V/14.2 V via OVP[1:0] register bits. ACOV event will immediately stop converter switching whether in buck or boost mode. The device will automatically resume normal operation once the input voltage drops back below the OVP threshold. During ACOV, REGN LDO is on, and the device doesn't enter HIZ mode.

During ACOV, the fault register CHRG\_FAULT bits are set to 01. An  $\overline{INT}$  pulse is asserted to the host.

##### 9.3.9.1.2 System Over-Voltage Protection (SYSOVP)

The charger device clamps the system voltage during a load transient so that the components connected to the system are not damaged due to high voltage.  $V_{SYS\_OVP}$  threshold is about 300-mV above battery regulation voltage when battery charging is terminated. Upon SYSOVP, converter stops switching immediately to clamp the overshoot. The charger pulls 30-mA  $I_{SYS\_LOAD}$  discharge current to bring down the system voltage.

#### 9.3.9.2 Voltage and Current Monitoring in Boost Mode

##### 9.3.9.2.1 Boost Mode Over-Voltage Protection

When the PMID voltage rises above regulation the target and exceeds  $V_{BST\_OVP}$ , the device stops switching immediately and the device exits boost mode and PMID\_GOOD is pulled low as well after the boost mode OVP lasts for 12 ms. Meanwhile, if VAC (and VBUS when shorted to VAC) voltage exceed  $V_{ACOV}$ , the device will exit boost mode as well. BST\_CONFIG bit is set to 0. During boost mode over-voltage, the fault register bit BOOST\_FAULT is set to 1 to indicate fault in boost operation. An  $\overline{INT}$  is asserted to the host.

#### 9.3.9.3 Thermal Regulation and Thermal Shutdown

##### 9.3.9.3.1 Thermal Protection in Buck Mode

Besides the battery temperature monitor on TS pin, the device monitors the internal junction temperature  $T_J$  to avoid overheating the chip and limits the IC junction temperature in buck mode. When the internal junction temperature exceeds thermal regulation limit (110°C), the device lowers down the charge current. During thermal regulation, the actual charging current is usually below the programmed battery charging current. Therefore, termination is disabled, the safety timer runs at half the clock rate, and the status register THERM\_STAT bit goes high.

Additionally, the device has thermal shutdown to turn off the converter and BATFET when IC surface temperature exceeds  $T_{SHUT}$  150°C. The BATFET and converter is enabled to recover when IC temperature is 130°C. The fault register CHRG\_FAULT is set to 10 during thermal shutdown and an  $\overline{INT}$  is asserted to the host.

##### 9.3.9.3.2 Thermal Protection in Boost Mode

Besides the battery temperature monitor on TS pin, The device monitors the internal junction temperature to provide thermal shutdown during boost mode. When IC junction temperature exceeds  $T_{SHUT}$  150°C, the boost

mode is disabled by setting BST\_CONFIG bit low. When IC junction temperature is below 145°C, the host can re-enable boost mode.

### 9.3.9.4 Battery Protection

#### 9.3.9.4.1 Battery Over-Voltage Protection (BATOVP)

The battery over-voltage limit is clamped at 4% above the battery regulation voltage. When battery over-voltage occurs, the charger device immediately stops switching. The fault register BAT\_FAULT bit goes high and an INT is asserted to the host.

#### 9.3.9.4.2 Battery Over-Discharge Protection

When battery is discharged below  $V_{BAT\_DPL\_FALL}$ , the BATFET will latch off to protect battery from over discharge. To recover from over-discharge latch-off, an input source plug-in is required at VAC/VBUS.

#### 9.3.9.4.3 System Over-Current Protection

$I_{SYS\_OCP\_Q4}$  sets battery discharge current limit. Once  $I_{BAT} > I_{SYS\_OCP\_Q4}$ , charger will latch off Q4 and put the device into ship mode. All methods to exit ship mode are valid to bring the part out of Q4 latch off.

### 9.3.10 Serial Interface

The device uses I<sup>2</sup>C compatible interface for flexible charging parameter programming and instantaneous device status reporting. I<sup>2</sup>C™ is a bi-directional 2-wire serial interface developed by Philips Semiconductor (now NXP Semiconductors). Only two bus lines are required: a serial data line (SDA) and a serial clock line (SCL). Devices can be considered as masters or slaves when performing data transfers. A master is the device which initiates a data transfer on the bus and generates the clock signals to permit that transfer. At that time, any device addressed is considered a slave.

The device operates as a slave device with address 6BH, receiving control inputs from the master device like micro controller or a digital signal processor through REG00-REG0C. Register read beyond REG0C returns 0xFF. The I<sup>2</sup>C interface supports both standard mode (up to 100 kbytes), and fast mode (up to 400 kbytes). connecting to the positive supply voltage via a current source or pull-up resistor. When the bus is free, both lines are HIGH. The SDA and SCL pins are open drain.

#### 9.3.10.1 Data Validity

The data on the SDA line must be stable during the HIGH period of the clock. The HIGH or LOW state of the data line can only change when the clock signal on the SCL line is LOW. One clock pulse is generated for each data bit transferred.

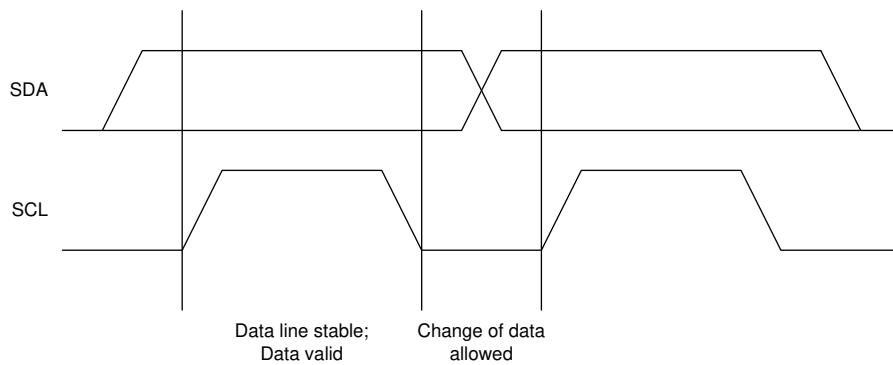


图 9-8. Bit Transfer on the I<sup>2</sup>C Bus

#### 9.3.10.2 START and STOP Conditions

All transactions begin with a START (S) and can be terminated by a STOP (P). A HIGH to LOW transition on the SDA line while SCL is HIGH defines a START condition. A LOW to HIGH transition on the SDA line when the SCL is HIGH defines a STOP condition. START and STOP conditions are always generated by the master. The bus is considered busy after the START condition, and free after the STOP condition.

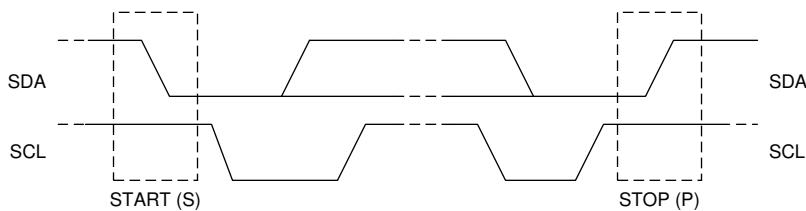


图 9-9. TS START and STOP conditions

### 9.3.10.3 Byte Format

Every byte on the SDA line must be 8 bits long. The number of bytes to be transmitted per transfer is unrestricted. Each byte has to be followed by an Acknowledge bit. Data is transferred with the Most Significant Bit (MSB) first. If a slave cannot receive or transmit another complete byte of data until it has performed some other function, it can hold the clock line SCL low to force the master into a wait state (clock stretching). Data transfer then continues when the slave is ready for another byte of data and release the clock line SCL.

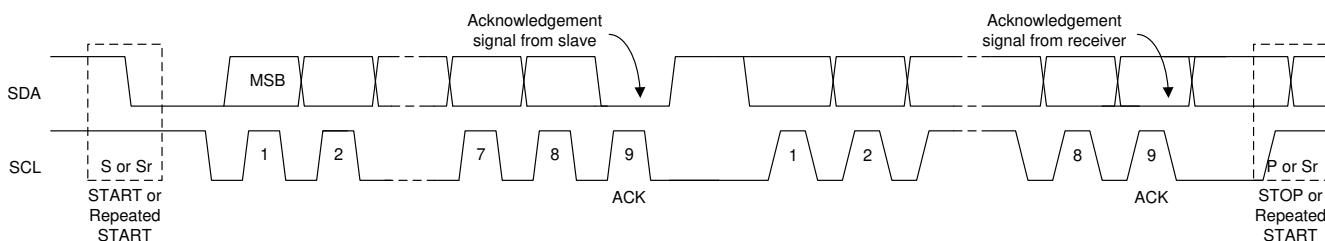


图 9-10. Data Transfer on the I<sup>2</sup>C Bus

### 9.3.10.4 Acknowledge (ACK) and Not Acknowledge (NACK)

The acknowledge takes place after every byte. The acknowledge bit allows the receiver to signal the transmitter that the byte was successfully received and another byte may be sent. All clock pulses, including the acknowledge ninth clock pulse, are generated by the master. The transmitter releases the SDA line during the acknowledge clock pulse so the receiver can pull the SDA line LOW and it remains stable LOW during the HIGH period of this clock pulse.

When SDA remains HIGH during the ninth clock pulse, this is the Not Acknowledge signal. The master can then generate either a STOP to abort the transfer or a repeated START to start a new transfer.

### 9.3.10.5 Slave Address and Data Direction Bit

After the START, a slave address is sent. This address is 7 bits long followed by the eighth bit as a data direction bit (bit R/W). A zero indicates a transmission (WRITE) and a one indicates a request for data (READ).

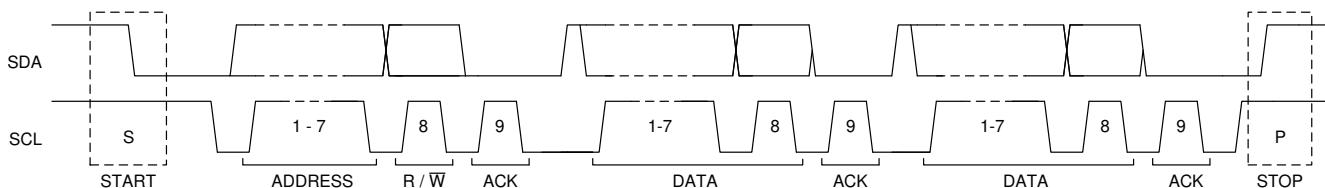


图 9-11. Complete Data Transfer

### 9.3.10.6 Single Read and Write

If the register address is not defined, the charger IC send back NACK and go back to the idle state.




图 9-12. Single Write

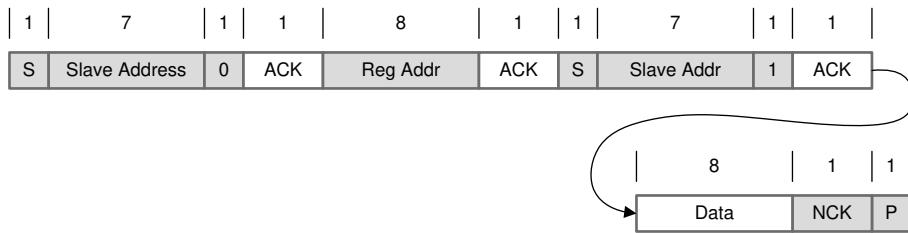


图 9-13. Single Read

### 9.3.10.7 Multi-Read and Multi-Write

The charger device supports multi-read and multi-write on REG00 through REG0C.

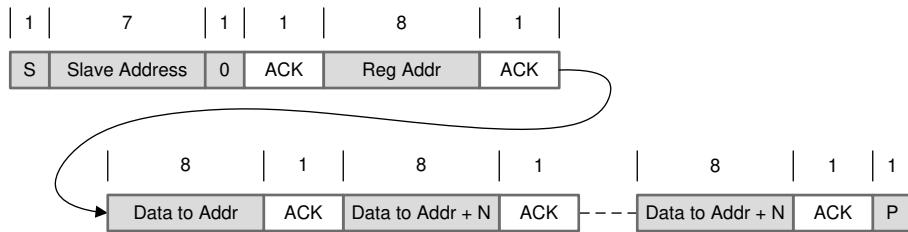


图 9-14. Multi-Write

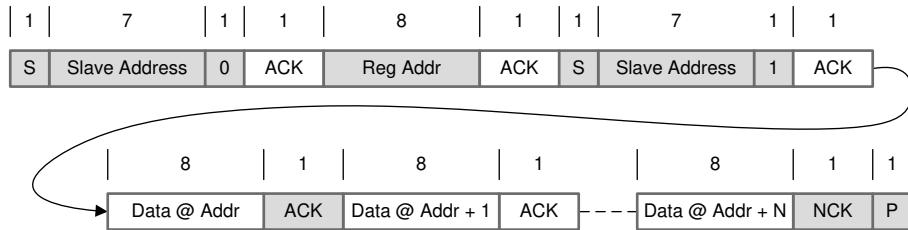


图 9-15. Multi-Read

REG09[7:0]/REG0A[6:4] are fault/status change register. They keep all the fault/status information from last read until the host issues a new read. For example, if Charge Safety Timer Expiration fault occurs but recovers later, the fault register REG09 reports the fault when it is read the first time, but returns to normal when it is read the second time. In order to get the fault information at present, the host has to read REG09/REG0A for the second time.

## 9.4 Device Functional Modes

### 9.4.1 Host Mode and Default Mode

The device is a host controlled charger, but it can operate in default mode without host management. In default mode, the device can be used an autonomous charger with no host or while host is in sleep mode. When the charger is in default mode, WATCHDOG\_FAULT bit is HIGH. When the charger is in host mode, WATCHDOG\_FAULT bit is LOW.

After power-on-reset, the device starts in default mode with watchdog timer expired, or default mode. All the registers are in the default settings.

All the device parameters can be programmed by the host. To keep the device in host mode, the host has to reset the watchdog timer by writing 1 to WD\_RST bit before the watchdog timer expires (WATCHDOG\_FAULT bit is set), or disable watchdog timer by setting WATCHDOG bits = 00.

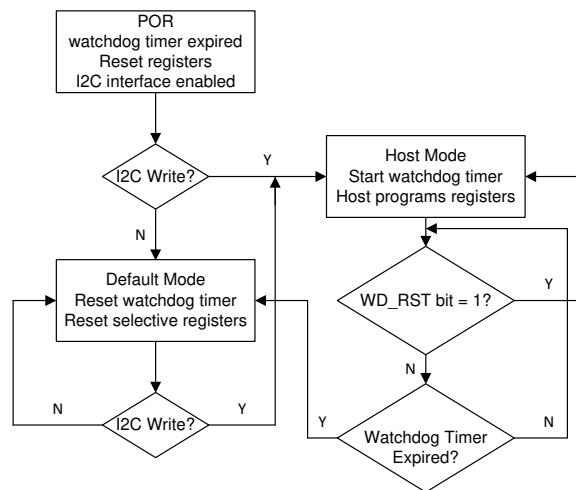


图 9-16. Watchdog Timer Flow Chart

## 9.5 Register Maps

I<sup>2</sup>C Slave Address: 6BH

Default I<sup>2</sup>C Slave Address: 0x6B (1101 011B + R/ W)

表 9-6. I<sup>2</sup>C Registers

| Address | Access Type | Acronym | Register Name                            | Section |
|---------|-------------|---------|--|---------|
| 00h     | R/W         | REG00   | Input Current Limit                      | Go      |
| 01h     | R/W         | REG01   | Charger Control 0                        | Go      |
| 02h     | R/W         | REG02   | Charge Current Limit                     | Go      |
| 03h     | R/W         | REG03   | pre-charge and Termination Current Limit | Go      |
| 04h     | R/W         | REG04   | Battery Voltage Limit                    | Go      |
| 05h     | R/W         | REG05   | Charger Control 1                        | Go      |
| 06h     | R/W         | REG06   | Charger Control 2                        | Go      |
| 07h     | R/W         | REG07   | Charger Control 3                        | Go      |
| 08h     | R           | REG08   | Charger Status 0                         | Go      |
| 09h     | R           | REG09   | Charger Status 1                         | Go      |
| 0Ah     | R           | REG0A   | Charger Status 2                         | Go      |
| 0Bh     | R           | REG0B   | Part Information                         | Go      |
| 0Ch     | R/W         | REG0C   | Charger Control 4                        | Go      |

Complex bit access types are encoded to fit into small table cells. 表 9-7 shows the codes that are used for access types in this section.

表 9-7. I<sup>2</sup>C Access Type Codes

| Access Type | Code | Description       |
|-------------|------|-------------------|
| Read Type   |      |                   |
| R           | R    | Read              |
| Write Type  |      |                   |
| W           | W    | Write             |
| Reset Value |      |                   |
| -n          |      | Value after reset |
| -X          |      | Undefined value   |

### 9.5.1 Input Current Limit Register (Address = 00h) [reset = 17h]

图 9-17. REG00 Register

| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 0   | 0   | 0   | 1   | 0   | 1   | 1   | 1   |
| R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

表 9-8. REG00 Field Descriptions

| Bit | Field      | POR | Type | Reset                     | Description  |  |
|-----|------------|-----|------|---------------------------|--|--|
| 7   | EN_HIZ     | 0   | R/W  | by REG_RST<br>by Watchdog | HIZ mode enable in buck mode.<br>0 - Disable (default)<br>1 - Enable   |  |
| 6   | TS_IGNORE  | 0   | R/W  | by REG_RST                | When charger does not monitor the NTC, host sets this bit to 1 to ignore the TS pin condition during charging and boost mode.<br>0 - Include TS pin into charge and boost mode enable conditions. (default)<br>1 - Ignore TS pin. Always consider TS is good to allow charging and boost mode. NTC_FAULT bits are 000 to report normal status. |  |
| 5   | BATSNS_DIS | 0   | R/W  | by REG_RST                | Select either BATSNS pin or BAT pin to regulate battery voltage.<br>0 - Enable BATSNS in battery CV regulation. If the device fails BATSNS open/short detection (BATSNS_STAT = 1). Battery voltage is regulated through BAT pin. (default)<br>1 - Disable BATSNS. Use BAT pin in battery CV regulation.  |  |
| 4   | IINDPM[4]  | 1   | R/W  | by REG_RST                | 1600 mA  | Input current limit setting (maximum limit, not typical)<br>Offset: 100 mA<br>Range: 100 mA (000000) - 3.2 A (11111)<br>Default: 2400 mA (10111)<br>IINDPM bits are changed automatically after <a href="#">Output Source Type Detection (IINDPM Threshold)</a> is completed<br>USB SDP = 500 mA<br>USB CDP = 1.5 A<br>USB DCP = 2.4 A<br>Unknown Adapter = 500 mA<br>Non-Standard Adapter = 1 A, 2 A, 2.1 A, or 2.4<br>Host can reprogram IINDPM register bits after input source detection is completed. |
| 3   | IINDPM[3]  | 0   | R/W  | by REG_RST                | 800 mA   |  |
| 2   | IINDPM[2]  | 1   | R/W  | by REG_RST                | 400 mA   |  |
| 1   | IINDPM[1]  | 1   | R/W  | by REG_RST                | 200 mA   |  |
| 0   | IINDPM[0]  | 1   | R/W  | by REG_RST                | 100 mA   |  |

LEGEND: R/W = Read/Write; R = Read only

### 9.5.2 Charger Control 0 Register (Address = 01h) [reset = 1Ah]

图 9-18. REG01 Register

| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 0   | 0   | 0   | 1   | 1   | 0   | 1   | 0   |
| R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

表 9-9. REG01 Field Descriptions

| Bit | Field        | POR | Type | Reset                     | Description  |
|-----|--------------|-----|------|---------------------------|--|
| 7   | PFM_DIS      | 0   | R/W  | by REG_RST                | PFM disable in both buck and boost mode.<br>0 - PFM enable (default)<br>1 - PFM disable  |
| 6   | WD_RST       | 0   | R/W  | by REG_RST<br>by Watchdog | I <sup>2</sup> C Watchdog timer reset. Back to 0 after watchdog timer reset<br>0 - Normal (default)<br>1 - Reset   |
| 5   | BST_CONFIG   | 0   | R/W  | by REG_RST<br>by Watchdog | Boost mode enable. In charging case application, based on adapter plug-in or removal, the charger will automatically transit between charging mode and boost mode by setting BST_CONFIG bit and CHG_CONFIG bit both to 1.<br>0 - Boost mode disable (default)<br>1 - Boost mode enable |
| 4   | CHG_CONFIG   | 1   | R/W  | by REG_RST<br>by Watchdog | Battery charging buck mode enable. Charging is enabled when CE pin is pulled low, CHG_CONFIG bit is 1 and charge current is not zero.<br>0 - Charge Disable<br>1 - Charge Enable (default)   |
| 3   | SYS_MIN[2]   | 1   | R/W  | by REG_RST                | System minimum voltage setting.<br>000 - 2.6 V   |
| 2   | SYS_MIN[1]   | 0   | R/W  | by REG_RST                | 001 - 2.8 V<br>010 - 3 V<br>011 - 3.2 V<br>100 - 3.4 V<br>101 - 3.5 V (default)<br>110 - 3.6 V<br>111 - 3.7 V  |
| 1   | SYS_MIN[0]   | 1   | R/W  | by REG_RST                | Minimum battery voltage when exiting boost mode. The rising threshold allows the device to start boost mode if other conditions are valid.<br>0 - 2.8V V <sub>BAT</sub> falling, 3 V rising (default)<br>1 - 2.5V V <sub>BAT</sub> falling, 2.8V rising                                |
| 0   | MIN_VBAT_SEL | 0   | R/W  | by REG_RST                |  |

LEGEND: R/W = Read/Write; R = Read only

### 9.5.3 Charge Current Limit Register (Address = 02h) [reset = 91h]

图 9-19. REG02 Register

| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 1   | 0   | 0   | 1   | 0   | 0   | 0   | 1   |
| R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

表 9-10. REG02 Field Descriptions

| Bit | Field     | POR | Type | Reset                     | Description  |   |
|-----|-----------|-----|------|---------------------------|--|---|
| 7   | BOOST_LIM | 1   | R/W  | by REG_RST<br>by Watchdog | Boost mode current regulation limit (minimum current limit, not typical).<br>0 - 0.5 A<br>1 - 1.2 A (default)  |   |
| 6   | Q1_FULLON | 0   | R/W  | by REG_RST                | In buck mode, charger will fully turn on Q1 RBFET according to this bit setting when IINDPM is below 700 mA. When IINDPM is over 700 mA, Q1 is always fully on. In boost mode, Q1 is always fully on too, regardless of this bit setting.<br>0 - Partially turn on Q1 for better regulation accuracy when IINDPM is below 700 mA. (default)<br>1 - Fully turn on Q1 for better efficiency when IINDPM is below 700 mA. |   |
| 5   | ICHG[5]   | 0   | R/W  | by REG_RST<br>by Watchdog | 1920 mA  | Fast charge current setting<br>Default: 1020 mA (010001)<br>Range: 0 mA (0000000) - 3000 mA (110010)<br>ICHG 0 mA disables charge.<br>ICHG > 3000 mA is clamped to 3000 mA (110010) |
| 4   | ICHG[4]   | 1   | R/W  | by REG_RST<br>by Watchdog | 960 mA   |   |
| 3   | ICHG[3]   | 0   | R/W  | by REG_RST<br>by Watchdog | 480 mA   |   |
| 2   | ICHG[2]   | 0   | R/W  | by REG_RST<br>by Watchdog | 240 mA   |   |
| 1   | ICHG[1]   | 0   | R/W  | by REG_RST<br>by Watchdog | 120 mA   |   |
| 0   | ICHG[0]   | 1   | R/W  | by REG_RST<br>by Watchdog | 60 mA  |   |

LEGEND: R/W = Read/Write; R = Read only

### 9.5.4 Pre-charge and Termination Current Limit Register (Address = 03h) [reset = 12h]

图 9-20. REG03 Register

| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 0   | 0   | 0   | 1   | 0   | 0   | 1   | 0   |
| R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

表 9-11. REG03 Field Descriptions

| Bit | Field      | POR | Type | Reset                     | Description |   |
|-----|------------|-----|------|---------------------------|-------------|---|
| 7   | IPRECHG[3] | 0   | R/W  | by REG_RST<br>by Watchdog | 480 mA      | Pre-charge current setting<br>Default: 180 mA (0010)<br>Range: 60 mA (0000) – 780 mA (1100)<br>Offset: 60 mA<br>Note: $I_{PRECHG} > 780$ mA is clamped to 780 mA (1100) |
| 6   | IPRECHG[2] | 0   | R/W  | by REG_RST<br>by Watchdog | 240 mA      |   |
| 5   | IPRECHG[1] | 1   | R/W  | by REG_RST<br>by Watchdog | 120 mA      |   |
| 4   | IPRECHG[0] | 0   | R/W  | by REG_RST<br>by Watchdog | 60 mA       |   |
| 3   | ITERM[3]   | 0   | R/W  | by REG_RST<br>by Watchdog | 480 mA      | Termination current setting<br>Default: 180 mA (0010)<br>Range: 60 mA – 780 mA (1100)<br>Offset: 60 mA  |
| 2   | ITERM[2]   | 0   | R/W  | by REG_RST<br>by Watchdog | 240 mA      |   |
| 1   | ITERM[1]   | 1   | R/W  | by REG_RST<br>by Watchdog | 120 mA      |   |
| 0   | ITERM[0]   | 0   | R/W  | by REG_RST<br>by Watchdog | 60 mA       |   |

LEGEND: R/W = Read/Write; R = Read only

### 9.5.5 Battery Voltage Limit Register (Address = 04h) [reset = 40h]

图 9-21. REG04 Register

| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 0   | 1   | 0   | 0   | 0   | 0   | 0   | 0   |
| R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

表 9-12. REG04 Field Descriptions

| Bit | Field           | POR | Type | Reset                     | Description   |
|-----|-----------------|-----|------|---------------------------|---|
| 7   | VBATREG[4]      | 0   | R/W  | by REG_RST<br>by Watchdog | Battery voltage setting, also called $V_{REG}$ .<br>Default: 4.190 V (01000)<br>00000 - 3.494 V<br>00001 - 3.590 V<br>00010 - 3.686 V<br>00011 - 3.790 V<br>00100 - 3.894 V<br>00101 - 3.990 V<br>00110 - 4.090 V<br>00111 - 4.140 V<br>01000 - 4.190 V<br>01001 - 11111 - 4.290 V - 4.510 V, 10 mV/step<br>01110 4.340 V, 10011 4.390V, 11000 4.440 V, 11101 4.490 V |
| 6   | VBATREG[3]      | 1   | R/W  | by REG_RST<br>by Watchdog |   |
| 5   | VBATREG[2]      | 0   | R/W  | by REG_RST<br>by Watchdog |   |
| 4   | VBATREG[1]      | 0   | R/W  | by REG_RST<br>by Watchdog |   |
| 3   | VBATREG[0]      | 0   | R/W  | by REG_RST<br>by Watchdog |   |
| 2   | TOPOFF_TIMER[1] | 0   | R/W  | by REG_RST<br>by Watchdog | Top-off timer setting.<br>00 - Disabled (Default)<br>01 - 15 minutes<br>10 - 30 minutes<br>11 - 45 minutes  |
| 1   | TOPOFF_TIMER[0] | 0   | R/W  | by REG_RST<br>by Watchdog |   |
| 0   | VRECHG          | 0   | R/W  | by REG_RST<br>by Watchdog | Battery recharge threshold setting.<br>0 - 120 mV (default)<br>1 - 210 mV   |

LEGEND: R/W = Read/Write; R = Read only

### 9.5.6 Charger Control 1 Register (Address = 05h) [reset = 9Eh]

图 9-22. REG05 Register

| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 1   | 0   | 0   | 1   | 1   | 1   | 1   | 0   |
| R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

表 9-13. REG05 Field Descriptions

| Bit | Field                | POR | Type | Reset                     | Description  |
|-----|----------------------|-----|------|---------------------------|--|
| 7   | EN_TERM              | 1   | R/W  | by REG_RST<br>by Watchdog | Battery charging termination enable.<br>0 - Disable<br>1 - Enable (default)  |
| 6   | Reserved             | 0   | R/W  | by REG_RST<br>by Watchdog | Reserved   |
| 5   | WATCHDOG[1]          | 0   | R/W  | by REG_RST<br>by Watchdog | Watchdog timer setting.<br>00 - Disable timer<br>01 - 40 s (default)<br>10 - 80 s<br>11 - 160 s  |
| 4   | WATCHDOG[0]          | 1   | R/W  | by REG_RST<br>by Watchdog |  |
| 3   | EN_TIMER             | 1   | R/W  | by REG_RST<br>by Watchdog | Battery charging safety timer enable, including both fast charge and pre-charge timers. Pre-charge timer is 2 hours. Fast charge timer is set by REG05[2]<br>0 - Disable<br>1 - Enable timer (default) |
| 2   | CHG_TIMER            | 1   | R/W  | by REG_RST<br>by Watchdog | Battery fast charging safety timer setting.<br>0 - 20 hrs<br>1 - 10 hrs (default)  |
| 1   | TREG                 | 1   | R/W  | by REG_RST<br>by Watchdog | Thermal Regulation Threshold:<br>0 - 90°C<br>1 - 110°C (default)   |
| 0   | JEITA_VSET (45C-60C) | 0   | R/W  | by REG_RST<br>by Watchdog | Battery voltage setting during JEITA warm (T3 - T5, typically 45C - 60C)<br>0 - Set Charge Voltage to 4.1 V (max) (default)<br>1 - Set Charge Voltage to $V_{REG}$                                     |

LEGEND: R/W = Read/Write; R = Read only

### 9.5.7 Charger Control 2 Register (Address = 06h) [reset = E6h]

图 9-23. REG06 Register

| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 1   | 1   | 1   | 0   | 0   | 1   | 1   | 0   |
| R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

表 9-14. REG06 Field Descriptions

| Bit | Field     | POR | Type | Reset      | Description   |  |  |
|-----|-----------|-----|------|------------|---|--|--|
| 7   | OVP[1]    | 1   | R/W  | by REG_RST | $V_{ACOV}$ threshold during buck mode and boost mode.<br>00 - 5.85 V<br>01 - 6.4 V (5-V input)<br>10 - 11 V (9-V input)<br>11 - 14.2 V (12-V input) (default) |  |  |
| 6   |           |     |      |            |   |  |  |
| 5   | BOOSTV[1] | 1   | R/W  | by REG_RST | Boost regulation voltage setting<br>00 - 4.6 V<br>01 - 4.75 V<br>10 - 5.0 V (default)<br>11 - 5.15 V  |  |  |
| 4   | BOOSTV[0] | 0   | R/W  | by REG_RST |   |  |  |
| 3   | VINDPM[3] | 0   | R/W  | by REG_RST | 800 mV  | VINDPM threshold setting<br>Default: 4.5 V (0110)<br>Range: 3.9 V (0000) - 5.4 V (1111)<br>Offset: 3.9 V |  |
| 2   | VINDPM[2] | 1   | R/W  | by REG_RST | 400 mV  |  |  |
| 1   | VINDPM[1] | 1   | R/W  | by REG_RST | 200 mV  |  |  |
| 0   | VINDPM[0] | 0   | R/W  | by REG_RST | 100 mV  |  |  |

LEGEND: R/W = Read/Write; R = Read only

### 9.5.8 Charger Control 3 Register (Address = 07h) [reset = 4Ch]

图 9-24. REG07 Register

| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 0   | 1   | 0   | 0   | 1   | 1   | 0   | 0   |
| R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

表 9-15. REG07 Field Descriptions

| Bit | Field               | POR | Type | Reset                     | Description   |
|-----|---------------------|-----|------|---------------------------|---|
| 7   | IINDET_EN           | 0   | R/W  | by REG_RST<br>by Watchdog | Force input source type detection. After the detection is complete, this bit returns to 0.<br>0 - Not in input current limit detection. (default)<br>1 - Force input current limit detection when adapter is present.   |
| 6   | TMR2X_EN            | 1   | R/W  | by REG_RST<br>by Watchdog | Safety timer is slowed by 2X during input DPM, JEITA cool/warm or thermal regulation.<br>0 - Disable. Safety timer duration is set by REG05[2].<br>1 - Safety timer slowed by 2X during input DPM (both V and I) or JEITA cool/warm (except $I_{CHG}=100\%$ ), or thermal regulation. (default) |
| 5   | BATFET_DIS          | 0   | R/W  | by REG_RST                | BATFET Q4 ON/OFF control. Set this bit to 1 to enter ship mode. To reset the device with adapter present, the host shall set BATFET_RST_WVBUS to 1 and then BATFET_DIS to 1.<br>0 - Turn on Q4. (default)<br>1 - Turn off Q4 after $t_{BATFET\_DLY}$ delay time (REG07[3])                      |
| 4   | BATFET_RST_WVBUS    | 0   | R/W  | by REG_RST                | Start BATFET full system reset with or without adapter present.<br>0 - Start BATFET full system reset after adapter is removed from VBUS. (default)<br>1 - Start BATFET full system reset when adapter is present on VBUS.  |
| 3   | BATFET_DLY          | 1   | R/W  | by REG_RST                | Delay from BATFET_DIS (REG07[5]) set to 1 to BATFET turn off during ship mode.<br>0 - Turn off BATFET immediately when BATFET_DIS bit is set.<br>1 - Turn off BATFET after $t_{BATFET\_DLY}$ (typ 10 s) when BATFET_DIS bit is set. (default)   |
| 2   | BATFET_RST_EN       | 1   | R/W  | by REG_RST<br>by Watchdog | Enable BATFET full system reset. The time to start of BATFET full system reset is based on the setting of BATFET_RST_WVBUS bit.<br>0 - Disable BATFET reset function<br>1 - Enable BATFET reset function when REG07[5] is also 1. (default)   |
| 1   | VINDPM_BAT_TRACK[1] | 0   | R/W  | by REG_RST                | Sets VINDPM to track BAT voltage. Actual VINDPM is higher of register value and $V_{BAT} + VINDPM\_BAT\_TRACK$ .<br>00 - Disable function (VINDPM set by register) (default)<br>01 - $V_{BAT} + 200$ mV<br>10 - $V_{BAT} + 250$ mV<br>11 - $V_{BAT} + 300$ mV                                   |
| 0   | VINDPM_BAT_TRACK[0] | 0   | R/W  | by REG_RST                |   |

LEGEND: R/W = Read/Write; R = Read only

### 9.5.9 Charger Status 0 Register (Address = 08h)

图 9-25. REG08

| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|---|---|---|---|---|---|---|---|
| x | x | x | x | x | x | x | x |
| R | R | R | R | R | R | R | R |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

表 9-16. REG08 Field Descriptions

| Bit | Field        | POR | Type | Reset | Description   |
|-----|--------------|-----|------|-------|---|
| 7   | VBUS_STAT[2] | x   | R    | NA    | VBUS Status register<br>Software current limit is reported in IINDPM register   |
| 6   | VBUS_STAT[1] | x   | R    | NA    |   |
| 5   | VBUS_STAT[0] | x   | R    | NA    |   |
| 4   | CHRG_STAT[1] | x   | R    | NA    | Charging status:<br>00 – Not Charging<br>01 – Pre-charge or trickle charge ( $V_{BATLOWV}$ )<br>10 – Fast Charging<br>11 – Charge Termination |
| 3   | CHRG_STAT[0] | x   | R    | NA    |   |
| 2   | Reserved     | x   | R    | NA    | Reserved  |
| 1   | THERM_STAT   | x   | R    | NA    | 0 – Not in thermal regulation<br>1 – In thermal regulation  |
| 0   | VSYS_STAT    | x   | R    | NA    | 0 – Not in SYS_MIN regulation ( $V_{BAT} > V_{SYS\_MIN}$ )<br>1 – In SYS_MIN regulation ( $V_{BAT} < V_{SYS\_MIN}$ )                          |

LEGEND: R/W = Read/Write; R = Read only

### 9.5.10 Charger Status 1 Register (Address = 09h)

图 9-26. REG09 Register

| 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|---|---|---|---|---|---|---|---|
| 1 | x | x | x | x | x | x | x |
| R | R | R | R | R | R | R | R |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

表 9-17. REG09 Field Descriptions

| Bit | Field          | POR | Type | Reset | Description   |
|-----|----------------|-----|------|-------|---|
| 7   | WATCHDOG_FAULT | 1   | R    | NA    | 0 - Normal, device is in host mode,<br>1 - Watchdog timer expiration, device is in default mode.  |
| 6   | BOOST_FAULT    | x   | R    | NA    | 0 - Normal<br>1 - Fault detected in boost mode (any conditions that are not valid for boost operation), including VBUS overloaded (BST_OVP) or battery is too low (BST_BAT) |
| 5   | CHRG_FAULT[1]  | x   | R    | NA    | 00 - Normal<br>01 - Input fault<br>10 - Thermal shutdown<br>11 - Charge safety timer expiration   |
| 4   | CHRG_FAULT[0]  | x   | R    | NA    | 000 - Normal<br>010 - Warm<br>011 - Cool<br>101 - Cold<br>110 - Hot   |
| 3   | BAT_FAULT      | x   | R    | NA    | 0 - Normal,<br>1 - Battery over voltage.  |
| 2   | NTC_FAULT[2]   | x   | R    | NA    | TS fault in buck mode   |
| 1   | NTC_FAULT[1]   | x   | R    | NA    | 000 - Normal<br>010 - Warm<br>011 - Cool<br>101 - Cold<br>110 - Hot   |
| 0   | NTC_FAULT[0]   | x   | R    | NA    | TS fault in boost mode<br>000 - Normal<br>101 - Cold<br>110 - Hot   |

LEGEND: R/W = Read/Write; R = Read only

**9.5.11 Charger Status 2 Register (Address = 0Ah)**
**图 9-27. REG0A Register**

| 7 | 6 | 5 | 4 | 3 | 2 | 1   | 0   |
|---|---|---|---|---|---|-----|-----|
| x | x | x | x | x | x | 0   | 0   |
| R | R | R | R | R | R | R/W | R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**表 9-18. REG0A Field Descriptions**

| Bit | Field           | POR | Type | Reset      | Description   |
|-----|-----------------|-----|------|------------|---|
| 7   | VBUS_GD         | x   | R    | NA         | 0 - VBUS does not pass poor source detection<br>1 - VBUS passes poor source detection   |
| 6   | VINDPM_STAT     | x   | R    | NA         | 0 - Not in VINDPM<br>1 - In VINDPM  |
| 5   | IINDPM_STAT     | x   | R    | NA         | 0 - Not in IINDPM<br>1 - In IINDPM  |
| 4   | BATSNS_STAT     | x   | R    | NA         | 0 - BATSNS pin is in good connection. Regulation battery voltage through BATSNS pin.<br>1 - BATSNS pin is open/short. Regulate battery voltage through BAT pin.     |
| 3   | TOPOFF_ACTIVE   | x   | R    | NA         | 0 - Top off timer not counting.<br>1 - Top off timer counting   |
| 2   | ACOV_STAT       | x   | R    | NA         | 0 - Not in ACOV<br>1 - In ACOV  |
| 1   | VINDPM_INT_MASK | 0   | R/W  | by REG_RST | Allow or block INT pulse assertion to host during VINDPM.<br>0 - INT is asserted to host during VINDPM (default)<br>1 - No INT pulse asserted to host during VINDPM |
| 0   | IINDPM_INT_MASK | 0   | R/W  | by REG_RST | Allow or block INT pulse assertion to host during IINDPM<br>0 - INT is asserted to host during IINDPM (default)<br>1 - No INT pulse asserted to host during IINDPM  |

LEGEND: R/W = Read/Write; R = Read only

### 9.5.12 Part Information Register (Address = 0Bh)

图 9-28. REG0B Register

| 7   | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|-----|---|---|---|---|---|---|---|
| 0   | 1 | 0 | 1 | 0 | 1 | 0 | 0 |
| R/W | R | R | R | R | R | R | R |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

表 9-19. REG0B Field Descriptions

| Bit | Field    | POR | Type | Reset | Description   |
|-----|----------|-----|------|-------|---|
| 7   | REG_RST  | 0   | R/W  | NA    | Register reset<br>0 - Keep current register setting (default)<br>1 - Reset to default register value and reset safety timer. This bit returns to 0 after register reset is completed. |
| 6   | PN[3]    | 1   | R    | NA    | BQ25611D: 1010  |
| 5   | PN[2]    | 0   | R    | NA    |   |
| 4   | PN[1]    | 1   | R    | NA    |   |
| 3   | PN[0]    | 0   | R    | NA    |   |
| 2   | Reserved | 1   | R    | NA    | Reserved  |
| 1   | Reserved | 0   | R    | NA    | Reserved  |
| 0   | Reserved | 0   | R    | NA    | Reserved  |

LEGEND: R/W = Read/Write; R = Read only

**9.5.13 Charger Control 4 Register (Address = 0Ch) [reset = 75h]**
**图 9-29. REG0C**

| 7   | 6   | 5   | 4   | 3   | 2   | 1   | 0   |
|-----|-----|-----|-----|-----|-----|-----|-----|
| 0   | 1   | 1   | 1   | 0   | 1   | 0   | 1   |
| R/W |

LEGEND: R/W = Read/Write; R = Read only; -n = value after reset

**表 9-20. REG0C Field Descriptions**

| Bit | Field               | POR | Type | Reset                     | Description  |
|-----|---------------------|-----|------|---------------------------|--|
| 7   | JEITA_COOL_ISET [1] | 0   | R/W  | by REG_RST<br>by Watchdog | Fast charge current setting during cool temperature range (T1 - T2), as percentage of $I_{CHG}$ in REG02[5:0].<br>00 - No Charge<br>01 - 20% of $I_{CHG}$ (default)<br>10 - 50% of $I_{CHG}$<br>11 - 100% of $I_{CHG}$ (safety timer does not become 2X) |
| 6   | JEITA_COOL_ISET [0] | 1   | R/W  | by REG_RST<br>by Watchdog |  |
| 5   | JEITA_WARM_ISET [1] | 1   | R/W  | by REG_RST<br>by Watchdog | Fast charge current setting during warm temperature range (T3 - T5), as percentage of $I_{CHG}$ in REG02[5:0].<br>00 - No Charge<br>01 - 20% of $I_{CHG}$<br>10 - 50% of $I_{CHG}$<br>11 - 100% of $I_{CHG}$ (safety timer does not become 2X) (default) |
| 4   | JEITA_WARM_ISET [0] | 1   | R/W  | by REG_RST<br>by Watchdog |  |
| 3   | JEITA_VT2 [1]       | 0   | R/W  | by REG_RST<br>by Watchdog | 00 - VT2% = 70.75% (5.5°C)<br>01 - VT2% = 68.25% (10°C) (default)<br>10 - VT2% = 65.25% (15°C)<br>11 - VT2% = 62.25% (20°C)  |
| 2   | JEITA_VT2 [0]       | 1   | R/W  | by REG_RST<br>by Watchdog |  |
| 1   | JEITA_VT3 [1]       | 0   | R/W  | by REG_RST<br>by Watchdog | 00 - VT3% = 48.25% (40°C)<br>01 - VT3% = 44.75% (44.5°C) (default)<br>10 - VT3% = 40.75% (50.5°C)<br>11 - VT3% = 37.75% (54.5°C)   |
| 0   | JEITA_VT3 [0]       | 1   | R/W  | by REG_RST<br>by Watchdog |  |

LEGEND: R/W = Read/Write; R = Read only

## 10 Application and Implementation

### Note

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

### 10.1 Application Information

A typical application consists of the device configured as an I<sup>2</sup>C controlled Power Path management device and a single cell battery charger for Li-Ion and Li-polymer batteries used in a wide range of smart phones and other portable devices. It integrates an input reverse-block FET (RBFET, Q1), high-side switching FET (HSFET, Q2), low-side switching FET (LSFET, Q3), and battery FET (BATFET Q4) between the system and battery. The device also integrates a bootstrap diode for the high-side gate drive.

### 10.2 Typical Application

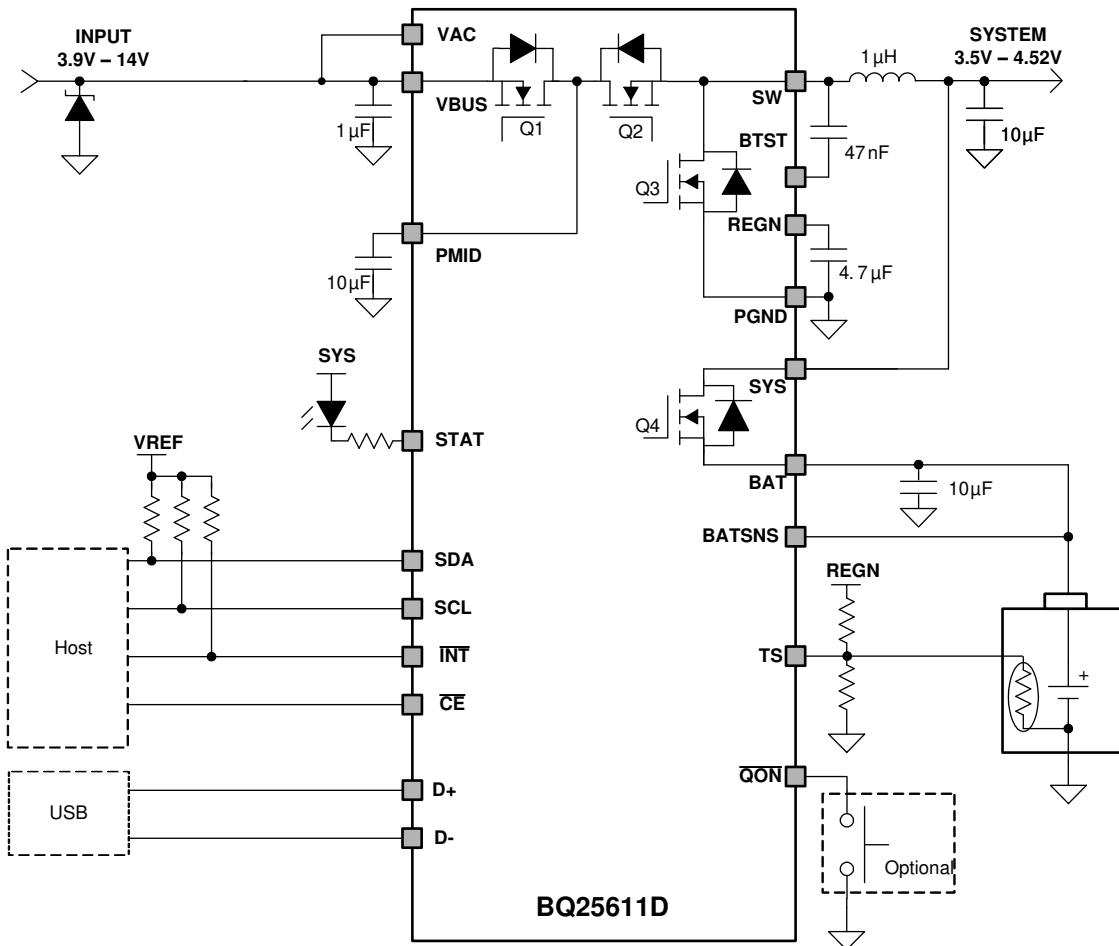


图 10-1. BQ25611D Application Diagram

### 10.2.1 Design Requirements

For this design example, use the parameters shown in the table below.

**表 10-1. Design Parameters**

| PARAMETER                                | VALUE         |
|--|---------------|
| $V_{V_{BUS}}$ voltage range              | 4 V to 13.5 V |
| Input current limit (REG00[4:0] )        | 2.4 A         |
| Fast charge current limit (REG02[5:0] )  | 1.024 A       |
| Minimum system voltage (REG01[3:1])      | 3.5 V         |
| Battery regulation voltage (REG04[7:3] ) | 4.2 V         |

### 10.2.2 Detailed Design Procedure

#### 10.2.2.1 Inductor Selection

The 1.5-MHz switching frequency allows the use of small inductor and capacitor values to maintain an inductor saturation current higher than the charging current ( $I_{CHG}$ ) plus half the ripple current ( $I_{RIPPLE}$ ):

$$I_{SAT} \geq I_{CHG} + (1/2) I_{RIPPLE} \quad (3)$$

The inductor ripple current depends on the input voltage ( $V_{V_{BUS}}$ ), the duty cycle ( $D = V_{BAT}/V_{V_{BUS}}$ ), the switching frequency ( $f_S$ ) and the inductance ( $L$ ).

$$I_{RIPPLE} = \frac{V_{IN} \times D \times (1 - D)}{f_S \times L} \quad (4)$$

The maximum inductor ripple current occurs when the duty cycle ( $D$ ) is 0.5 or approximately 0.5. Usually inductor ripple is designed in the range between 20% and 40% maximum charging current as a trade-off between inductor size and efficiency for a practical design.

#### 10.2.2.2 Input Capacitor and Resistor

Design input capacitance to provide enough ripple current rating to absorb input switching ripple current. The worst case RMS ripple current is half of the charging current when duty cycle is 0.5. If the converter does not operate at 50% duty cycle, then the worst case capacitor RMS current  $I_{CIN}$  occurs where the duty cycle is closest to 50% and can be estimated using [方程式 5](#).

$$I_{CIN} = I_{CHG} \times \sqrt{D \times (1 - D)} \quad (5)$$

Low ESR ceramic capacitor such as X7R or X5R is preferred for input decoupling capacitor and should be placed to the drain of the high-side MOSFET and source of the low-side MOSFET as close as possible. Voltage rating of the capacitor must be higher than normal input voltage level. A rating of 25-V or higher capacitor is preferred for 12-V input voltage. Capacitance of minimum 10  $\mu$ F is suggested for typical of 3-A charging current.

During high current output over 700 mA in boost mode, a 10-k  $\Omega$  pull-down resistor on  $V_{V_{BUS}}$  is recommended to keep  $V_{V_{BUS}}$  low in case Q1 RBFET leakage gets high.

#### 10.2.2.3 Output Capacitor

Ensure that the output capacitance has enough ripple current rating to absorb the output switching ripple current. [方程式 6](#) shows the output capacitor RMS current  $I_{COUP}$  calculation.

$$I_{COUP} = \frac{I_{RIPPLE}}{2 \times \sqrt{3}} \approx 0.29 \times I_{RIPPLE} \quad (6)$$


The output capacitor voltage ripple can be calculated as follows:


$$\Delta V_O = \frac{V_{OUT}}{8LCf^2} \left( 1 - \frac{V_{OUT}}{V_{IN}} \right) \quad (7)$$

At certain input and output voltage and switching frequency, the voltage ripple can be reduced by increasing the output filter LC.

The charger device has internal loop compensation optimized for  $> 10\text{-}\mu\text{F}$  ceramic output capacitance. The preferred ceramic capacitor is 10-V rating, X7R or X5R.


### 10.3 Application Curves

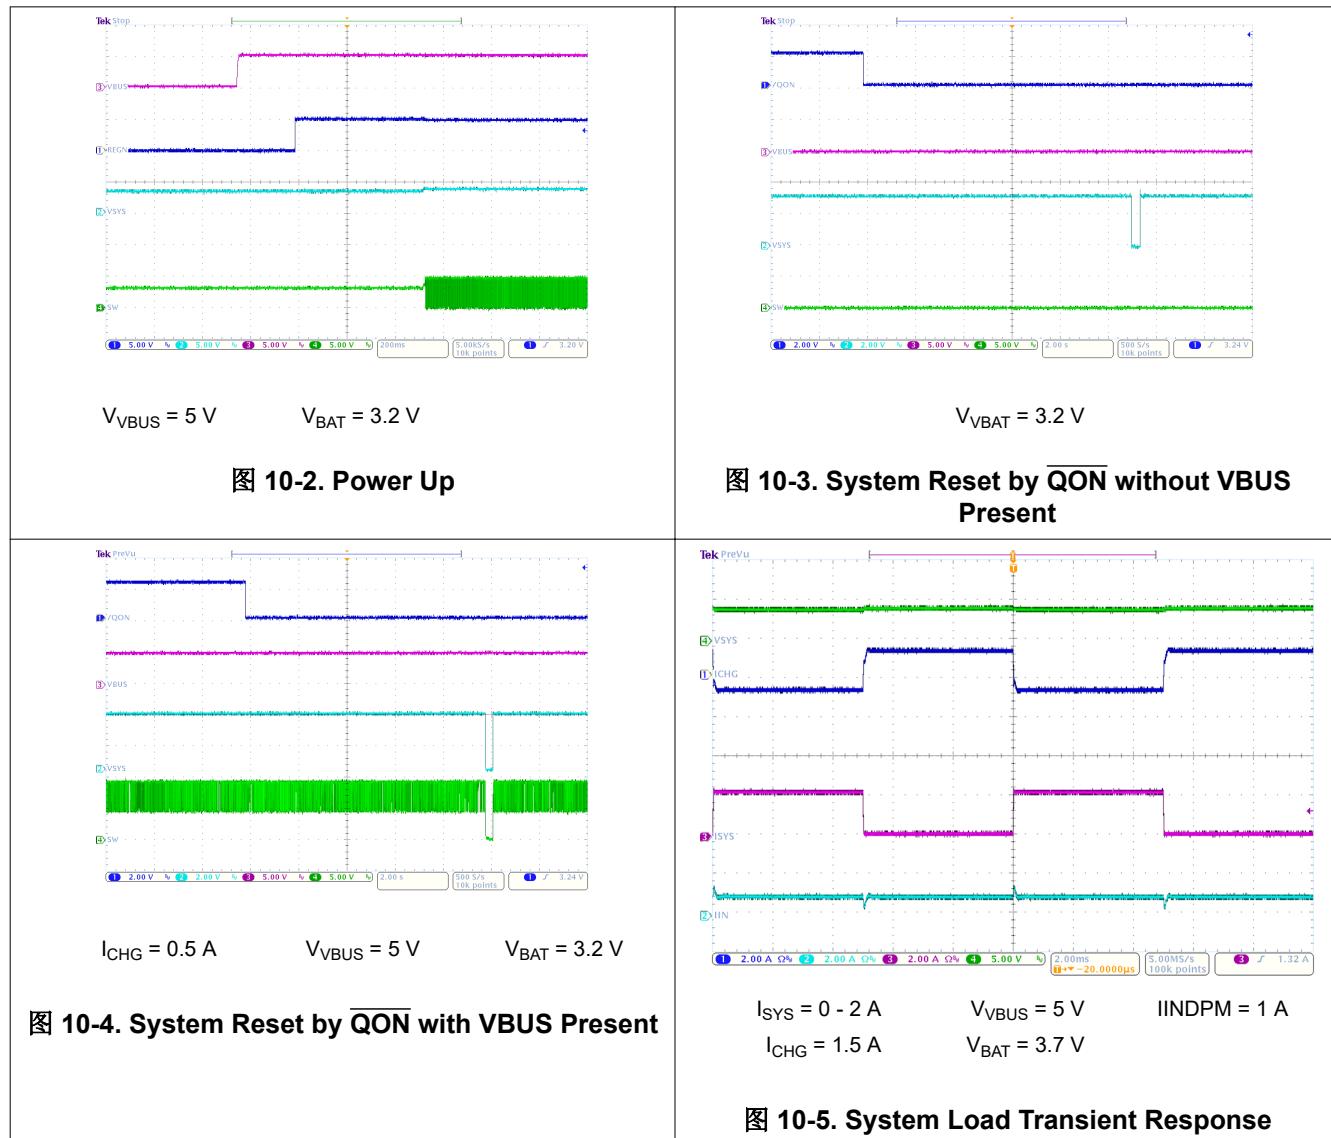

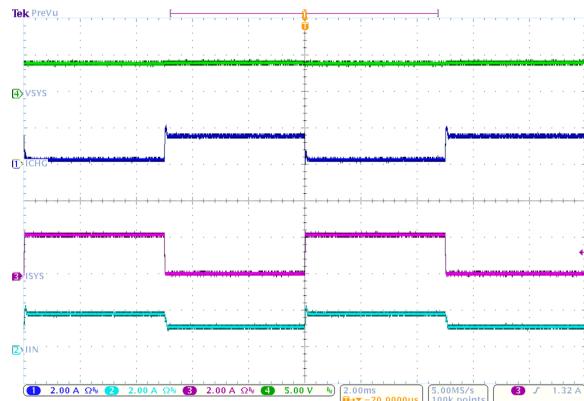


$I_{SYS} = 0 - 2 A$        $V_{VBUS} = 5 V$        $I_{INDPM} = 2 A$   
 $I_{CHG} = 1 A$        $V_{BAT} = 3.7 V$

图 10-6. System Load Transient Response

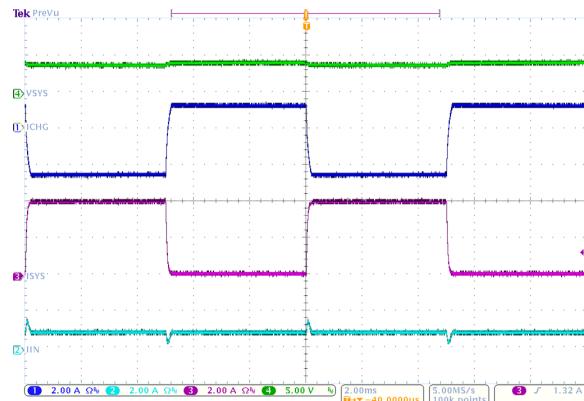

$I_{SYS} = 0 - 4 A$        $V_{VBUS} = 5 V$        $I_{INDPM} = 1 A$   
 $I_{CHG} = 1.5 A$        $V_{BAT} = 3.7 V$

图 10-7. System Load Transient Response

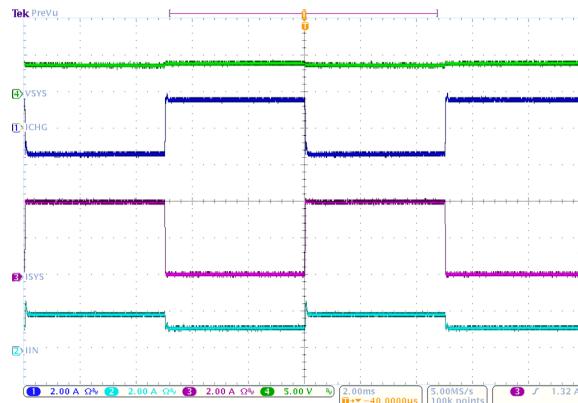

$I_{SYS} = 0 - 4 A$        $V_{VBUS} = 5 V$        $I_{INDPM} = 2 A$   
 $I_{CHG} = 1.5 A$        $V_{BAT} = 3.7 V$

图 10-8. System Load Transient Response

## 11 Power Supply Recommendations

In order to provide an output voltage on SYS, the battery charger requires a power supply between 4-V and 13.5-V input with at least 100-mA current rating connected to VBUS and a single-cell Li-Ion battery with battery voltage greater than  $V_{BAT\_UVLOZ}$  connected to BAT. The source current rating needs to be at least 3-A in order for the buck converter of the charger to provide maximum output power to SYS.

## 12 Layout

### 12.1 Layout Guidelines

The switching node rise and fall times should be minimized for minimum switching loss. Proper layout of the components to minimize high frequency current path loop (see [图 12-1](#)) is important to prevent electrical and magnetic field radiation and high frequency resonant problems. Follow this specific order carefully to achieve the proper layout.

1. Place input capacitor as close as possible to PMID pin and GND pin connections and use shortest copper trace connection or GND plane. Add 1 nF small size (such as 0402 or 0201) decoupling cap for high frequency noise filter and EMI improvement.
2. Place inductor input pin to SW pin as close as possible. Minimize the copper area of this trace to lower electrical and magnetic field radiation but make the trace wide enough to carry the charging current. Do not use multiple layers in parallel for this connection. Minimize parasitic capacitance from this area to any other trace or plane.
3. Put output capacitor near to the inductor and the device. Ground connections need to be tied to the IC ground with a short copper trace connection or GND plane.
4. Route analog ground separately from power ground. Connect analog ground and connect power ground separately. Connect analog ground and power ground together using thermal pad as the single ground connection point. Or using a  $0\ \Omega$  resistor to tie analog ground to power ground.
5. Use single ground connection to tie charger power ground to charger analog ground. Just beneath the device. Use ground copper pour but avoid power pins to reduce inductive and capacitive noise coupling.
6. Place decoupling capacitors next to the IC pins and make trace connection as short as possible.
7. It is critical that the exposed thermal pad on the backside of the device package be soldered to the PCB ground. Ensure that there are sufficient thermal vias directly under the IC, connecting to the ground plane on the other layers.
8. Ensure that the number and sizes of vias allow enough copper for a given current path.

See the [BQ25619 BMS025 Evaluation Module EVM User's Guide](#) for the recommended component placement with trace and via locations. For the VQFN information, refer to [Quad Flatpack No-Lead Logic Packages Application Report](#) and [QFN and SON PCB Attachment Application Report](#).

### 12.2 Layout Example

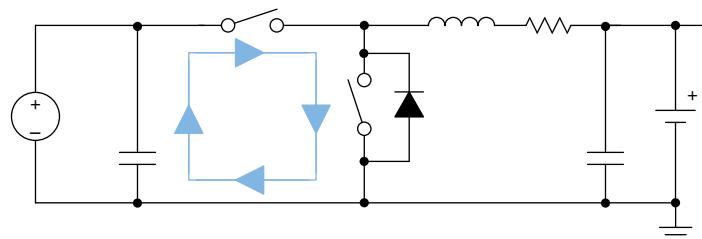


图 12-1. High Frequency Current Path

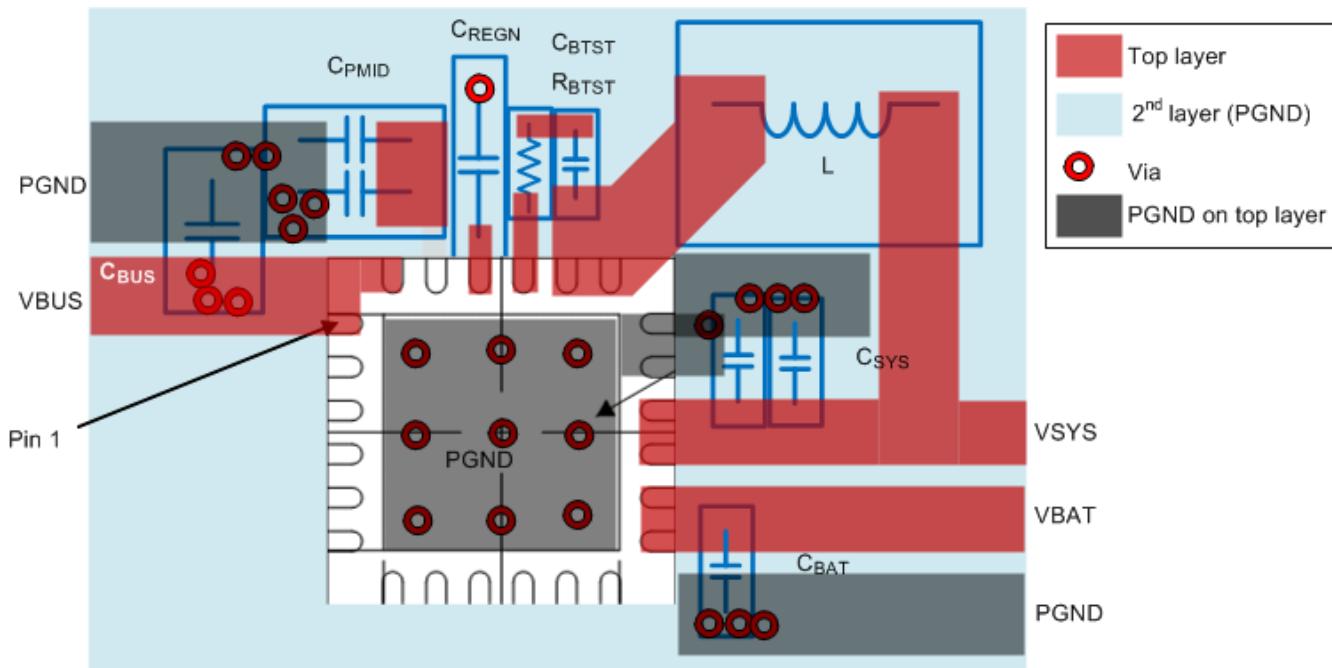


图 12-2. Layout Example

## 13 Device and Documentation Support

### 13.1 Device Support

### 13.2 Documentation Support

#### 13.2.1 Related Documentation

For related documentation see the following:

- [BQ25619 BMS025 Evaluation Module User's Guide](#)

### 13.3 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on [ti.com](#). Click on *Subscribe to updates* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

### 13.4 Support Resources

[TI E2E™ support forums](#) are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

### 13.5 Trademarks

TI E2E™ is a trademark of Texas Instruments.

所有商标均为其各自所有者的财产。

### 13.6 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

### 13.7 Glossary

[TI Glossary](#) This glossary lists and explains terms, acronyms, and definitions.

## 14 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

**PACKAGING INFORMATION**

| Orderable part number | Status<br>(1) | Material type<br>(2) | Package   Pins  | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6) |
|-----------------------|---------------|----------------------|-----------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| BQ25611DRTWR          | Active        | Production           | WQFN (RTW)   24 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 85    | BQ<br>25611D        |
| BQ25611DRTWR.A        | Active        | Production           | WQFN (RTW)   24 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 85    | BQ<br>25611D        |
| BQ25611DRTWT          | Active        | Production           | WQFN (RTW)   24 | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 85    | BQ<br>25611D        |
| BQ25611DRTWT.A        | Active        | Production           | WQFN (RTW)   24 | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 85    | BQ<br>25611D        |

<sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).

<sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

<sup>(4)</sup> **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.



<sup>(6)</sup> **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a " ~ " will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.


**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

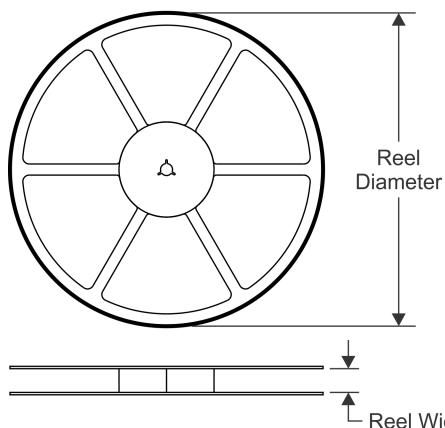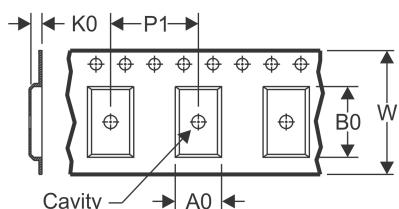


**TAPE AND REEL INFORMATION**
**REEL DIMENSIONS**

**TAPE DIMENSIONS**

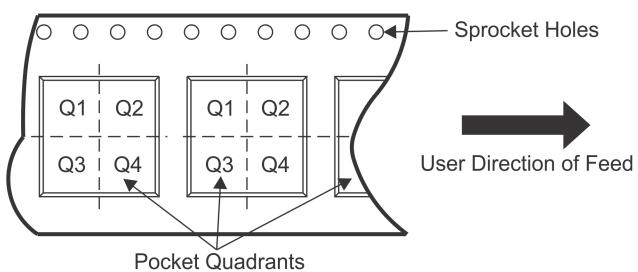
|    |   |
|----|---|
| A0 | Dimension designed to accommodate the component width     |
| B0 | Dimension designed to accommodate the component length    |
| K0 | Dimension designed to accommodate the component thickness |
| W  | Overall width of the carrier tape                         |
| P1 | Pitch between successive cavity centers                   |

**QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE**


\*All dimensions are nominal
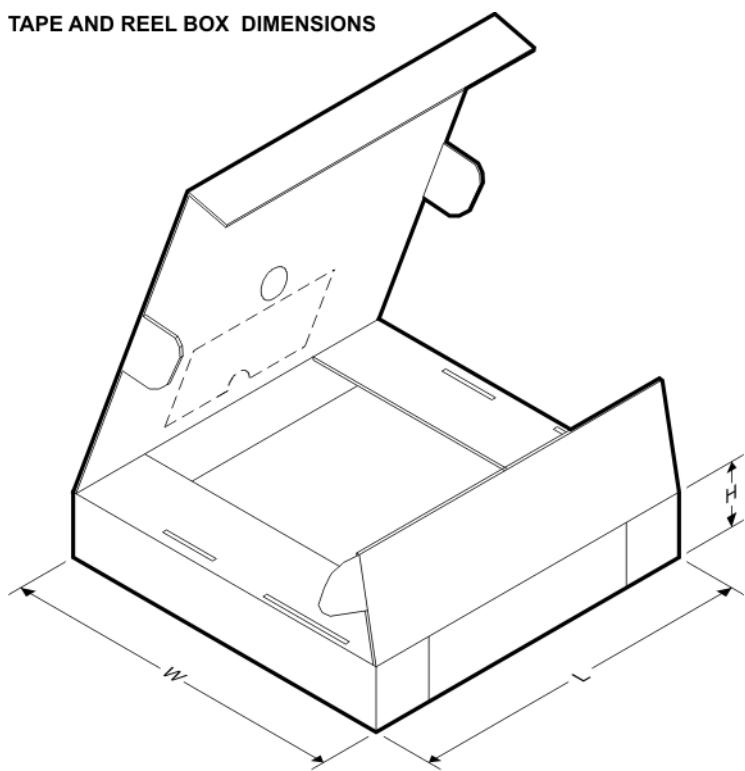
| Device       | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|--------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| BQ25611DRTWR | WQFN         | RTW             | 24   | 3000 | 330.0              | 12.4               | 4.25    | 4.25    | 1.15    | 8.0     | 12.0   | Q2            |
| BQ25611DRTWT | WQFN         | RTW             | 24   | 250  | 180.0              | 12.4               | 4.25    | 4.25    | 1.15    | 8.0     | 12.0   | Q2            |

**TAPE AND REEL BOX DIMENSIONS**

\*All dimensions are nominal

| Device       | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|--------------|--------------|-----------------|------|------|-------------|------------|-------------|
| BQ25611DRTWR | WQFN         | RTW             | 24   | 3000 | 367.0       | 367.0      | 35.0        |
| BQ25611DRTWT | WQFN         | RTW             | 24   | 250  | 210.0       | 185.0      | 35.0        |

## GENERIC PACKAGE VIEW


**RTW 24**

**WQFN - 0.8 mm max height**

**4 x 4, 0.5 mm pitch**

**PLASTIC QUAD FLATPACK - NO LEAD**


This image is a representation of the package family, actual package may vary.  
Refer to the product data sheet for package details.

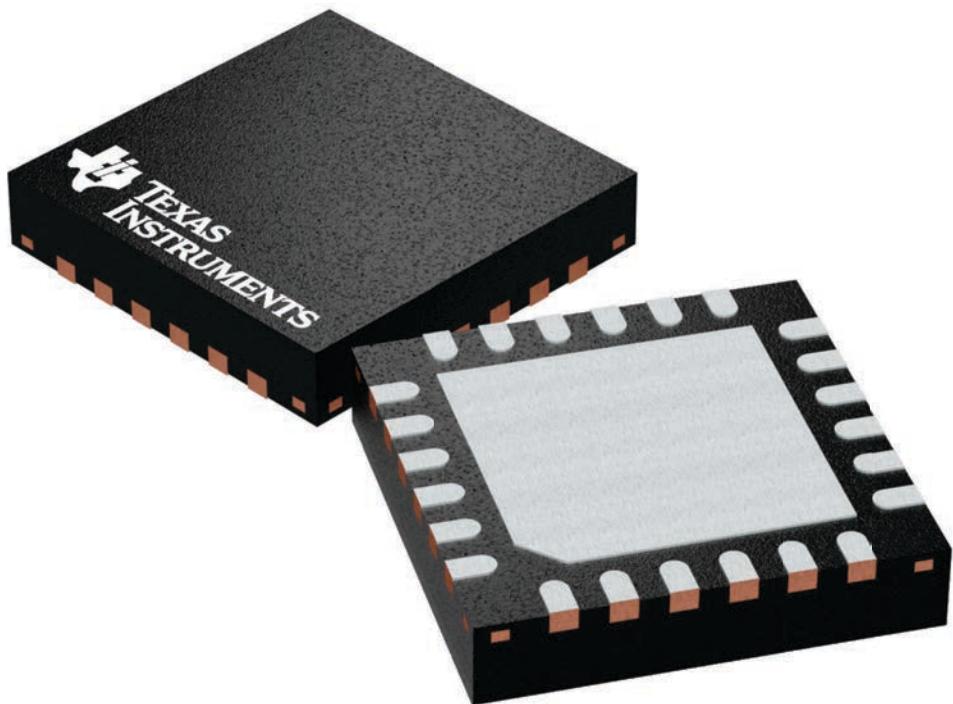

4224801/A

RTW (S-PWQFN-N24)

PLASTIC QUAD FLATPACK NO-LEAD

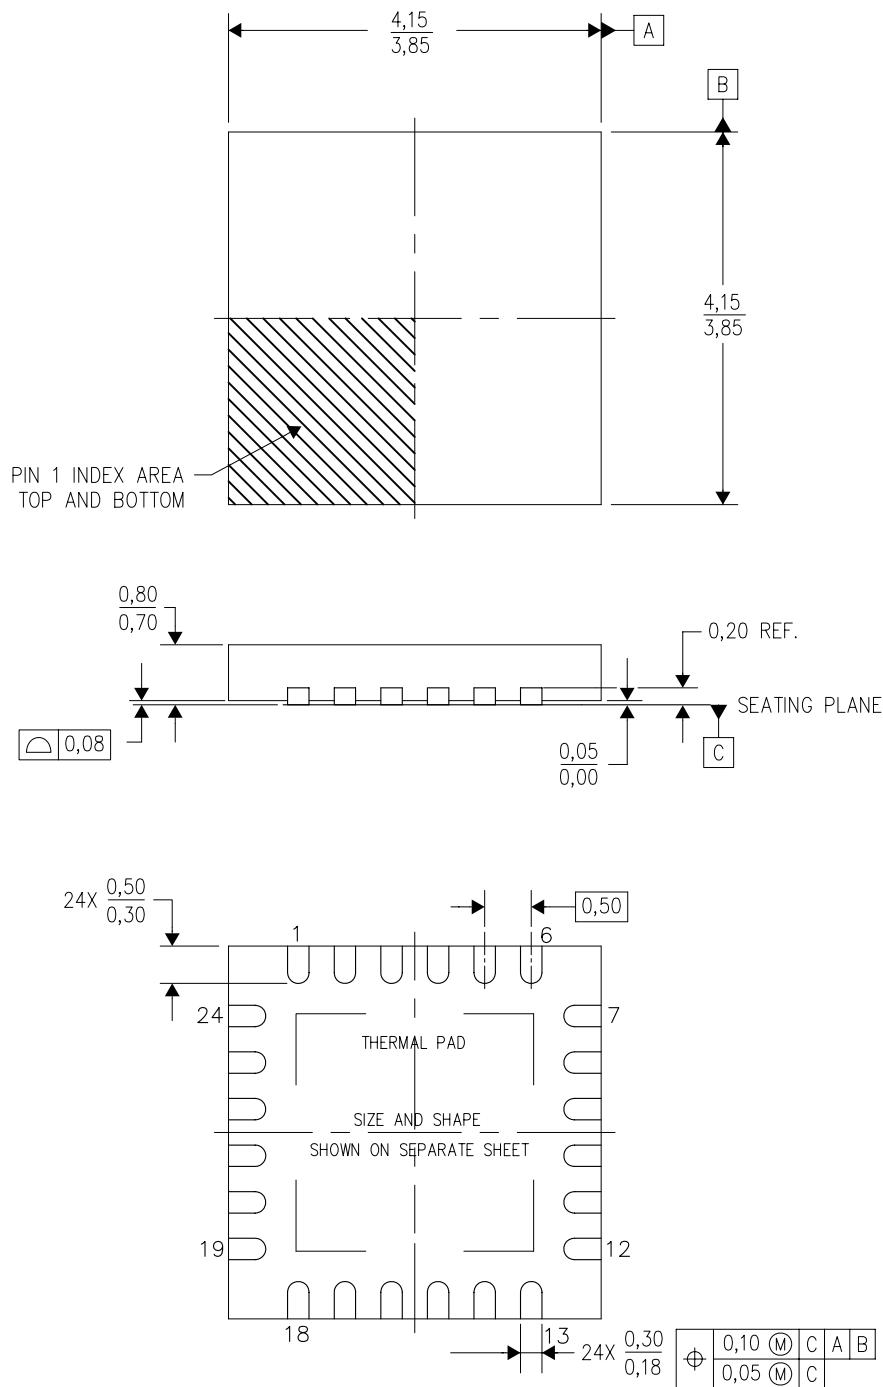

4206244/C 07/11

NOTES:

- All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M-1994.
- This drawing is subject to change without notice.
- Quad Flatpack, No-Leads (QFN) package configuration.
- The package thermal pad must be soldered to the board for thermal and mechanical performance.
- See the additional figure in the Product Data Sheet for details regarding the exposed thermal pad features and dimensions.
- Falls within JEDEC MO-220.

RTW (S-PWQFN-N24)


PLASTIC QUAD FLATPACK NO-LEAD

## THERMAL INFORMATION

This package incorporates an exposed thermal pad that is designed to be attached directly to an external heatsink. The thermal pad must be soldered directly to the printed circuit board (PCB). After soldering, the PCB can be used as a heatsink. In addition, through the use of thermal vias, the thermal pad can be attached directly to the appropriate copper plane shown in the electrical schematic for the device, or alternatively, can be attached to a special heatsink structure designed into the PCB. This design optimizes the heat transfer from the integrated circuit (IC).

For information on the Quad Flatpack No-Lead (QFN) package and its advantages, refer to Application Report, QFN/SON PCB Attachment, Texas Instruments Literature No. SLUA271. This document is available at [www.ti.com](http://www.ti.com).

The exposed thermal pad dimensions for this package are shown in the following illustration.

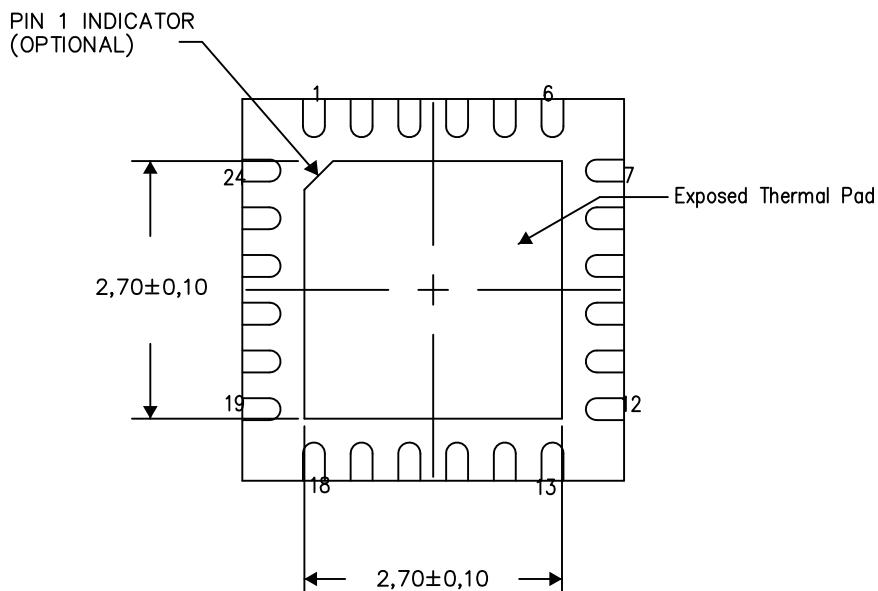

Bottom View  
Exposed Thermal Pad Dimensions


4206249-5/P 05/15

NOTES: A. All linear dimensions are in millimeters

# LAND PATTERN DATA

RTW (S-PWQFN-N24)

PLASTIC QUAD FLATPACK NO-LEAD

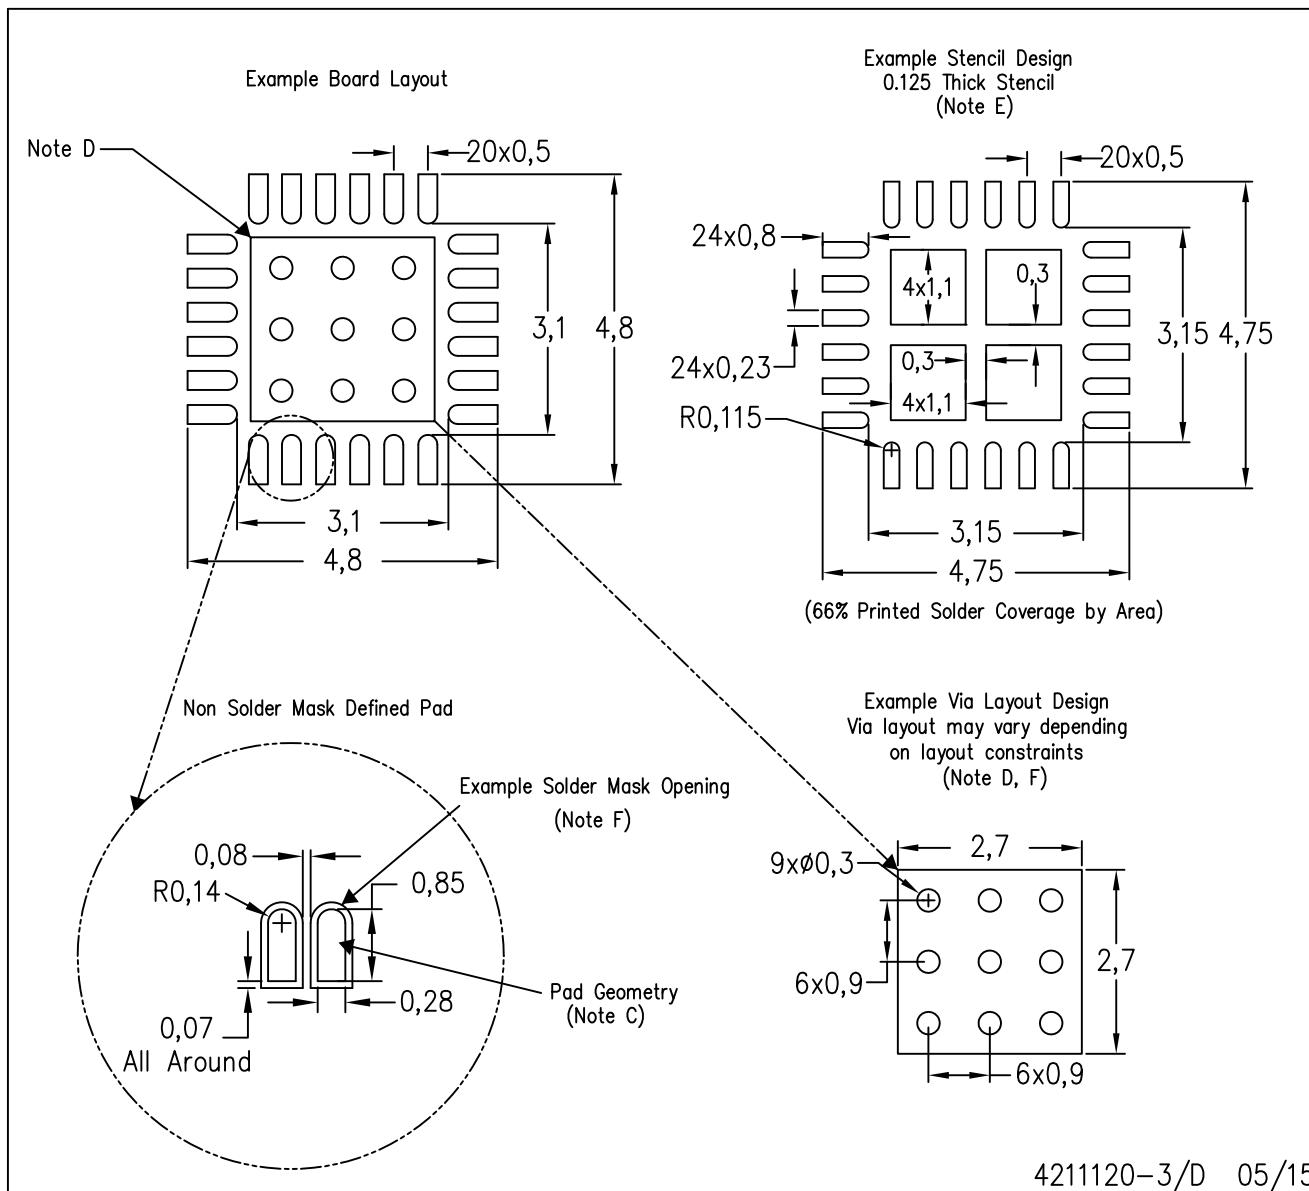

NOTES:

- A. All linear dimensions are in millimeters.
- B. This drawing is subject to change without notice.
- C. Publication IPC-7351 is recommended for alternate designs.
- D. This package is designed to be soldered to a thermal pad on the board. Refer to Application Note, Quad Flat-Pack Packages, Texas Instruments Literature No. SLUA271, and also the Product Data Sheets for specific thermal information, via requirements, and recommended board layout. These documents are available at [www.ti.com](http://www.ti.com) <<http://www.ti.com>>.
- E. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC 7525 for stencil design considerations.
- F. Customers should contact their board fabrication site for recommended solder mask tolerances and via tenting recommendations for vias placed in the thermal pad.

## 重要通知和免责声明

TI“按原样”提供技术和可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证没有瑕疵且不做出任何明示或暗示的担保，包括但不限于对适销性、与某特定用途的适用性或不侵犯任何第三方知识产权的暗示担保。

这些资源可供使用 TI 产品进行设计的熟练开发人员使用。您将自行承担以下全部责任：(1) 针对您的应用选择合适的 TI 产品，(2) 设计、验证并测试您的应用，(3) 确保您的应用满足相应标准以及任何其他安全、安保法规或其他要求。

这些资源如有变更，恕不另行通知。TI 授权您仅可将这些资源用于研发本资源所述的 TI 产品的相关应用。严禁以其他方式对这些资源进行复制或展示。您无权使用任何其他 TI 知识产权或任何第三方知识产权。对于因您对这些资源的使用而对 TI 及其代表造成的任何索赔、损害、成本、损失和债务，您将全额赔偿，TI 对此概不负责。

TI 提供的产品受 [TI 销售条款](#)、[TI 通用质量指南](#) 或 [ti.com](#) 上其他适用条款或 TI 产品随附的其他适用条款的约束。TI 提供这些资源并不会扩展或以其他方式更改 TI 针对 TI 产品发布的适用的担保或担保免责声明。除非德州仪器 (TI) 明确将某产品指定为定制产品或客户特定产品，否则其产品均为按确定价格收入目录的标准通用器件。

TI 反对并拒绝您可能提出的任何其他或不同的条款。

版权所有 © 2025，德州仪器 (TI) 公司

最后更新日期：2025 年 10 月