

LMH6644-MIL Low-Power, 130-MHz, 75-mA Rail-to-Rail Output Amplifier

1 Features

($V_S = \pm 5\text{ V}$, $T_A = 25^\circ\text{C}$, $R_L = 2\text{ k}\Omega$, $A_V = +1$. Typical Values Unless Specified).

- -3 dB BW ($A_V = +1$) 130 MHz
- Supply Voltage Range 2.7 V to 12.8 V
- Slew Rate, ($A_V = -1$) 130 V/ μs ⁽¹⁾
- Supply Current (no load) 2.7 mA/amp
- Output Short Circuit Current +115 mA to 145 mA
- Linear Output Current $\pm 75\text{ mA}$
- Input Common Mode Voltage 0.5 V Beyond V^- , 1 V from V^+
- Output Voltage Swing 40 mV from Rails
- Input Voltage Noise (100 kHz) 17 nV/ $\sqrt{\text{Hz}}$
- Input Current Noise (100 kHz) 0.9 pA/ $\sqrt{\text{Hz}}$
- THD (5 MHz, $R_L = 2\text{ k}\Omega$, $V_O = 2\text{ V}_{PP}$, $A_V = +2$) -62 dBc
- Settling Time 68 ns
- Fully Characterized for 3 V, 5 V, and $\pm 5\text{ V}$
- Overdrive Recovery 100 ns
- Output Short Circuit Protected⁽²⁾
- No Output Phase Reversal with CMVR Exceeded

⁽¹⁾ Slew rate is the average of the rising and falling slew rates.

⁽²⁾ Output short circuit duration is infinite for $V_S < 6\text{ V}$ at room temperature and below. For $V_S > 6\text{ V}$, allowable short circuit duration is 1.5 ms.

2 Applications

- Active Filters
- CD/DVD ROM
- ADC Buffer Amp
- Portable Video
- Current Sense Buffer

3 Description

The LMH6644-MIL true single supply voltage feedback amplifier offers high speed (130 MHz), low distortion (-62 dBc), and exceptionally high-output current (approximately 75 mA) at low cost and with reduced power consumption when compared against existing devices with similar performance.

Input common mode voltage range extends to 0.5 V below V^- and 1 V from V^+ . Output voltage range extends to within 40 mV of either supply rail, allowing wide dynamic range especially desirable in low-voltage applications. The output stage is capable of approximately 75 mA in order to drive heavy loads. Fast output slew rate (130 V/ μs) ensures large peak-to-peak output swings can be maintained even at higher speeds, resulting in exceptional full power bandwidth of 40 MHz with a 3-V supply. These characteristics, along with low cost, are ideal features for a multitude of industrial and commercial applications.

Device Information⁽¹⁾

PART NUMBER	PACKAGE	BODY SIZE (NOM)
LMH6644-MIL	SOIC (14)	8.64 mm \times 3.91 mm
	TSSOP (14)	5.00 mm \times 4.40 mm

⁽¹⁾ For all available packages, see the orderable addendum at the end of the datasheet.

Closed Loop Gain vs Frequency for Various Supplies

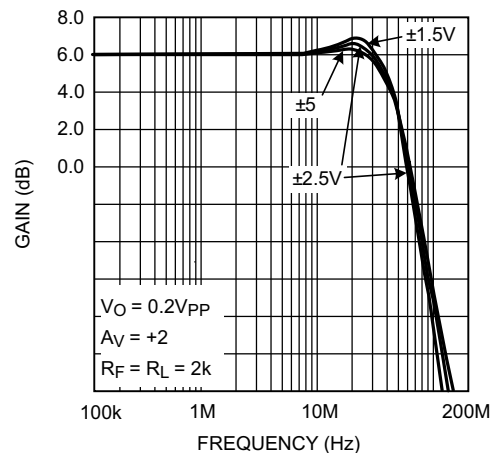


Table of Contents

1 Features	1	8.2 Functional Block Diagram	21
2 Applications	1	8.3 Feature Description	21
3 Description	1	8.4 Device Functional Modes	21
4 Revision History	2	9 Application and Implementation	22
5 Description (continued)	3	9.1 Application Information	22
6 Pin Configuration and Functions	4	9.2 Typical Application	22
7 Specifications	5	10 Power Supply Recommendations	24
7.1 Absolute Maximum Ratings	5	11 Layout	25
7.2 ESD Ratings	5	11.1 Layout Guidelines	25
7.3 Recommended Operating Conditions	5	11.2 Layout Example	25
7.4 Thermal Information	5	12 Device and Documentation Support	26
7.5 3-V Electrical Characteristics	6	12.1 Receiving Notification of Documentation Updates	26
7.6 5-V Electrical Characteristics	8	12.2 Community Resources	26
7.7 ± 5 -V Electrical Characteristics	10	12.3 Trademarks	26
7.8 Typical Performance Characteristics	12	12.4 Electrostatic Discharge Caution	26
8 Detailed Description	21	12.5 Glossary	26
8.1 Overview	21	13 Mechanical, Packaging, and Orderable Information	26

4 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.


DATE	REVISION	NOTES
June 2017	*	Initial release.

5 Description (continued)

Careful attention has been paid to ensure device stability under all operating voltages and modes. The result is a very well behaved frequency response characteristic (0.1-dB gain flatness up the 12 MHz under 150- Ω load and $A_V = +2$) with minimal peaking (typically 2-dB maximum) for any gain setting and under both heavy and light loads. This along with fast settling time (68 ns) and low distortion allows the device to operate well in an ADC buffer as well as high-frequency filter applications.

This device offers professional quality video performance with low differential gain (0.01%) and differential phase (0.01°) characteristics. Differential gain and differential phase characteristics are also well maintained under heavy loads (150 Ω) and throughout the output voltage range.

6 Pin Configuration and Functions

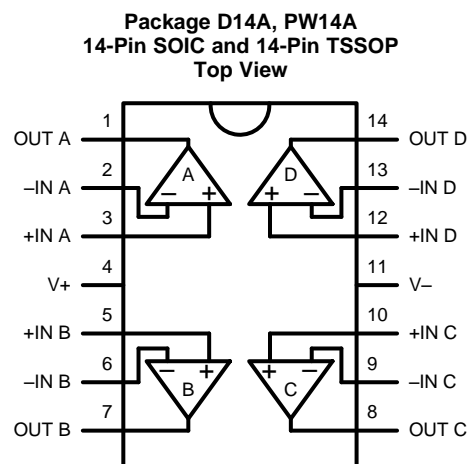

Pin Functions

PIN		I/O	DESCRIPTION
NAME	NO.		
-IN A	2	I	ChA inverting input
+IN A	3	I	ChA non-inverting input
-IN B	6	I	ChB inverting input
+IN B	5	I	ChB non-inverting input
-IN C	9	I	ChC inverting input
+IN C	10	I	ChC non-inverting input
-IN D	13	I	ChD inverting input
+IN D	12	I	ChD non-inverting input
OUT A	1	O	ChA output
OUT B	7	O	ChB output
OUT C	8	O	ChC output
OUT D	14	O	ChD output
V ⁻	11	I	Negative supply
V ⁺	4	I	Positive supply

7 Specifications

7.1 Absolute Maximum Ratings⁽¹⁾⁽²⁾

over operating free-air temperature range (unless otherwise noted)

	MIN	MAX	UNIT
V_{IN} differential		±2.5	V
Output short circuit duration	See ⁽³⁾ and ⁽⁴⁾		
Supply voltage ($V^+ - V^-$)		13.5	V
Voltage at input/output pins		$V^+ +0.8$ $V^- -0.8$	V
Input current		±10	mA
Junction temperature ⁽⁵⁾		+150	°C
Soldering information	Infrared or convection reflow (20 s)		235
	Wave soldering lead temperature (10 s)		260
Storage temperature range, T_{stg}	-65	+150	°C

- (1) Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is intended to be functional, but specific performance is not ensured. For ensured specifications and the test conditions, see the Electrical Characteristics.
- (2) If Military/Aerospace specified devices are required, please contact the TI Sales Office/Distributors for availability and specifications.
- (3) Applies to both single-supply and split-supply operation. Continuous short circuit operation at elevated ambient temperature can result in exceeding the maximum allowed junction temperature of 150°C.
- (4) Output short circuit duration is infinite for $V_S < 6V$ at room temperature and below. For $V_S > 6V$, allowable short circuit duration is 1.5ms.
- (5) The maximum power dissipation is a function of $T_{J(MAX)}$, $R_{\theta JA}$, and T_A . The maximum allowable power dissipation at any ambient temperature is $P_D = (T_{J(MAX)} - T_A) / R_{\theta JA}$. All numbers apply for packages soldered directly onto a PC board.

7.2 ESD Ratings

	VALUE	UNIT
$V_{(ESD)}$ Electrostatic discharge ⁽¹⁾	Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001, all pins ⁽²⁾	2000
	Machine model (MM) ⁽³⁾	200
	Charged-device model (CDM), per JEDEC specification JESD22-C101, all pins ⁽⁴⁾	1000

- (1) Human body model, 1.5 k Ω in series with 100 pF. Machine Model, 0 Ω in series with 200 pF.
- (2) JEDEC document JEP155 states that 2000-V HBM allows safe manufacturing with a standard ESD control process.
- (3) JEDEC document JEP157 states that 200-V MM allows safe manufacturing with a standard ESD control process.
- (4) JEDEC document JEP157 states that 1000-V CDM allows safe manufacturing with a standard ESD control process.

7.3 Recommended Operating Conditions⁽¹⁾

over operating free-air temperature range (unless otherwise noted)

	MIN	MAX	UNIT
Supply voltage ($V^+ - V^-$)	2.7	12.8	V
Operating temperature range ⁽²⁾	-40	+85	°C

- (1) Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is intended to be functional, but specific performance is not ensured. For ensured specifications and the test conditions, see the Electrical Characteristics.
- (2) The maximum power dissipation is a function of $T_{J(MAX)}$, $R_{\theta JA}$, and T_A . The maximum allowable power dissipation at any ambient temperature is $P_D = (T_{J(MAX)} - T_A) / R_{\theta JA}$. All numbers apply for packages soldered directly onto a PC board.

7.4 Thermal Information

THERMAL METRIC ⁽¹⁾	LMH6644-MIL		UNIT
	D14A	PW14A	
	14 PINS	14 PINS	
$R_{\theta JA}$ Junction-to-ambient thermal resistance ⁽²⁾	145	155	°C/W

- (1) For more information about traditional and new thermal metrics, see the *IC Package Thermal Metrics* application report, [SPRA953](#).
- (2) The maximum power dissipation is a function of $T_{J(MAX)}$, $R_{\theta JA}$, and T_A . The maximum allowable power dissipation at any ambient temperature is $P_D = (T_{J(MAX)} - T_A) / R_{\theta JA}$. All numbers apply for packages soldered directly onto a PC board.

7.5 3-V Electrical Characteristics

Unless otherwise specified, all limits ensured for $V^+ = 3\text{ V}$, $V^- = 0\text{ V}$, $V_{CM} = V_O = V^+/2$, V_{ID} (input differential voltage) as noted (where applicable) and $R_L = 2\text{ k}\Omega$ to $V^+/2$

PARAMETER	TEST CONDITIONS	AT TEMPERATURE EXTREMES			$V^+ = 3\text{ V}$, $V^- = 0\text{ V}$, $V_{CM} = V_O = V^+/2$, V_{ID} $R_L = 2\text{ k}\Omega$ to $V^+/2$			UNIT
		MIN	TYP	MAX	MIN ⁽¹⁾	TYP ⁽²⁾	MAX ⁽¹⁾	
BW –3-dB BW	$A_V = +1$, $V_{OUT} = 200\text{mV}_{PP}$				80	115		MHz
	$A_V = +2$, -1 , $V_{OUT} = 200\text{mV}_{PP}$					46		
BW _{0.1dB} 0.1-dB gain flatness	$A_V = +2$, $R_L = 150\Omega$ to $V^+/2$, $R_f = 402\Omega$, $V_{OUT} = 200\text{mV}_{PP}$					19		MHz
PBW Full power bandwidth	$A_V = +1$, -1dB , $V_{OUT} = 1\text{V}_{PP}$					40		MHz
e_n Input-referred voltage noise	$f = 100\text{kHz}$					17		$\text{nV}/\sqrt{\text{Hz}}$
	$f = 1\text{kHz}$					48		
i_n Input-referred current noise	$f = 100\text{kHz}$					0.90		$\text{pA}/\sqrt{\text{Hz}}$
	$f = 1\text{kHz}$					3.3		
THD Total harmonic distortion	$f = 5\text{MHz}$, $V_O = 2\text{V}_{PP}$, $A_V = -1$, $R_L = 100\Omega$ to $V^+/2$					–48		dBc
DG Differential gain	$V_{CM} = 1\text{V}$, NTSC, $A_V = +2$ $R_L = 150\Omega$ to $V^+/2$					0.17%		
	$R_L = 1\text{k}\Omega$ to $V^+/2$					0.03%		
DP Differential phase	$V_{CM} = 1\text{V}$, NTSC, $A_V = +2$ $R_L = 150\Omega$ to $V^+/2$					0.05		deg
	$R_L = 1\text{k}\Omega$ to $V^+/2$					0.03		
CT Rej. Cross-talk rejection	$f = 5\text{MHz}$, receiver: $R_f = R_g = 510\Omega$, $A_V = +2$					47		dB
T_S Settling time	$V_O = 2\text{V}_{PP}$, $\pm 0.1\%$, 8pF Load, $V_S = 5\text{V}$					68		ns
SR Slew rate ⁽³⁾	$A_V = -1$, $V_I = 2\text{V}_{PP}$				90	120		$\text{V}/\mu\text{s}$
V_{OS} Input offset voltage				± 7		± 1	± 5	mV
TC V_{OS} Input offset average drift	See ⁽⁴⁾					± 5		$\mu\text{V}/^\circ\text{C}$
I_B Input bias current	See ⁽⁵⁾			–3.25		–1.50	–2.60	μA
I_{OS} Input offset current				1000		20	800	nA
R_{IN} Common-mode input resistance						3		$\text{M}\Omega$

(1) All limits are ensured by testing or statistical analysis.

(2) Typical values represent the most likely parametric norm.

(3) Slew rate is the average of the rising and falling slew rates.

(4) Offset voltage average drift determined by dividing the change in V_{OS} at temperature extremes by the total temperature change.

(5) Positive current corresponds to current flowing into the device.

3-V Electrical Characteristics (continued)

Unless otherwise specified, all limits ensured for $V^+ = 3\text{ V}$, $V^- = 0\text{ V}$, $V_{CM} = V_O = V^+/2$, V_{ID} (input differential voltage) as noted (where applicable) and $R_L = 2\text{ k}\Omega$ to $V^+/2$

PARAMETER		TEST CONDITIONS	AT TEMPERATURE EXTREMES			$V^+ = 3\text{ V}$, $V^- = 0\text{ V}$, $V_{CM} = V_O = V^+/2$, V_{ID} $R_L = 2\text{ k}\Omega$ to $V^+/2$			UNIT
			MIN	TYP	MAX	MIN ⁽¹⁾	TYP ⁽²⁾	MAX ⁽¹⁾	
C_{IN}	Common-mode input capacitance						2		pF
$CMVR$	Input common-mode voltage range	$CMRR \geq 50\text{ dB}$			-0.1		-0.5	-0.2	V
			1.6			1.8	2.0		
$CMRR$	Common-mode rejection ratio	V_{CM} Stepped from 0V to 1.5V				72	95		dB
A_{VOL}	Large signal voltage gain	$V_O = 0.5\text{ V}$ to 2.5 V $R_L = 2\text{ k}\Omega$ to $V^+/2$	75			80	96		dB
		$V_O = 0.5\text{ V}$ to 2.5 V $R_L = 150\Omega$ to $V^+/2$	70			74	82		
V_O	Output swing high	$R_L = 2\text{ k}\Omega$ to $V^+/2$, $V_{ID} = 200\text{ mV}$				2.90	2.98		V
		$R_L = 150\Omega$ to $V^+/2$, $V_{ID} = 200\text{ mV}$				2.80	2.93		
	Output swing low	$R_L = 2\text{ k}\Omega$ to $V^+/2$, $V_{ID} = -200\text{ mV}$					25	75	mV
		$R_L = 150\Omega$ to $V^+/2$, $V_{ID} = -200\text{ mV}$					75	150	
I_{SC}	Output short circuit current	Sourcing to $V^+/2$ $V_{ID} = 200\text{ mV}$ ⁽⁶⁾	35			50	95		mA
		Sinking to $V^+/2$ $V_{ID} = -200\text{ mV}$ ⁽⁶⁾	40			55	110		
I_{OUT}	Output current	$V_{OUT} = 0.5\text{ V}$ from either supply					± 65		mA
+PSRR	Positive power supply rejection ratio	$V^+ = 3.0\text{ V}$ to 3.5 V , $V_{CM} = 1.5\text{ V}$				75	85		dB
I_S	Supply current (per channel)	No load			4.50		2.70	4.00	mA

(6) Short circuit test is a momentary test. See [Note 7](#) under 5-V Electrical Characteristics.

7.6 5-V Electrical Characteristics

Unless otherwise specified, all limits ensured for $V^+ = 5\text{ V}$, $V^- = 0\text{ V}$, $V_{CM} = V_O = V^+/2$, V_{ID} (input differential voltage) as noted (where applicable) and $R_L = 2\text{ k}\Omega$ to $V^+/2$

PARAMETER	TEST CONDITIONS	AT TEMPERATURE EXTREMES			$V^+ = 5\text{ V}$, $V^- = 0\text{ V}$, $V_{CM} = V_O = V^+/2$, V_{ID} $R_L = 2\text{ k}\Omega$ to $V^+/2$			UNIT
		MIN	TYP	MAX	MIN ⁽¹⁾	TYP ⁽²⁾	MAX ⁽¹⁾	
BW –3-dB BW	$A_V = +1$, $V_{OUT} = 200\text{mV}_{PP}$				90	120		MHz
	$A_V = +2$, -1 , $V_{OUT} = 200\text{mV}_{PP}$					46		
$BW_{0.1dB}$ 0.1-dB gain flatness	$A_V = +2$, $R_L = 150\Omega$ to $V^+/2$, $R_f = 402\Omega$, $V_{OUT} = 200\text{mV}_{PP}$					15		MHz
PBW Full power bandwidth	$A_V = +1$, -1dB , $V_{OUT} = 2V_{PP}$					22		MHz
e_n Input-referred voltage noise	$f = 100\text{kHz}$					17		$\text{nV}/\sqrt{\text{Hz}}$
	$f = 1\text{kHz}$					48		
i_n Input-referred current noise	$f = 100\text{kHz}$					0.90		$\text{pA}/\sqrt{\text{Hz}}$
	$f = 1\text{kHz}$					3.3		
THD Total harmonic distortion	$f = 5\text{MHz}$, $V_O = 2V_{PP}$, $A_V = +2$					–60		dBc
DG Differential gain	NTSC, $A_V = +2$ $R_L = 150\Omega$ to $V^+/2$					0.16%		
	$R_L = 1\text{k}\Omega$ to $V^+/2$					0.05%		
DP Differential phase	NTSC, $A_V = +2$ $R_L = 150\Omega$ to $V^+/2$					0.05		deg
	$R_L = 1\text{k}\Omega$ to $V^+/2$					0.01		
CT Rej. Cross-talk rejection	$f = 5\text{MHz}$, receiver: $R_f = R_g = 510\Omega$, $A_V = +2$					47		dB
T_S Settling time	$V_O = 2V_{PP}$, $\pm 0.1\%$, 8pF Load					68		ns
SR Slew rate ⁽³⁾	$A_V = -1$, $V_I = 2V_{PP}$				95	125		$\text{V}/\mu\text{s}$
V_{OS} Input offset voltage				± 7		± 1	± 5	mV
TC V_{OS} Input offset average drift	See ⁽⁴⁾					± 5		$\mu\text{V}/^\circ\text{C}$
I_B Input bias current	See ⁽⁵⁾			–3.25		–1.70	–2.60	μA
I_{OS} Input offset current				1000		20	800	nA
R_{IN} Common-mode input resistance						3		$\text{M}\Omega$
C_{IN} Common-mode input capacitance						2		pF
CMVR Input common-mode voltage range	CMRR $\geq 50\text{dB}$			–0.1		–0.5	–0.2	V
		3.6			3.8	4.0		
CMRR Common-mode rejection ratio	V_{CM} Stepped from 0V to 3.5V				72	95		dB
A_{VOL} Large signal voltage gain	$V_O = 0.5\text{V}$ to 4.50V $R_L = 2\text{k}\Omega$ to $V^+/2$	82			86	98		dB
	$V_O = 0.5\text{V}$ to 4.25V $R_L = 150\Omega$ to $V^+/2$	72			76	82		

(1) All limits are ensured by testing or statistical analysis.

(2) Typical values represent the most likely parametric norm.

(3) Slew rate is the average of the rising and falling slew rates.

(4) Offset voltage average drift determined by dividing the change in V_{OS} at temperature extremes by the total temperature change.

(5) Positive current corresponds to current flowing into the device.

5-V Electrical Characteristics (continued)

Unless otherwise specified, all limits ensured for $V^+ = 5\text{ V}$, $V^- = 0\text{ V}$, $V_{CM} = V_O = V^+/2$, V_{ID} (input differential voltage) as noted (where applicable) and $R_L = 2\text{ k}\Omega$ to $V^+/2$

PARAMETER		TEST CONDITIONS	AT TEMPERATURE EXTREMES			$V^+ = 5\text{ V}$, $V^- = 0\text{ V}$, $V_{CM} = V_O = V^+/2$, V_{ID} $R_L = 2\text{ k}\Omega$ to $V^+/2$			UNIT
			MIN	TYP	MAX	MIN ⁽¹⁾	TYP ⁽²⁾	MAX ⁽¹⁾	
V_O	Output swing high	$R_L = 2\text{ k}\Omega$ to $V^+/2$, $V_{ID} = 200\text{ mV}$				4.90	4.98		V
		$R_L = 150\Omega$ to $V^+/2$, $V_{ID} = 200\text{ mV}$				4.65	4.90		
	Output swing low	$R_L = 2\text{ k}\Omega$ to $V^+/2$, $V_{ID} = -200\text{ mV}$					25	100	mV
		$R_L = 150\Omega$ to $V^+/2$, $V_{ID} = -200\text{ mV}$					100	150	
I_{SC}	Output short circuit current	Sourcing to $V^+/2$ $V_{ID} = 200\text{ mV}$ ⁽⁶⁾⁽⁷⁾	40			55	115		mA
		Sinking to $V^+/2$ $V_{ID} = -200\text{ mV}$ ⁽⁶⁾⁽⁷⁾	55			70	140		
I_{OUT}	Output current	$V_O = 0.5\text{ V}$ from either supply					± 70		mA
+PSRR	Positive power supply rejection ratio	$V^+ = 4.0\text{ V}$ to 6 V				79	90		dB
I_S	Supply current (per channel)	No load			5.00		2.70	4.25	mA

(6) Short circuit test is a momentary test. See [Note 7](#).

(7) Output short circuit duration is infinite for $V_S < 6\text{ V}$ at room temperature and below. For $V_S > 6\text{ V}$, allowable short circuit duration is 1.5ms.

7.7 ±5-V Electrical Characteristics

Unless otherwise specified, all limits ensured for $V^+ = 5\text{ V}$, $V^- = -5\text{ V}$, $V_{CM} = V_O = 0\text{ V}$, V_{ID} (input differential voltage) as noted (where applicable) and $R_L = 2\text{ k}\Omega$ to ground

PARAMETER	TEST CONDITIONS	AT TEMPERATURE EXTREMES			$V^+ = 5\text{ V}$, $V^- = -5\text{ V}$, $V_{CM} = V_O = 0\text{ V}$, V_{ID}			UNIT
		MIN	TYP	MAX	MIN ⁽¹⁾	TYP ⁽²⁾	MAX ⁽¹⁾	
BW –3-dB BW	$A_V = +1$, $V_{OUT} = 200\text{mV}_{PP}$				95	130		MHz
	$A_V = +2$, -1 , $V_{OUT} = 200\text{mV}_{PP}$					46		
$BW_{0.1\text{dB}}$	0.1-dB gain flatness $A_V = +2$, $R_L = 150\Omega$ to $V^+/2$, $R_f = 806\Omega$, $V_{OUT} = 200\text{mV}_{PP}$					12		MHz
PBW	Full power bandwidth $A_V = +1$, -1dB , $V_{OUT} = 2V_{PP}$					24		MHz
e_n	Input-referred voltage noise $f = 100\text{kHz}$					17		$\text{nV}/\sqrt{\text{Hz}}$
	$f = 1\text{kHz}$					48		
i_n	Input-referred current noise $f = 100\text{kHz}$					0.90		$\text{pA}/\sqrt{\text{Hz}}$
	$f = 1\text{kHz}$					3.3		
THD	Total harmonic distortion $f = 5\text{MHz}$, $V_O = 2V_{PP}$, $A_V = +2$					–62		dBc
DG	Differential gain NTSC, $A_V = +2$ $R_L = 150\Omega$ to $V^+/2$					0.15%		
	$R_L = 1\text{k}\Omega$ to $V^+/2$					0.01%		
DP	Differential phase NTSC, $A_V = +2$ $R_L = 150\Omega$ to $V^+/2$					0.04		deg
	$R_L = 1\text{k}\Omega$ to $V^+/2$					0.01		
CT Rej.	Cross-talk rejection $f = 5\text{MHz}$, receiver: $R_f = R_g = 510\Omega$, $A_V = +2$					47		dB
T_S	Settling time $V_O = 2V_{PP}$, $\pm 0.1\%$, 8pF Load, $V_S = 5\text{V}$					68		ns
SR	Slew rate ⁽³⁾ $A_V = -1$, $V_I = 2V_{PP}$				100	135		$\text{V}/\mu\text{s}$
V_{OS}	Input offset voltage			± 7		± 1	± 5	mV
TC V_{OS}	Input offset average drift See ⁽⁴⁾					± 5		$\mu\text{V}/^\circ\text{C}$
I_B	Input bias current See ⁽⁵⁾			–3.25		–1.60	–2.60	μA
I_{OS}	Input offset current			1000		20	800	nA
R_{IN}	Common-mode input resistance					3		$\text{M}\Omega$
C_{IN}	Common-mode input capacitance					2		pF
CMVR	Input common-mode voltage range CMRR $\geq 50\text{dB}$			–5.1		–5.5	–5.2	V
		3.6			3.8	4.0		
CMRR	Common-mode rejection ratio V_{CM} Stepped from -5V to 3.5V				74	95		dB

(1) All limits are ensured by testing or statistical analysis.

(2) Typical values represent the most likely parametric norm.

(3) Slew rate is the average of the rising and falling slew rates.

(4) Offset voltage average drift determined by dividing the change in V_{OS} at temperature extremes by the total temperature change.

(5) Positive current corresponds to current flowing into the device.

±5-V Electrical Characteristics (continued)

Unless otherwise specified, all limits ensured for $V^+ = 5\text{ V}$, $V^- = -5\text{ V}$, $V_{CM} = V_O = 0\text{ V}$, V_{ID} (input differential voltage) as noted (where applicable) and $R_L = 2\text{ k}\Omega$ to ground

PARAMETER		TEST CONDITIONS	AT TEMPERATURE EXTREMES			V ⁺ = 5 V, V ⁻ = −5 V, V _{CM} = V _O = 0 V, V _{ID}			UNIT
			MIN	TYP	MAX	MIN ⁽¹⁾	TYP ⁽²⁾	MAX ⁽¹⁾	
A _{VOL}	Large signal voltage gain	V _O = −4.5V to 4.5V, R _L = 2kΩ	84			88	96		dB
		V _O = −4.0V to 4.0V, R _L = 150Ω	74			78	82		
V _O	Output swing high	R _L = 2kΩ, V _{ID} = 200mV				4.90	4.96		V
		R _L = 150Ω, V _{ID} = 200mV				4.65	4.80		
	Output swing low	R _L = 2kΩ, V _{ID} = −200mV					−4.96	−4.90	V
		R _L = 150Ω, V _{ID} = −200mV					−4.80	−4.65	
I _{SC}	Output short circuit current	Sourcing to ground V _{ID} = 200mV ⁽⁶⁾⁽⁷⁾	35			60	115		mA
		Sinking to ground V _{ID} = −200mV ⁽⁶⁾⁽⁷⁾	65			85	145		
I _{OUT}	Output current	V _O = 0.5V from either supply				±75			mA
PSRR	Power supply rejection ratio	(V ⁺ , V ⁻) = (4.5V, −4.5V) to (5.5V, −5.5V)				78	90		dB
I _S	Supply current (per channel)	No load	5.50				2.70	4.50	mA

(6) Short circuit test is a momentary test. See ⁽⁷⁾.

(7) Output short circuit duration is infinite for $V_S < 6\text{ V}$ at room temperature and below. For $V_S > 6\text{ V}$, allowable short circuit duration is 1.5ms.

7.8 Typical Performance Characteristics

$V^+ = +5\text{ V}$, $V^- = -5\text{ V}$, $R_F = R_L = 2\text{ k}\Omega$, unless specified otherwise.

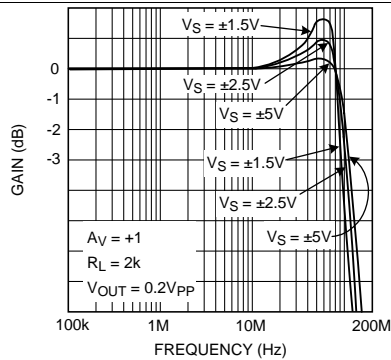


Figure 1. Closed Loop Frequency Response for Various Supplies

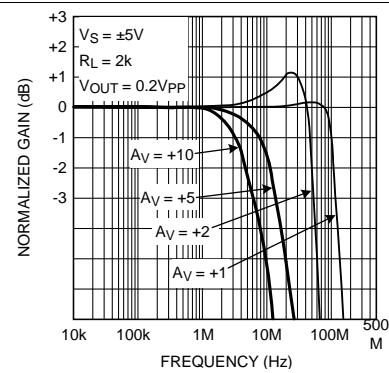


Figure 2. Closed Loop Gain vs Frequency for Various Gain

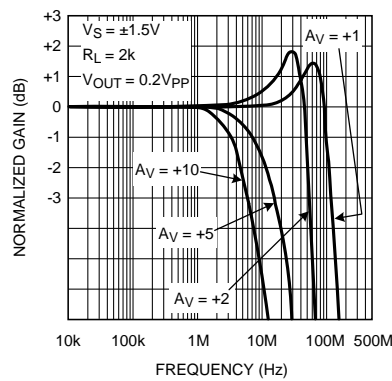


Figure 3. Closed Loop Gain vs Frequency for Various Gain

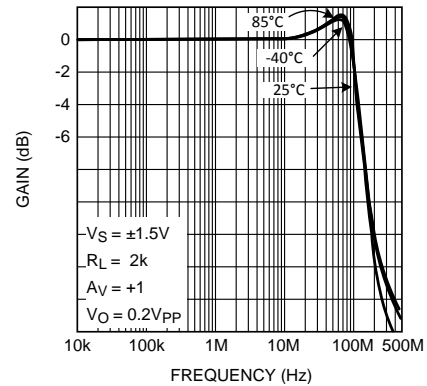


Figure 4. Closed Loop Frequency Response for Various Temperature

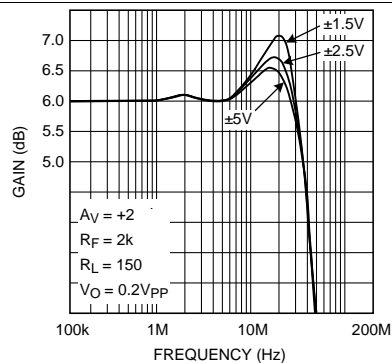


Figure 5. Closed Loop Gain vs Frequency for Various Supplies

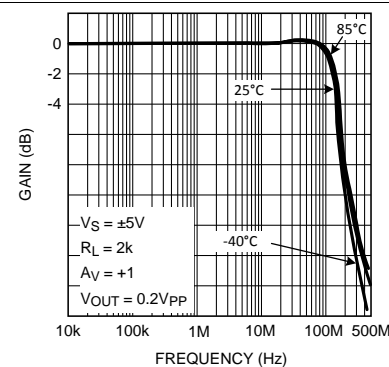


Figure 6. Closed Loop Frequency Response for Various Temperature

Typical Performance Characteristics (continued)

$V^+ = +5\text{ V}$, $V^- = -5\text{ V}$, $R_F = R_L = 2\text{ k}\Omega$, unless specified otherwise.

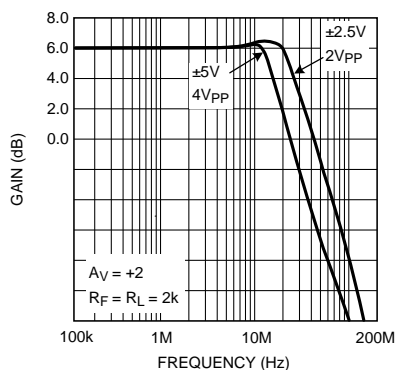


Figure 7. Large Signal Frequency Response

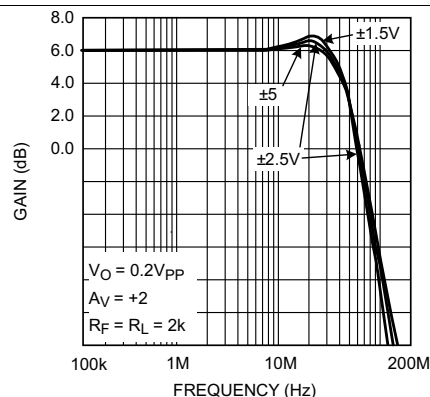


Figure 8. Closed Loop Small Signal Frequency Response for Various Supplies

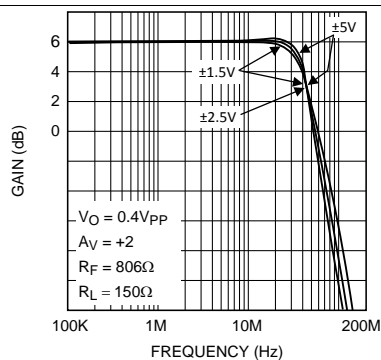


Figure 9. Closed Loop Frequency Response for Various Supplies

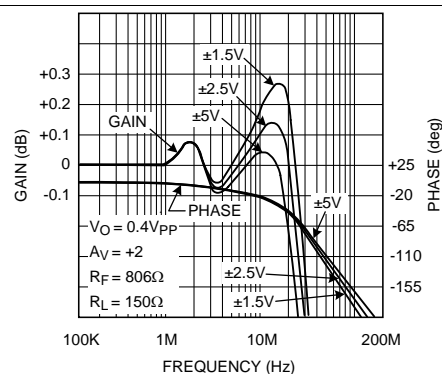


Figure 10. $\pm 0.1\text{dB}$ Gain Flatness for Various Supplies

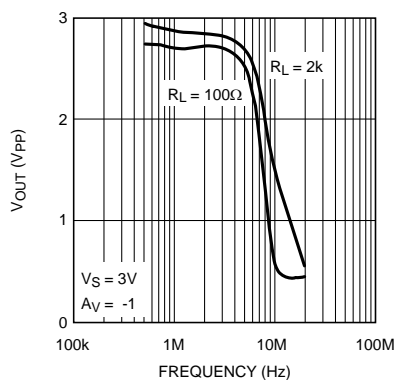


Figure 11. V_{OUT} (V_{PP}) for THD < 0.5%

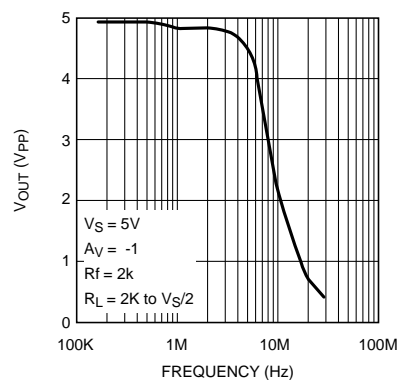


Figure 12. V_{OUT} (V_{PP}) for THD < 0.5%

Typical Performance Characteristics (continued)

$V^+ = +5\text{ V}$, $V^- = -5\text{ V}$, $R_F = R_L = 2\text{ k}\Omega$, unless specified otherwise.

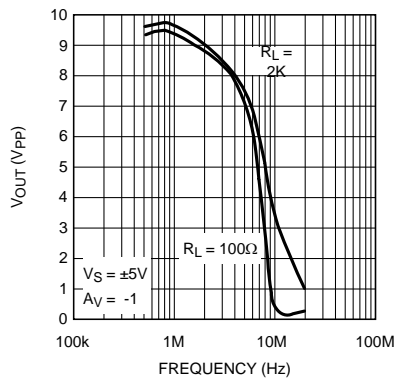


Figure 13. V_{OUT} (V_{PP}) for THD < 0.5%

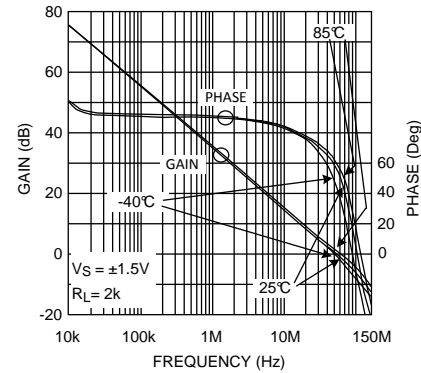


Figure 14. Open Loop Gain/Phase for Various Temperature

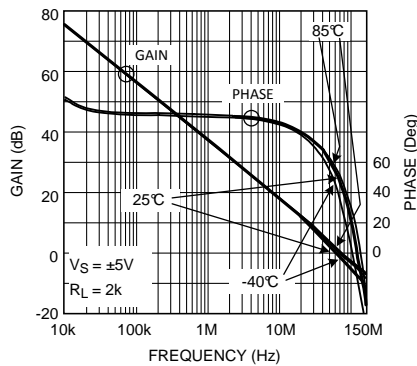


Figure 15. Open Loop Gain/Phase for Various Temperature

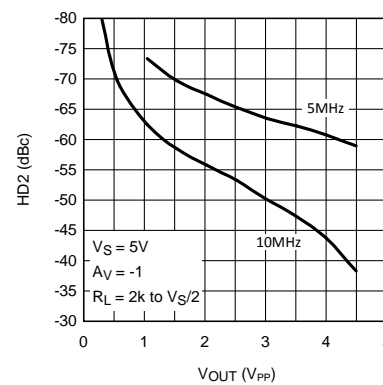


Figure 16. HD2 (dBc) vs Output Swing

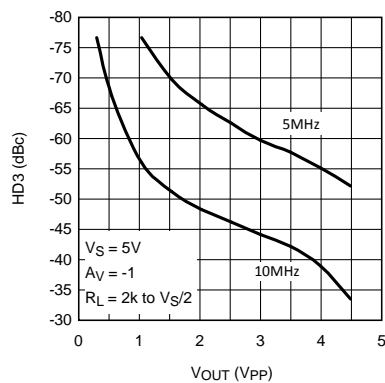


Figure 17. HD3 (dBc) vs Output Swing

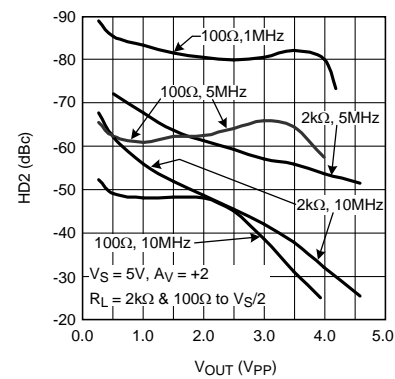


Figure 18. HD2 vs Output Swing

Typical Performance Characteristics (continued)

$V^+ = +5\text{ V}$, $V^- = -5\text{ V}$, $R_F = R_L = 2\text{ k}\Omega$, unless specified otherwise.

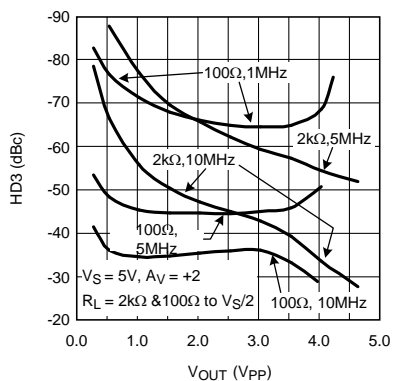


Figure 19. HD3 vs Output Swing

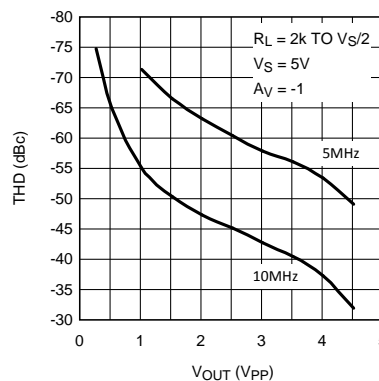
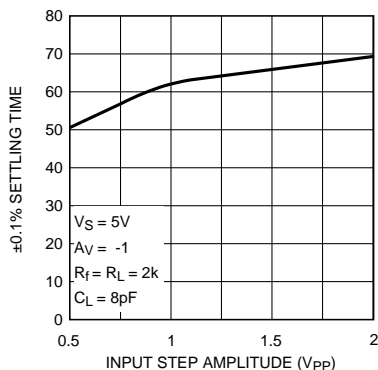


Figure 20. THD (dBc) vs Output Swing



**Figure 21. Settling Time vs Input Step Amplitude
(Output Slew and Settle Time)**

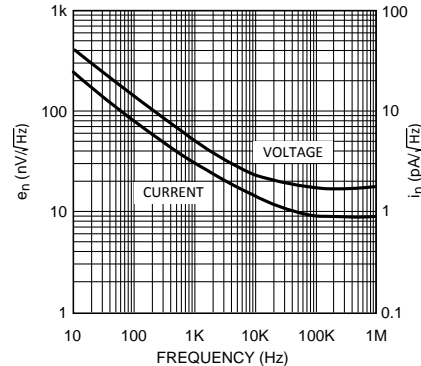


Figure 22. Input Noise vs Frequency

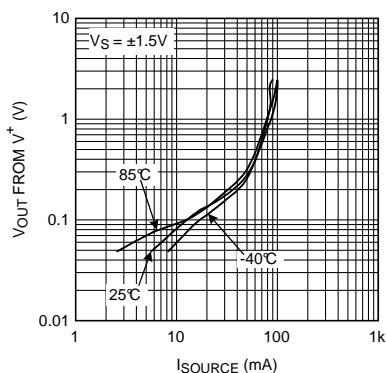


Figure 23. V_{OUT} from V^+ vs I_{SOURCE}

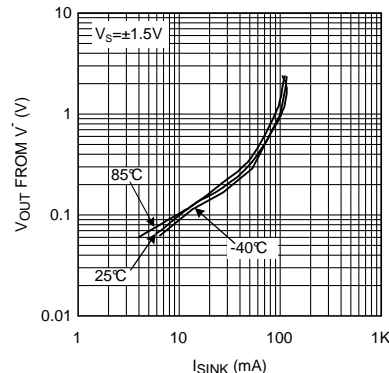


Figure 24. V_{OUT} from V^- vs I_{SINK}

Typical Performance Characteristics (continued)

$V^+ = +5\text{ V}$, $V^- = -5\text{ V}$, $R_F = R_L = 2\text{ k}\Omega$, unless specified otherwise.

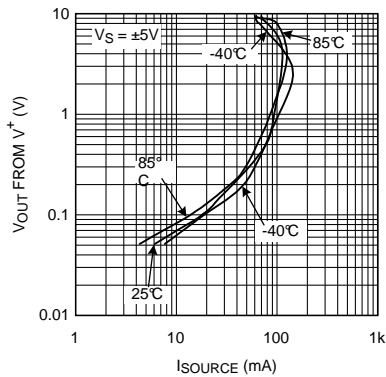


Figure 25. V_{OUT} from V^+ vs I_{SOURCE}

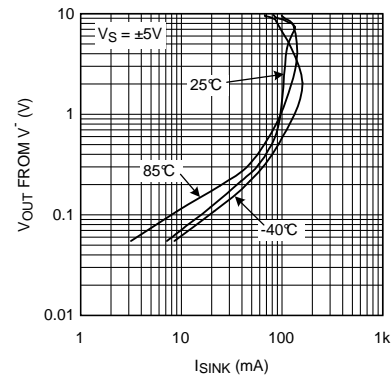


Figure 26. V_{OUT} from V^- vs I_{SINK}

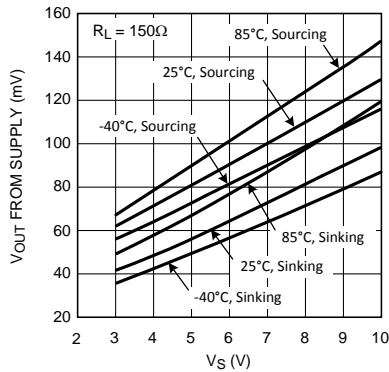


Figure 27. Swing vs V_S

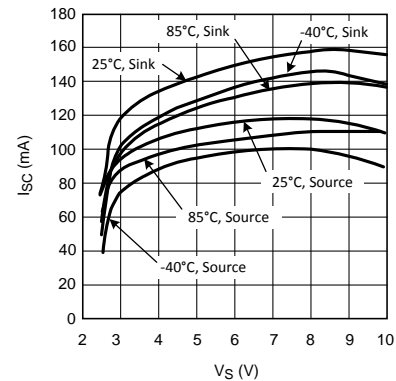


Figure 28. Short Circuit Current (to $V_S/2$) vs V_S

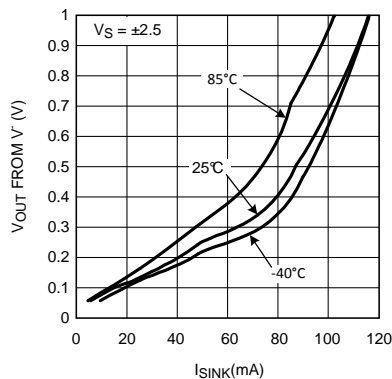


Figure 29. Output Sinking Saturation Voltage vs I_{OUT}

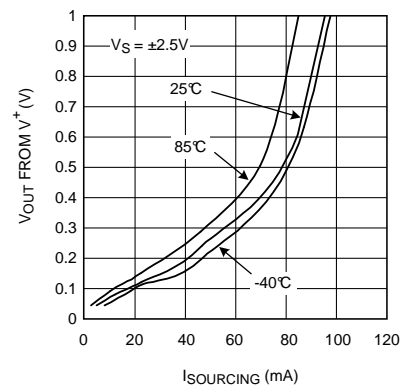


Figure 30. Output Sourcing Saturation Voltage vs I_{OUT}

Typical Performance Characteristics (continued)

$V^+ = +5\text{ V}$, $V^- = -5\text{ V}$, $R_F = R_L = 2\text{ k}\Omega$, unless specified otherwise.

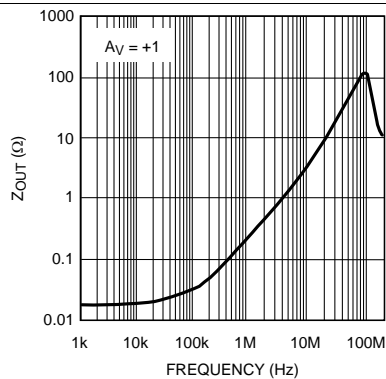


Figure 31. Closed Loop Output Impedance vs Frequency $A_V = +1$

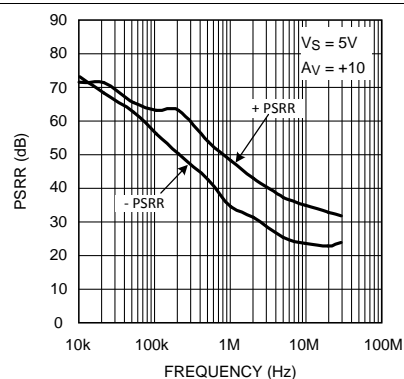


Figure 32. PSRR vs Frequency

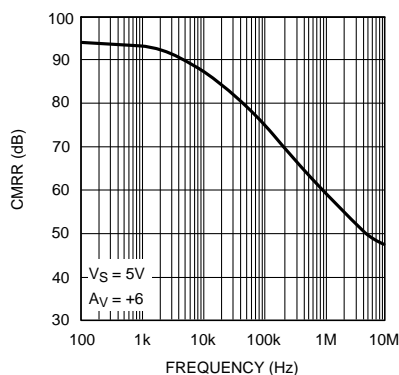


Figure 33. CMRR vs Frequency

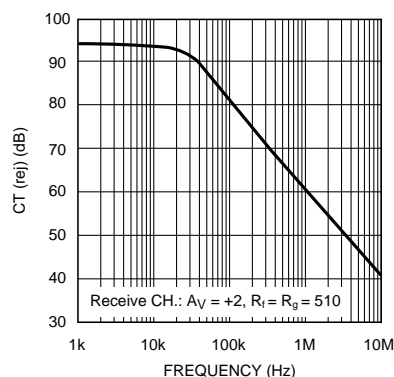


Figure 34. Crosstalk Rejection vs Frequency (Output to Output)

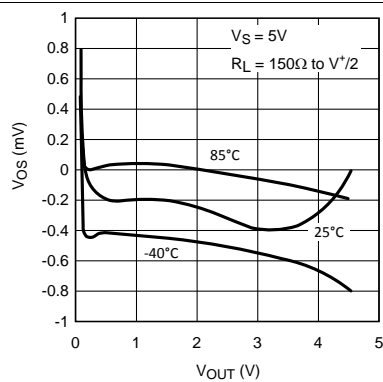


Figure 35. V_{OS} vs V_{OUT} (Typical Unit)

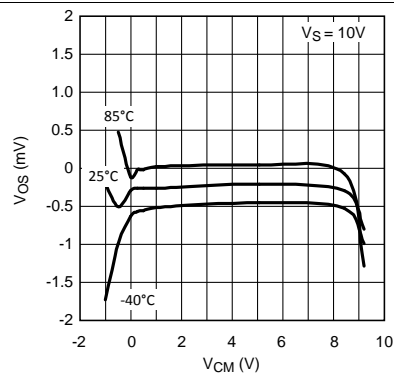


Figure 36. V_{OS} vs V_{CM} (Typical Unit)

Typical Performance Characteristics (continued)

$V^+ = +5\text{ V}$, $V^- = -5\text{ V}$, $R_F = R_L = 2\text{ k}\Omega$, unless specified otherwise.

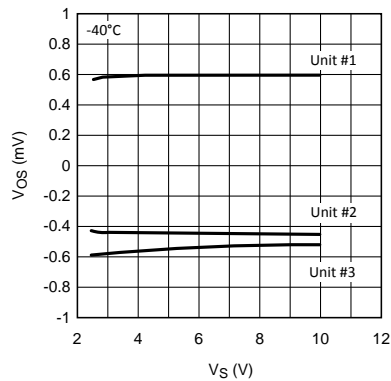


Figure 37. V_{OS} vs V_S (for 3 Representative Units)

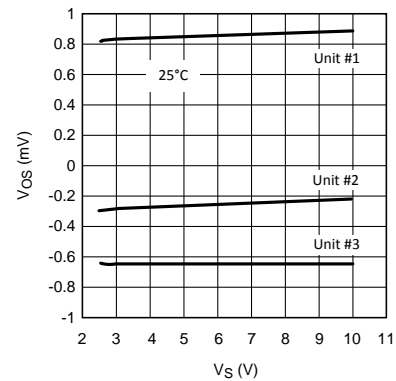


Figure 38. V_{OS} vs V_S (for 3 Representative Units)

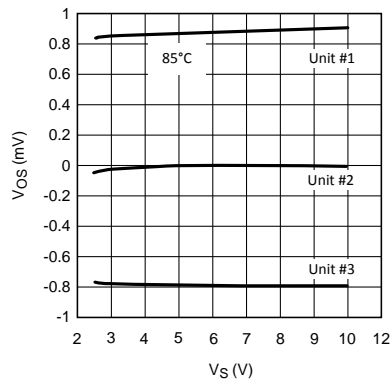


Figure 39. V_{OS} vs V_S (for 3 Representative Units)

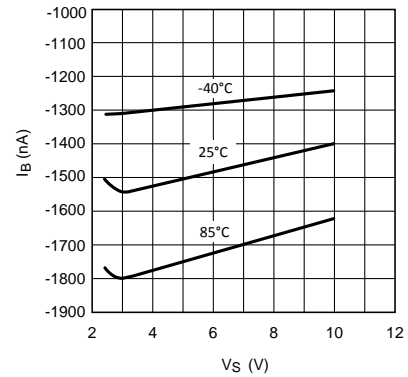


Figure 40. I_B vs V_S

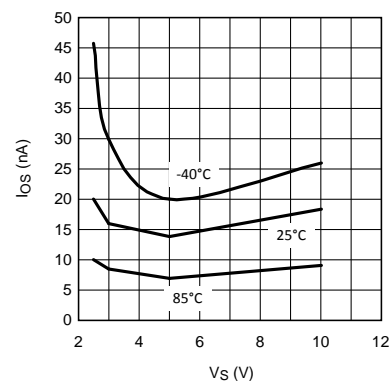


Figure 41. I_{OS} vs V_S

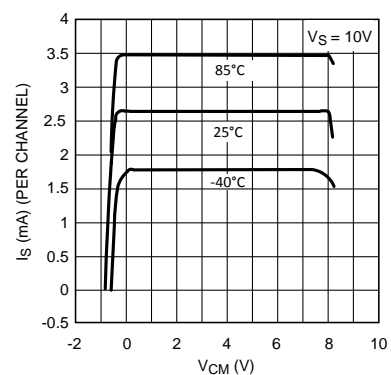


Figure 42. I_S vs V_{CM}

Typical Performance Characteristics (continued)

$V^+ = +5\text{ V}$, $V^- = -5\text{ V}$, $R_F = R_L = 2\text{ k}\Omega$, unless specified otherwise.

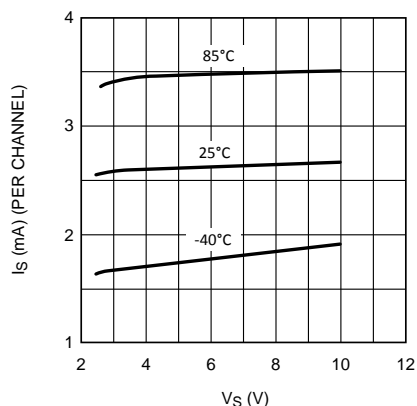


Figure 43. I_S vs V_S

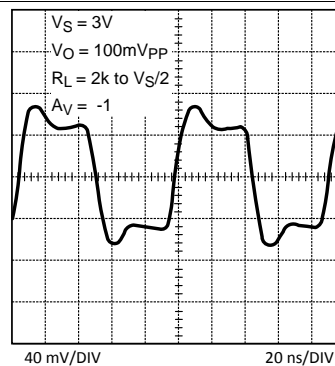


Figure 44. Small Signal Step Response

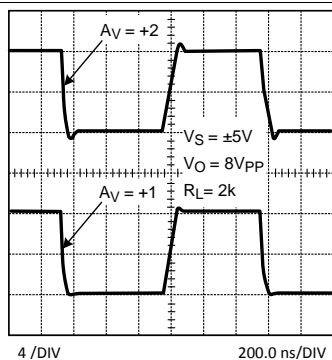


Figure 45. Large Signal Step Response

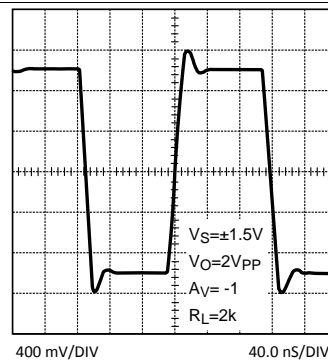


Figure 46. Large Signal Step Response

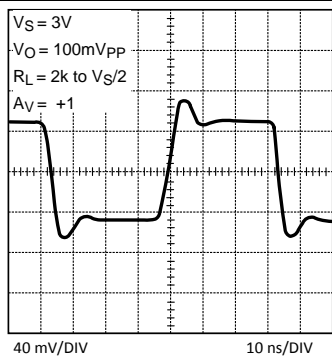


Figure 47. Small Signal Step Response

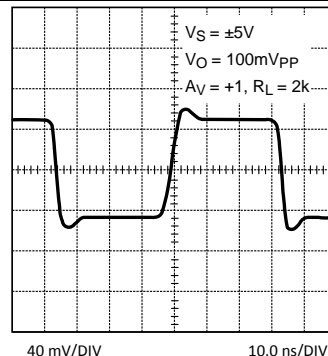


Figure 48. Small Signal Step Response

Typical Performance Characteristics (continued)

$V^+ = +5\text{ V}$, $V^- = -5\text{ V}$, $R_F = R_L = 2\text{ k}\Omega$, unless specified otherwise.

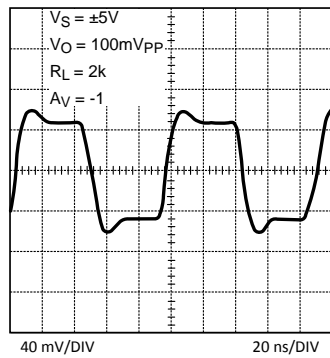


Figure 49. Small Signal Step Response

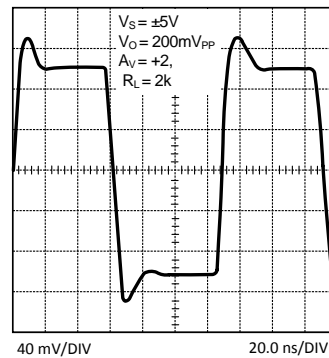


Figure 50. Small Signal Step Response

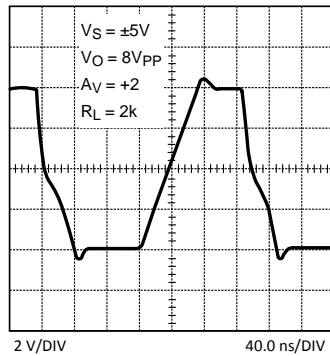


Figure 51. Large Signal Step Response

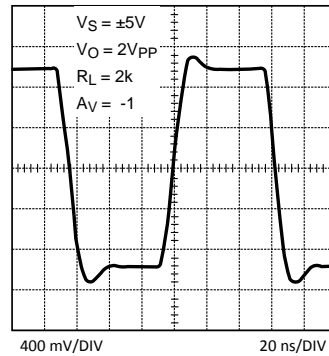


Figure 52. Large Signal Step Response

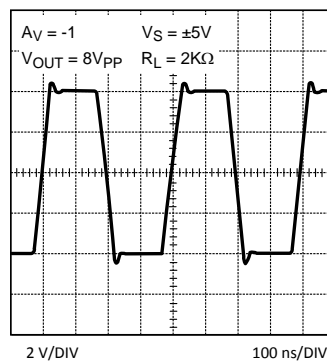


Figure 53. Large Signal Step Response

8 Detailed Description

8.1 Overview

The LMH6644-MIL is based on proprietary VIP10 dielectrically isolated bipolar process. This device architecture features the following:

- Complimentary bipolar devices with exceptionally high f_t (~8 GHz) even under low-supply voltage (2.7 V) and low-bias current.
- A class A-B *turn-around* stage with improved noise, offset, and reduced power dissipation compared to similar speed devices (patent pending).
- Common Emitter push-push output stage capable of 75-mA output current (at 0.5 V from the supply rails) while consuming only 2.7 mA of total supply current per channel. This architecture allows output to reach within mV of either supply rail.
- Consistent performance over the entire operating supply voltage range with little variation for the most important specifications (for example, BW, SR, I_{OUT} , and so forth)
- Significant power saving (~40%) compared to competitive devices on the market with similar performance.

8.2 Functional Block Diagram

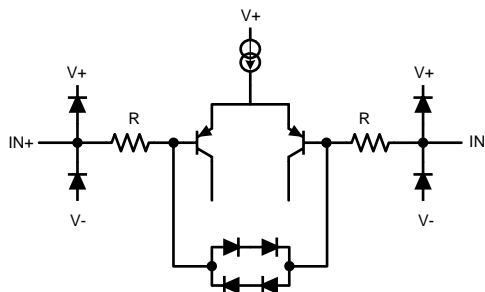


Figure 54. Input Equivalent Circuit

8.3 Feature Description

The LMH6644-MIL is a drop-in replacement for the AD805X family of high-speed op amps in most applications. In addition, the LMH6644-MIL will typically save about 40% on power dissipation, due to lower supply current, when compared to competition. All AD805X family's specified parameters are included in the list of LMH6644-MIL ensured specifications in order to ensure equal or better level of performance. However, as in most high-performance parts and due to subtleties of applications, it is strongly recommended that the performance of the part to be evaluated is tested under actual operating conditions to ensure full compliance to all specifications.

8.4 Device Functional Modes

With 3-V supplies and a common-mode input voltage range that extends 0.5 V below V^- , the LMH6644-MIL find applications in low voltage/low power applications. Even with 3-V supplies, the -3dB BW (@ $A_V = +1$) is typically 115 MHz with a tested limit of 80 MHz. Production testing guarantees that process variations will not compromise speed. High-frequency response is exceptionally stable, confining the typical -3dB BW over the industrial temperature range to $\pm 2.5\%$.

As seen in [Typical Performance Characteristics](#), the LMH6644-MIL output current capability (~75 mA) is enhanced compared to AD805X. This enhancement increases the output load range, adding to the LMH6644-MIL's versatility. Since LMH6644-MIL is capable of high-output current, device junction temperature should not to exceed the Absolute Maximum Ratings.

9 Application and Implementation

NOTE

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

9.1 Application Information

This device was designed to avoid output phase reversal. With input overdrive, the output is kept near supply rail (or as closed to it as mandated by the closed loop gain setting and the input voltage). See [Figure 56](#).

However, if the input voltage range of -0.5 V to 1 V from V^+ is exceeded by more than a diode drop, the internal ESD protection diodes will start to conduct. The current in the diodes should be kept at or below 10 mA .

Output overdrive recovery time is less than 100 ns as can be seen in [Figure 57](#).

9.2 Typical Application

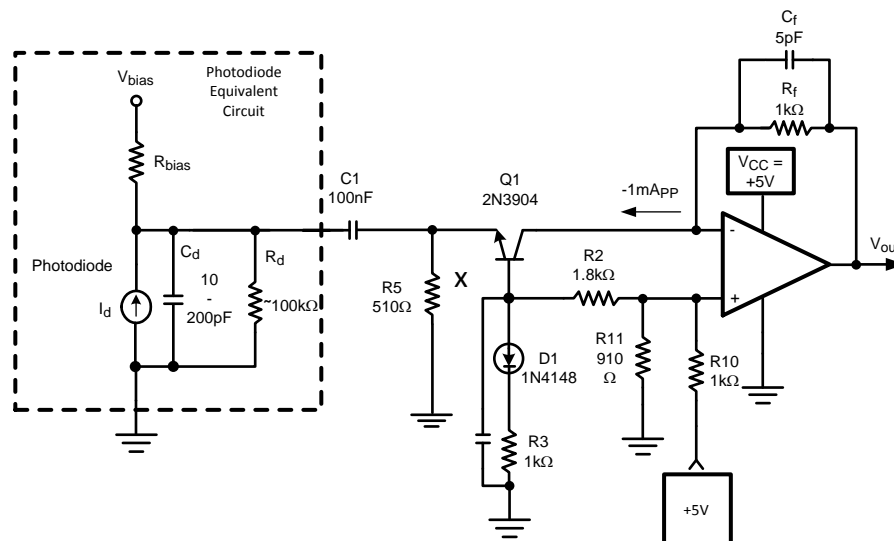


Figure 55. Single-Supply Photodiode I-V Converter

9.2.1 Design Requirements

The circuit shown in [Figure 55](#) is used to amplify the current from a photodiode into a voltage output. In this circuit, the emphasis is on achieving high bandwidth and the transimpedance gain setting is kept relatively low. Because of its high-slew-rate limit and high speed, the LMH6644-MIL lends itself well to such an application. This circuit achieves approximately 1 V/mA of transimpedance gain and capable of handling up to 1 mApp from the photodiode. Q1, in a common base configuration, isolates the high capacitance of the photodiode (C_d) from the op amp input in order to maximize speed. Input is AC coupled through C1 to ease biasing and allow single supply operation. With 5-V single supply, the device input/output is shifted to near half supply using a voltage divider from VCC. Note that Q1 collector does not have any voltage swing and the Miller effect is minimized. D1, tied to Q1 base, is for temperature compensation of Q1's bias point. Q1 collector current was set to be large enough to handle the peak-to-peak photodiode excitation and not too large to shift the U1 output too far from mid-supply.

Typical Application (continued)

9.2.1.1 Input and Output Topology

All input / output pins are protected against excessive voltages by ESD diodes connected to V^+ and V^- rails (see [Figure 54](#)). These diodes start conducting when the input / output pin voltage approaches $1 V_{be}$ beyond V^+ or V^- to protect against over voltage. These diodes are normally reverse biased. Further protection of the inputs is provided by the two resistors (R in [Figure 54](#)), in conjunction with the string of anti-parallel diodes connected between both bases of the input stage. The combination of these resistors and diodes reduces excessive differential input voltages approaching $2 V_{be}$. This occurs most commonly when the device is used as a comparator (or with little or no feedback) and the device inputs no longer follow each other. In such a case, the diodes may conduct. As a consequence, input current increases and the differential input voltage is clamped. It is important to make sure that the subsequent current flow through the device input pins does not violate the Absolute Maximum Ratings of the device. To limit the current through this protection circuit, extra series resistors can be placed. Together with the built-in series resistors of several hundred ohms, these external resistors can limit the input current to a safe number (that is, less than 10 mA). Be aware that these input series resistors may impact the switching speed of the device and could slow down the device.

9.2.1.2 Single-Supply, Low-Power Photodiode Amplifier

The circuit shown in [Figure 55](#) is used to amplify the current from a photodiode into a voltage output. In this circuit, the emphasis is on achieving high bandwidth and the transimpedance gain setting is kept relatively low. Because of its high slew rate limit and high speed, the LMH6644-MIL lends itself well to such an application.

This circuit achieves approximately 1V/mA of transimpedance gain and capable of handling up to $1mA_{pp}$ from the photodiode. Q1, in a common base configuration, isolates the high capacitance of the photodiode (C_d) from the Op Amp input in order to maximize speed. Input is AC coupled through C1 to ease biasing and allow single-supply operation. With 5-V single supply, the device input/output is shifted to near half supply using a voltage divider from V_{CC} . Note that Q1 collector does not have any voltage swing and the Miller effect is minimized. D1, tied to Q1 base, is for temperature compensation of Q1's bias point. Q1 collector current was set to be large enough to handle the peak-to-peak photodiode excitation and not too large to shift the U1 output too far from mid-supply.

No matter how low an R_f is selected, there is a need for C_f in order to stabilize the circuit. The reason for this is that the Op Amp input capacitance and Q1 equivalent collector capacitance together (C_{IN}) will cause additional phase shift to the signal fed back to the inverting node. C_f will function as a zero in the feedback path counteracting the effect of the C_{IN} and acting to stabilize the circuit. By proper selection of C_f such that the Op Amp open loop gain is equal to the inverse of the feedback factor at that frequency, the response is optimized with a theoretical 45° phase margin.

$$C_F = \sim \text{SQRT} \left[(C_{IN}) / (2\pi \cdot \text{GBWP} \cdot R_F) \right]$$

where

- GBWP is the Gain Bandwidth Product of the Op Amp (1)

Optimized as such, the I-V converter will have a theoretical pole, f_p , at:

$$f_p = \text{SQRT} \left[\text{GBWP} / (2\pi R_F \cdot C_{IN}) \right] \quad (2)$$

With op amp input capacitance of 3 pF and an estimate for Q1 output capacitance of about 3 pF as well, $C_{IN} = 6$ pF. From the typical performance plots, GBWP is approximately 57 MHz. Therefore, with $R_f = 1k$, from [Equation 1](#) and [Equation 2](#):

$$C_f = \sim 4.1 \text{ pF and } f_p = 39 \text{ MHz} \quad (3)$$

For this example, optimum C_f was empirically determined to be around 5 pF. This time domain response is shown in [Figure 58](#) below showing about 9-ns rise/fall times, corresponding to about 39 MHz for f_p . The overall supply current from the +5 V supply is around 5 mA with no load.

Typical Application (continued)

9.2.2 Detailed Design Procedure

No matter how low an R_f is selected, there is a need for C_f in order to stabilize the circuit. The reason for this is that the op amp input capacitance and Q1 equivalent collector capacitance together (C_{IN}) will cause additional phase shift to the signal fed back to the inverting node. C_f will function as a zero in the feedback path counteracting the effect of the C_{IN} and acting to stabilize the circuit. By proper selection of C_f such that the Op Amp open loop gain is equal to the inverse of the feedback factor at that frequency, the response is optimized with a theoretical 45° phase margin where GBWP is the Gain Bandwidth Product of the Op Amp, optimized as such, the I-V converter will have a theoretical pole, f_p , at: (2) With Op Amp input capacitance of 3 pF and an estimate for Q1 output capacitance of about 3 pF as well, $C_{IN} = 6$ pF. From the typical performance plots, GBWP is approximately 57 MHz. Therefore, with $R_f = 1$ k, from Equation 2 and Equation 3 : $C_f = \sim 4.1$ pF and $f_p = 39$ MHz.

For this example, optimum C_f was empirically determined to be around 5 pF. This time domain response is shown in Figure 58 showing about 9 ns rise/fall times, corresponding to about 39 MHz for f_p . The overall supply current from the +5-V supply is around 5 mA with no load.

9.2.3 Application Curves

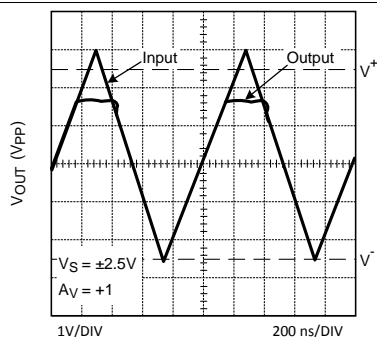


Figure 56. Input and Output Shown with CMVR Exceeded




Figure 57. Overload Recovery Waveform




Figure 58. Converter Step Response (1 V_{pp}, 20 ns/DIV)

10 Power Supply Recommendations

The LMH6644-MIL device can operate off a single supply or with dual supplies. The input CM capability of the parts (CMVR) extends all the way down to the V_- rail to simplify single supply applications. Supplies should be decoupled with low inductance, often ceramic, capacitors to ground less than 0.5 inches from the device pins. The use of ground plane is recommended, and as in most high speed devices, it is advisable to remove ground plane close to device sensitive pins such as the inputs.

11 Layout

11.1 Layout Guidelines

Generally, a good high-frequency layout will keep power supply and ground traces away from the inverting input and output pins. Parasitic capacitances on these nodes to ground will cause frequency response peaking and possible circuit oscillations (see Application Note OA-15, "Frequent Faux Pas in Applying Wideband Current Feedback Amplifiers", [SNOA367](#), for more information). Texas Instruments suggests the following evaluation boards as a guide for high-frequency layout and as an aid in device testing and characterization:

Table 1. Printed Circuit Board Layout And Component Values

DEVICE	PACKAGE	EVALUATION BOARD PN
LMH6644MA	14-Pin SOIC	LMH730231
LMH6644MT	14-Pin TSSOP	LMH730131

Another important parameter in working with high-speed and high-performance amplifiers is the component values selection. Choosing external resistors that are large in value will effect the closed loop behavior of the stage because of the interaction of these resistors with parasitic capacitances. These capacitors could be inherent to the device or a by-product of the board layout and component placement. Either way, keeping the resistor values lower, will diminish this interaction to a large extent. On the other hand, choosing very low value resistors could load down nodes and will contribute to higher overall power dissipation.

11.2 Layout Example

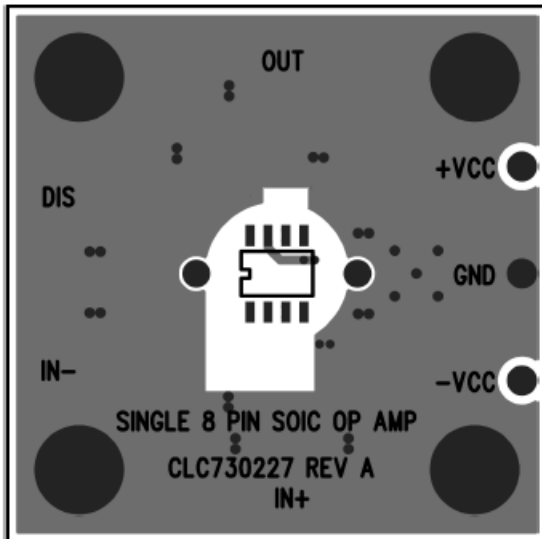


Figure 59. LMH6644-MIL Layer 1

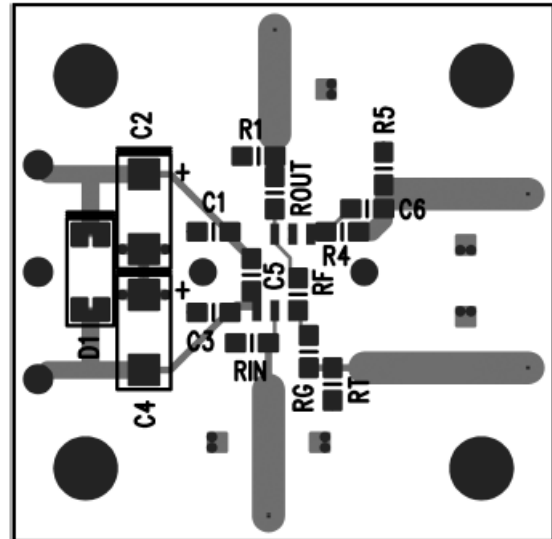


Figure 60. LMH6644-MIL Layer 2

12 Device and Documentation Support

12.1 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. In the upper right corner, click on *Alert me* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

12.2 Community Resources

The following links connect to TI community resources. Linked contents are provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

TI E2E™ Online Community *TI's Engineer-to-Engineer (E2E) Community*. Created to foster collaboration among engineers. At e2e.ti.com, you can ask questions, share knowledge, explore ideas and help solve problems with fellow engineers.

Design Support *TI's Design Support* Quickly find helpful E2E forums along with design support tools and contact information for technical support.

12.3 Trademarks

E2E is a trademark of Texas Instruments.
All other trademarks are the property of their respective owners.

12.4 Electrostatic Discharge Caution



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

12.5 Glossary

[SLYZ022](#) — *TI Glossary*.

This glossary lists and explains terms, acronyms, and definitions.

13 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package Pins	Package qty Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
LMH6644 MDC	Active	Production	DIESALE (Y) 0	100 NOT REQUIRED	Yes	Call TI	Level-1-NA-UNLIM	-40 to 85	
LMH6644-MDC.A	Active	Production	DIESALE (Y) 0	100 NOT REQUIRED	Yes	Call TI	Level-1-NA-UNLIM	-40 to 85	

⁽¹⁾ **Status:** For more details on status, see our [product life cycle](#).

⁽²⁾ **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

⁽⁴⁾ **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

⁽⁵⁾ **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

⁽⁶⁾ **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer:The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#), [TI's General Quality Guidelines](#), or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025