

**PGA206**  
**PGA207**

## High-Speed Programmable Gain INSTRUMENTATION AMPLIFIER

### FEATURES

- **DIGITALLY PROGRAMMABLE GAINS:**  
PGA206: G=1, 2, 4, 8V/V  
PGA207: G=1, 2, 5, 10V/V
- **TRUE INSTRUMENTATION AMP INPUT**
- **FAST SETTLING:** 3.5 $\mu$ s to 0.01%
- **FET INPUT:**  $I_B$  = 100pA max
- **INPUT PROTECTION:**  $\pm 40$ V
- **LOW OFFSET VOLTAGE:** 1.5mV max
- **16-PIN DIP, SOL-16 SOIC PACKAGES**

### APPLICATIONS

- **MULTIPLE-CHANNEL DATA ACQUISITION**
- **MEDICAL, PHYSIOLOGICAL AMPLIFIER**
- **PC-CONTROLLED ANALOG INPUT  
BOARDS**


### DESCRIPTION

The PGA206 and PGA207 are digitally programmable gain instrumentation amplifiers that are ideally suited for data acquisition systems.

The PGA206 and PGA207's fast settling time allows multiplexed input channels for excellent system efficiency. FET inputs eliminate  $I_B$  errors due to analog multiplexer series resistance.

Gains are selected by two CMOS/TTL-compatible address lines. Analog inputs are internally protected for overloads up to  $\pm 40$ V, even with the power supplies off. The PGA206 and PGA207 are laser-trimmed for low offset voltage and low drift.

The PGA206 and PGA207 are available in 16-pin plastic DIP and SOL-16 surface-mount packages. Both are specified for -40°C to +85°C operation.

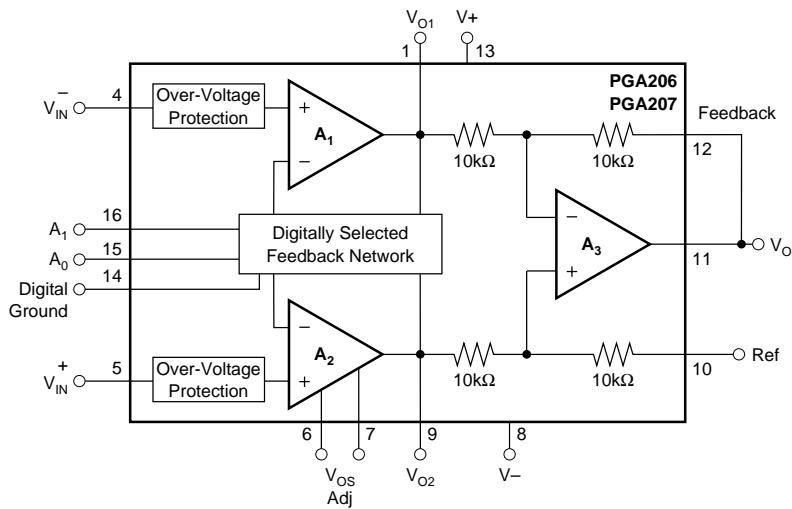

International Airport Industrial Park • Mailing Address: PO Box 11400, Tucson, AZ 85734 • Street Address: 6730 S. Tucson Blvd., Tucson, AZ 85706 • Tel: (520) 746-1111 • Twx: 910-952-1111  
Internet: <http://www.burr-brown.com/> • FAXLine: (800) 548-6133 (US/Canada Only) • Cable: BBRCORP • Telex: 066-6491 • FAX: (520) 889-1510 • Immediate Product Info: (800) 548-6132

# SPECIFICATIONS

At  $T_A = +25^\circ\text{C}$ ,  $V_S = \pm 15\text{V}$ ,  $R_L = 2\text{k}\Omega$  unless otherwise noted.


PARAMETER	CONDITIONS	PGA206P, U PGA207P, U			PGA206PA, UA PGA207PA, UA			UNITS	
		MIN	TYP	MAX	MIN	TYP	MAX		
<b>INPUT</b>									
Offset Voltage, RTI	All Gains $T_A = +25^\circ\text{C}$								
Initial vs Temperature	$T_A = T_{\text{MIN}} \text{ to } T_{\text{MAX}}$ , $G = 8, 10$	$\pm 0.5$	$\pm 1.5$		$\pm 1$	$\pm 2.5$		$\text{mV}$	
vs Power Supply	$V_S = \pm 4.5\text{V}$ to $\pm 18\text{V}$	$\pm 2$		$\pm 20$	$*$	$\pm 40$		$\mu\text{V}/^\circ\text{C}$	
Long-Term Stability		$\pm 5$			$\pm 10$			$\mu\text{V}/\text{V}$	
Impedance, Differential		4.5			$*$			$\mu\text{V}/\text{mV}$	
Common-Mode		$10^{13} \parallel 1$			$*$			$\Omega \parallel \text{pF}$	
Common-Mode Voltage Range <sup>(1)</sup>	$V_O = 0\text{V}$	$\pm( V_S  - 4)$	$10^{12} \parallel 4$	$\pm( V_S  - 2.5)$	$\pm 40$	$*$	$*$	$\Omega \parallel \text{pF}$	
Safe Input Voltage								$\text{V}$	
Common-Mode Rejection	$V_{\text{CM}} = \pm 11\text{V}$ , $\Delta R_S = 1\text{k}\Omega$	$G = 1$ $G = 2$ $G = 4$ or $5$ $G = 8$ or $10$	80 85 90 95	92 96 100 100		75 80 84 84	86 90 94 94		$\text{V}$
<b>INPUT BIAS CURRENT</b>	$V_{\text{IN}} = 0$		2	100		$*$	$*$	$\text{pA}$	
vs Temperature			See Typical Curve			$*$			
Offset Current		1		100		$*$		$\text{pA}$	
vs Temperature			See Typical Curve			$*$			
<b>NOISE VOLTAGE, RTI</b>	$G = 8, 10$ ; $R_S = 0\Omega$		30 20 18 1			$*$		$\text{nV}/\sqrt{\text{Hz}}$	
$f = 10\text{Hz}$						$*$		$\text{nV}/\sqrt{\text{Hz}}$	
$f = 100\text{Hz}$						$*$		$\text{nV}/\sqrt{\text{Hz}}$	
$f = 1\text{kHz}$						$*$		$\text{nV}/\sqrt{\text{Hz}}$	
$f_B = 0.1\text{Hz}$ to $10\text{Hz}$						$*$		$\mu\text{Vp-p}$	
Noise Current			1.5			$*$		$\text{fA}/\sqrt{\text{Hz}}$	
<b>GAIN</b>	All Gains, $V_O = \pm 11\text{V}$		$\pm 0.01$ $\pm 1$ $\pm 0.0003$	$\pm 0.05$ $\pm 10$ $\pm 0.002$		$*$	$\pm 0.1$ $*$ $\pm 0.005$	$\%$ $\text{ppm}/^\circ\text{C}$ $\%$ of FSR	
<b>OUTPUT</b>									
Voltage, Positive		$(V+) - 4$	$(V+) - 2.3$			$*$		$\text{V}$	
Negative		$(V-) + 4$	$(V-) + 1.5$			$*$		$\text{V}$	
Load Capacitance Stability			1000			$*$		$\text{pF}$	
Short-Circuit Current			$\pm 17$			$*$		$\text{mA}$	
<b>FREQUENCY RESPONSE</b>									
Bandwidth, $-3\text{dB}$		$G = 1$ $G = 2$ $G = 4, 5$ $G = 8, 10$	5 4 1.3 600			$*$		$\text{MHz}$	
Slew Rate	$V_O = \pm 10\text{V}$ , $G = 1$ to $10$		25			$*$		$\text{MHz}$	
Settling Time, 0.1%			2			$*$		$\text{kHz}$	
0.01%			3.5			$*$		$\text{V}/\mu\text{s}$	
Output Overload Recovery			1.5			$*$		$\mu\text{s}$	
								$\mu\text{s}$	
<b>DIGITAL LOGIC INPUTS</b>									
Digital Ground Voltage, $V_{\text{DG}}$		$V-$		$(V+) - 4$		$*$	$*$	$\text{V}$	
Digital Low Voltage		$V-$		$V_{\text{DG}} + 0.8\text{V}$		$*$	$*$	$\text{V}$	
Digital Input Current		1				$*$		$\text{pA}$	
Digital High Voltage			500	$V+$		$*$	$*$	$\text{V}$	
Gain Switching Time						$*$	$*$	$\text{ns}$	
<b>POWER SUPPLY</b>									
Voltage Range									
Current	$V_{\text{IN}} = 0\text{V}$	$\pm 4.5$	$\pm 15$ $+12.4/-11.2$	$\pm 18$ $\pm 13.5$	$*$	$*$	$*$	$\text{V}$ $\text{mA}$	
<b>TEMPERATURE RANGE</b>									
Specification			$-40$			$*$	$*$	$^\circ\text{C}$	
Operating			$-40$			$*$	$*$	$^\circ\text{C}$	
Thermal Resistance, $\theta_{JA}$				80	$+85$ $+125$		$*$	$^\circ\text{C}/\text{W}$	

\* Specification same as PGA206P or PGA207P.

NOTES: (1) Input common-mode range varies with output voltage—see typical curves. (2) Guaranteed by wafer test.

The information provided herein is believed to be reliable; however, BURR-BROWN assumes no responsibility for inaccuracies or omissions. BURR-BROWN assumes no responsibility for the use of this information, and all use of such information shall be entirely at the user's own risk. Prices and specifications are subject to change without notice. No patent rights or licenses to any of the circuits described herein are implied or granted to any third party. BURR-BROWN does not authorize or warrant any BURR-BROWN product for use in life support devices and/or systems.

## PIN CONFIGURATION

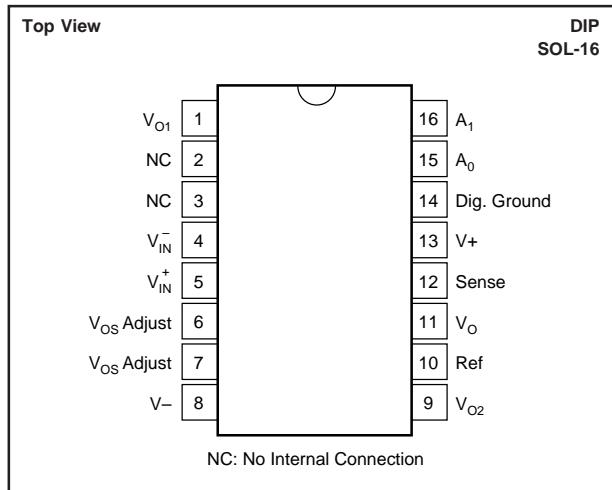

## PACKAGE INFORMATION

PRODUCT	PACKAGE	PACKAGE DRAWING NUMBER <sup>(1)</sup>
PGA206PA	16-Pin Plastic DIP	180
PGA206P	16-Pin Plastic DIP	180
PGA206UA	SOL-16 Surface Mount	211
PGA206U	SOL-16 Surface Mount	211
PGA207PA	16-Pin Plastic DIP	180
PGA207P	16-Pin Plastic DIP	180
PGA207UA	SOL-16 Surface Mount	211
PGA207U	SOL-16 Surface Mount	211

NOTE: (1) For detailed drawing and dimension table, please see end of data sheet, or Appendix C of Burr-Brown IC Data Book.

## ABSOLUTE MAXIMUM RATINGS

Supply Voltage .....	±18V
Analog Input Voltage Range .....	±40V
Logic Input Voltage Range .....	±V <sub>S</sub>
Output Short-Circuit (to ground) .....	Continuous
Operating Temperature .....	-40°C to +125°C
Storage Temperature .....	-40°C to +125°C
Junction Temperature .....	+150°C
Lead Temperature (soldering ~10s) .....	+300°C

## ORDERING INFORMATION

PRODUCT	GAINS	PACKAGE	TEMPERATURE RANGE
PGA206PA	1, 2, 4, 8/V/V	16-Pin Plastic DIP	-40°C to +85°C
PGA206P	1, 2, 4, 8/V/V	16-Pin Plastic DIP	-40°C to +85°C
PGA206UA	1, 2, 4, 8/V/V	SOL-16 Surface-Mount	-40°C to +85°C
PGA206U	1, 2, 4, 8/V/V	SOL-16 Surface-Mount	-40°C to +85°C
PGA207PA	1, 2, 5, 10/V/V	16-Pin Plastic DIP	-40°C to +85°C
PGA207P	1, 2, 5, 10/V/V	16-Pin Plastic DIP	-40°C to +85°C
PGA207UA	1, 2, 5, 10/V/V	SOL-16 Surface-Mount	-40°C to +85°C
PGA207U	1, 2, 5, 10/V/V	SOL-16 Surface-Mount	-40°C to +85°C









## ELECTROSTATIC DISCHARGE SENSITIVITY

This integrated circuit can be damaged by ESD. Burr-Brown recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.







# TYPICAL PERFORMANCE CURVES

At  $T_A = +25^\circ\text{C}$ , and  $V_S = \pm 15\text{V}$ , unless otherwise noted.

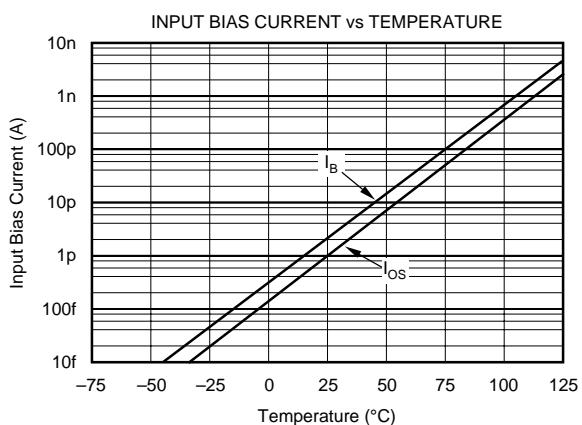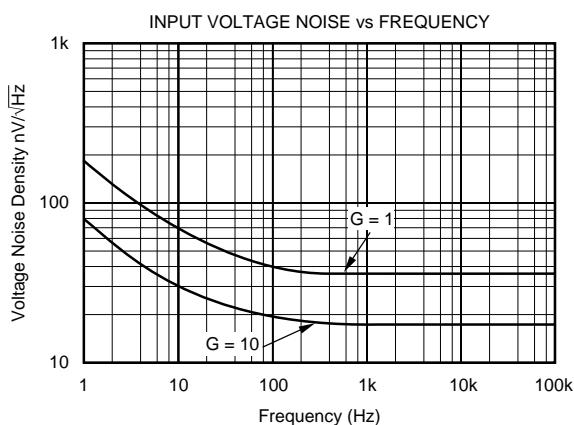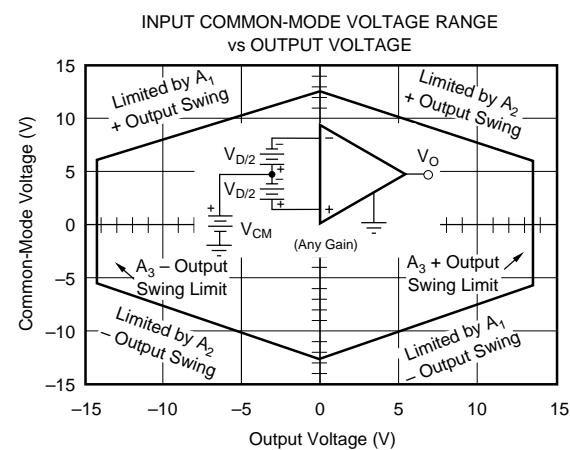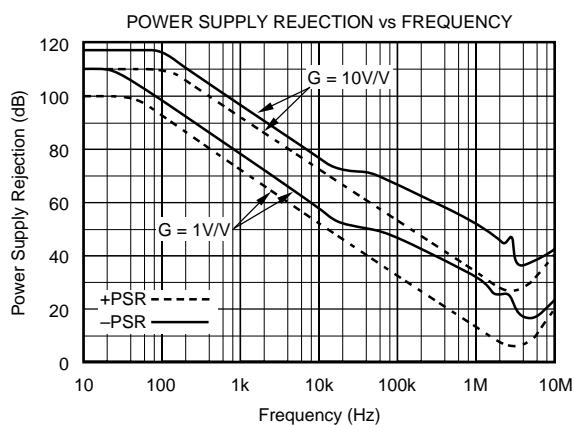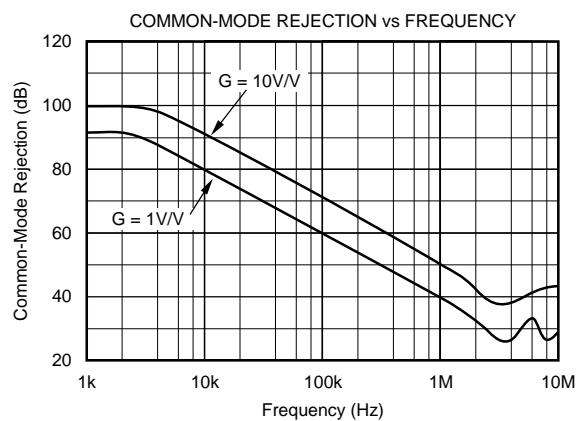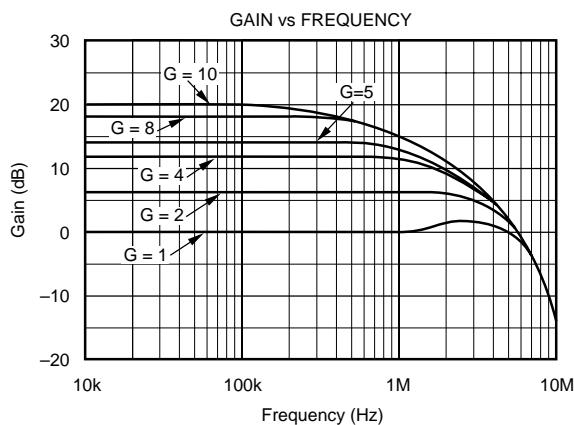

## TYPICAL PERFORMANCE CURVES (CONT)


At  $T_A = +25^\circ\text{C}$ , and  $V_S = \pm 15\text{V}$ , unless otherwise noted.

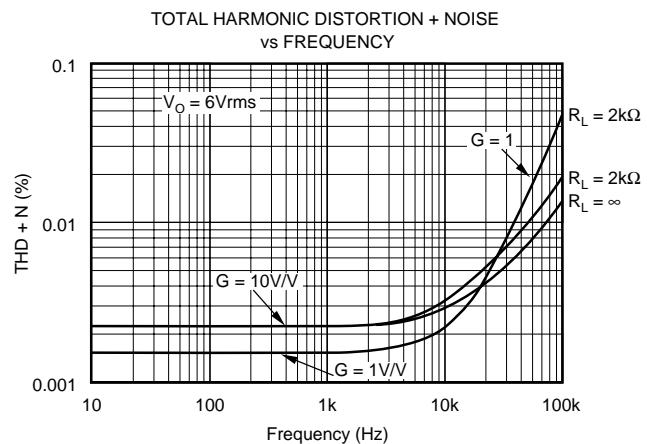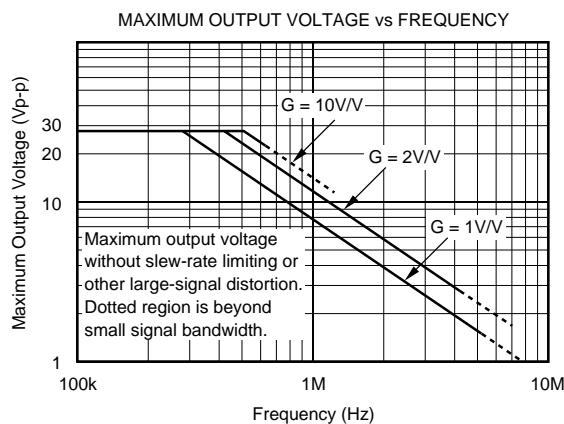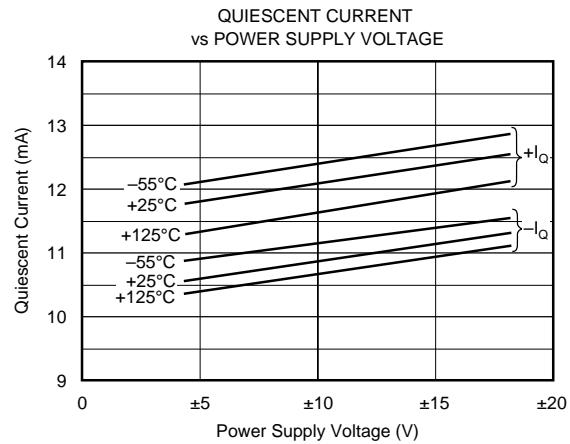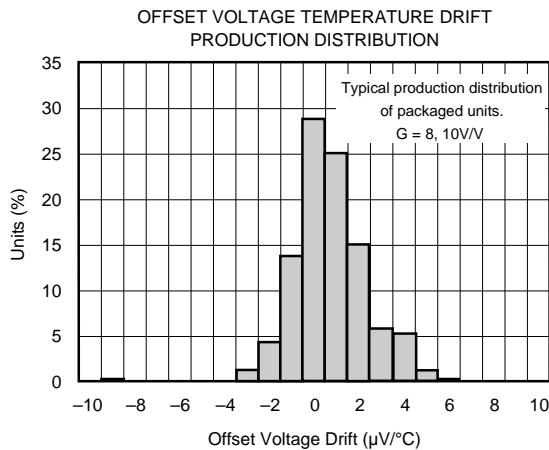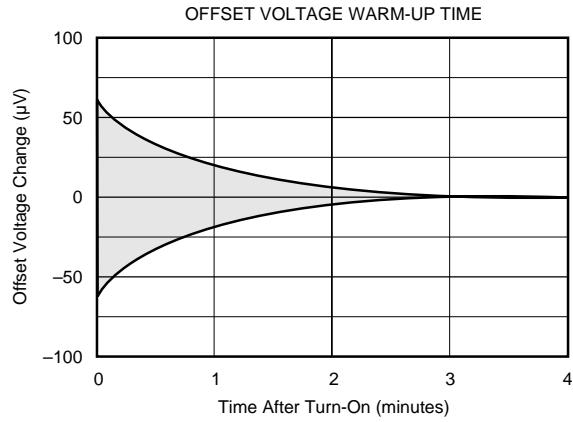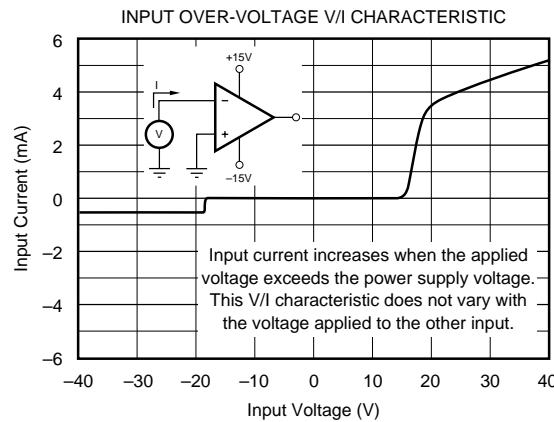


## TYPICAL PERFORMANCE CURVES (CONT)

At  $T_A = +25^\circ\text{C}$ , and  $V_S = \pm 15\text{V}$ , unless otherwise noted.


SMALL SIGNAL RESPONSE  
 $G = 1, C_L = 50\text{pF}$

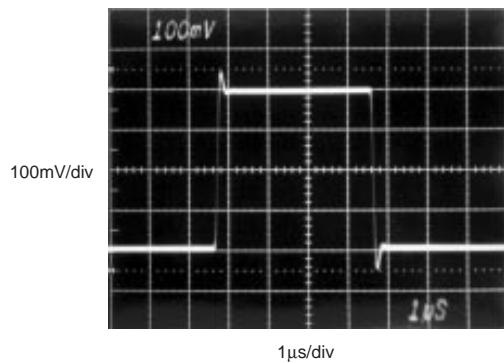


SMALL SIGNAL RESPONSE  
 $G = 10, C_L = 50\text{pF}$

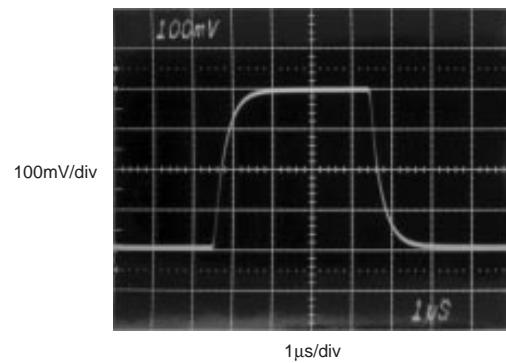

LARGE SIGNAL RESPONSE  
 $G = 1, C_L = 50\text{pF}$

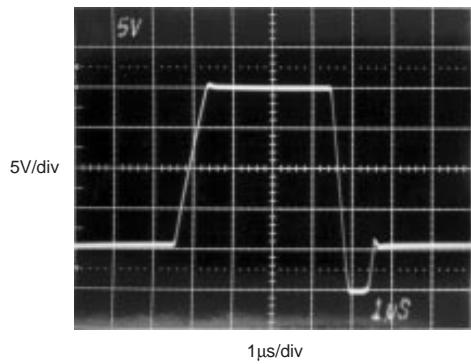

LARGE SIGNAL RESPONSE  
 $G = 10, C_L = 50\text{pF}$

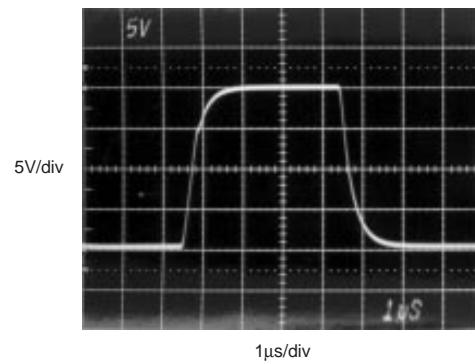

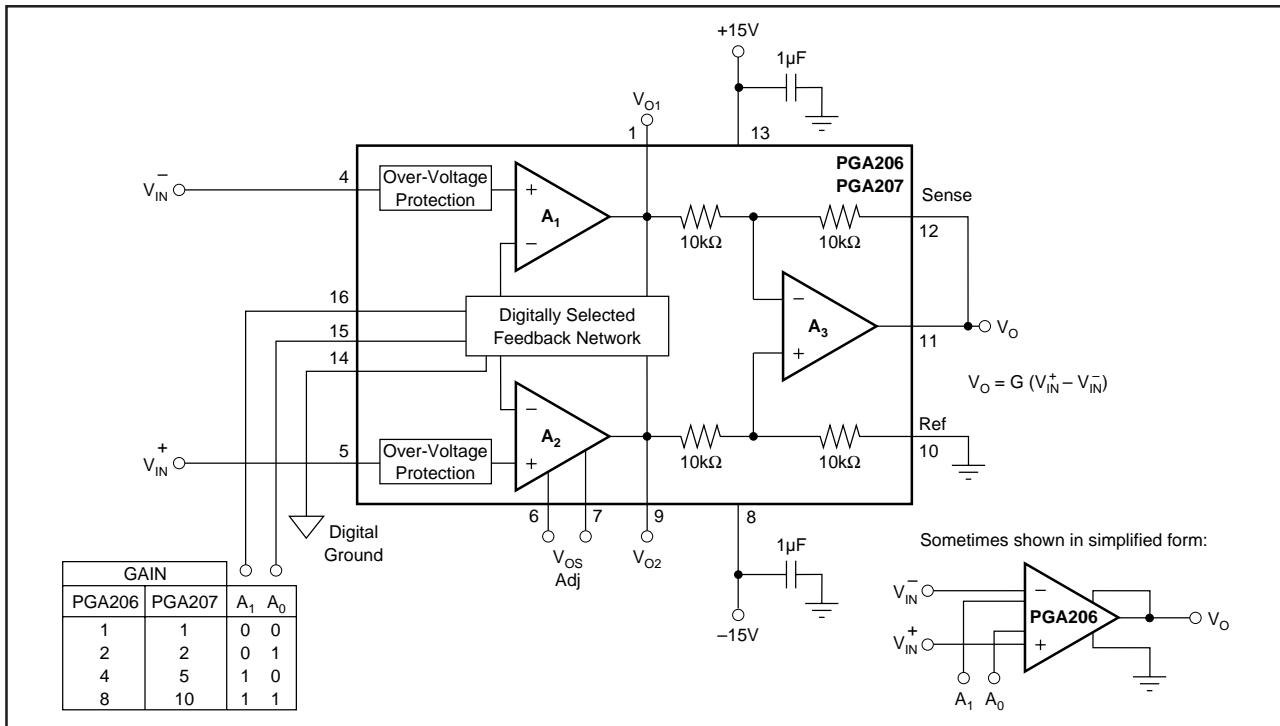


FIGURE 1. Basic Connections.

## APPLICATIONS INFORMATION

Figure 1 shows the circuit diagram for basic operation of the PGA206 or PGA207. Applications with noisy or high impedance power supplies may require decoupling capacitors close to the device pins as shown.

The output is referred to the output reference (Ref) terminal which is normally grounded. This must be a low-impedance connection to assure good common-mode rejection. A resistance of  $2\Omega$  in series with the Ref pin will cause a typical device to degrade to approximately 80dB CMR ( $G = 1$ ).

The output sense connection (pin 12) must be connected to the output terminal (pin 11) for proper operation. This connection can be made at the load for best accuracy.

### DIGITAL INPUTS

The digital inputs  $A_0$  and  $A_1$  select the gain according to the logic table in Figure 1. Logic "1" is defined as a voltage greater than 2V above digital ground potential (pin 14). Digital ground can be connected to any potential ranging from the  $V_-$  power supply to 4V less than  $V_+$ . Digital ground is usually equal to analog ground potential and the two grounds are connected at the power supply. The digital inputs interface directly to CMOS and TTL logic.

A nearly constant current of approximately 1.2mA flows in the digital ground pin. It is good practice to return digital ground through a separate connection path so that analog ground is not affected by the digital ground current.

The digital inputs,  $A_0$  and  $A_1$ , are not latched. A change in logic input immediately selects a new gain. Switching time of the logic is approximately 500ns. The time to respond to gain change is equal to switching time, plus the time it takes the amplifier to settle to a new output voltage in the newly selected gain (see settling time specifications).

Many applications use an external logic latch to acquire gain control data from a high speed digital bus. Using an external latch isolates the high speed digital bus from sensitive analog circuitry. Locate the digital latch as far as practical from analog circuitry to avoid coupling digital noise into analog input circuitry.

### OFFSET VOLTAGE ADJUSTMENT

The PGA206 and PGA207 are laser trimmed for very low offset voltage and drift. Many applications require no external offset adjustment. Multiplexed data acquisition systems generally correct offset by grounding the inputs of one channel to measure offset voltage. Stored offset values for each gain are then subtracted from subsequent readings of other channels.

Figure 2 shows optional offset voltage trim circuits. Offset voltage changes with the selected gain. To adjust for low offset voltage in all gains, both input and output offsets must be trimmed.

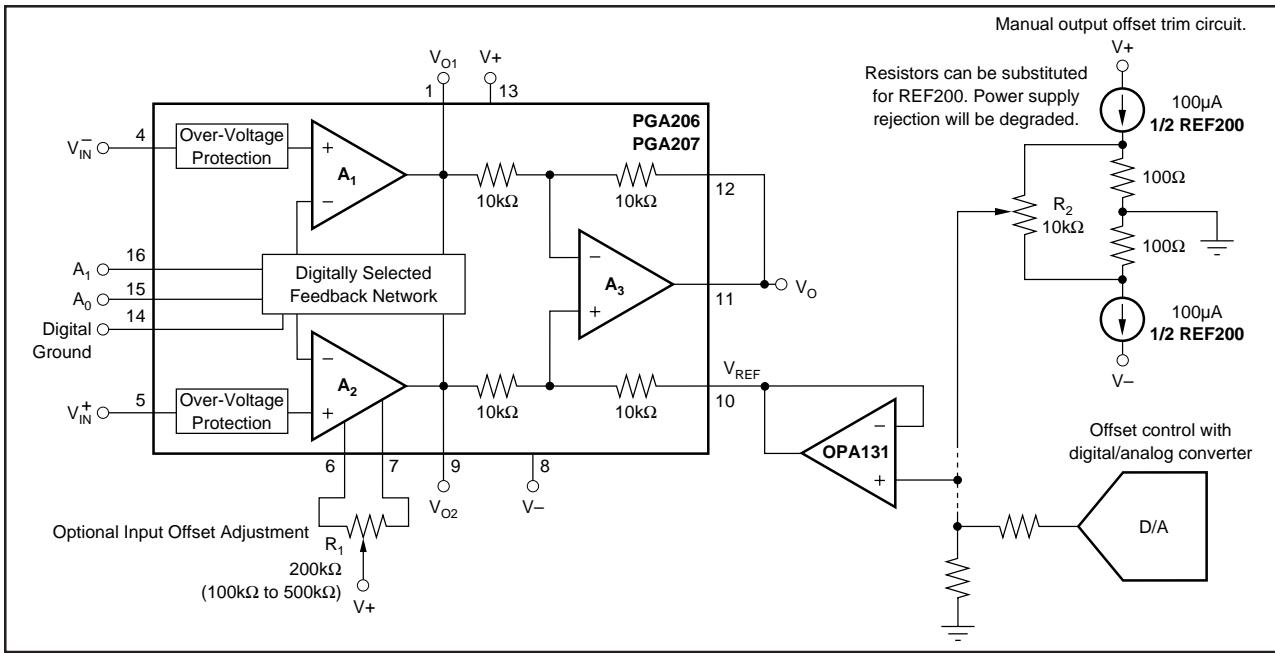


FIGURE 2. Optional Offset Voltage Trim Circuits.

$R_1$  adjusts the offset of the input amplifiers. Output stage offset is adjusted with  $R_2$ . A buffer op amp is required in the output offset adjustment circuit, as shown, to assure that the Ref pin is driven by a low source impedance. To adjust for low offset voltage in all gains, first adjust the input stage offset in the highest gain. Then adjust the output stage offset ( $R_2$ ) in  $G = 1$ . Iterate the adjustments for lowest offset in all gains.

Offset can also be adjusted under processor control with a D/A converter as shown in Figure 2. The D/A's output voltage can be reduced with a resistor divider for better adjustment resolution, but an op amp buffer following the divider is required to provide a low source impedance to the ref terminal. A different offset value is required for each amplifier gain.

### INPUT BIAS CURRENT RETURN PATH

The FET inputs of the PGA206 and PGA207 provide extremely high input impedance. Still, a path must be provided for the bias current of each input. Figure 3 shows provisions for an input bias current path. Without a bias current return path, the inputs will float to a potential which exceeds the linear input voltage range and the input amplifiers will saturate.

If the differential source resistance is low, a bias current return path can be connected to only one input (see thermocouple example in Figure 3). With higher source impedance, using two resistors provides a balanced input with possible advantages of lower input offset voltage due to bias current and better common-mode rejection.

Many sources or sensors inherently provide a path for input bias current (e.g. the bridge sensor shown in Figure 3). These applications do not require additional resistor(s) for proper operation.

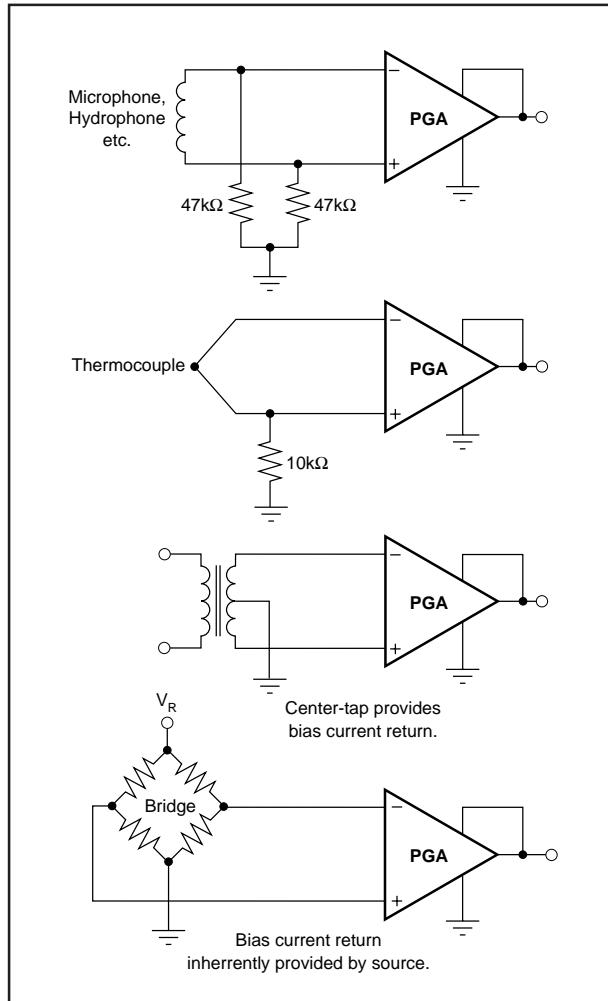


FIGURE 3. Providing an Input Bias Current Path.

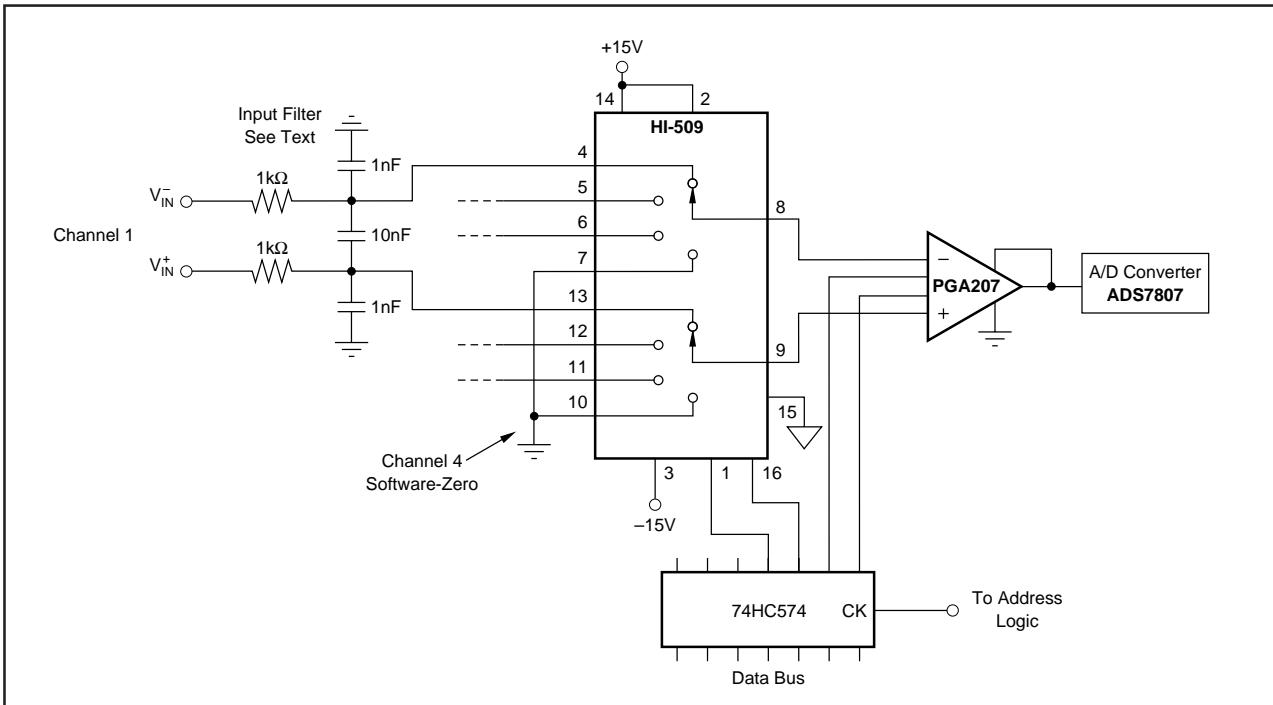


FIGURE 4. Multiplexed-Input Signal Acquisition System.

### INPUT COMMON-MODE RANGE

The linear input voltage range of the PGA206 and PGA207 is from approximately 2.3V below the positive supply voltage to 1.5V above the negative supply. As a differential input voltage causes output voltage to increase, however, the linear input range is limited by the output voltage swing of amplifiers  $A_1$  and  $A_2$ . So the linear common-mode input range is related to the output voltage of the complete amplifier. This behavior also depends on supply voltage—see performance curves “Input Common-Mode Range vs Output Voltage”.

Input overload can produce an output voltage that appears normal. For example, if an input overload condition drives both input amplifiers to their positive output swing limit, the difference voltage measured by the output amplifier will be near zero. The output of the PGA206 or PGA207 will be near 0V even though both inputs are overloaded. This condition can be detected by sensing the voltage on the  $V_{01}$  and  $V_{02}$  pins to determine whether they are within their linear operating range.

### INPUT PROTECTION

The inputs of the PGA206 and PGA207 are individually protected for voltages up to  $\pm 40V$ . For example, a condition of  $-40V$  on one input and  $+40V$  on the other input will not cause damage. Internal circuitry on each input provides low series impedance under normal signal conditions. If the input is overloaded, the protection circuitry limits the input current to a safe value. The typical performance curve “Input Overload V/I Characteristic” shows this behavior. The inputs are protected even if no power supply voltage is applied.

### MULTIPLEXED INPUTS

The PGA206 and PGA207 are ideally suited for multiple channel data acquisition. Figure 4 shows a typical application with an analog multiplexer used to connect one of four differential input signals to a single PGA207.

Careful circuit layout will help preserve accuracy of multiplexed signals. Run the inverting and non-inverting connections of each channel parallel to each other over a ground plane, or directly adjacent on top and bottom of the circuit board. Grounded guard traces between channels help reduce stray signal pick-up.

Multiplexed signals from high impedance sources require special care. As inputs are switched by the multiplexer, charge can be injected into the source, disturbing the input signal. Since many such sources involve slow signals, a simple R/C filter at the input can be used to dramatically reduce this effect. The arrangement shown filters both the differential signal and common-mode noise.


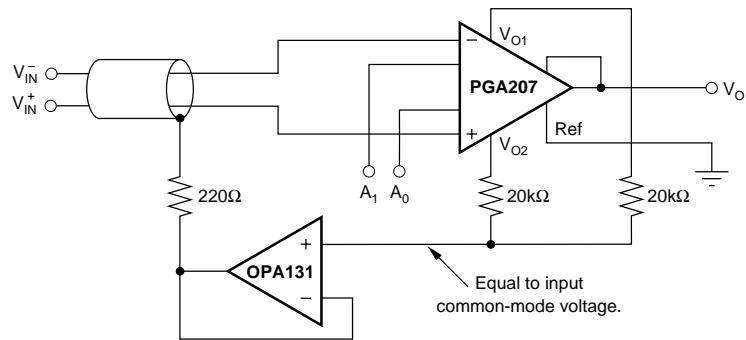


FIGURE 5. Shield Drive Circuit.

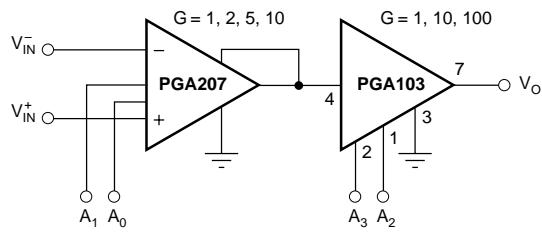

GAIN (V/V)	A <sub>1</sub>	A <sub>0</sub>	A <sub>3</sub>	A <sub>2</sub>
1	0	0	0	0
2	0	1	0	0
5	1	0	0	0
10	1	1	0	0
20	0	1	0	1
50	1	0	0	1
100	1	1	0	1
200	0	1	1	0
500	1	0	1	0
1000	1	1	1	0

FIGURE 6. Wide Gain Range Programmable IA.

**PACKAGING INFORMATION**

Orderable part number	Status (1)	Material type (2)	Package   Pins	Package qty   Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
PGA206PA	Last Time Buy	Production	PDIP (N)   16	25   TUBE	Yes	NIPDAU	N/A for Pkg Type	-40 to 85	PGA206PA
PGA206PA.A	Active	Production	PDIP (N)   16	25   TUBE	Yes	NIPDAU	N/A for Pkg Type	-40 to 85	PGA206PA
PGA206UA	Last Time Buy	Production	SOIC (DW)   16	40   TUBE	Yes	NIPDAUAG	Level-3-260C-168 HR	-40 to 85	PGA206UA
PGA206UA.A	Active	Production	SOIC (DW)   16	40   TUBE	Yes	NIPDAUAG	Level-3-260C-168 HR	-40 to 85	PGA206UA
PGA206UAG4	Active	Production	SOIC (DW)   16	40   TUBE	Yes	NIPDAUAG	Level-3-260C-168 HR	-40 to 85	PGA206UA
PGA207UA	Last Time Buy	Production	SOIC (DW)   16	40   TUBE	Yes	NIPDAUAG	Level-3-260C-168 HR	-40 to 85	PGA207UA
PGA207UA.A	Active	Production	SOIC (DW)   16	40   TUBE	Yes	NIPDAUAG	Level-3-260C-168 HR	-40 to 85	PGA207UA
PGA207UA/1K	Last Time Buy	Production	SOIC (DW)   16	1000   LARGE T&R	Yes	NIPDAUAG	Level-3-260C-168 HR	-40 to 85	PGA207UA
PGA207UA/1K.A	Active	Production	SOIC (DW)   16	1000   LARGE T&R	Yes	NIPDAUAG	Level-3-260C-168 HR	-40 to 85	PGA207UA

<sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).

<sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

<sup>(4)</sup> **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.



<sup>(6)</sup> **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.


---

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

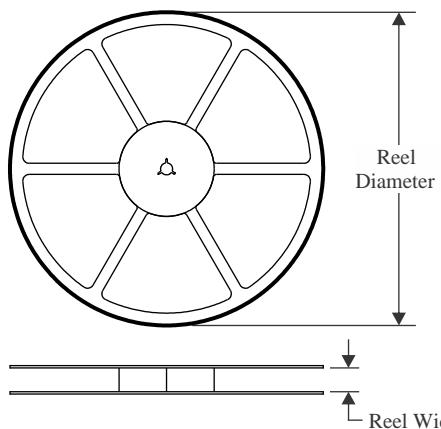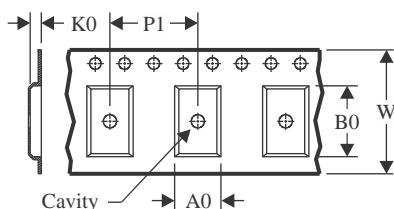
**TAPE AND REEL INFORMATION**
**REEL DIMENSIONS**

**TAPE DIMENSIONS**

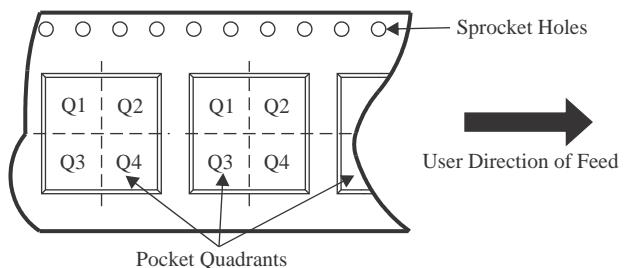
A0	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

**QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE**


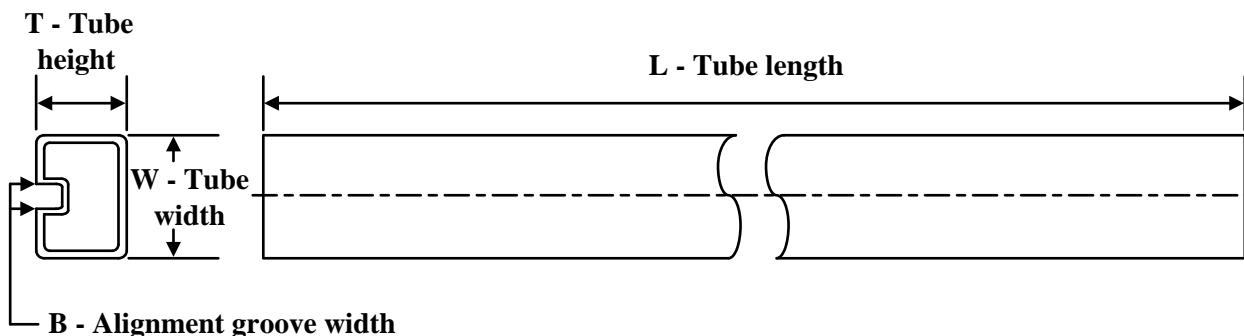
\*All dimensions are nominal

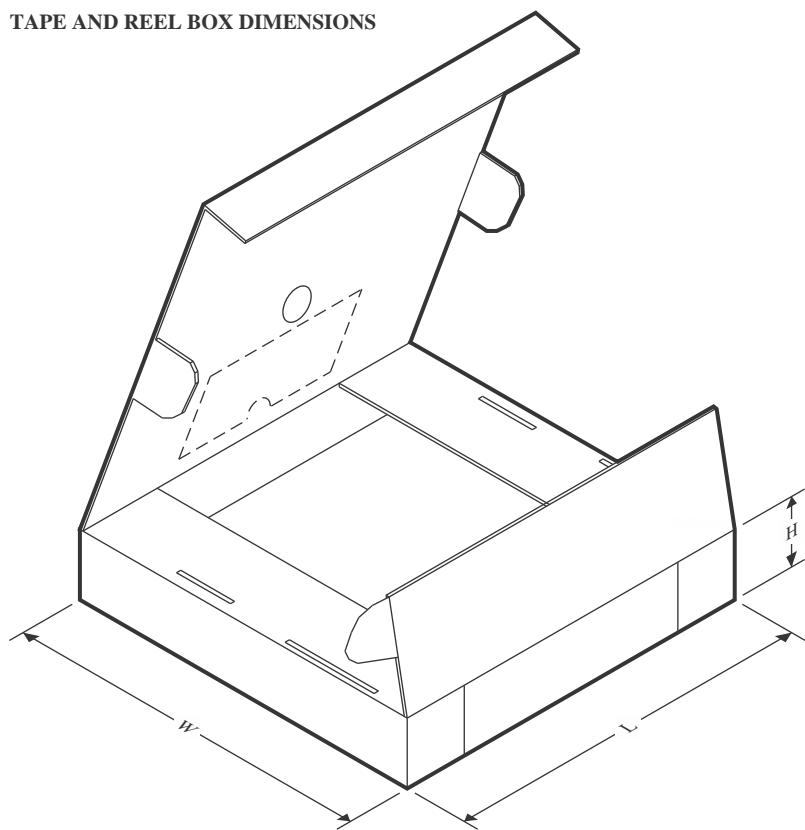Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
PGA207UA/1K	SOIC	DW	16	1000	330.0	16.4	10.75	10.7	2.7	12.0	16.0	Q1

**TAPE AND REEL BOX DIMENSIONS**


\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
PGA207UA/1K	SOIC	DW	16	1000	353.0	353.0	32.0

**TUBE**


\*All dimensions are nominal

Device	Package Name	Package Type	Pins	SPQ	L (mm)	W (mm)	T (μm)	B (mm)
PGA206PA	N	PDIP	16	25	506	13.97	11230	4.32
PGA206PA.A	N	PDIP	16	25	506	13.97	11230	4.32
PGA206UA	DW	SOIC	16	40	507	12.83	5080	6.6
PGA206UA.A	DW	SOIC	16	40	507	12.83	5080	6.6
PGA206UAG4	DW	SOIC	16	40	507	12.83	5080	6.6
PGA207UA	DW	SOIC	16	40	507	12.83	5080	6.6
PGA207UA.A	DW	SOIC	16	40	507	12.83	5080	6.6

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#), [TI's General Quality Guidelines](#), or other applicable terms available either on [ti.com](#) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2026, Texas Instruments Incorporated

Last updated 10/2025