

# TLV62130x 采用 3x3 QFN 封装的 3V 至 17V 3A 降压转换器

## 1 特性

- DCS-Control™ 拓扑
- 输入电压范围：3V 至 17V
- 输出电流高达 3A
- 可调节输出电压为 0.9V 至 5.5V
- 可通过引脚选择输出电压（标称值，+5%）
- 可编程软启动和跟踪
- 无缝省电模式转换
- 19μA 的静态电流（典型值）
- 可选运行频率
- 电源正常输出
- 100% 占空比模式
- 短路保护功能
- 过热保护
- 要获得改进的特性集，请见 [TPS62130](#)
- 与 [TLV62150 引脚兼容](#) 中）
- 采用 3mm × 3mm VQFN-16 封装
- 使用 TLV62130 并借助 [WEBENCH® Power Designer](#) 创建定制设计方案

## 2 应用

- 标准 12V 导轨式电源
- 由单节或多节锂离子电池组成的负载点 (POL) 电源
- 电机驱动器、电子销售终端
- 移动 PC、平板、调制解调器、摄像头
- TV、机顶盒、音频

## 3 说明

TLV62130 器件是易于使用的同步降压 DC-DC 转换器，针对 高功率密度的应用 进行了优化。该器件的开关频率典型值高达 2.5MHz，允许使用小型电感器，通过利用 DCS-Control™ 拓扑技术提供快速的瞬态响应并实现高输出电压精度。

此器件具有 3V 至 17V 宽运行输入电压范围，非常适用于由锂离子或其它电池以及 12V 中间电源轨供电的系统。其支持高达 3A 的持续输出电流，输出电压范围为 0.9V 至 5.5V（100% 占空比模式下）。

输出电压启动斜坡由软启动引脚控制，可由独立电源供电运行，也可在跟踪配置下运行。此外，还可以通过配置使能引脚和开漏电源正常状态引脚实现电源排序。

在节能模式下，器件可根据  $V_{IN}$  生成约 19μA 的静态电流。负载较小时可自动且无缝进入节能模式，同时该模式可保持整个负载范围内的高效率。在关断模式下，此器件会关闭且关断期间的流耗少于 2μA。


该器件采用 3mm × 3mm (RGT) 16 引脚超薄型四方扁平无引线 (VQFN) 封装。

器件信息<sup>(1)</sup>


| 器件型号      | 封装        | 封装尺寸（标称值）       |
|-----------|-----------|-----------------|
| TLV62130  | VQFN (16) | 3.00mm × 3.00mm |
| TLV62130A |           |                 |

(1) 如需了解所有可用封装，请参阅产品说明书末尾的可订购产品附录。

典型应用原理图

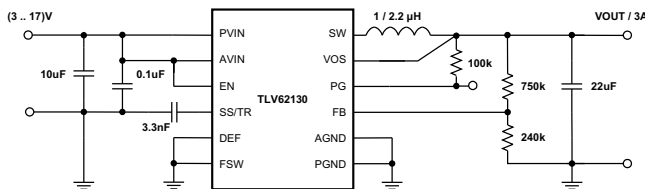

效率与输出电流间的关系

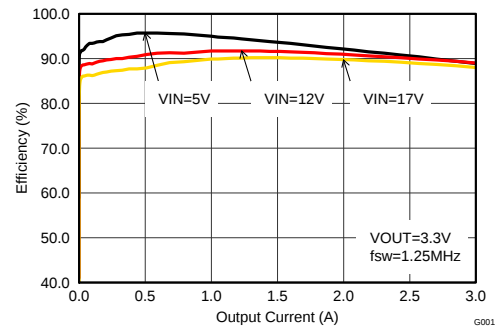

## 目录

|          |                                              |          |           |                                             |           |
|----------|----------------------------------------------|----------|-----------|---------------------------------------------|-----------|
| <b>1</b> | <b>特性</b> .....                              | <b>1</b> | <b>9</b>  | <b>Application and Implementation</b> ..... | <b>13</b> |
| <b>2</b> | <b>应用</b> .....                              | <b>1</b> | 9.1       | Application Information .....               | 13        |
| <b>3</b> | <b>说明</b> .....                              | <b>1</b> | 9.2       | Typical Application .....                   | 13        |
| <b>4</b> | <b>修订历史记录</b> .....                          | <b>2</b> | 9.3       | System Examples .....                       | 24        |
| <b>5</b> | <b>Device Comparison Table</b> .....         | <b>4</b> | <b>10</b> | <b>Power Supply Recommendations</b> .....   | <b>27</b> |
| <b>6</b> | <b>Pin Configuration and Functions</b> ..... | <b>4</b> | <b>11</b> | <b>Layout</b> .....                         | <b>28</b> |
| <b>7</b> | <b>Specifications</b> .....                  | <b>5</b> | 11.1      | Layout Guidelines .....                     | 28        |
| 7.1      | Absolute Maximum Ratings .....               | 5        | 11.2      | Layout Example .....                        | 28        |
| 7.2      | ESD Ratings .....                            | 5        | 11.3      | Thermal Considerations .....                | 29        |
| 7.3      | Recommended Operating Conditions .....       | 5        | <b>12</b> | <b>器件和文档支持</b> .....                        | <b>30</b> |
| 7.4      | Thermal Information .....                    | 5        | 12.1      | 器件支持 .....                                  | 30        |
| 7.5      | Electrical Characteristics .....             | 6        | 12.2      | 接收文档更新通知 .....                              | 30        |
| 7.6      | Typical Characteristics .....                | 7        | 12.3      | 文档支持 .....                                  | 30        |
| <b>8</b> | <b>Detailed Description</b> .....            | <b>8</b> | 12.4      | 相关链接 .....                                  | 30        |
| 8.1      | Overview .....                               | 8        | 12.5      | 社区资源 .....                                  | 30        |
| 8.2      | Functional Block Diagram .....               | 8        | 12.6      | 商标 .....                                    | 31        |
| 8.3      | Feature Description .....                    | 9        | 12.7      | 静电放电警告 .....                                | 31        |
| 8.4      | Device Functional Modes .....                | 10       | 12.8      | 术语表 .....                                   | 31        |
|          |                                              |          | <b>13</b> | <b>机械、封装和可订购信息</b> .....                    | <b>31</b> |

## 4 修订历史记录

注：之前版本的页码可能与当前版本有所不同。

### Changes from Revision G (January 2017) to Revision H Page

|                                                                                                                |          |
|----------------------------------------------------------------------------------------------------------------|----------|
| • 将可调节输出电压从“0.9V 至 5V”更改成了“0.9V 至 5.5V”- 通改。 .....                                                             | <b>1</b> |
| • Changed the VOUT MAX value From: 5 V To: 5.5 V in the <a href="#">Electrical Characteristics</a> table ..... | <b>6</b> |

### Changes from Revision F (January 2017) to Revision G Page

|                                            |          |
|--------------------------------------------|----------|
| • 已添加 WEBENCH® 信息至 特性，详细设计流程和开发支持部分。 ..... | <b>1</b> |
|--------------------------------------------|----------|

### Changes from Revision E (July 2016) to Revision F Page

|                                                                                               |          |
|-----------------------------------------------------------------------------------------------|----------|
| • Added ac voltage specification for SW pin in <a href="#">Absolute Maximum Ratings</a> ..... | <b>5</b> |
|-----------------------------------------------------------------------------------------------|----------|

### Changes from Revision D (August 2015) to Revision E Page

|                                                                                                                                                                                                 |           |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|
| • 已添加 “与 TLV62150 引脚兼容” (特性) .....                                                                                                                                                              | <b>1</b>  |
| • Changed temperature data in the <a href="#">Thermal Information</a> table .....                                                                                                               | <b>5</b>  |
| • Changed V <sub>OUT</sub> Initial Output Voltage Accuracy from “-2.5% MIN and +2.5% MAX” to “780 mV MIN, 800 mV TYP, 820 mV MAX” in the <a href="#">Electrical Characteristics</a> table ..... | <b>6</b>  |
| • Added information to the <a href="#">Power Good (PG)</a> section. ....                                                                                                                        | <b>9</b>  |
| • Changed <a href="#">Layout Example</a> image .....                                                                                                                                            | <b>28</b> |
| • 已添加 <a href="#">接收文档更新通知</a> 部分 .....                                                                                                                                                         | <b>30</b> |

### Changes from Revision C (June 2015) to Revision D Page

|                                                 |          |
|-------------------------------------------------|----------|
| • 已更改 输入电压范围，从“4V 至 17V”改为“3V 至 17V”（通改）。 ..... | <b>1</b> |
|-------------------------------------------------|----------|

**Changes from Revision B (June 2013) to Revision C**
**Page**

- 已添加 **ESD** 额定值表, 特性 描述 部分, 器件功能模式, 应用和实现部分, 电源相关建议部分, 布局部分, 器件和文档支持部分以及机械、封装和可订购信息部分..... **1**

**Changes from Revision A (February 2013) to Revision B**
**Page**

- 已添加 器件 TLV62130A 至数据表 ..... **1**
- Added text to Power Good (PG) section regarding TLV62130A function ..... **9**
- Added additional option to Pin-Selectable Output Voltage (DEF) section footnote. .... **10**
- Added text to Frequency Selection (FSW) section regarding pin control..... **10**


**Changes from Original (February 2012) to Revision A**
**Page**

- Added text to Power Save Mode Operation section for clarification. .... **11**
- Changed Layout Considerations description for clarification. .... **28**

## 5 Device Comparison Table

| PART NUMBER | OUTPUT VOLTAGE | Power Good Logic Level (EN=Low) |
|-------------|----------------|---------------------------------|
| TLV62130    | Adjustable     | High Impedance                  |
| TLV62130A   | Adjustable     | Low                             |

## 6 Pin Configuration and Functions

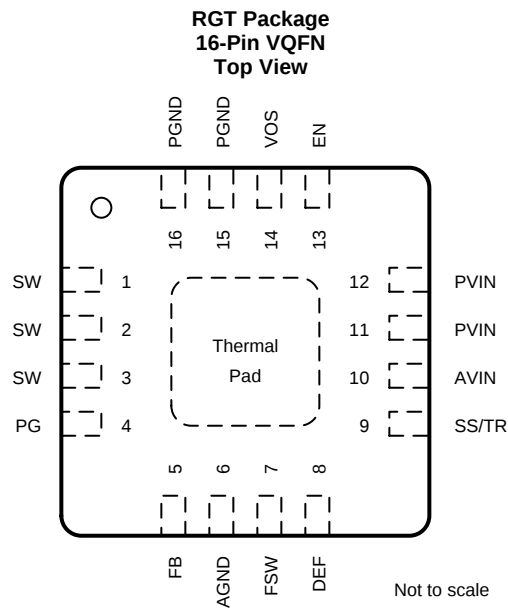

### Pin Functions

| PIN <sup>(1)</sup>  |         | I/O | DESCRIPTION                                                                                                                                                                                             |
|---------------------|---------|-----|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| NAME                | NO.     |     |                                                                                                                                                                                                         |
| AGND                | 6       | —   | Analog Ground. Must be connected directly to the Exposed Thermal Pad and common ground plane.                                                                                                           |
| AVIN                | 10      | I   | Supply voltage for control circuitry. Connect to same source as PVIN.                                                                                                                                   |
| DEF                 | 8       | I   | Output Voltage Scaling (Low = nominal, High = nominal + 5%) <sup>(2)</sup>                                                                                                                              |
| EN                  | 13      | I   | Enable input (High = enabled, Low = disabled) <sup>(2)</sup>                                                                                                                                            |
| FB                  | 5       | I   | Voltage feedback. Connect resistive voltage divider to this pin.                                                                                                                                        |
| FSW                 | 7       | I   | Switching Frequency Select (Low $\approx$ 2.5 MHz, High $\approx$ 1.25 MHz <sup>(3)</sup> for typical operation) <sup>(2)</sup>                                                                         |
| PG                  | 4       | O   | Output power good (High = $V_{OUT}$ ready, Low = $V_{OUT}$ below nominal regulation) ; open drain (requires pull-up resistor)                                                                           |
| PGND                | 15, 16  | —   | Power ground. Must be connected directly to the Exposed Thermal Pad and common ground plane.                                                                                                            |
| PVIN                | 11, 12  | I   | Supply voltage for power stage. Connect to same source as AVIN.                                                                                                                                         |
| SS/TR               | 9       | I   | Soft-Start / Tracking Pin. An external capacitor connected to this pin sets the internal voltage reference rise time. It can be used for tracking and sequencing.                                       |
| SW                  | 1, 2, 3 | O   | Switch node, which is connected to the internal MOSFET switches. Connect inductor between SW and output capacitor.                                                                                      |
| VOS                 | 14      | I   | Output voltage sense pin and connection for the control loop circuitry.                                                                                                                                 |
| Exposed Thermal Pad | —       | —   | Must be connected to AGND (pin 6), PGND (pin 15,16) and common ground plane. See <a href="#">Layout Example</a> . Must be soldered to achieve appropriate power dissipation and mechanical reliability. |

(1) For more information about connecting pins, see [Detailed Description](#) and [Application and Implementation](#) sections.

(2) An internal pull-down resistor keeps logic level low, if pin is floating.

(3) Connect FSW to  $V_{OUT}$  or PG in this case.

## 7 Specifications

### 7.1 Absolute Maximum Ratings

|                                |                                        | MIN  | MAX                  | UNIT |
|--------------------------------|----------------------------------------|------|----------------------|------|
| Pin voltage <sup>(1)</sup>     | AVIN, PVIN                             | −0.3 | 20                   | V    |
|                                | EN, SS/TR                              | −0.3 | V <sub>IN</sub> +0.3 |      |
|                                | SW (DC)                                | −0.3 | V <sub>IN</sub> +0.3 | V    |
|                                | SW (AC), less than 10ns <sup>(2)</sup> | −2   | 24.5                 |      |
|                                | DEF, FSW, FB, PG, VOS                  | −0.3 | 7                    | V    |
| Power Good sink current        | PG                                     |      | 10                   | mA   |
| Operating junction temperature | T <sub>J</sub>                         | −40  | 125                  | °C   |
| Storage temperature            | T <sub>stg</sub>                       | −65  | 150                  |      |

(1) All voltages are with respect to network ground terminal.

(2) While switching.

### 7.2 ESD Ratings

|                  |                                        |                                                                                          | VALUE | UNIT |
|------------------|----------------------------------------|------------------------------------------------------------------------------------------|-------|------|
| V <sub>ESD</sub> | Electrostatic discharge <sup>(1)</sup> | Human body model (HBM), per ANSI/ESDA/JEDEC JS-001, all pins <sup>(2)</sup>              | ±2000 | V    |
|                  |                                        | Charged device model (CDM), per JEDEC specification JESD22-C101, all pins <sup>(3)</sup> | ±500  |      |

(1) ESD testing is performed according to the respective JESD22 JEDEC standard.

(2) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.

(3) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

### 7.3 Recommended Operating Conditions

|                                                | MIX | MAX | UNIT |
|------------------------------------------------|-----|-----|------|
| Supply Voltage                                 | 3   | 17  | V    |
| Operating free air temperature, T <sub>A</sub> | −40 | 85  | °C   |
| Operating junction temperature, T <sub>J</sub> | −40 | 125 |      |

### 7.4 Thermal Information

| THERMAL METRIC <sup>(1)</sup> |                                              | TLV62130   | UNIT |
|-------------------------------|----------------------------------------------|------------|------|
|                               |                                              | RGT [VQFN] |      |
|                               |                                              | 16 PINS    |      |
| R <sub>θJA</sub>              | Junction-to-ambient thermal resistance       | 45         | °C/W |
| R <sub>θJC(top)</sub>         | Junction-to-case (top) thermal resistance    | 53.6       | °C/W |
| R <sub>θJB</sub>              | Junction-to-board thermal resistance         | 17.4       | °C/W |
| ψ <sub>JT</sub>               | Junction-to-top characterization parameter   | 1.1        | °C/W |
| ψ <sub>JB</sub>               | Junction-to-board characterization parameter | 17.4       | °C/W |
| R <sub>θJC(bot)</sub>         | Junction-to-case (bottom) thermal resistance | 4.5        | °C/W |

(1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.

## 7.5 Electrical Characteristics

over operating free-air temperature range ( $T_A = -40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$ ), typical values at  $V_{IN} = 12\text{ V}$  and  $T_A = 25^{\circ}\text{C}$  (unless otherwise noted)

| PARAMETER                         |                                                       | TEST CONDITIONS                                                                                    | MIN | TYP                  | MAX | UNIT |
|-----------------------------------|-------------------------------------------------------|----------------------------------------------------------------------------------------------------|-----|----------------------|-----|------|
| POWER SUPPLY                      |                                                       |                                                                                                    |     |                      |     |      |
| V <sub>IN</sub>                   | Input Voltage Range <sup>(1)</sup>                    |                                                                                                    | 3   |                      | 17  | V    |
| I <sub>Q</sub>                    | Operating Quiescent Current                           | EN=High, I <sub>OUT</sub> = 0 mA, device not switching                                             |     | 19                   | 27  | μA   |
| I <sub>SD</sub>                   | Shutdown Current <sup>(2)</sup>                       | EN=Low                                                                                             |     | 1.5                  | 4   | μA   |
| V <sub>UVLO</sub>                 | Undervoltage Lockout Threshold                        | Falling Input Voltage (PWM mode operation)                                                         | 2.6 | 2.7                  | 2.8 | V    |
|                                   |                                                       | Hysteresis                                                                                         |     | 200                  |     | mV   |
| T <sub>SD</sub>                   | Thermal Shutdown Temperature                          |                                                                                                    |     | 160                  |     | °C   |
|                                   | Thermal Shutdown Hysteresis                           |                                                                                                    |     | 20                   |     |      |
| CONTROL (EN, DEF, FSW, SS/TR, PG) |                                                       |                                                                                                    |     |                      |     |      |
| V <sub>H</sub>                    | High Level Input Threshold Voltage (EN, DEF, FSW)     |                                                                                                    | 0.9 |                      |     | V    |
| V <sub>L</sub>                    | Low Level Input Threshold Voltage (EN, DEF, FSW)      |                                                                                                    |     |                      | 0.3 | V    |
| I <sub>LKG</sub>                  | Input Leakage Current (EN, DEF, FSW)                  | EN = V <sub>IN</sub> or GND; DEF, FSW = V <sub>OUT</sub> or GND                                    |     | 0.01                 | 1   | μA   |
| V <sub>TH_PG</sub>                | Power Good Threshold Voltage                          | Rising (%V <sub>OUT</sub> )                                                                        | 92% | 95%                  | 98% |      |
|                                   |                                                       | Falling (%V <sub>OUT</sub> )                                                                       | 87% | 90%                  | 94% |      |
| V <sub>OL_PG</sub>                | Power Good Output Low                                 | I <sub>PG</sub> = -2 mA                                                                            |     | 0.07                 | 0.3 | V    |
| I <sub>LKG_PG</sub>               | Input Leakage Current (PG)                            | V <sub>PG</sub> = 1.8 V                                                                            |     | 1                    | 400 | nA   |
| I <sub>SS/TR</sub>                | SS/TR Pin Source Current                              |                                                                                                    | 2.3 | 2.5                  | 2.7 | μA   |
| POWER SWITCH                      |                                                       |                                                                                                    |     |                      |     |      |
| R <sub>DS(ON)</sub>               | High-Side MOSFET ON-Resistance                        | V <sub>IN</sub> ≥ 6 V                                                                              |     | 90                   |     | mΩ   |
|                                   | Low-Side MOSFET ON-Resistance                         | V <sub>IN</sub> ≥ 6 V                                                                              |     | 40                   |     | mΩ   |
| I <sub>LIMF</sub>                 | High-Side MOSFET Forward Current Limit <sup>(3)</sup> | V <sub>IN</sub> = 12 V, T <sub>A</sub> = 25°C                                                      | 3.6 | 4.2                  |     | A    |
| OUTPUT                            |                                                       |                                                                                                    |     |                      |     |      |
| I <sub>LKG_FB</sub>               | Input Leakage Current (FB)                            | V <sub>FB</sub> = 0.8 V                                                                            |     | 1                    | 100 | nA   |
| V <sub>OUT</sub>                  | Output Voltage Range                                  | V <sub>IN</sub> ≥ V <sub>OUT</sub>                                                                 | 0.9 |                      | 5.5 | V    |
|                                   | DEF (Output Voltage Programming)                      | DEF=0 (GND)                                                                                        |     | V <sub>OUT</sub>     |     |      |
|                                   |                                                       | DEF=1 (V <sub>OUT</sub> )                                                                          |     | V <sub>OUT</sub> +5% |     |      |
|                                   | Initial Output Voltage Accuracy <sup>(4)</sup>        | PWM mode operation, V <sub>IN</sub> ≥ V <sub>OUT</sub> +1 V                                        | 780 | 800                  | 820 | mV   |
|                                   | Load Regulation <sup>(5)</sup>                        | V <sub>IN</sub> = 12 V, V <sub>OUT</sub> = 3.3 V, PWM mode operation                               |     | 0.05                 |     | %/A  |
|                                   | Line Regulation <sup>(5)</sup>                        | 4 V ≤ V <sub>IN</sub> ≤ 17 V, V <sub>OUT</sub> = 3.3 V, I <sub>OUT</sub> = 1 A, PWM mode operation |     | 0.02                 |     | %/V  |

(1) The device is still functional down to Undervoltage Lockout (see parameter  $V_{UVLO}$ ).


(2) Current into AVIN + PVIN pin.

(3) This is the static current limit. It can be temporarily higher in applications due to internal propagation delay (see [Current Limit and Short Circuit Protection](#)).


(4) This is the accuracy provided at the FB pin (line and load regulation effects are not included).

(5) Line and load regulation depend on external component selection and layout (see [Figure 20](#) and [Figure 21](#)).


## 7.6 Typical Characteristics

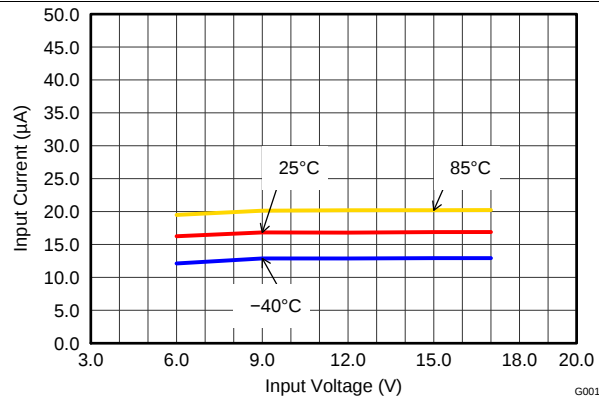


**Figure 1. Quiescent Current**

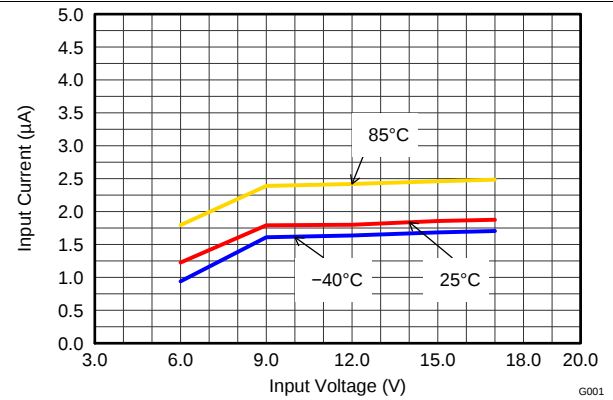

**Figure 2. Shutdown Current**

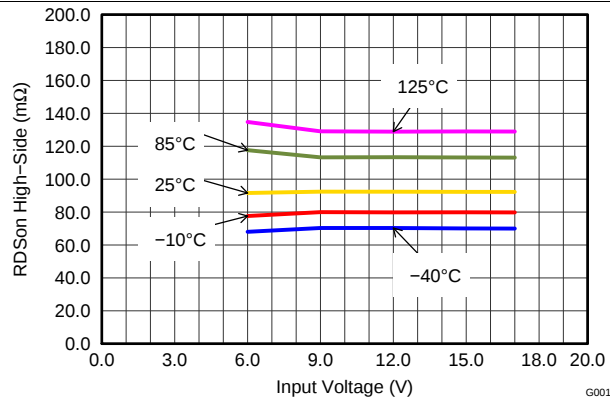

**Figure 3. High-Side Switch Resistance**

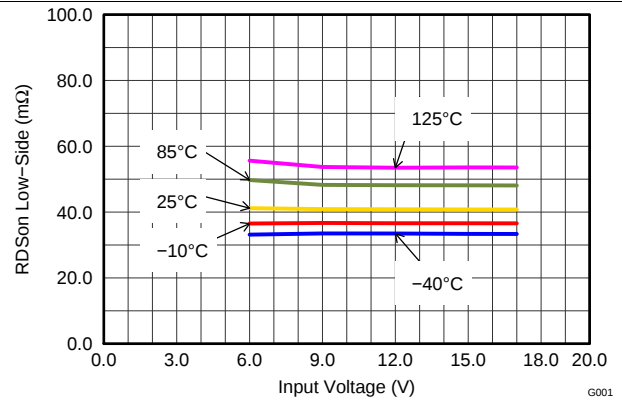

**Figure 4. Low-Side Switch Resistance**

## 8 Detailed Description


### 8.1 Overview

The TLV62130 synchronous switched-mode power converters are based on DCS-Control™ (Direct Control with Seamless Transition into Power Save Mode), an advanced regulation topology, that combines the advantages of hysteretic, voltage mode and current mode control including an AC loop directly associated to the output voltage. This control loop takes information about output voltage changes and feeds it directly to a fast comparator stage. It sets the switching frequency, which is constant for steady state operating conditions, and provides immediate response to dynamic load changes. To get accurate DC load regulation, a voltage feedback loop is used. The internally compensated regulation network achieves fast and stable operation with small external components and low ESR capacitors.

The DCS-Control™ topology supports Pulse Width Modulation (PWM) mode for medium and heavy load conditions and a Power Save Mode at light loads. During PWM, it operates at its nominal switching frequency in continuous conduction mode. This frequency is typically about 2.5 MHz or 1.25 MHz with a controlled frequency variation depending on the input voltage. If the load current decreases, the converter enters Power Save Mode to sustain high efficiency down to very light loads. In Power Save Mode the switching frequency decreases linearly with the load current. Since DCS-Control™ supports both operation modes within one single building block, the transition from PWM to Power Save Mode is seamless without effects on the output voltage. An internal current limit supports nominal output currents of up to 3 A.

The TLV62130 offers both excellent DC voltage and superior load transient regulation, combined with very low output voltage ripple, minimizing interference with RF circuits.

### 8.2 Functional Block Diagram

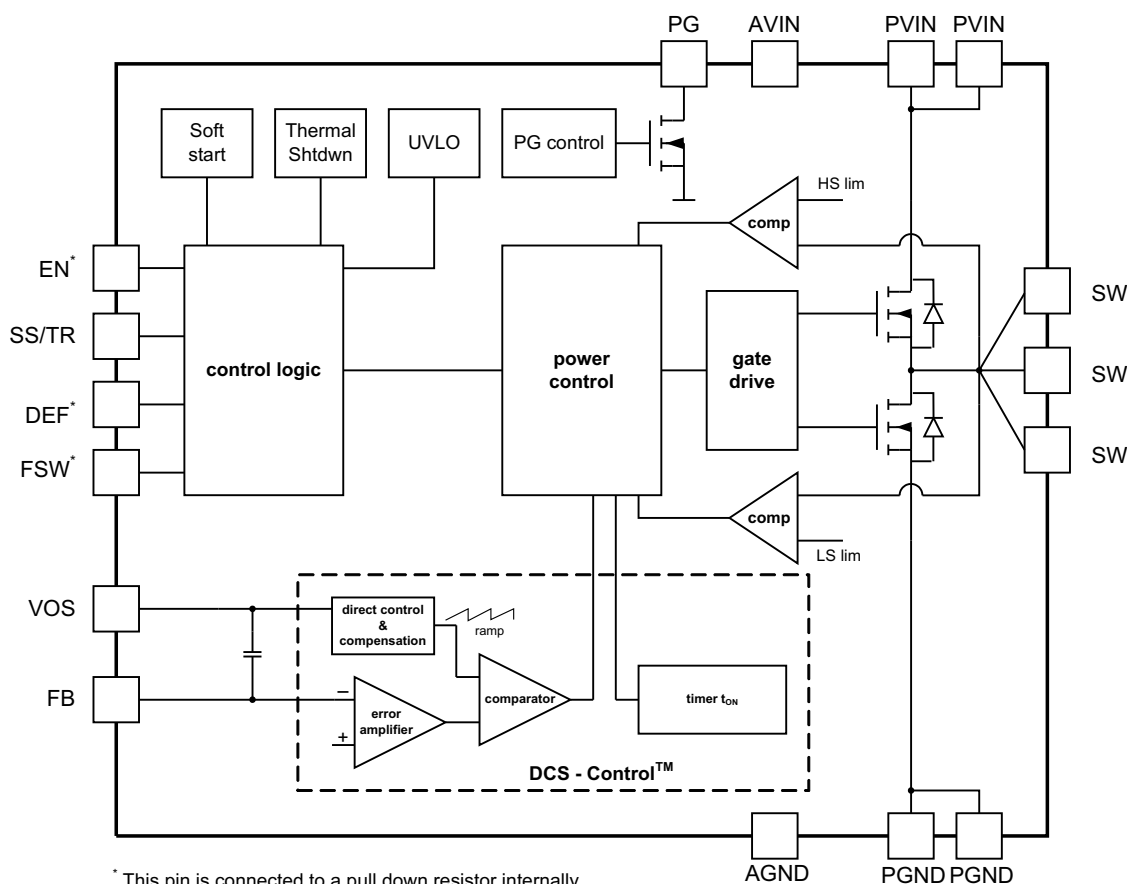

## 8.3 Feature Description

### 8.3.1 Enable / Shutdown (EN)

When Enable (EN) is set High, the device starts operation. Shutdown is forced if EN is pulled Low with a shutdown current of typically 1.5  $\mu$ A. During shutdown, the internal power MOSFETs as well as the entire control circuitry are turned off. The EN signal must be set externally to High or Low. An internal pull-down resistor of about 400 k $\Omega$  is connected and keeps EN logic low, if the pin is floating. It is disconnected if the pin is High.

Connecting the EN pin to an appropriate output signal of another power rail provides sequencing of multiple power rails.

### 8.3.2 Soft Start / Tracking (SS/TR)

The internal soft start circuitry controls the output voltage slope during startup. This avoids excessive inrush current and ensures a controlled output voltage rise time. It also prevents unwanted voltage drops from high-impedance power sources or batteries. When EN is set to start device operation, the device starts switching after a delay of about 50  $\mu$ s and VOUT rises with a slope controlled by an external capacitor connected to the SS/TR pin. See [Figure 32](#) and [Figure 33](#) for typical startup operation.

Using a very small capacitor (or leaving SS/TR pin un-connected) provides fastest startup behavior. There is no theoretical limit for the longest startup time. The TLV62130 can start into a pre-biased output. During monotonic pre-biased startup, the low-side MOSFET is not allowed to turn on until the device's internal ramp sets an output voltage above the pre-bias voltage. As long as the output is below about 0.5 V, a reduced current limit of typically 1.6 A is set internally. If the device is set to shutdown (EN=GND), undervoltage lockout or thermal shutdown, an internal resistor pulls the SS/TR pin down to ensure a proper low level. Returning from those states causes a new startup sequence as set by the SS/TR connection.

A voltage supplied to SS/TR can be used for tracking a master voltage. The output voltage will follow this voltage in both directions up and down (see [Application and Implementation](#)).

### 8.3.3 Power Good (PG)

The TLV62130 has a built in power good (PG) function to indicate whether the output voltage has reached its appropriate level or not. The PG signal can be used for startup sequencing of multiple rails. The PG pin is an open-drain output that requires a pull-up resistor (to any voltage below 7 V). It can sink 2 mA of current and maintain its specified logic low level. With TLV62130 it is high impedance when the device is turned off due to EN, UVLO or thermal shutdown. TLV62130A features PG=Low in this case and can be used to actively discharge Vout (see [Figure 39](#)). VIN must remain present for the PG pin to stay Low. See [SLVA644](#) for application details. If not used, the PG pin should be connected to GND but may be left floating.

**Table 1. Power Good Pin Logic Table (TLV62130)**

| Device State         |                            | PG Logic Status |     |
|----------------------|----------------------------|-----------------|-----|
|                      |                            | High Impedance  | Low |
| Enable (EN=High)     | $V_{FB} \geq V_{TH\_PG}$   | √               |     |
|                      | $V_{FB} \leq V_{TH\_PG}$   |                 | √   |
| Shutdown (EN=Low)    |                            | √               |     |
| UVLO                 | $0.7V < V_{IN} < V_{UVLO}$ | √               |     |
| Thermal Shutdown     | $T_J > T_{SD}$             | √               |     |
| Power Supply Removal | $V_{IN} < 0.7V$            | √               |     |

**Table 2. Power Good Pin Logic Table (TLV62130A)**

| Device State         |                            | PG Logic Status |     |
|----------------------|----------------------------|-----------------|-----|
|                      |                            | High Impedance  | Low |
| Enable (EN=High)     | $V_{FB} \geq V_{TH\_PG}$   | √               |     |
|                      | $V_{FB} \leq V_{TH\_PG}$   |                 | √   |
| Shutdown (EN=Low)    |                            |                 | √   |
| UVLO                 | $0.7V < V_{IN} < V_{UVLO}$ |                 | √   |
| Thermal Shutdown     | $T_J > T_{SD}$             |                 | √   |
| Power Supply Removal | $V_{IN} < 0.7V$            | √               |     |

### 8.3.4 Pin-Selectable Output Voltage (DEF)

The output voltage of the TLV62130 devices can be increased by 5% above the nominal voltage by setting the DEF pin to High <sup>(1)</sup>. When DEF is Low, the device regulates to the nominal output voltage. Increasing the nominal voltage allows adapting the power supply voltage to the variations of the application hardware. More detailed information on voltage margining using TLV62130 can be found in [SLVA489](#). A pull down resistor of about 400 kΩ is internally connected to the pin, to ensure a proper logic level if the pin is high impedance or floating after initially set to Low. The resistor is disconnected if the pin is set High.

### 8.3.5 Frequency Selection (FSW)

To get high power density with very small solution size, a high switching frequency allows the use of small external components for the output filter. However switching losses increase with the switching frequency. If efficiency is the key parameter, more than solution size, the switching frequency can be set to half (1.25 MHz typical) by pulling FSW to High. It is mandatory to start with FSW=Low to limit inrush current, which can be done by connecting to  $V_{OUT}$  or PG. Running with lower frequency a higher efficiency, but also a higher output voltage ripple, is achieved. Pull FSW to Low for high frequency operation (2.5 MHz typical). To get low ripple and full output current at the lower switching frequency, it's recommended to use an inductor of at least 2.2 μH. The switching frequency can be changed during operation, if needed. A pull down resistor of about 400kOhm is internally connected to the pin, acting the same way as at the DEF Pin (see above).

### 8.3.6 Undervoltage Lockout (UVLO)

If the input voltage drops, the undervoltage lockout prevents misoperation of the device by switching off both the power FETs. The undervoltage lockout threshold is set typically to 2.7 V. The device is fully operational for voltages above the UVLO threshold and turns off if the input voltage trips the threshold. The converter starts operation again once the input voltage exceeds the threshold by a hysteresis of typically 200 mV.

### 8.3.7 Thermal Shutdown

The junction temperature ( $T_J$ ) of the device is monitored by an internal temperature sensor. If  $T_J$  exceeds 160°C (typical), the device goes into thermal shut down. Both the high-side and low-side power FETs are turned off and PG goes high impedance. When  $T_J$  decreases below the hysteresis amount, the converter resumes normal operation, beginning with Soft Start. To avoid unstable conditions, a hysteresis of typically 20°C is implemented on the thermal shut down temperature.

## 8.4 Device Functional Modes

### 8.4.1 Pulse Width Modulation (PWM) Operation

The TLV62130 operates with pulse width modulation in continuous conduction mode (CCM) with a nominal switching frequency of 2.5 MHz or 1.25 MHz, selectable with the FSW pin. The frequency variation in PWM is controlled and depends on  $V_{IN}$ ,  $V_{OUT}$  and the inductance. The device operates in PWM mode as long the output current is higher than half the inductor's ripple current. To maintain high efficiency at light loads, the device enters Power Save Mode at the boundary to discontinuous conduction mode (DCM). This happens if the output current becomes smaller than half the inductor's ripple current.

(1) Maximum allowed voltage is 7 V. Therefore, TI recommends connecting it to  $V_{OUT}$  or PG, not  $V_{IN}$ .

## Device Functional Modes (continued)

### 8.4.2 Power Save Mode Operation

The TLV62130X enters its built in Power Save Mode seamlessly if the load current decreases. This secures a high efficiency in light load operation. The device remains in Power Save Mode as long as the inductor current is discontinuous.

In Power Save Mode the switching frequency decreases linearly with the load current maintaining high efficiency. The transition into and out of Power Save Mode happens within the entire regulation scheme and is seamless in both directions.

TLV62130 includes a fixed on-time circuitry. This on-time, in steady-state operation, can be estimated (for FSW=Low) as:

$$t_{ON} = \frac{V_{OUT}}{V_{IN}} \times 400 \text{ ns} \quad (1)$$

For very small output voltages, an absolute minimum on-time of about 80ns is kept to limit switching losses. The operating frequency is thereby reduced from its nominal value, which keeps efficiency high. Also the off-time can reach its minimum value at high duty cycles. The output voltage remains regulated in such cases. Using  $t_{ON}$ , the typical peak inductor current in Power Save Mode can be approximated by:

$$I_{LPSM(peak)} = \frac{(V_{IN} - V_{OUT})}{L} \times t_{ON} \quad (2)$$

When  $V_{IN}$  decreases to typically 15% above  $V_{OUT}$ , the TLV62130 won't enter Power Save Mode, regardless of the load current. The device maintains output regulation in PWM mode.

### 8.4.3 100% Duty-Cycle Operation

The duty cycle of the buck converter is given by  $D=V_{out}/V_{in}$  and increases as the input voltage comes close to the output voltage. In this case, the device starts 100% duty cycle operation turning on the high-side switch 100% of the time. The high-side switch stays turned on as long as the output voltage is below the internal setpoint. This allows the conversion of small input to output voltage differences, for example, for longest operation time of battery-powered applications. In 100% duty cycle mode, the low-side FET is switched off.

The minimum input voltage to maintain output voltage regulation, depending on the load current and the output voltage level, can be calculated as:

$$V_{IN(min)} = V_{OUT(min)} + I_{OUT}(R_{DS(on)} + R_L)$$

where

- $I_{OUT}$  is the output current.
- $R_{DS(on)}$  is the  $R_{DS(on)}$  of the high-side FET.
- $R_L$  is the DC resistance of the inductor used.

(3)

### 8.4.4 Current Limit and Short Circuit Protection

The TLV62130 device is protected against heavy load and short circuit events. If a short circuit is detected ( $V_{OUT}$  drops below 0.5 V), the current limit is reduced to 1.6 A typically. If the output voltage rises above 0.5 V, the device runs in normal operation again. At heavy loads, the current limit determines the maximum output current. If the current limit is reached, the high-side FET is turned off. Avoiding shoot through current, then the low-side FET switches on to allow the inductor current to decrease. The low-side current limit is typically 3.5 A. The high-side FET turns on again only if the current in the low-side FET has decreased below the low side current limit threshold.

## Device Functional Modes (continued)

The output current of the device is limited by the current limit (see [Electrical Characteristics](#)). Due to internal propagation delay, the actual current can exceed the static current limit during that time. The dynamic current limit can be calculated as follows:

$$I_{\text{peak(typ)}} = I_{\text{LIMF}} + \frac{V_L}{L} \times t_{\text{PD}}$$

where

- $I_{\text{LIMF}}$  is the static current limit, specified in the [Electrical Characteristics](#).
- $L$  is the inductor value.
- $V_L$  is the voltage across the inductor ( $V_{\text{IN}} - V_{\text{OUT}}$ ).
- $t_{\text{PD}}$  is the internal propagation delay.

(4)

The current limit can exceed static values, especially if the input voltage is high and very small inductances are used. The dynamic high side switch peak current can be calculated as follows:

$$I_{\text{peak(typ)}} = I_{\text{LIMF}} + \frac{(V_{\text{IN}} - V_{\text{OUT}})}{L} \times 30\text{ns}$$

(5)

## 9 Application and Implementation

### NOTE


Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

### 9.1 Application Information

The TLV62130 is a switched-mode step-down converter, able to convert a 3-V to 17-V input voltage into a 0.9-V to 5.5-V output voltage, providing up to 3 A. It needs a minimum amount of external components. Apart from the LC output filter and the input capacitors, the TLV62130 (TLV62130A) needs an additional resistive divider to set the output voltage level.

### 9.2 Typical Application

Figure 5 shows an application for Point-Of-Load Power Supply Using TLV62130.

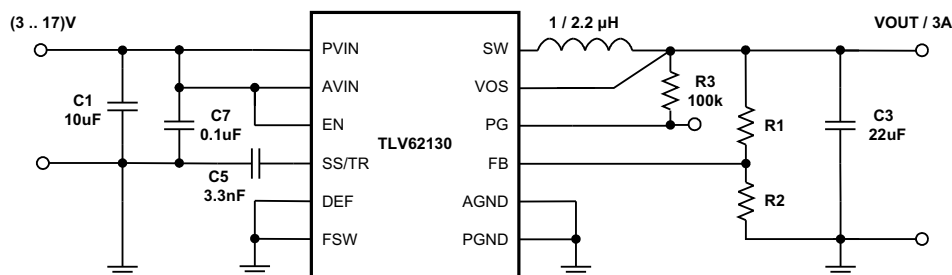

**Figure 5. 3-A Step-Down Converter**

#### 9.2.1 Design Requirements

The following design guideline provides a component selection to operate the device within the recommended operating conditions. Using the FSW pin, the design can be optimized for highest efficiency or smallest solution size and lowest output voltage ripple. For highest efficiency set FSW=High and the device operates at the lower switching frequency. For smallest solution size and lowest output voltage ripple set FSW=Low and the device operates with higher switching frequency. The typical values for all measurements are  $V_{IN} = 12\text{ V}$ ,  $V_{OUT} = 3.3\text{ V}$  and  $T = 25^\circ\text{C}$ , using the external components of Table 3.

#### 9.2.2 Detailed Design Procedure

##### 9.2.2.1 Custom Design With WEBENCH® Tools

[Click here](#) to create a custom design using the TLV62130 device with the WEBENCH® Power Designer.

1. Start by entering the input voltage ( $V_{IN}$ ), output voltage ( $V_{OUT}$ ), and output current ( $I_{OUT}$ ) requirements.
2. Optimize the design for key parameters such as efficiency, footprint, and cost using the optimizer dial.
3. Compare the generated design with other possible solutions from Texas Instruments.

The WEBENCH Power Designer provides a customized schematic along with a list of materials with real-time pricing and component availability.

In most cases, these actions are available:

## Typical Application (continued)

- Run electrical simulations to see important waveforms and circuit performance
- Run thermal simulations to understand board thermal performance
- Export customized schematic and layout into popular CAD formats
- Print PDF reports for the design, and share the design with colleagues

Get more information about WEBENCH tools at [www.ti.com/WEBENCH](http://www.ti.com/WEBENCH).

The component selection used for measurements is given as follows:

**Table 3. List of Components<sup>(1)</sup>**

| REFERENCE | DESCRIPTION                         | MANUFACTURER                   |
|-----------|-------------------------------------|--------------------------------|
| IC        | 17-V, 3-A Step-Down Converter, VQFN | TLV62130RGT, Texas Instruments |
| L1        | 2.2 µH, 0.165 × 0.165 in            | XFL4020-222MEB, Coilcraft      |
| C1        | 10 µF, 25 V, Ceramic, 1210          | Standard                       |
| C3        | 22 µF, 6.3 V, Ceramic, 0805         | Standard                       |
| C5        | 3300 pF, 25 V, Ceramic, 0603        |                                |
| C7        | 0.1 µF, 25V, Ceramic, 0603          |                                |
| R1        | depending on Vout                   |                                |
| R2        | depending on Vout                   |                                |
| R3        | 100 kΩ, Chip, 0603, 1/16W, 1%       | Standard                       |

(1) See [Third-Party Products](#) Disclaimer

### 9.2.2.2 Programming the Output Voltage

The TLV62130 (TLV62130A) can be programmed for output voltages from 0.9 V to 5.5 V by using a resistive divider from V<sub>OUT</sub> to AGND. The voltage at the FB pin is regulated to 800 mV. The value of the output voltage is set by the selection of the resistive divider from [Equation 6](#). It is recommended to choose resistor values which allow a current of at least 2 µA, meaning the value of R2 should not exceed 400 kΩ. Lower resistor values are recommended for highest accuracy and most robust design.

$$R_1 = R_2 \left( \frac{V_{OUT}}{0.8V} - 1 \right) \quad (6)$$

In case the FB pin gets opened, the device clamps the output voltage at the VOS pin internally to about 7.4 V.

### 9.2.2.3 External Component Selection

The external components have to fulfill the needs of the application, but also the stability criteria of the devices control loop. The TLV62130 is optimized to work within a range of external components. The LC output filter's inductance and capacitance have to be considered together, creating a double pole, responsible for the corner frequency of the converter (see [Output Filter and Loop Stability](#)). [Table 4](#) can be used to simplify the output filter component selection. Checked cells represent combinations that are proven for stability by simulation and lab test. Further combinations should be checked for each individual application. See [SLVA463](#) for details.

**Table 4. Recommended LC Output Filter Combinations<sup>(1)</sup>**

|         | 4.7 µF | 10 µF | 22 µF            | 47 µF | 100 µF | 200 µF | 400 µF |
|---------|--------|-------|------------------|-------|--------|--------|--------|
| 0.47 µH |        |       |                  |       |        |        |        |
| 1 µH    |        |       | √                | √     | √      | √      |        |
| 2.2 µH  |        | √     | √ <sup>(2)</sup> | √     | √      | √      |        |
| 3.3 µH  |        | √     | √                | √     | √      |        |        |
| 4.7 µH  |        |       |                  |       |        |        |        |

(1) The values in the table are nominal values. The effective capacitance was considered to vary by +20% and -50%.

(2) This LC combination is the standard value and recommended for most applications.

The TLV62130 can be run with an inductor as low as 1  $\mu\text{H}$ . FSW should be set Low in this case. However, for applications running with the low frequency setting (FSW=High) or with low input voltages, 2.2  $\mu\text{H}$  is recommended.

### 9.2.2.3.1 Inductor Selection

The inductor selection is affected by several effects like inductor ripple current, output ripple voltage, PWM-to-PSM transition point and efficiency. In addition, the inductor selected has to be rated for appropriate saturation current and DC resistance (DCR). Equation 7 and Equation 8 calculate the maximum inductor current under static load conditions.

$$I_{L(\max)} = I_{\text{OUT}(\max)} + \frac{\Delta I_{L(\max)}}{2} \quad (7)$$

$$\Delta I_{L(\max)} = V_{\text{OUT}} \times \left( \frac{1 - \frac{V_{\text{OUT}}}{V_{\text{IN}(\max)}}}{L_{(\min)} \times f_{\text{SW}}} \right) \quad (8)$$

where

- $I_{L(\max)}$  is the maximum inductor current.
- $\Delta I_L$  is the Peak to Peak Inductor Ripple Current.
- $L_{(\min)}$  is the minimum effective inductor value.
- $f_{\text{SW}}$  is the actual PWM Switching Frequency.

Calculating the maximum inductor current using the actual operating conditions gives the minimum saturation current of the inductor needed. A margin of about 20% is recommended to add. A larger inductor value is also useful to get lower ripple current, but increases the transient response time and size as well. The following inductors have been used with the TLV62130 and are recommended for use:

**Table 5. List of Inductors**

| Type           | Inductance [ $\mu\text{H}$ ]   | Current [A] <sup>(1)</sup> | Dimensions [LxBxH]<br>mm | MANUFACTURER <sup>(2)</sup> |
|----------------|--------------------------------|----------------------------|--------------------------|-----------------------------|
| XFL4020-102ME_ | 1.0 $\mu\text{H}$ , $\pm 20\%$ | 4.7                        | 4 × 4 × 2.1              | Coilcraft                   |
| XFL4020-152ME_ | 1.5 $\mu\text{H}$ , $\pm 20\%$ | 4.2                        | 4 × 4 × 2.1              | Coilcraft                   |
| XFL4020-222ME_ | 2.2 $\mu\text{H}$ , $\pm 20\%$ | 3.8                        | 4 × 4 × 2.1              | Coilcraft                   |
| IHLP1212BZ-11  | 1.0 $\mu\text{H}$ , $\pm 20\%$ | 4.5                        | 3 × 3.6 × 2              | Vishay                      |
| IHLP1212BZ-11  | 2.2 $\mu\text{H}$ , $\pm 20\%$ | 3.0                        | 3 × 3.6 × 2              | Vishay                      |
| SRP4020-3R3M   | 3.3 $\mu\text{H}$ , $\pm 20\%$ | 3.3                        | 4.8 × 4 × 2              | Bourns                      |
| VLC5045T-3R3N  | 3.3 $\mu\text{H}$ , $\pm 30\%$ | 4.0                        | 5 × 5 × 4.5              | TDK                         |

(1) Lower of  $I_{\text{RMS}}$  at 40°C rise or  $I_{\text{SAT}}$  at 30% drop.

(2) See [Third-Party Products](#) Disclaimer

The inductor value also determines the load current at which Power Save Mode is entered:

$$I_{\text{load(PSM)}} = \frac{1}{2} \Delta I_L \quad (9)$$

Using Equation 8, this current level can be adjusted by changing the inductor value.

### 9.2.2.3.2 Capacitor Selection

#### 9.2.2.3.2.1 Output Capacitor

The recommended value for the output capacitor is 22  $\mu\text{F}$ . The architecture of the TLV62130 allows the use of tiny ceramic output capacitors which have low equivalent series resistance (ESR). These capacitors provide low output voltage ripple and are recommended. To keep its low resistance up to high frequencies and to get narrow capacitance variation with temperature, it's recommended to use X7R or X5R dielectric. Using a higher value can have some advantages like smaller voltage ripple and a tighter DC output accuracy in Power Save Mode (see [SLVA463](#)).

Note: In power save mode, the output voltage ripple depends on the output capacitance, its ESR and the peak inductor current. Using ceramic capacitors provides small ESR and low ripple.

#### 9.2.2.3.2.2 Input Capacitor

For most applications, 10  $\mu\text{F}$  will be sufficient and is recommended, though a larger value reduces input current ripple further. The input capacitor buffers the input voltage for transient events and also decouples the converter from the supply. A low ESR multilayer ceramic capacitor is recommended for best filtering and should be placed between PVIN and PGND as close as possible to those pins. Even though AVIN and PVIN must be supplied from the same input source, it's required to place a capacitance of 0.1  $\mu\text{F}$  from AVIN to AGND, to avoid potential noise coupling. An RC, low-pass filter from PVIN to AVIN may be used but is not required.

#### 9.2.2.3.2.3 Soft Start Capacitor

A capacitance connected between SS/TR pin and AGND allows a user programmable start-up slope of the output voltage. A constant current source supports 2.5  $\mu\text{A}$  to charge the external capacitance. The capacitor required for a given soft-start ramp time for the output voltage is given by:

$$C_{SS} = t_{SS} \times \frac{2.5\mu\text{A}}{1.25\text{V}} [\text{F}] \quad (10)$$

where

- $C_{SS}$  is the capacitance (F) required at the SS/TR pin.
- $t_{SS}$  is the desired soft-start ramp time (s).

#### NOTE

**DC Bias effect:** High capacitance ceramic capacitors have a DC Bias effect, which will have a strong influence on the final effective capacitance. Therefore the right capacitor value has to be chosen carefully. Package size and voltage rating in combination with dielectric material are responsible for differences between the rated capacitor value and the effective capacitance.

### 9.2.2.4 Tracking Function

If a tracking function is desired, the SS/TR pin can be used for this purpose by connecting it to an external tracking voltage. The output voltage tracks that voltage. If the tracking voltage is between 50 mV and 1.2 V, the FB pin will track the SS/TR pin voltage as described in [Equation 11](#) and shown in [Figure 6](#).

$$V_{FB} = 0.64 \cdot V_{SS/TR} \text{ with } \pm 2\% \text{ (typ.)} \quad (11)$$

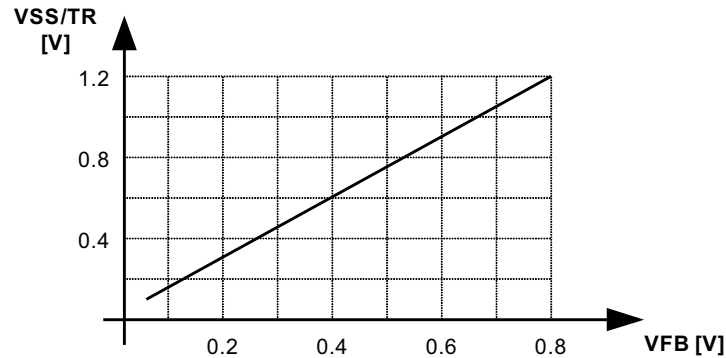


Figure 6. Voltage Tracking Relationship

Once the SS/TR pin voltage reaches about 1.2 V, the internal voltage is clamped to the internal feedback voltage and device goes to normal regulation. This works for rising and falling tracking voltages with the same behavior, as long as the input voltage is inside the recommended operating conditions. For decreasing SS/TR pin voltage, the device doesn't sink current from the output. So, the resulting decrease of the output voltage may be slower than the SS/TR pin voltage if the load is light. When driving the SS/TR pin with an external voltage, do not exceed the voltage rating of the SS/TR pin which is  $V_{IN} + 0.3$  V.

If the input voltage drops into undervoltage lockout or even down to zero, the output voltage will go to zero, independent of the tracking voltage. Figure 7 shows how to connect devices to get ratiometric and simultaneous sequencing by using the tracking function.

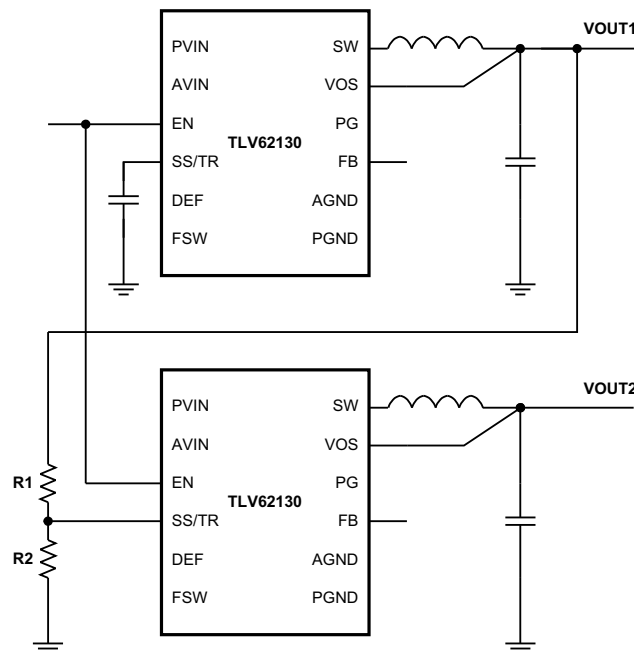


Figure 7. Sequence for Ratiometric and Simultaneous Startup

The resistive divider of R1 and R2 can be used to change the ramp rate of VOUT2 faster, slower or the same as VOUT1.

A sequential startup is achieved by connecting the PG pin of VOUT1 to the EN pin of VOUT2. Ratiometric start-up sequence happens if both supplies are sharing the same soft start capacitor. Equation 10 calculates the soft start time, though the SS/TR current has to be doubled. Details about these and other tracking and sequencing circuits are found in SLVA470.

Note: If the voltage at the FB pin is below its typical value of 0.8 V, the output voltage accuracy may have a wider tolerance than specified.

### 9.2.2.5 Output Filter and Loop Stability

The TLV62130 is internally compensated to be stable with L-C filter combinations corresponding to a corner frequency to be calculated with [Equation 12](#):

$$f_{LC} = \frac{1}{2\pi\sqrt{L \times C}} \quad (12)$$

Proven nominal values for inductance and ceramic capacitance are given in [Table 4](#) and are recommended for use. Different values may work, but care has to be taken on the loop stability which will be affected. More information including a detailed LC stability matrix can be found in [SLVA463](#).

The TLV62130 device includes an internal 25-pF feedforward capacitor, connected between the VOS and FB pins. This capacitor impacts the frequency behavior and sets a pole and zero in the control loop with the resistors of the feedback divider, per equation [Equation 13](#) and [Equation 14](#):

$$f_{zero} = \frac{1}{2\pi \times R_1 \times 25\text{pF}} \quad (13)$$

$$f_{pole} = \frac{1}{2\pi \times 25\text{pF}} \times \left( \frac{1}{R_1} + \frac{1}{R_2} \right) \quad (14)$$

Though the TLV62130 is stable without the pole and zero being in a particular location, adjusting their location to the specific needs of the application can provide better performance in Power Save mode and/or improved transient response. An external feedforward capacitor can also be added. A more detailed discussion on the optimization for stability vs. transient response can be found in [SLVA289](#) and [SLVA466](#).

## 9.2.3 Application Curves

$V_{IN} = 12\text{ V}$ ,  $V_{OUT} = 3.3\text{ V}$ ,  $T_A = 25^\circ\text{C}$ , (unless otherwise noted)

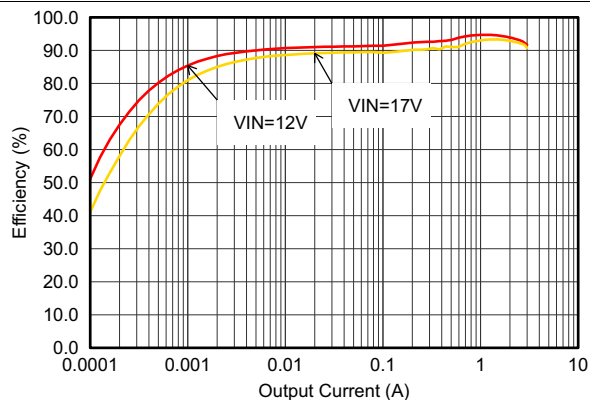


Figure 8. Efficiency With 1.25 MHz, Vout = 5 V

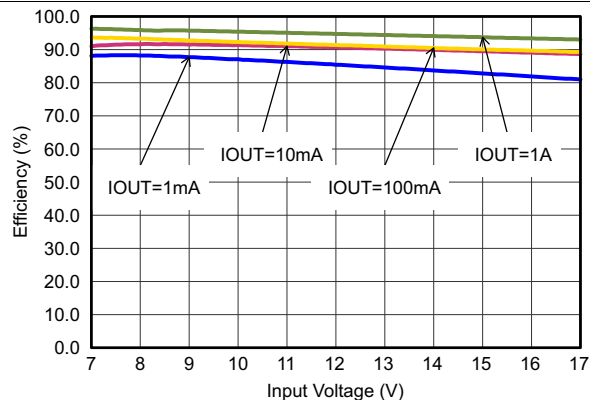


Figure 9. Efficiency With 1.25 MHz, Vout = 5 V

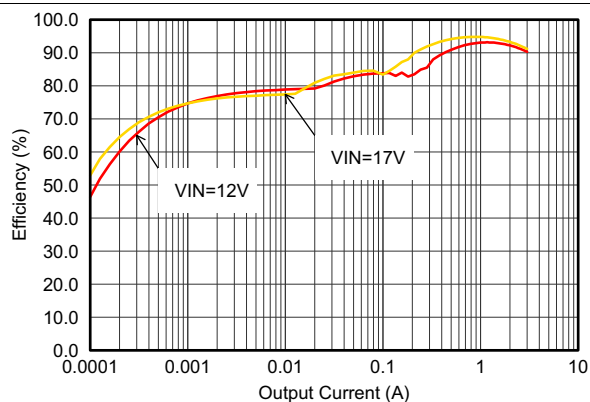


Figure 10. Efficiency With 2.5 MHz, Vout = 5 V

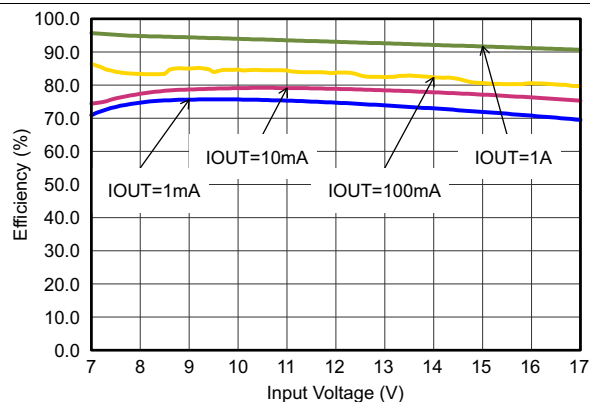


Figure 11. Efficiency With 2.5 MHz, Vout = 5 V

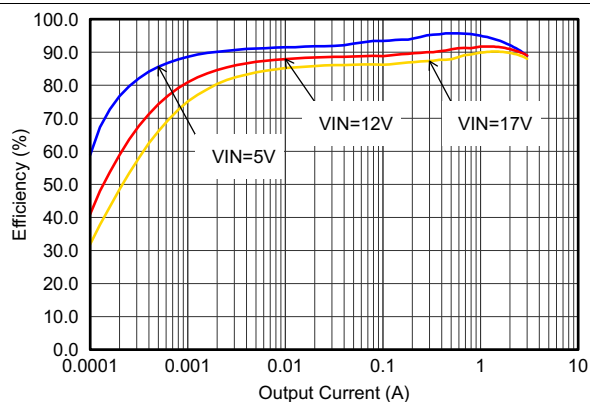


Figure 12. Efficiency With 1.25 MHz, Vout = 3.3 V

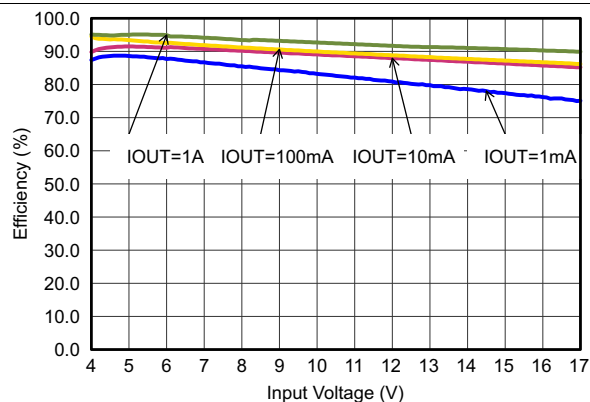


Figure 13. Efficiency With 1.25 MHz, Vout = 3.3 V

# TLV62130, TLV62130A

ZHCS760H – FEBRUARY 2012 – REVISED JUNE 2018

www.ti.com.cn

$V_{IN} = 12\text{ V}$ ,  $V_{OUT} = 3.3\text{ V}$ ,  $T_A = 25^\circ\text{C}$ , (unless otherwise noted)

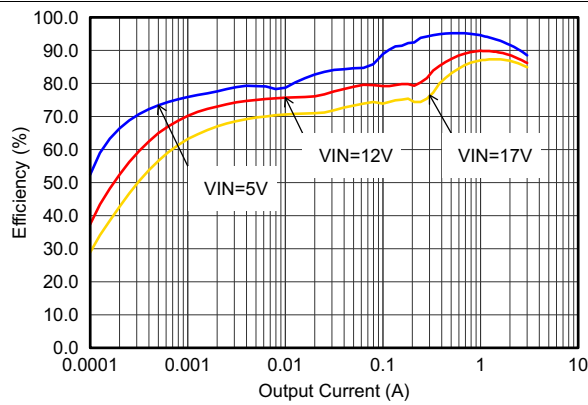


Figure 14. Efficiency With 2.5 MHz,  $V_{out} = 3.3\text{ V}$

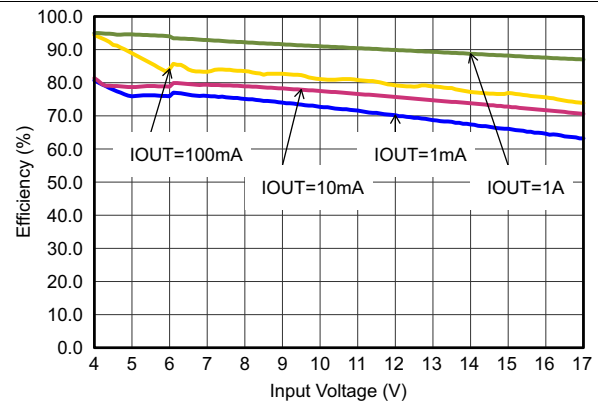


Figure 15. Efficiency With 2.5 MHz,  $V_{out} = 3.3\text{ V}$

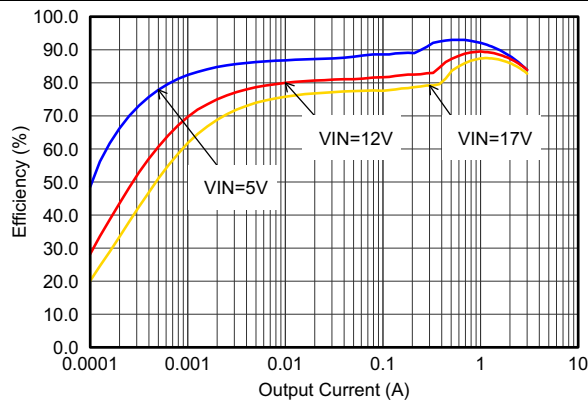


Figure 16. Efficiency With 1.25 MHz,  $V_{out} = 1.8\text{ V}$

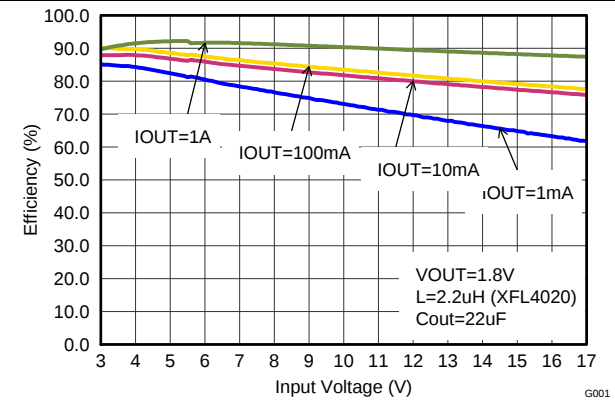


Figure 17. Efficiency With 1.25 MHz,  $V_{out} = 1.8\text{ V}$

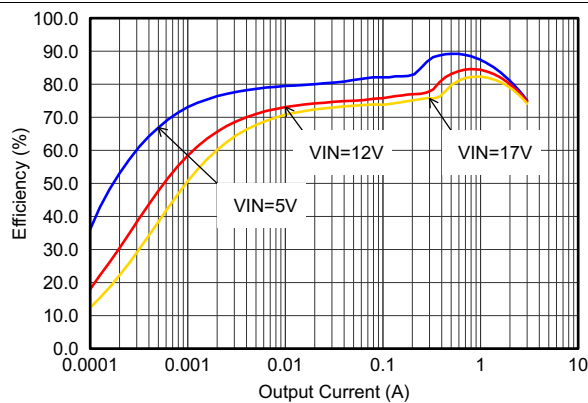


Figure 18. Efficiency With 1.25 MHz,  $V_{out} = 0.9\text{ V}$



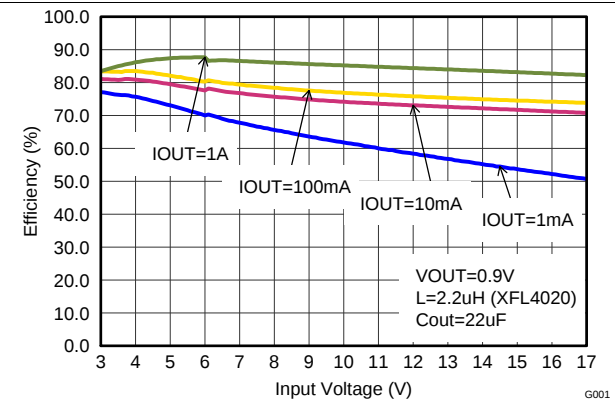


Figure 19. Efficiency With 1.25 MHz,  $V_{out} = 0.9\text{ V}$


$V_{IN} = 12\text{ V}$ ,  $V_{OUT} = 3.3\text{ V}$ ,  $T_A = 25^\circ\text{C}$ , (unless otherwise noted)

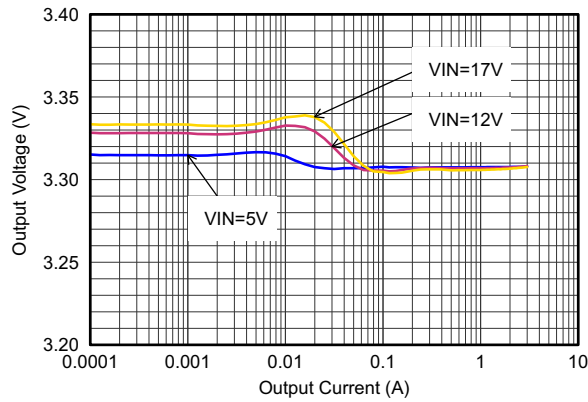


**Figure 20. Output Voltage Accuracy (Load Regulation)**

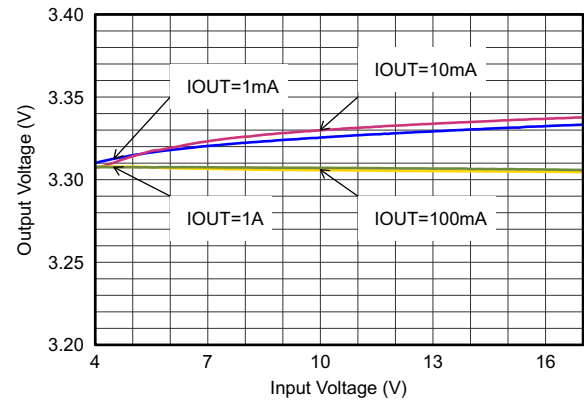


**Figure 21. Output Voltage Accuracy (Line Regulation)**

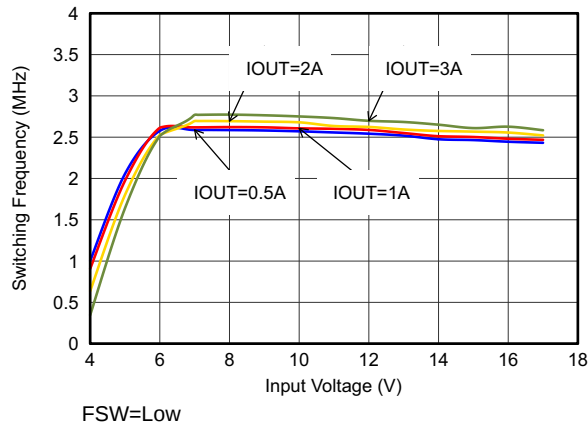


**Figure 22. Switching Frequency**

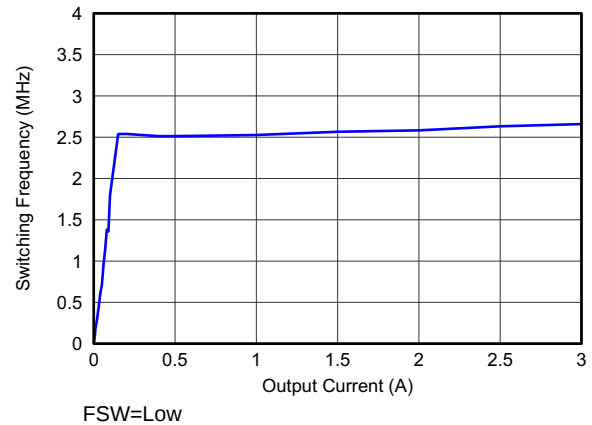

**Figure 23. Switching Frequency**

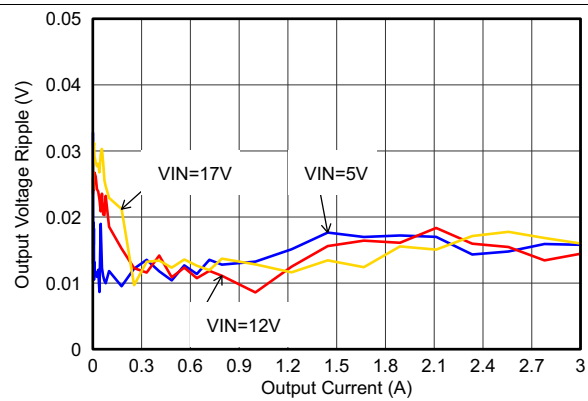

**Figure 24. Output Voltage Ripple**

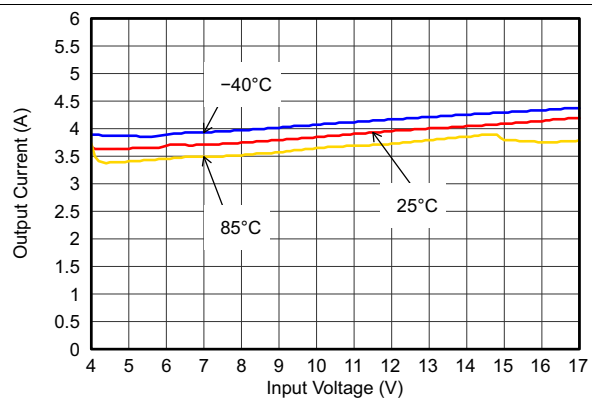

**Figure 25. Maximum Output Current**

# TLV62130, TLV62130A

ZHCS760H – FEBRUARY 2012 – REVISED JUNE 2018

www.ti.com.cn

$V_{IN} = 12\text{ V}$ ,  $V_{OUT} = 3.3\text{ V}$ ,  $T_A = 25^\circ\text{C}$ , (unless otherwise noted)

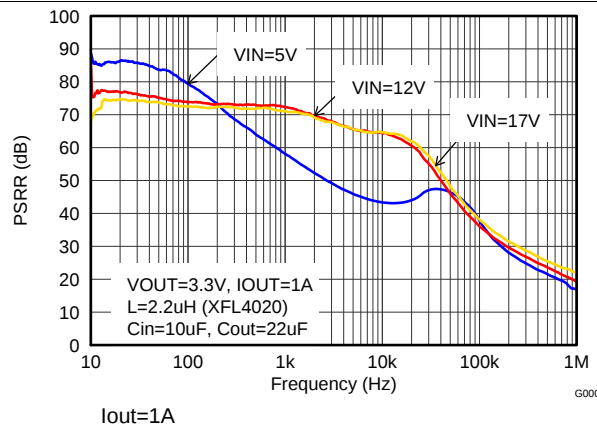


Figure 26. Power Supply Rejection Ratio,  $F_{SW} = 2.5\text{ MHz}$

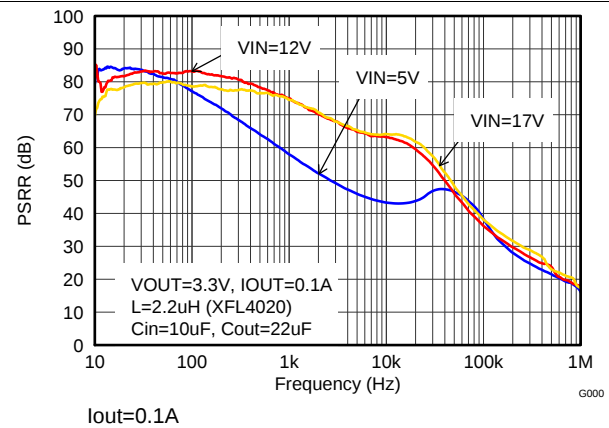


Figure 27. Power Supply Rejection Ratio,  $F_{SW} = 2.5\text{ MHz}$

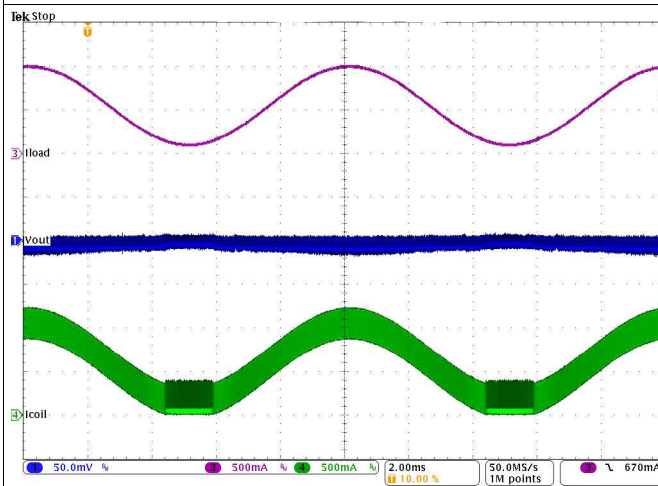


Figure 28. PWM-PSM-Transition  
( $V_{IN} = 12\text{ V}$ ,  $V_{OUT} = 3.3\text{ V}$  with 50 mV/Div)

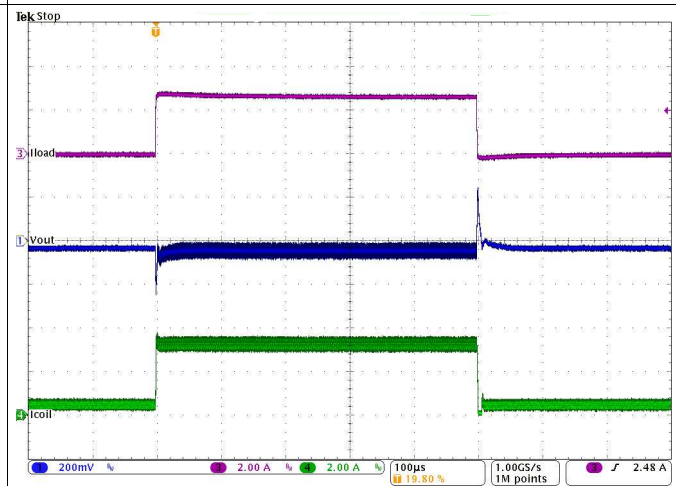


Figure 29. Load Transient Response  
( $I_{OUT} = 0.5\text{ to }3\text{ to }0.5\text{ A}$ )

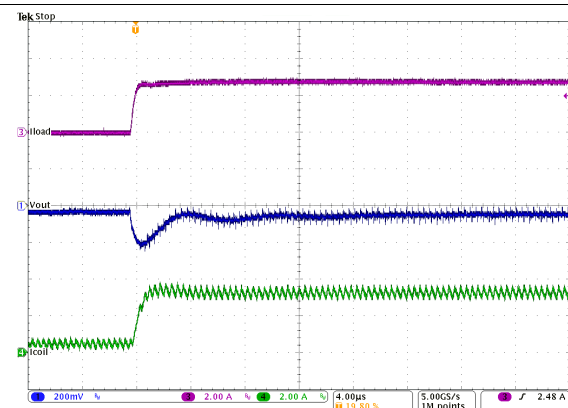


Figure 30. Load Transient Response of Figure 29,  
Rising Edge



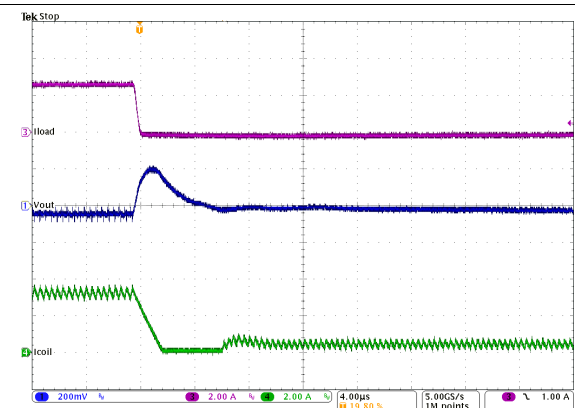


Figure 31. Load Transient Response of Figure 29,  
Falling Edge


$V_{IN} = 12\text{ V}$ ,  $V_{OUT} = 3.3\text{ V}$ ,  $T_A = 25^\circ\text{C}$ , (unless otherwise noted)

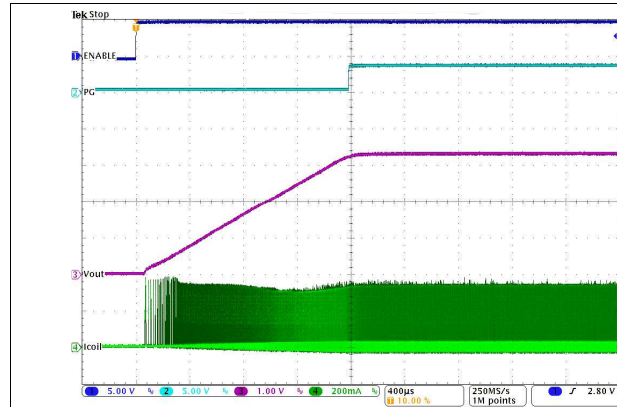


**Figure 32. Startup into 100 mA**

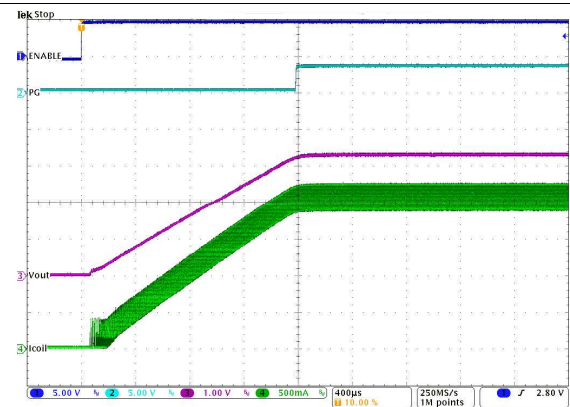


**Figure 33. Startup into 3 A**

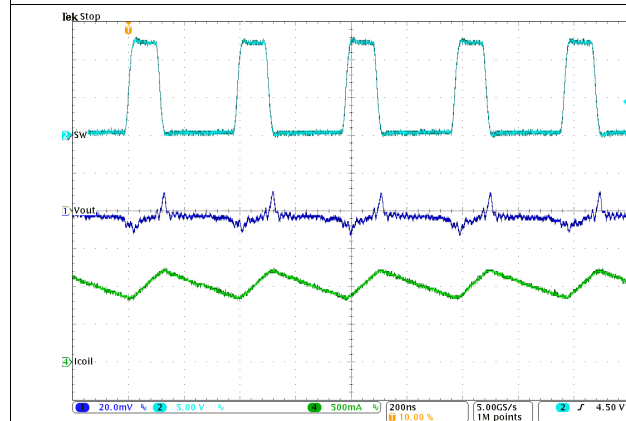


**Figure 34. Typical Operation in PWM Mode  
( $I_{OUT} = 1\text{ A}$ )**

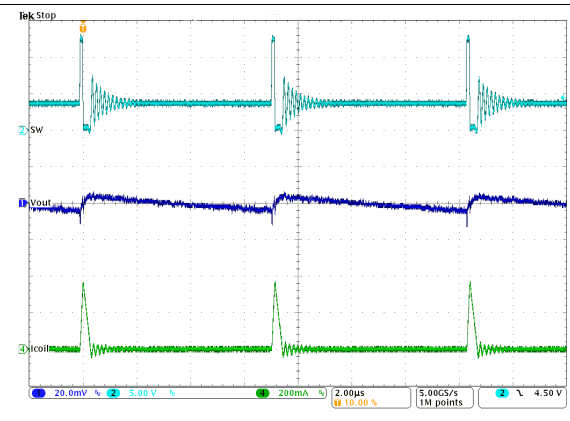

**Figure 35. Typical Operation in Power Save Mode  
( $I_{OUT} = 10\text{ mA}$ )**

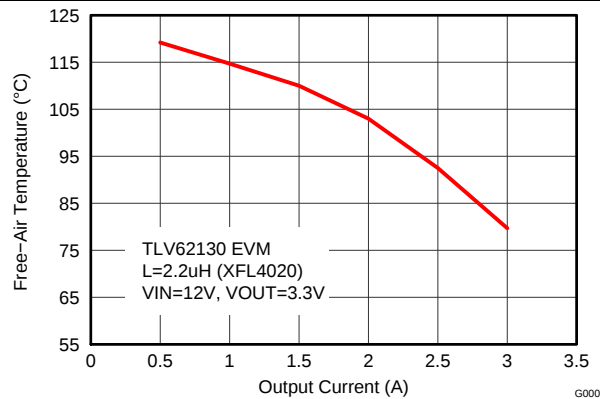

**Figure 36. Maximum Ambient Temperature ( $F_{SW} = 2.5\text{ MHz}$ )**

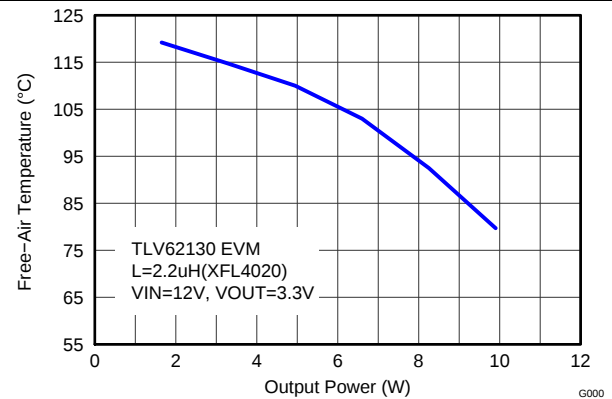


**Figure 37. Maximum Ambient Temperature ( $F_{SW} = 2.5\text{ MHz}$ )**

## 9.3 System Examples

### 9.3.1 LED Power Supply

The TLV62130 can be used as a power supply for power LEDs. The FB pin can be easily set down to lower values than nominal by using the SS/TR pin. With that, the voltage drop on the sense resistor is low to avoid excessive power loss. Since this pin provides 2.5  $\mu\text{A}$ , the feedback pin voltage can be adjusted by an external resistor per [Equation 15](#). This drop, proportional to the LED current, is used to regulate the output voltage (anode voltage) to a proper level to drive the LED. Both analog and PWM dimming are supported with the TLV62130. [Figure 38](#) shows an application circuit, tested with analog dimming:

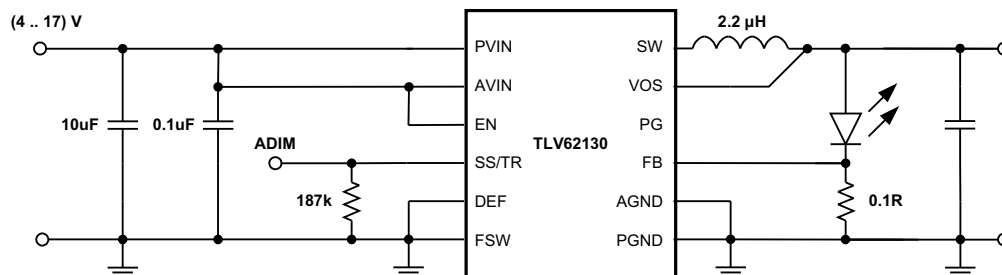

**Figure 38. 3 A Single LED Power Supply**


The resistor at SS/TR sets the FB voltage to a level of about 300 mV and is calculated from [Equation 15](#).

$$V_{FB} = 0.64 \times 2.5\mu\text{A} \times R_{SS/TR} \quad (15)$$

The device now supplies a constant current, set by the resistor at the FB pin, by regulating the output voltage accordingly. The minimum input voltage has to be rated according the forward voltage needed by the LED used. More information is available in the Application Note [SLVA451](#).

### 9.3.2 Active Output Discharge

The TLV62130A pulls the PG pin Low, when the device is shut down by EN, UVLO or thermal shutdown. Connecting PG to Vout through a resistor can be used to discharge Vout in those cases (see [Figure 39](#)). The discharge rate can be adjusted by R3, which is also used to pull up the PG pin in normal operation. For reliability, keep the maximum current into the PG pin less than 10 mA.

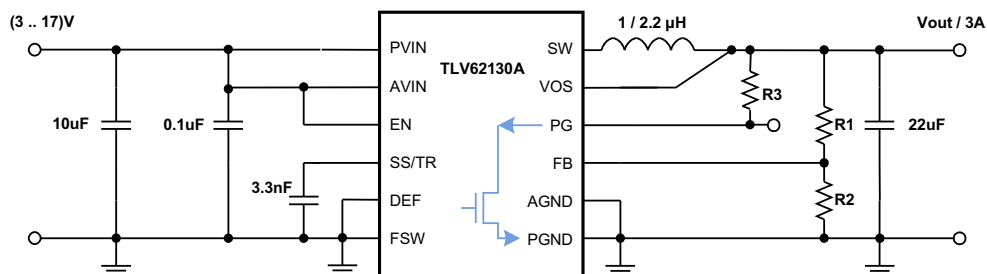

**Figure 39. Discharge Vout Through PG Pin With TLV62130A**

## System Examples (continued)

### 9.3.3 Inverting Power Supply

The TLV62130 can be used as inverting power supply by rearranging external circuitry as shown in [Figure 40](#). As the former GND node now represents a voltage level below system ground, the voltage difference between  $V_{IN}$  and  $V_{OUT}$  has to be limited for operation to the maximum supply voltage of 17 V (see [Equation 16](#)).

$$V_{IN} + |V_{OUT}| \leq V_{INmax} \quad (16)$$

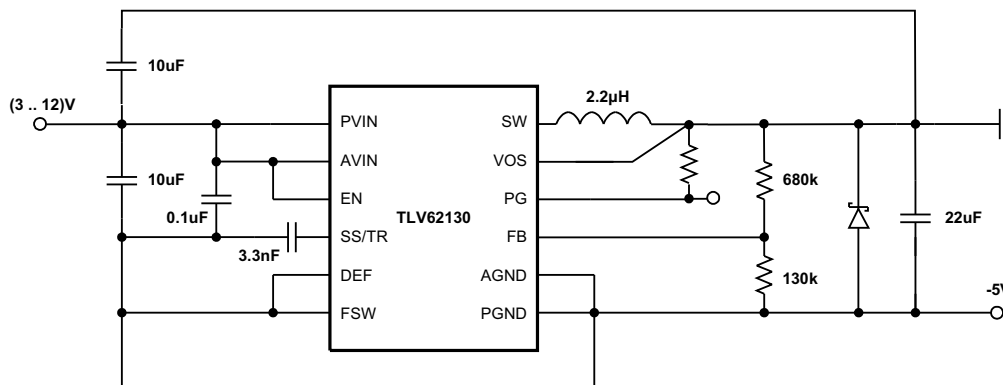


Figure 40. -5 V Inverting Power Supply

The transfer function of the inverting power supply configuration differs from the buck mode transfer function, incorporating a Right Half Plane Zero additionally. The loop stability has to be adapted and an output capacitance of at least 22  $\mu$ F is recommended. A detailed design example is given in [SLVA469](#).

### 9.3.4 Various Output Voltages

The following example circuits show how to configure the external circuitry to furnish different output voltages at 3 A.

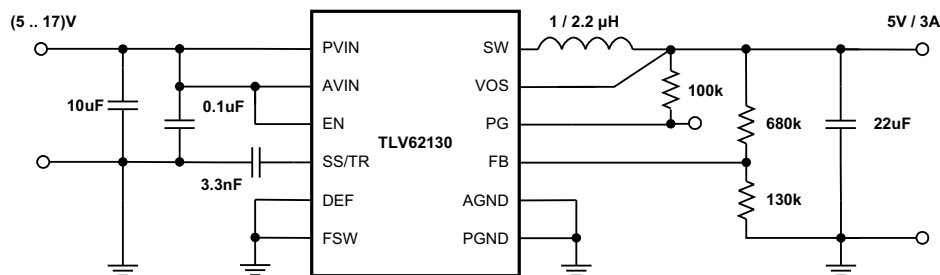
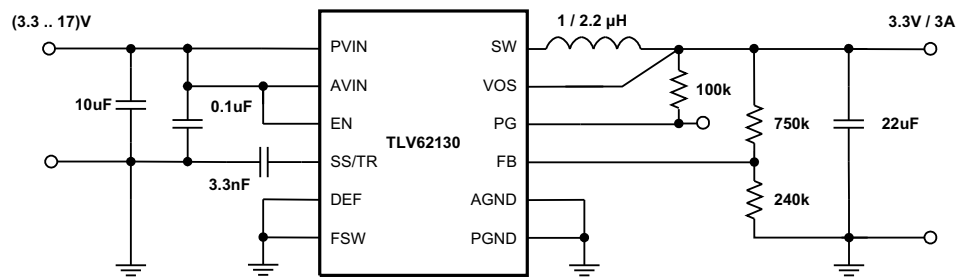
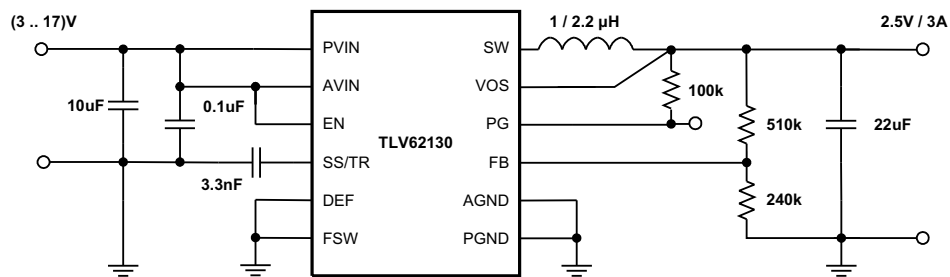
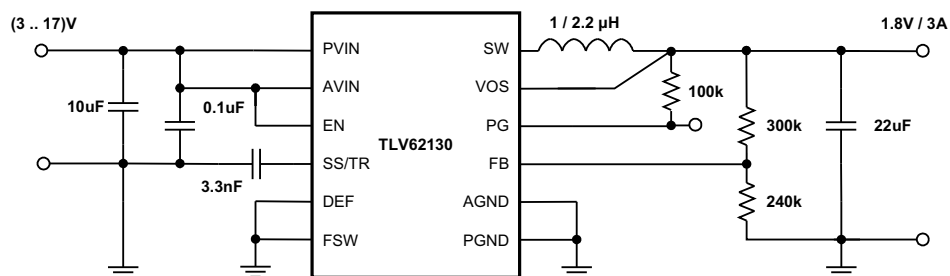
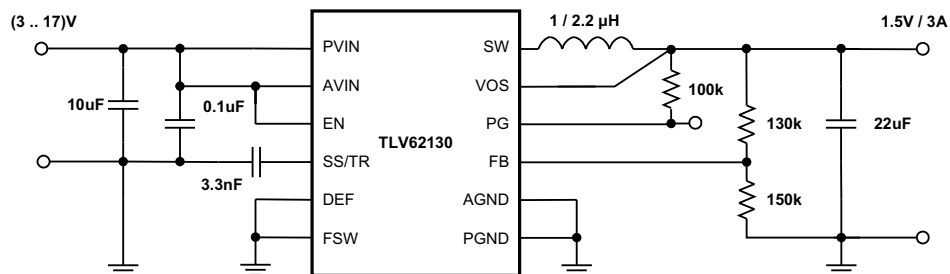



Figure 41. 5-V / 3-A Power Supply

**System Examples (continued)**

**Figure 42. 3.3-V / 3-A Power Supply**

**Figure 43. 2.5-V / 3-A Power Supply**

**Figure 44. 1.8-V / 3-A Power Supply**

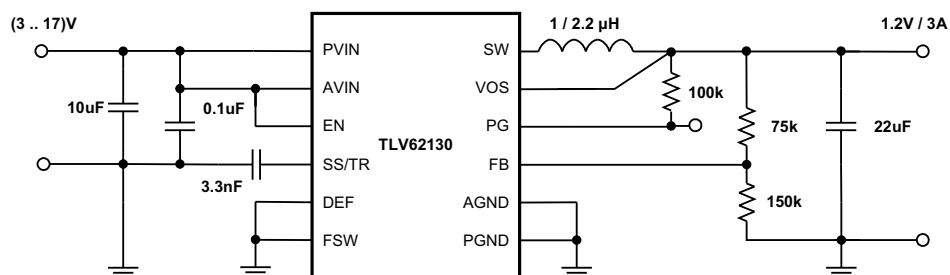
## System Examples (continued)



**Figure 45. 1.5-V / 3-A Power Supply**



**Figure 46. 1.2-V / 3-A Power Supply**

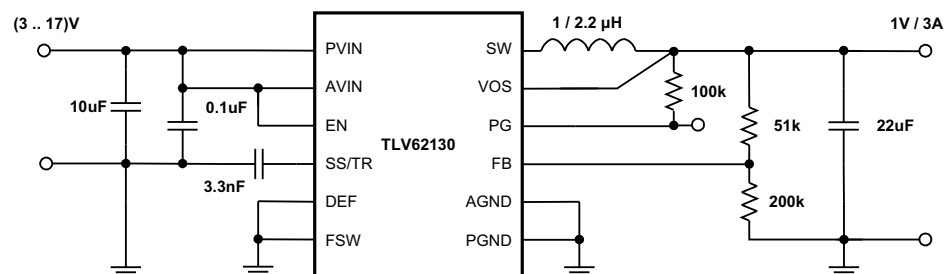

**Figure 47. 1-V / 3-A Power Supply**

## 10 Power Supply Recommendations

The TLV62130 are designed to operate from a 3-V to 17-V input voltage supply. The input power supply's output current needs to be rated according to the output voltage and the output current of the power rail application.

## 11 Layout

### 11.1 Layout Guidelines

A proper layout is critical for the operation of a switched mode power supply, even more at high switching frequencies. Therefore the PCB layout of the TLV62130 demands careful attention to ensure operation and to get the performance specified. A poor layout can lead to issues like poor regulation (both line and load), stability and accuracy weaknesses, increased EMI radiation and noise sensitivity.

See [Figure 48](#) for the recommended layout of the TLV62130, which is designed for common external ground connections. Therefore both AGND and PGND pins are directly connected to the Exposed Thermal Pad. On the PCB, the direct common ground connection of AGND and PGND to the Exposed Thermal Pad and the system ground (ground plane) is mandatory. Also connect the VOS pin in the shortest way to  $V_{OUT}$  at the output capacitor. To avoid noise coupling into the VOS line, this connection should be separated from the  $V_{OUT}$  power line/plane as shown in [Figure 48](#).


Provide low inductive and resistive paths for loops with high  $di/dt$ . Therefore paths conducting the switched load current should be as short and wide as possible. Provide low capacitive paths (with respect to all other nodes) for wires with high  $dv/dt$ . Therefore the input and output capacitance should be placed as close as possible to the IC pins and parallel wiring over long distances as well as narrow traces should be avoided. Loops which conduct an alternating current should outline an area as small as possible, as this area is proportional to the energy radiated.

Sensitive nodes like FB and VOS need to be connected with short wires and not nearby high  $dv/dt$  signals (for example, SW). As they carry information about the output voltage, they should be connected as close as possible to the actual output voltage (at the output capacitor). The capacitor on the SS/TR pin and on AVIN as well as the FB resistors, R1 and R2, should be kept close to the IC and connect directly to those pins and the system ground plane.

The Exposed Thermal Pad must be soldered to the circuit board for mechanical reliability and to achieve appropriate power dissipation.

The recommended layout is implemented on the EVM and shown in its Users Guide, [SLAU416](#). Additionally, the EVM Gerber data are available for download here, [SLVC394](#).

### 11.2 Layout Example

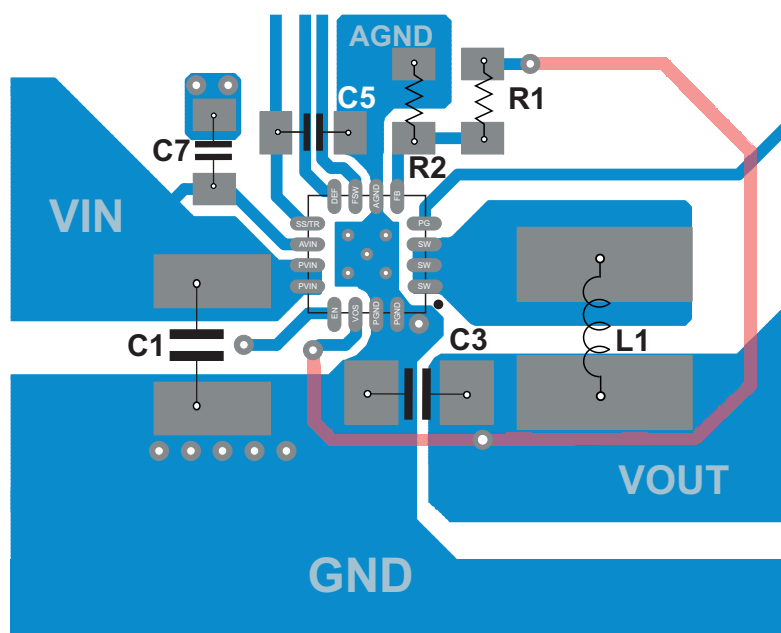

**Figure 48. Layout Example Recommendation**

### 11.3 Thermal Considerations

Implementation of integrated circuits in low-profile and fine-pitch surface-mount packages typically requires special attention to power dissipation. Many system-dependent issues such as thermal coupling, airflow, added heat sinks and convection surfaces, and the presence of other heat-generating components affect the power-dissipation limits of a given component.

Three basic approaches for enhancing thermal performance are listed below:

- Improving the power dissipation capability of the PCB design
- Improving the thermal coupling of the component to the PCB by soldering the Exposed Thermal Pad
- Introducing airflow in the system

For more details on how to use the thermal parameters, see the application notes: thermal characteristics application note ([SZZA017](#)), and ([SPRA953](#)).

The TLV62130 is designed for a maximum operating junction temperature ( $T_j$ ) of 125°C. Therefore the maximum output power is limited by the power losses that can be dissipated over the actual thermal resistance, given by the package and the surrounding PCB structures. Since the thermal resistance of the package is fixed, increasing the size of the surrounding copper area and improving the thermal connection to the IC can reduce the thermal resistance. To get an improved thermal behavior, it's recommended to use top layer metal to connect the device with wide and thick metal lines. Internal ground layers can connect to vias directly under the IC for improved thermal performance.

If short circuit or overload conditions are present, the device is protected by limiting internal power dissipation. Experimental data, taken from the TLV62130 EVM, shows the maximum ambient temperature (without additional cooling like airflow or heat sink), that can be allowed to limit the junction temperature to at most 125°C (see [Figure 36](#)).

## 12 器件和文档支持

### 12.1 器件支持

#### 12.1.1 第三方产品免责声明

TI 发布的与第三方产品或服务有关的信息，不能构成与此类产品或服务或保修的适用性有关的认可，不能构成此类产品或服务单独或与任何 TI 产品或服务一起的表示或认可。

#### 12.1.2 开发支持

##### 12.1.2.1 使用 **WEBENCH®** 工具创建定制设计

请单击[此处](#)，借助 **WEBENCH® Power Designer** 并使用 TLV62130 器件定制设计方案

1. 首先输入输入电压 ( $V_{IN}$ )、输出电压 ( $V_{OUT}$ ) 和输出电流 ( $I_{OUT}$ ) 要求。
2. 使用优化器拨盘优化该设计的关键参数，如效率、尺寸和成本。
3. 将生成的设计与德州仪器 (TI) 的其他可行的解决方案进行比较。

**WEBENCH** 电源设计器可提供定制原理图以及罗列实时价格和组件供货情况的物料清单。

在多数情况下，可执行以下操作：

- 运行电气仿真，观察重要波形以及电路性能
- 运行热性能仿真，了解电路板热性能
- 将定制原理图和布局方案以常用 CAD 格式导出
- 打印设计方案的 PDF 报告并与同事共享

有关 **WEBENCH** 工具的详细信息，请访问 [www.ti.com.cn/WEBENCH](http://www.ti.com.cn/WEBENCH)。

### 12.2 接收文档更新通知

要接收文档更新通知，请导航至 [TI.com.cn](http://TI.com.cn) 上的器件产品文件夹。单击右上角的 **通知我** 进行注册，即可每周接收产品信息更改摘要。有关更改的详细信息，请查看任何已修订文档中包含的修订历史记录。

### 12.3 文档支持

#### 12.3.1 相关文档

请参阅如下相关文档：

- 《**TLV62130EVM-505** 和 **TLV62150EVM-505** 评估模块》，[SLAU416](#)
- 《**EVM** 光绘数据》，[SLVC394](#)
- 《采用 **JEDEC PCB** 设计的线性和逻辑封装散热特性》，[SZZA017](#)
- 《半导体和 IC 封装热指标》，[SPRA953](#)

### 12.4 相关链接

下表列出了快速访问链接。类别包括技术文档、支持与社区资源、工具和软件，以及申请样片或购买产品的快速链接。

表 6. 相关链接

| 器件        | 产品文件夹                 | 立即订购                  | 技术文档                  | 工具和软件                 | 支持和社区                 |
|-----------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| TLV62130  | <a href="#">请单击此处</a> | <a href="#">请单击此处</a> | <a href="#">请单击此处</a> | <a href="#">请单击此处</a> | <a href="#">请单击此处</a> |
| TLV62130A | <a href="#">请单击此处</a> | <a href="#">请单击此处</a> | <a href="#">请单击此处</a> | <a href="#">请单击此处</a> | <a href="#">请单击此处</a> |

### 12.5 社区资源

下列链接提供到 TI 社区资源的连接。链接的内容由各个分销商“按照原样”提供。这些内容并不构成 TI 技术规范，并且不一定反映 TI 的观点；请参阅 TI 的《[使用条款](#)》。

**TI E2E™ 在线社区** **TI 的工程师对工程师 (E2E) 社区**。此社区的创建目的在于促进工程师之间的协作。在 [e2e.ti.com](http://e2e.ti.com) 中，您可以咨询问题、分享知识、拓展思路并与同行工程师一道帮助解决问题。

## 社区资源 (接下页)

**设计支持** *TI 参考设计支持* 可帮助您快速查找有帮助的 E2E 论坛、设计支持工具以及技术支持的联系信息。

### 12.6 商标

DCS-Control, E2E are trademarks of Texas Instruments.  
WEBENCH is a registered trademark of Texas Instruments.  
All other trademarks are the property of their respective owners.

### 12.7 静电放电警告



这些装置包含有限的内置 ESD 保护。存储或装卸时，应将导线一起截短或将装置放置于导电泡棉中，以防止 MOS 门极遭受静电损伤。

### 12.8 术语表

**SLYZ022** — *TI 术语表*。

这份术语表列出并解释术语、缩写和定义。

## 13 机械、封装和可订购信息

以下页面包含机械、封装和可订购信息。这些信息是指定器件的最新可用数据。数据如有变更，恕不另行通知，且不会对此文档进行修订。如需获取此产品说明书的浏览器版本，请查阅左侧的导航栏。

## PACKAGING INFORMATION

| Orderable part number         | Status<br>(1) | Material type<br>(2) | Package   Pins  | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6) |
|-------------------------------|---------------|----------------------|-----------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| <a href="#">TLV62130ARGTR</a> | Active        | Production           | VQFN (RGT)   16 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | VUNI                |
| TLV62130ARGTR.A               | Active        | Production           | VQFN (RGT)   16 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | VUNI                |
| TLV62130ARGTR.B               | Active        | Production           | VQFN (RGT)   16 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | VUNI                |
| TLV62130ARGTRG4               | Active        | Production           | VQFN (RGT)   16 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | VUNI                |
| TLV62130ARGTRG4.A             | Active        | Production           | VQFN (RGT)   16 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | VUNI                |
| TLV62130ARGTRG4.B             | Active        | Production           | VQFN (RGT)   16 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | VUNI                |
| <a href="#">TLV62130ARGTT</a> | Active        | Production           | VQFN (RGT)   16 | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | VUNI                |
| TLV62130ARGTT.A               | Active        | Production           | VQFN (RGT)   16 | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | VUNI                |
| TLV62130ARGTT.B               | Active        | Production           | VQFN (RGT)   16 | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | VUNI                |
| <a href="#">TLV62130RGTR</a>  | Active        | Production           | VQFN (RGT)   16 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | VUBI                |
| TLV62130RGTR.A                | Active        | Production           | VQFN (RGT)   16 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | VUBI                |
| TLV62130RGTR.B                | Active        | Production           | VQFN (RGT)   16 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | VUBI                |
| TLV62130RGTRG4                | Active        | Production           | VQFN (RGT)   16 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | VUBI                |
| TLV62130RGTRG4.A              | Active        | Production           | VQFN (RGT)   16 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | VUBI                |
| TLV62130RGTRG4.B              | Active        | Production           | VQFN (RGT)   16 | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | VUBI                |
| <a href="#">TLV62130RGTT</a>  | Active        | Production           | VQFN (RGT)   16 | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | VUBI                |
| TLV62130RGTT.A                | Active        | Production           | VQFN (RGT)   16 | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | VUBI                |
| TLV62130RGTT.B                | Active        | Production           | VQFN (RGT)   16 | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | VUBI                |

<sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).

<sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

<sup>(4)</sup> **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

## TAPE AND REEL INFORMATION



\*All dimensions are nominal

| Device          | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|-----------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| TLV62130ARGTR   | VQFN         | RGT             | 16   | 3000 | 330.0              | 12.4               | 3.3     | 3.3     | 1.1     | 8.0     | 12.0   | Q2            |
| TLV62130ARGTRG4 | VQFN         | RGT             | 16   | 3000 | 330.0              | 12.4               | 3.3     | 3.3     | 1.1     | 8.0     | 12.0   | Q2            |
| TLV62130ARGTT   | VQFN         | RGT             | 16   | 250  | 180.0              | 12.4               | 3.3     | 3.3     | 1.1     | 8.0     | 12.0   | Q2            |
| TLV62130RGTR    | VQFN         | RGT             | 16   | 3000 | 330.0              | 12.4               | 3.3     | 3.3     | 1.1     | 8.0     | 12.0   | Q2            |
| TLV62130RGTR    | VQFN         | RGT             | 16   | 3000 | 330.0              | 12.4               | 3.3     | 3.3     | 1.1     | 8.0     | 12.0   | Q2            |
| TLV62130RGTRG4  | VQFN         | RGT             | 16   | 3000 | 330.0              | 12.4               | 3.3     | 3.3     | 1.1     | 8.0     | 12.0   | Q2            |
| TLV62130RGTT    | VQFN         | RGT             | 16   | 250  | 180.0              | 12.4               | 3.3     | 3.3     | 1.1     | 8.0     | 12.0   | Q2            |
| TLV62130RGTT    | VQFN         | RGT             | 16   | 250  | 180.0              | 12.5               | 3.3     | 3.3     | 1.1     | 8.0     | 12.0   | Q2            |

## TAPE AND REEL BOX DIMENSIONS



\*All dimensions are nominal

| Device          | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|-----------------|--------------|-----------------|------|------|-------------|------------|-------------|
| TLV62130ARGTR   | VQFN         | RGT             | 16   | 3000 | 346.0       | 346.0      | 33.0        |
| TLV62130ARGTRG4 | VQFN         | RGT             | 16   | 3000 | 346.0       | 346.0      | 33.0        |
| TLV62130ARGTT   | VQFN         | RGT             | 16   | 250  | 210.0       | 185.0      | 35.0        |
| TLV62130RGTR    | VQFN         | RGT             | 16   | 3000 | 552.0       | 346.0      | 36.0        |
| TLV62130RGTR    | VQFN         | RGT             | 16   | 3000 | 338.0       | 355.0      | 35.0        |
| TLV62130RGTRG4  | VQFN         | RGT             | 16   | 3000 | 552.0       | 346.0      | 36.0        |
| TLV62130RGTT    | VQFN         | RGT             | 16   | 250  | 552.0       | 185.0      | 36.0        |
| TLV62130RGTT    | VQFN         | RGT             | 16   | 250  | 338.0       | 355.0      | 35.0        |

## TUBE



\*All dimensions are nominal


| Device           | Package Name | Package Type | Pins | SPQ  | L (mm) | W (mm) | T (μm) | B (mm) |
|------------------|--------------|--------------|------|------|--------|--------|--------|--------|
| TLV62130RGTR     | RGT          | VQFN         | 16   | 3000 | 381    | 4.83   | 2286   | 0      |
| TLV62130RGTR.A   | RGT          | VQFN         | 16   | 3000 | 381    | 4.83   | 2286   | 0      |
| TLV62130RGTR.B   | RGT          | VQFN         | 16   | 3000 | 381    | 4.83   | 2286   | 0      |
| TLV62130RGTRG4   | RGT          | VQFN         | 16   | 3000 | 381    | 4.83   | 2286   | 0      |
| TLV62130RGTRG4.A | RGT          | VQFN         | 16   | 3000 | 381    | 4.83   | 2286   | 0      |
| TLV62130RGTRG4.B | RGT          | VQFN         | 16   | 3000 | 381    | 4.83   | 2286   | 0      |
| TLV62130RGTT     | RGT          | VQFN         | 16   | 250  | 381    | 4.83   | 2286   | 0      |
| TLV62130RGTT.A   | RGT          | VQFN         | 16   | 250  | 381    | 4.83   | 2286   | 0      |
| TLV62130RGTT.B   | RGT          | VQFN         | 16   | 250  | 381    | 4.83   | 2286   | 0      |

**RGT 16**

**GENERIC PACKAGE VIEW**



**VQFN - 1 mm max height**

PLASTIC QUAD FLATPACK - NO LEAD

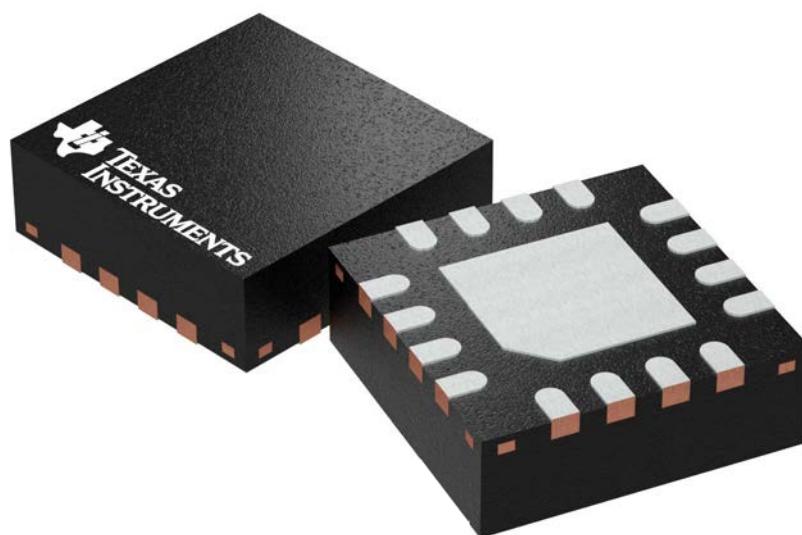

Images above are just a representation of the package family, actual package may vary.  
Refer to the product data sheet for package details.

4203495/1

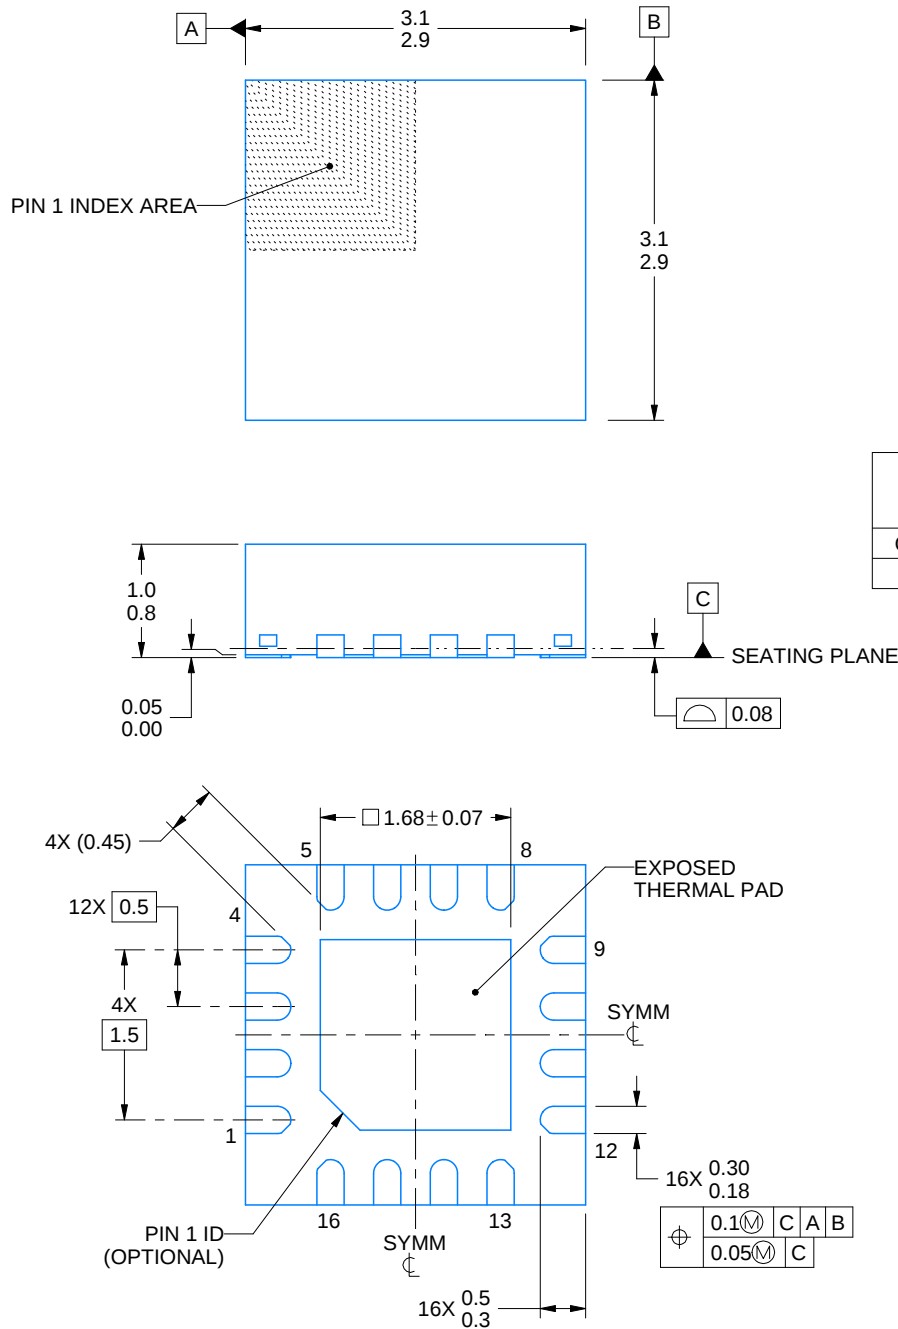

4222419/E 07/2025


## NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. The package thermal pad must be soldered to the printed circuit board for thermal and mechanical performance.


**RGT0016C**

### VQFN - 1 mm max height

PLASTIC QUAD FLATPACK - NO LEAD

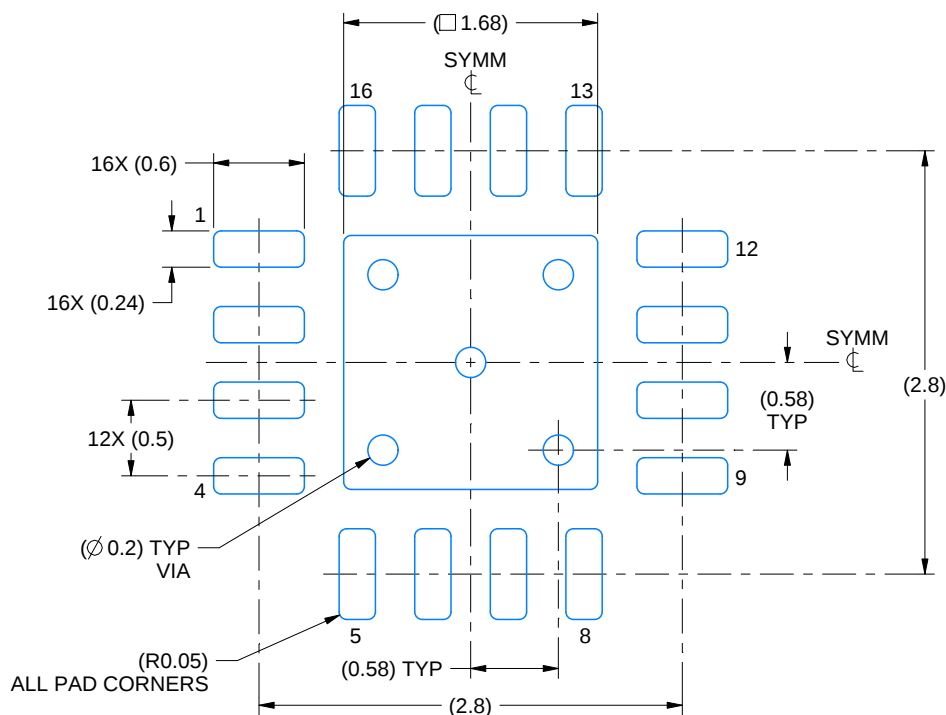

LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE:20X

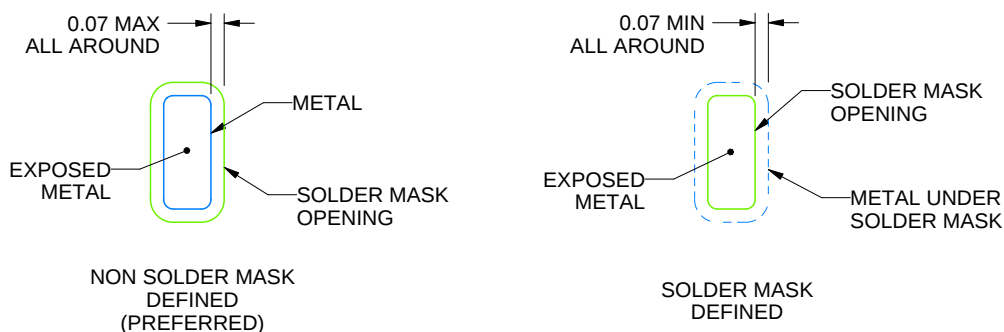

## SOLDER MASK DETAILS

4222419/E 07/2025

NOTES: (continued)


4. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 ([www.ti.com/lit/sluea271](http://www.ti.com/lit/sluea271)).
5. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.

# EXAMPLE STENCIL DESIGN

RGT0016C

VQFN - 1 mm max height

PLASTIC QUAD FLATPACK - NO LEAD

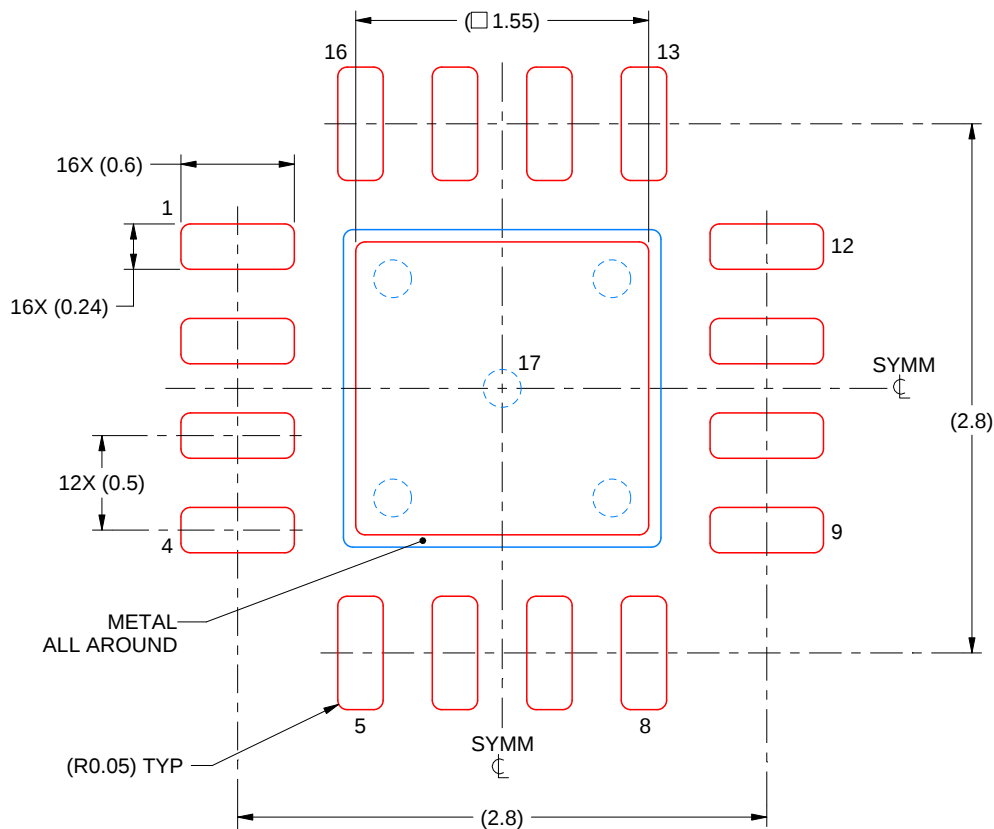

**SOLDER PASTE EXAMPLE**  
BASED ON 0.125 mm THICK STENCIL

EXPOSED PAD 17:  
85% PRINTED SOLDER COVERAGE BY AREA UNDER PACKAGE  
SCALE:25X

4222419/E 07/2025

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

## 重要通知和免责声明

TI“按原样”提供技术和可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证没有瑕疵且不做任何明示或暗示的担保，包括但不限于对适销性、与某特定用途的适用性或不侵犯任何第三方知识产权的暗示担保。

这些资源可供使用 TI 产品进行设计的熟练开发人员使用。您将自行承担以下全部责任：(1) 针对您的应用选择合适的 TI 产品，(2) 设计、验证并测试您的应用，(3) 确保您的应用满足相应标准以及任何其他安全、安保法规或其他要求。

这些资源如有变更，恕不另行通知。TI 授权您仅可将这些资源用于研发本资源所述的 TI 产品的相关应用。严禁以其他方式对这些资源进行复制或展示。您无权使用任何其他 TI 知识产权或任何第三方知识产权。对于因您对这些资源的使用而对 TI 及其代表造成的任何索赔、损害、成本、损失和债务，您将全额赔偿，TI 对此概不负责。

TI 提供的产品受 [TI 销售条款](#)、[TI 通用质量指南](#) 或 [ti.com](#) 上其他适用条款或 TI 产品随附的其他适用条款的约束。TI 提供这些资源并不会扩展或以其他方式更改 TI 针对 TI 产品发布的适用的担保或担保免责声明。除非德州仪器 (TI) 明确将某产品指定为定制产品或客户特定产品，否则其产品均为按确定价格收入目录的标准通用器件。

TI 反对并拒绝您可能提出的任何其他或不同的条款。

版权所有 © 2026，德州仪器 (TI) 公司

最后更新日期：2025 年 10 月