

# 带有集成场效应晶体管 (FET) 的 4A/2A 双通道同步降压转换开关

查询样片: [TPS54494](#)

## 特性

- **D-CAP2™** 控制模式
  - 快速瞬态响应
  - 环路补偿无需外部部件
  - 与陶瓷输出电容器兼容
- 宽输入电压范围: **4.5V 至 18V**
- 输出电压范围: **0.76V 至 7V**
- 针对低占空比应用对高效集成 **FET** 进行了优化
  - **90mΩ** (高侧) 和 **60mΩ** (低侧)
- 高初始基准精度
- **4A CH1 / 2A CH2** 持续负载电流
- 低侧  $r_{DS(on)}$  低损失电流感测
- 固定软启动时间: **1ms**
- 非灌入预偏置软启动
- 电源正常 (**Powergood**)
- **700kHz** 开关频率
- 逐周期过流限制控制
- 过流限制 (**OCL**) / 欠压闭锁 (**UVLO**) / 热关断 (**TSD**) 应用
- 用于过载保护的断续定时器
- 带有集成式升压 **P** 通道金属氧化物半导体 (**PMOS**) 开关的自适应栅极驱动器
- 由于热补偿  $r_{DS(on)}$  的值为 **4000ppm/°C** , 过流保护 (**OCP**) 恒定
- **16** 引脚散热薄型小外形尺寸封装 (**HTSSOP**) , **16** 引脚超薄型四方扁平无引线 (**VQFN**) 封装
- 自动跳跃 **Eco-mode™** 模式, 以实现轻负载时的高效率

## 应用范围



- 针对广泛应用的低功耗系统中的负载点调节
  - 数字电视电源
  - 网络互联家庭终端设备
  - 数字机顶盒 (**STB**)
  - **DVD** 播放器/刻录机
  - 游戏控制台和其它设备

## 说明

TPS54494 是一款双路、自适应接通时间 D-CAP2™ 模式同步降压转换器。TPS54494 可帮助系统设计人员通过成本有效性、低组件数量、和低待机电流解决方案来完成多种终端设备的电源总线调节器集。

TPS54494 的主控制环路采用 D-CAP2™ 模式控制, 此模式控制无需外部补偿组件即可提供极快的瞬态响应。自适应接通时间控制支持较高负载状态下的脉宽调制 (PWM) 模式与轻负载下的 Eco-mode™ 工作模式之间的无缝转换。Eco-mode™ 使 TPS54494 能够在较轻负载条件下保持高效率。TPS54494 也能够去适应诸如高分子有机半导体固体电容器 (POSCAP) 或者高分子聚合物电容器 (SP-CAP) 的低等效串联电阻 (ESR), 和超低 ESR 陶瓷电容器。此器件在输入电压为 4.5V 至 18V 之间时提供便捷和有效的运行。

TPS54494 采用 4.4mm x 5mm 16 引脚 TSSOP (PWP) 封装和 4mm x 4mm 16 引脚 VQFN (RSA) 封装, 额定环境运行温度范围为 -40°C 至 85°C。

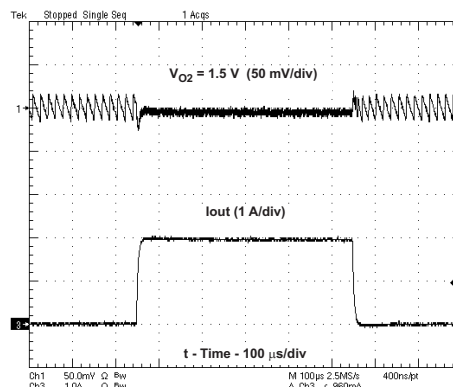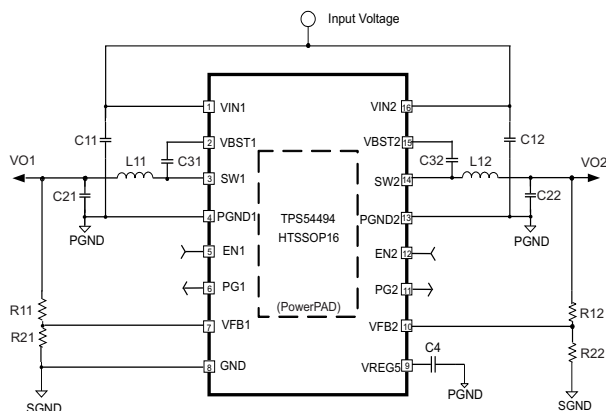

Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

D-CAP2, Eco-mode, Eco-Mode are trademarks of Texas Instruments.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of the Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

Copyright © 2012–2013, Texas Instruments Incorporated  
English Data Sheet: [SLVSBH1](#)



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

### ORDERING INFORMATION<sup>(1)</sup>

| T <sub>A</sub> | PACKAGE <sup>(2)</sup> <sup>(3)</sup> | ORDERING PART NUMBER | PINS | OUTPUT SUPPLY |
|----------------|---------------------------------------|----------------------|------|---------------|
| –40°C to 85°C  | PWP                                   | TPS54494PWPR         | 16   | Tape-and-Reel |
|                |                                       | TPS54494PWP          |      | Tube          |
|                | RSA                                   | TPS54494RSAR         | 16   | Tape-and-Reel |
|                |                                       | TPS54494RSAT         |      |               |

- (1) For the most current package and ordering information, see the Package Option Addendum at the end of this document, or see the TI web site at [www.ti.com](http://www.ti.com)
- (2) Package drawings, thermal data, and symbolization are available at [www.ti.com/packaging](http://www.ti.com/packaging).
- (3) All packaging options have Cu NIPDAU lead/ball finish.

### ABSOLUTE MAXIMUM RATINGS

over operating free-air temperature range (unless otherwise noted)<sup>(1)</sup> <sup>(2)</sup>

|                         |                                     | VALUE       | UNIT |
|-------------------------|-------------------------------------|-------------|------|
| Input voltage range     | VIN1, VIN2, EN1, EN2                | –0.3 to 20  | V    |
|                         | VBST1, VBST2                        | –0.3 to 26  |      |
|                         | VBST1, VBST2 (10ns transient)       | –0.3 to 28  |      |
|                         | VBST1–SW1, VBST2–SW2                | –0.3 to 6.5 |      |
|                         | VFB1, VFB2                          | –0.3 to 6.5 |      |
|                         | SW1, SW2                            | –2 to 20    |      |
|                         | SW1, SW2 (10ns transient)           | –3 to 22    |      |
| Output voltage range    | VREG5, PG1, PG2                     | –0.3 to 6.5 | V    |
|                         | PGND1, PGND2                        | –0.3 to 0.3 |      |
| Electrostatic discharge | Human Body Model (HBM)              | 2           | kV   |
|                         | Charged Device Model (CDM)          | 500         | V    |
| T <sub>A</sub>          | Operating ambient temperature range | –40 to 85   | °C   |
| T <sub>STG</sub>        | Storage temperature range           | –55 to 150  | °C   |
| T <sub>J</sub>          | Junction temperature range          | –40 to 150  | °C   |

- (1) Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" are not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) All voltages are with respect to IC GND terminal.

### THERMAL INFORMATION

| THERMAL METRIC <sup>(1)</sup> |                                              | TPS54494      |               | UNITS |
|-------------------------------|----------------------------------------------|---------------|---------------|-------|
|                               |                                              | PWP (16) PINS | RSA (16) PINS |       |
| θ <sub>JA</sub>               | Junction-to-ambient thermal resistance       | 41.4          | 32.8          | °C/W  |
| θ <sub>JCTop</sub>            | Junction-to-case (top) thermal resistance    | 27.8          | 35.4          |       |
| θ <sub>JB</sub>               | Junction-to-board thermal resistance         | 23.2          | 9.9           |       |
| ψ <sub>JT</sub>               | Junction-to-top characterization parameter   | 0.9           | 0.4           |       |
| ψ <sub>JB</sub>               | Junction-to-board characterization parameter | 23.0          | 10.0          |       |
| θ <sub>JCbot</sub>            | Junction-to-case (bottom) thermal resistance | 3.5           | 1.6           |       |

- (1) 有关传统和全新热度的更多信息，请参阅 IC 封装热量量 应用报告（文献号：ZHCA543）。

## RECOMMENDED OPERATING CONDITIONS

over operating free-air temperature range (unless otherwise noted)

|                            |                                | VALUES |     | UNIT |
|----------------------------|--------------------------------|--------|-----|------|
|                            |                                | MIN    | MAX |      |
| Supply input voltage range | VIN1, VIN2                     | 4.5    | 18  | V    |
| Input voltage range        | VBST1, VBST2                   | –0.1   | 24  | V    |
|                            | VBST1, VBST2 (10ns transient)  | –0.1   | 27  |      |
|                            | VBST1–SW1, VBST2–SW2           | –0.1   | 5.7 |      |
|                            | VFB1, VFB2                     | –0.1   | 5.7 |      |
|                            | EN1, EN2                       | –0.1   | 18  |      |
|                            | SW1, SW2                       | –1.0   | 18  |      |
|                            | SW1, SW2 (10ns transient)      | –3     | 21  |      |
| Output voltage range       | VREG5, PG1 , PG2               | –0.1   | 5.7 | V    |
|                            | PGND1, PGND2                   | –0.1   | 0.1 |      |
|                            | VO1, VO2                       | 0.76   | 7.0 |      |
| T <sub>A</sub>             | Operating free-air temperature | –40    | 85  | °C   |
| T <sub>J</sub>             | Operating Junction Temperature | –40    | 150 | °C   |

## ELECTRICAL CHARACTERISTICS<sup>(1)</sup>

over recommended free-air temperature range, VIN = 12 V (unless otherwise noted)

| PARAMETER                    |                             | CONDITIONS                                                         | MIN  | TYP  | MAX  | UNIT   |
|------------------------------|-----------------------------|--------------------------------------------------------------------|------|------|------|--------|
| <b>SUPPLY CURRENT</b>        |                             |                                                                    |      |      |      |        |
| I <sub>IN</sub>              | VIN supply current          | T <sub>A</sub> = 25°C, EN1 = EN2 = 5 V, VFB1 = VFB2 = 0.8 V        |      | 1200 | 2000 | μA     |
| I <sub>VINSDN</sub>          | VIN shutdown current        | T <sub>A</sub> = 25°C, EN1 = EN2 = L after H,                      |      | 15   | 20   | μA     |
| <b>FEEDBACK VOLTAGE</b>      |                             |                                                                    |      |      |      |        |
| V <sub>VFBTHLX</sub>         | VFBx threshold voltage      | T <sub>A</sub> = 25°C, CH1 = 3.3 V, CH2 = 1.5 V                    | 758  | 765  | 773  | mV     |
| T <sub>C</sub> VFBx          | Temperature coefficient     | On the basis of 25°C <sup>(2)</sup>                                | –115 |      | 115  | ppm/°C |
| I <sub>VFBx</sub>            | VFB Input Current           | VFBx = 0.8 V, T <sub>A</sub> = 25°C                                | –0.4 | 0.2  | 0.4  | μA     |
| <b>VREG5 OUTPUT</b>          |                             |                                                                    |      |      |      |        |
| V <sub>VREG5</sub>           | VREG5 output voltage        | T <sub>A</sub> = 25°C, 6 V < VIN1 < 18 V, I <sub>VREG</sub> = 5 mA |      | 5.5  |      | V      |
| I <sub>VREG5</sub>           | Output current              | VIN1 = 6 V, VREG5 = 4.0 V, T <sub>A</sub> = 25°C <sup>(2)</sup>    |      | 75   |      | mA     |
| <b>MOSFETs</b>               |                             |                                                                    |      |      |      |        |
| r <sub>DS(on)H</sub>         | High side switch resistance | T <sub>A</sub> = 25°C, VBSTx–SWx = 5.5 V <sup>(2)</sup>            |      | 90   |      | mΩ     |
| r <sub>DS(on)L</sub>         | Low side switch resistance  | T <sub>A</sub> = 25°C <sup>(2)</sup>                               |      | 60   |      | mΩ     |
| <b>ON-TIME TIMER CONTROL</b> |                             |                                                                    |      |      |      |        |
| T <sub>ON1</sub>             | SW1 On Time                 | SW1 = 12 V, VO1 = 1.2 V                                            |      | 165  |      | ns     |
| T <sub>ON2</sub>             | SW2 On Time                 | SW2 = 12 V, VO2 = 1.2 V                                            |      | 165  |      | ns     |
| T <sub>OFF1</sub>            | SW1 Min off time            | T <sub>A</sub> = 25°C, VFB1 = 0.7 V <sup>(2)</sup>                 |      | 220  |      | ns     |
| T <sub>OFF2</sub>            | SW2 Min off time            | T <sub>A</sub> = 25°C, VFB2 = 0.7 V <sup>(2)</sup>                 |      | 220  |      | ns     |
| <b>SOFT START</b>            |                             |                                                                    |      |      |      |        |
| T <sub>SS</sub>              | Soft-start time             | Internal soft-start time                                           |      | 1.0  |      | ms     |

(1) x means either 1 or 2, that is, VFBx means VFB1 or VFB2.

(2) Specified by design. Not production tested.


**ELECTRICAL CHARACTERISTICS<sup>(1)</sup> (continued)**

over recommended free-air temperature range, VIN = 12 V (unless otherwise noted)

| PARAMETER                                                 |                               | CONDITIONS                                | MIN  | TYP | MAX | UNIT |
|-----------------------------------------------------------|-------------------------------|-------------------------------------------|------|-----|-----|------|
| POWER GOOD                                                |                               |                                           |      |     |     |      |
| V <sub>PGTH</sub>                                         | PGx threshold                 | PG from lower VOx (going high)            | 84%  |     |     |      |
|                                                           |                               | PG from higher VOx (going low)            | 116% |     |     |      |
| R <sub>PG</sub>                                           | PGx pull-down resistance      | VPGx = 0.5 V                              | 50   | 75  | 110 | Ω    |
| T <sub>PGDLY</sub>                                        | PGx delay time                | Delay for PGx going high                  | 1.5  |     |     | ms   |
|                                                           |                               | Delay for PGx going low                   | 2    |     |     | μs   |
| T <sub>PGCOMPSS</sub>                                     | PGx comparator start-up delay | PGx comparator wake-up delay              | 1.5  |     |     | ms   |
| UVLO                                                      |                               |                                           |      |     |     |      |
| V <sub>UVREG5</sub>                                       | VREG5 UVLO threshold          | VREG5 rising                              | 3.83 |     |     | V    |
|                                                           |                               | Hysteresis                                | 0.6  |     |     |      |
| LOGIC THRESHOLDS                                          |                               |                                           |      |     |     |      |
| V <sub>ENH</sub>                                          | ENx H-level threshold voltage |                                           | 2.0  |     |     | V    |
| V <sub>ENL</sub>                                          | ENx L-level threshold voltage |                                           | 0.4  |     |     | V    |
| R <sub>ENx_IN</sub>                                       | ENx input resistance          | ENx = 12 V                                | 225  | 450 | 900 | kΩ   |
| CURRENT LIMITS                                            |                               |                                           |      |     |     |      |
| I <sub>OCL1</sub>                                         | CH1 Current limit             | L <sub>OUT1</sub> = 2.2 μH <sup>(3)</sup> | 4.5  | 5.7 | 7.0 | A    |
| I <sub>OCL2</sub>                                         | CH2 Current limit             | L <sub>OUT2</sub> = 1.5 μH <sup>(3)</sup> | 2.8  | 3.9 | 5.0 | A    |
| OUTPUT UNDERVOLTAGE AND OVERVOLTAGE PROTECTION (UVP, OVP) |                               |                                           |      |     |     |      |
| V <sub>UVP</sub>                                          | Output UVP trip threshold     | measured on VFBx                          | 63%  | 68% | 73% |      |
| T <sub>UVPDEL</sub>                                       | Output UVP delay time         |                                           | 1.5  |     |     | ms   |
| T <sub>UVPEN</sub>                                        | Output UVP enable delay       |                                           | 1.5  |     |     | ms   |
| THERMAL SHUTDOWN                                          |                               |                                           |      |     |     |      |
| T <sub>SD</sub>                                           | Thermal shutdown threshold    | Shutdown temperature <sup>(3)</sup>       | 155  |     |     | °C   |
|                                                           |                               | Hysteresis <sup>(3)</sup>                 | 25   |     |     |      |

(3) Specified by design. Not production tested.


## DEVICE INFORMATION

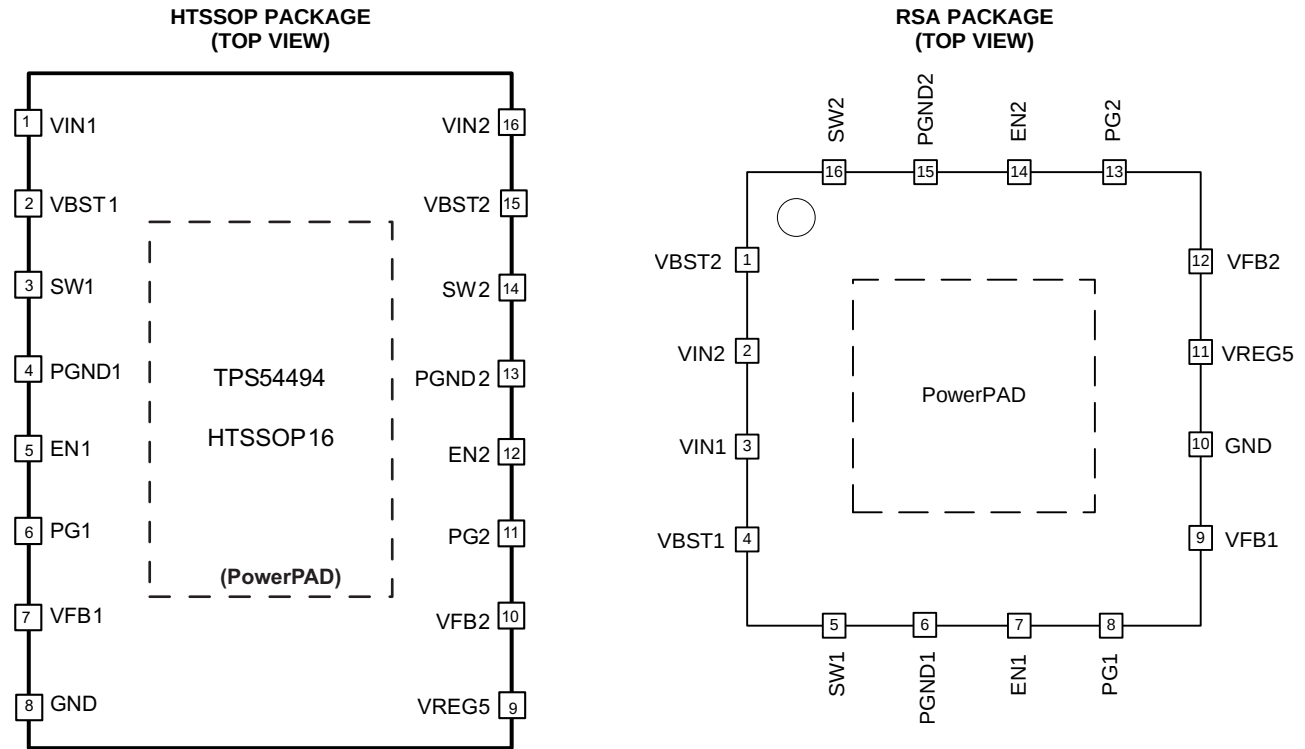

### PIN FUNCTIONS<sup>(1)</sup>

| PIN                 |           |           | I/O | DESCRIPTION                                                                                                                                                            |
|---------------------|-----------|-----------|-----|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| NAME                | PWP       | RSA       |     |                                                                                                                                                                        |
| VIN1                | 1         | 3         | I   | Power inputs and connects to both high side NFET drains. Supply Input for 5.5V linear regulator.                                                                       |
| VIN2                | 16        | 2         | I   |                                                                                                                                                                        |
| VBST1,              | 2         | 4         | I   | Supply input for high-side NFET gate drive circuit. Connect 0.1μF ceramic capacitor between VBSTx and SWx pins. An internal diode is connected between VREG5 and VBSTx |
| VBST2               | 15        | 1         | I   |                                                                                                                                                                        |
| SW1                 | 3         | 5         | I/O | Switch node connections for both the high-side NFETs and low-side NFETs. Input of current comparator.                                                                  |
| SW2                 | 14        | 16        | I/O |                                                                                                                                                                        |
| PGND1               | 4         | 6         | I/O | Ground returns for low-side MOSFETs. Input of current comparator.                                                                                                      |
| PGND2               | 13        | 15        | I/O |                                                                                                                                                                        |
| EN1                 | 5         | 7         | I   | Enable. Pull High to enable according converter.                                                                                                                       |
| EN2                 | 12        | 14        | I   |                                                                                                                                                                        |
| PG1                 | 6         | 8         | O   | Open drain power good outputs. Low indicates the corresponding output voltage is out of regulation.                                                                    |
| PG2                 | 11        | 13        | O   |                                                                                                                                                                        |
| VFB1                | 7         | 9         | I   | D-CAP2 feedback inputs. Connect to output voltage with resistor divider.                                                                                               |
| VFB2                | 10        | 12        | I   |                                                                                                                                                                        |
| GND                 | 8         | 10        | I/O | Signal GND. Connect sensitive SSx and VFBx returns to GND at a single point.                                                                                           |
| VREG5               | 9         | 11        | O   | Output of 5.5V linear regulator. Bypass to GND with a high-quality ceramic capacitor of at least 1 μF. VREG5 is active when ENx is high.                               |
| Exposed Thermal Pad | Back side | Back side | I/O | Thermal pad of the package. Must be soldered to achieve appropriate dissipation. Must be connected to GND.                                                             |

(1) x means either 1 or 2, that is, VFBx means VFB1 or VFB2.

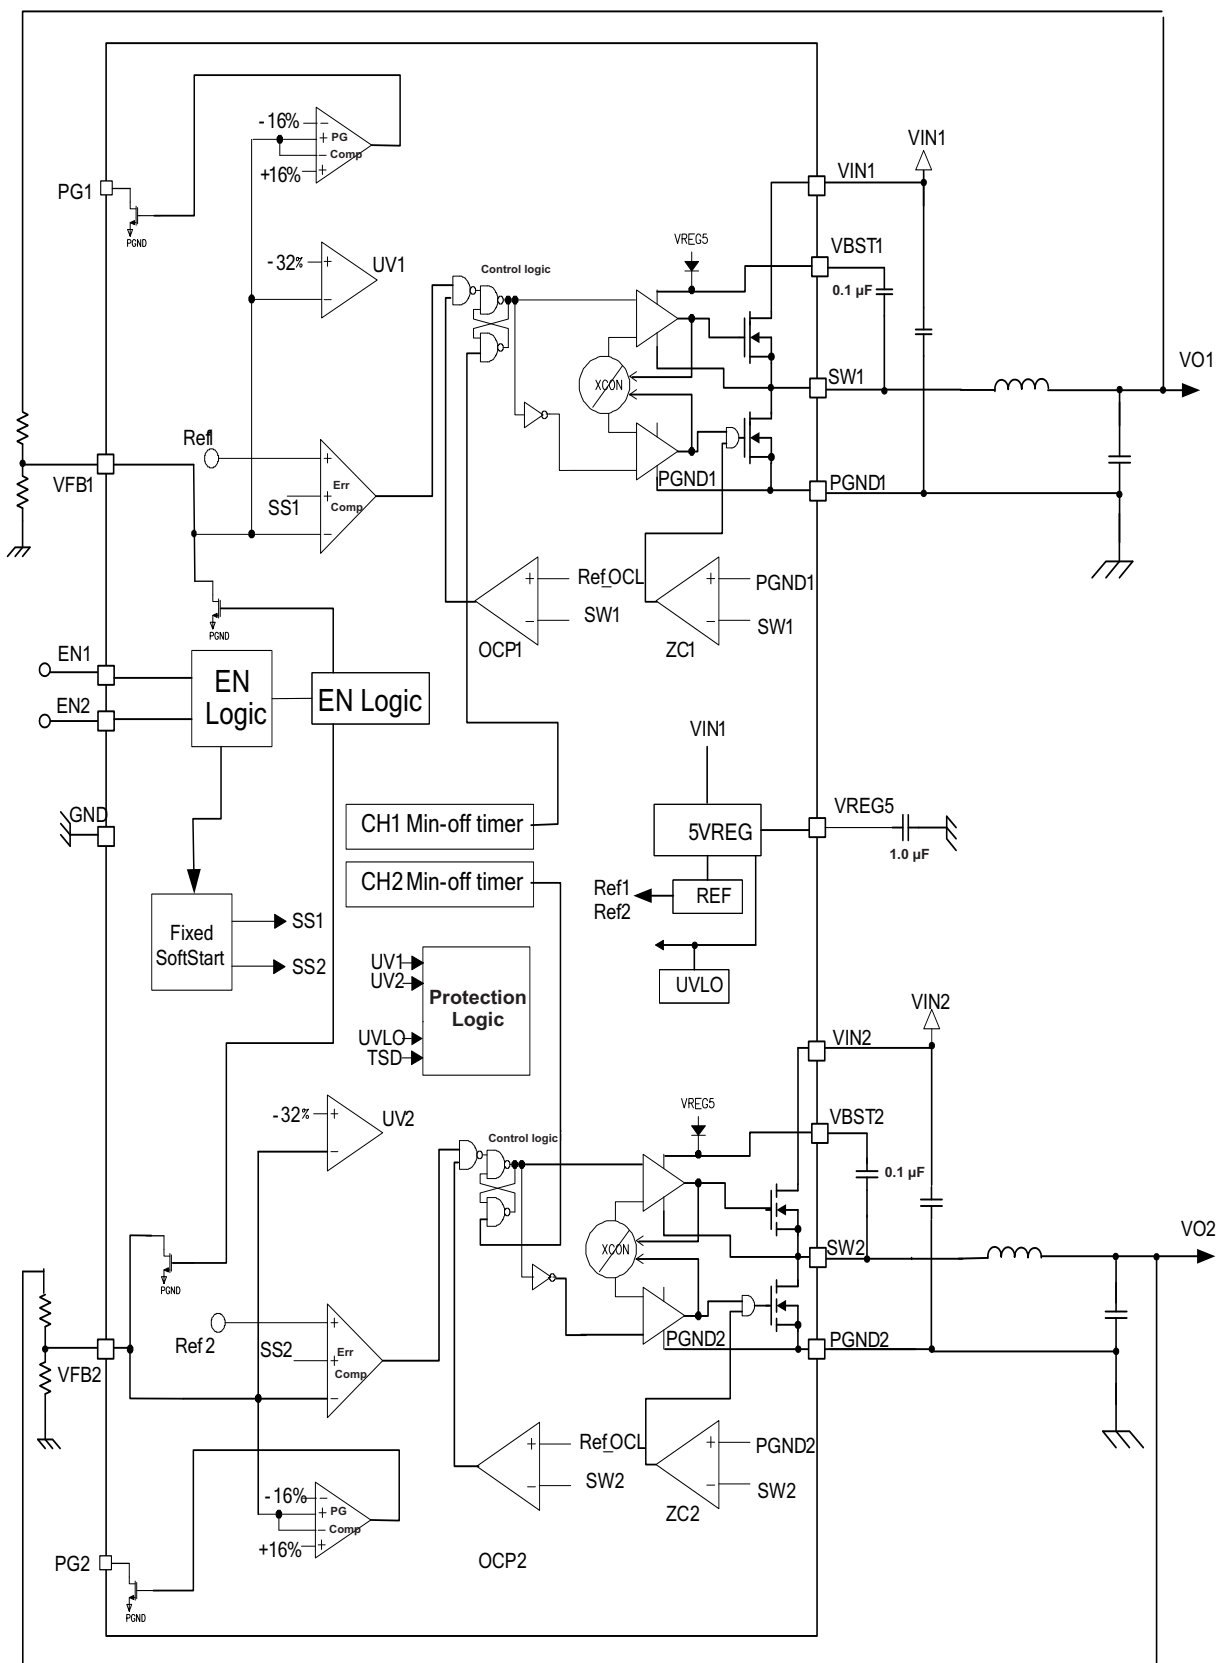**FUNCTIONAL BLOCK DIAGRAM**

## OVERVIEW

The TPS54494 is a 4A/2A dual synchronous step-down (buck) converter with two integrated N-channel MOSFETs for each channel. It operates using D-CAP2™ control mode. The fast transient response of D-CAP2™ control reduces the required output capacitance to meet a specific level of performance. Proprietary internal circuitry allows the use of low ESR output capacitors including ceramic and special polymer types.

## DETAILED DESCRIPTION

### PWM Operation

The main control loop of the TPS54494 is an adaptive on-time pulse width modulation (PWM) controller that supports a proprietary D-CAP2™ control mode. D-CAP2™ control combines constant on-time control with an internal compensation circuit for pseudo-fixed frequency and low external component count configuration with both low ESR and ceramic output capacitors. It is stable even with virtually no ripple at the output.

At the beginning of each cycle, the high-side MOSFET is turned on. This MOSFET is turned off when the internal timer expires. This timer is set by the converter's input voltage, VINx, and the output voltage, VOx, to maintain a pseudo-fixed frequency over the input voltage range hence it is called adaptive on-time control. The timer is reset and the high-side MOSFET is turned on again when the feedback voltage falls below the nominal output voltage. An internal ramp is added to the reference voltage to simulate output voltage ripple, eliminating the need for ESR induced output ripple from D-CAP™ control.

### PWM Frequency and Adaptive On-Time Control

TPS54494 uses an adaptive on-time control scheme and does not have a dedicated on board oscillator. The TPS54494 runs with a pseudo-fixed frequency of 700 kHz by using the input voltage and output voltage to set the on-time timer. The on-time is inversely proportional to the input voltage and proportional to the output voltage, therefore, when the duty ratio is VOx/VINx, the frequency is constant.

### Auto-Skip Eco-Mode™ Control

The TPS54494 is designed with Auto-Skip Eco-mode™ to increase light load efficiency. As the output current decreases from heavy load condition, the inductor current also reduces and eventually comes to the point where its ripple valley touches the zero level, which is the boundary between continuous conduction and discontinuous conduction modes. The rectifying MOSFET is turned off when zero inductor current is detected. As the load current further decreases the converter runs into discontinuous conduction mode. The on-time is kept almost the same as it was in the continuous conduction mode because it takes longer to discharge the output capacitor with smaller load current to the nominal output voltage. The transition point to the light load operation IOx(LL) current can be estimated with Equation 1 with 700-kHz used as fSW.

$$I_{Ox(LL)} = \frac{1}{2 \times L1x \times f_{SW}} \times \frac{(V_{INx} - V_{Ox}) \times V_{Ox}}{V_{INx}} \quad (1)$$

### Soft Start and Pre-Biased Soft Start

The TPS54494 has an internal, 1.0ms, soft-start for each channel. When the ENx pin becomes high, an internal DAC begins ramping up the reference voltage to the PWM comparator. Smooth control of the output voltage is maintained during start up.

The TPS54494 contains a unique circuit to prevent current from being pulled from the output during startup if the output is pre-biased. When the soft-start commands a voltage higher than the pre-bias level (internal soft start becomes greater than internal feedback voltage, VFBx), the controller slowly activates synchronous rectification by starting the first low side FET gate driver pulses with a narrow on-time. It then increments that on-time on a cycle-by-cycle basis until it coincides with the time dictated by (1-D), where D is the duty cycle of the converter. This scheme prevents the initial sinking of the pre-biased output, and ensures that the output voltage (VOx) starts and ramps up smoothly into regulation from pre-biased startup to normal mode operation.

## POWERGOOD

The TPS54494 has power-good outputs that are measured on VFBx. The power-good function is activated after the soft-start has finished. If the output voltage is within 16% of the target voltage, the internal comparator detects the power good state and the power good signal becomes high after 1.5ms delay. During start-up, this internal delay starts after 1.5ms of the UVP Enable delay time to avoid a glitch of the power-good signal. If the feedback voltage goes outside of  $\pm 16\%$  of the target value, the power-good signal becomes low after 2 $\mu$ s.

## Current Sensing and Over-Current Protection

The output over-current protection (OCP) is implemented using a cycle-by-cycle valley detection control circuit. The switch current is monitored by measuring the low-side FET switch voltage between the SWx and PGNDx pins. This voltage is proportional to the switch current and the on-resistance of the FET. To improve the measurement accuracy, the voltage sensing is temperature compensated.

During the on-time of the high-side FET switch, the switch current increases at a linear rate determined by VINx, VOx, the on-time and the output inductor value. During the on-time of the low-side FET switch, this current decreases linearly. The average value of the switch current is the load current  $I_{OUTx}$ . If the sensed voltage on the low-side FET is above the voltage proportional to the current limit, the converter keeps the low-side switch on until the measured voltage falls below the voltage corresponding to the current limit and a new switching cycle begins. In subsequent switching cycles, the on-time is set to the value determined for CCM and the current is monitored in the same manner.

Important considerations for this type of over-current protection: The load current is one half of the peak-to-peak inductor current higher than the over-current threshold. Also when the current is being limited, the output voltage tends to fall as the demanded load current may be higher than the current available from the converter. When the over current condition is removed, the output voltage returns to the regulated value. This protection is non-latching.

## Undervoltage Protection and Hiccup Mode

Hiccup mode of operation protects the power supply from being damaged during an over-current fault condition. If the OCL comparator circuit detects an over-current event the output voltage falls. When the feedback voltage falls below 68% of the reference voltage, the UVP comparator output goes high and an internal UVP delay counter begins counting. After counting UVP delay time, the TPS54494 shuts off the power supply for a given time (7x UVP Enable Delay Time) and then tries to re-start the power supply. If the over-load condition has been removed, the power supply starts and operates normally; otherwise, the TPS54494 detects another over-current event and shuts off the power supply again, repeating the previous cycle. Excess heat due to overload lasts for only a short duration in the hiccup cycle, therefore the junction temperature of the power device is much lower.

## UVLO Protection

Under-voltage lock out protection (UVLO) monitors the voltage of the V<sub>REG5</sub> pin. When the V<sub>REG5</sub> voltage is lower than the UVLO threshold, the TPS54494 shuts down. As soon as the voltage increases above the UVLO threshold, the converter starts again.

## Thermal Shutdown

TPS54494 monitors its temperature. If the temperature exceeds the threshold value (typically 155°C), the device shuts down. When the temperature falls below the threshold, the IC starts again.

When VIN1 starts up and VREG5 output voltage is below its nominal value, the thermal shutdown threshold is lower than 155°C. As long as VIN1 rises, T<sub>j</sub> must be kept below 110°C.

## TYPICAL CHARACTERISTICS

One output is enabled unless otherwise noted.  $V_{IN} = V_{IN1}$  or  $V_{IN2}$ .  $V_{IN} = 12\text{ V}$ ,  $T_A = 25^\circ\text{C}$  (unless otherwise noted).

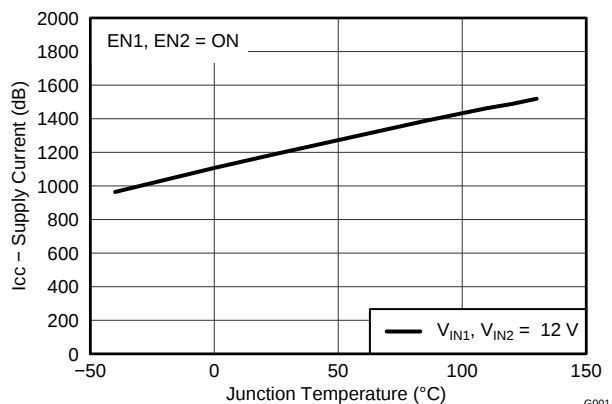


Figure 1. Input Current vs Junction Temperature

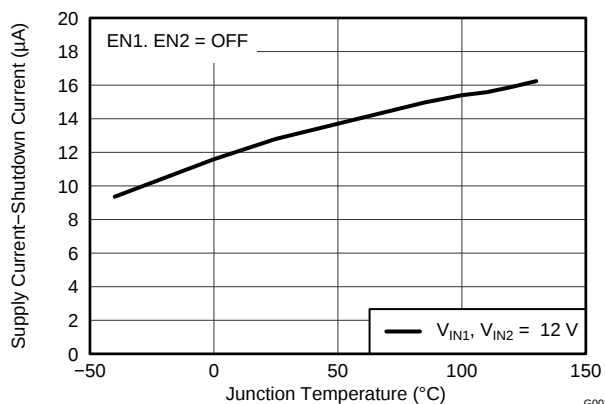


Figure 2. Input Shutdown Current vs Junction Temperature

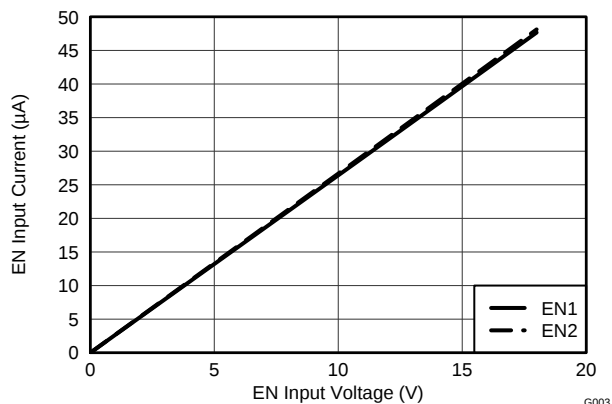


Figure 3. EN Current vs EN Voltage (VEN=12V)

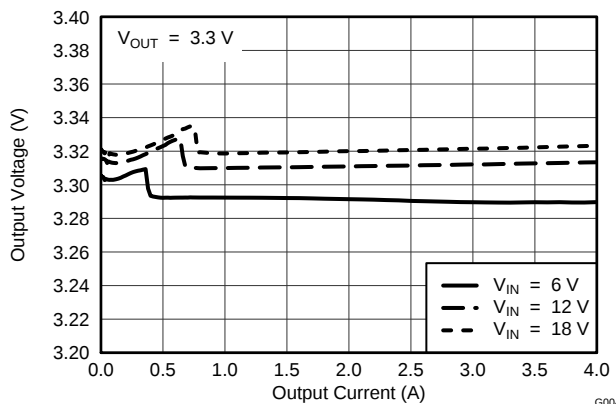


Figure 4. VO1=3.3V Output Voltage vs Output Current

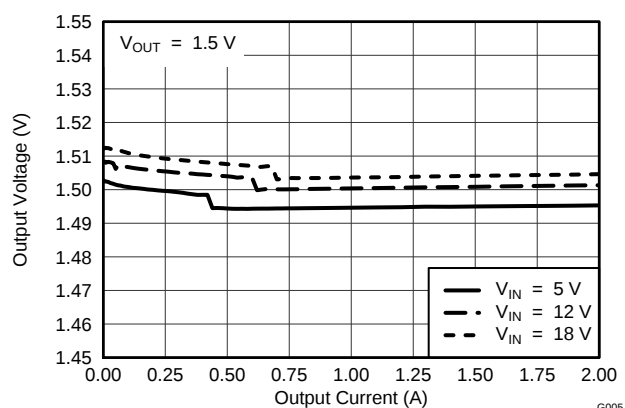


Figure 5. VO2=1.5V Output Voltage vs Output Current

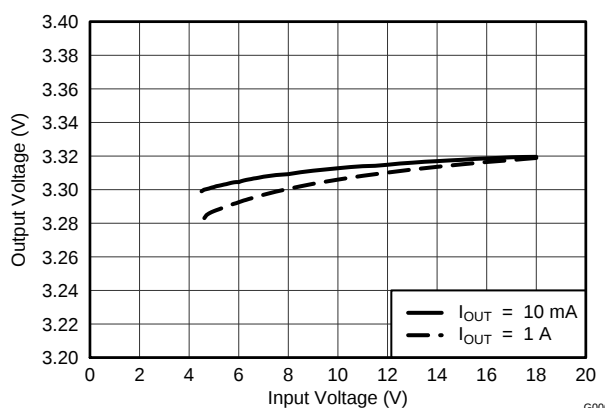


Figure 6. VO1=3.3V Output Voltage vs Input Voltage

## TYPICAL CHARACTERISTICS (continued)

One output is enabled unless otherwise noted.  $V_{IN} = V_{IN1}$  or  $V_{IN2}$ .  $V_{IN} = 12\text{ V}$ ,  $T_A = 25^\circ\text{C}$  (unless otherwise noted).

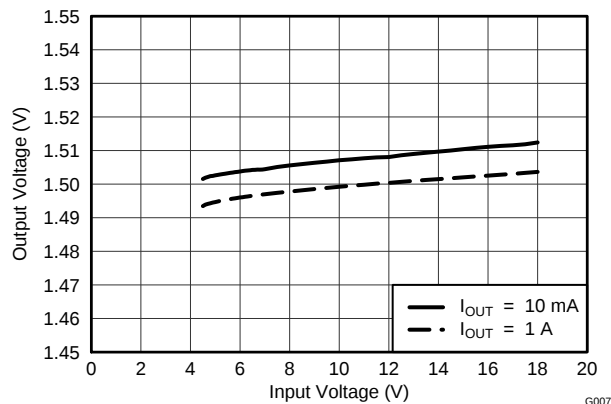


Figure 7. VO2=1.5V Output Voltage vs Input Voltage

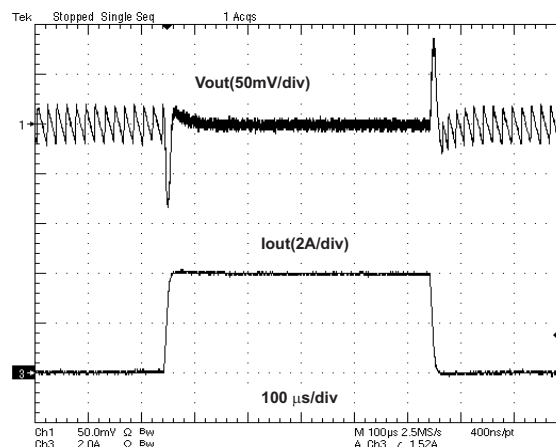


Figure 8. VO1=3.3V, 0 A to 4 A Load Transient Response

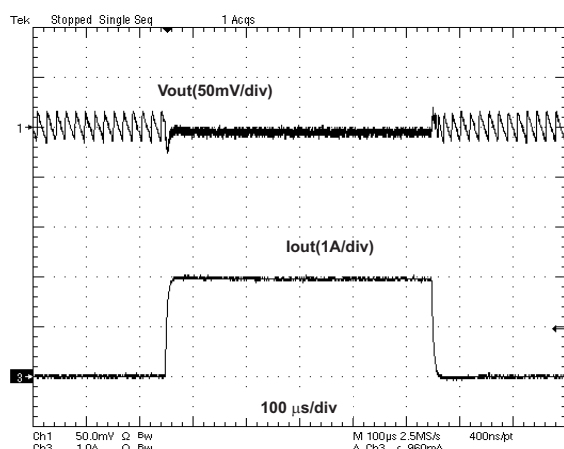


Figure 9. VO2=1.5V, 0 A to 2 A Load Transient Response

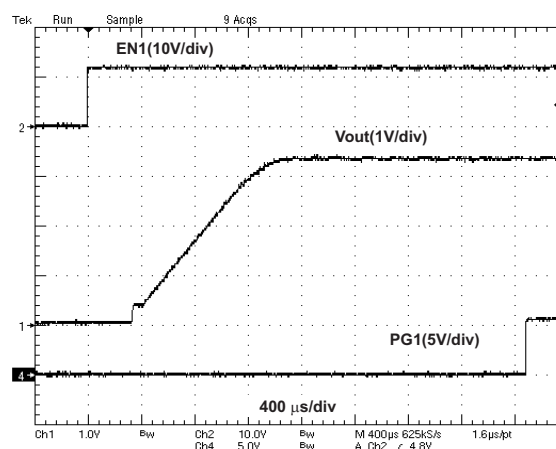


Figure 10. VO1=3.3V, PG1

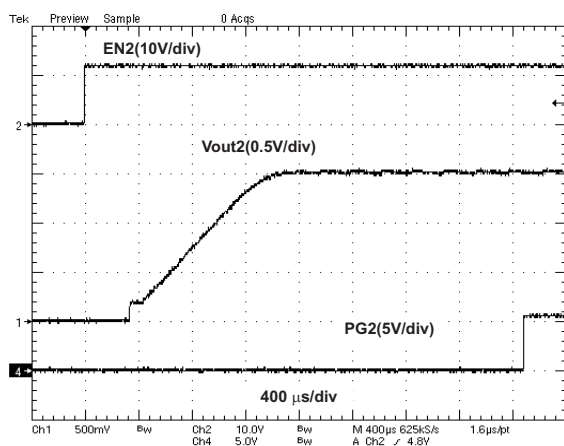


Figure 11. VO2=1.5V, PG2

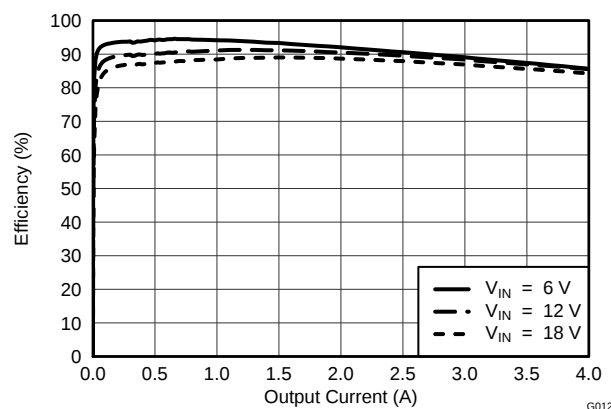


Figure 12. VO1=3.3V, Efficiency vs Output Current

## TYPICAL CHARACTERISTICS (continued)

One output is enabled unless otherwise noted.  $V_{IN} = V_{IN1}$  or  $V_{IN2}$ .  $V_{IN} = 12\text{ V}$ ,  $T_A = 25^\circ\text{C}$  (unless otherwise noted).

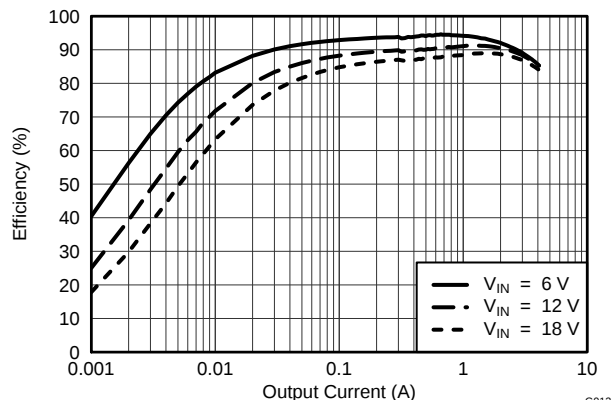


Figure 13. VO1=1.5V, Efficiency vs Output Current

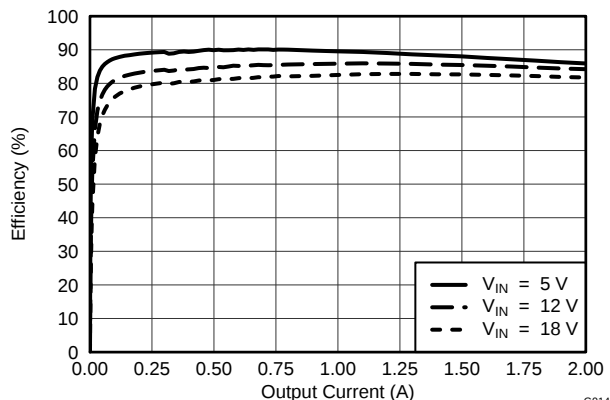


Figure 14. VO1=3.3V, Efficiency vs Output Current

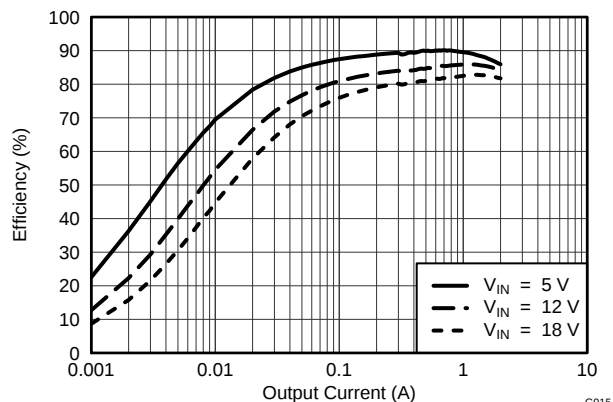


Figure 15. VO2=1.5V, Efficiency vs Output Current

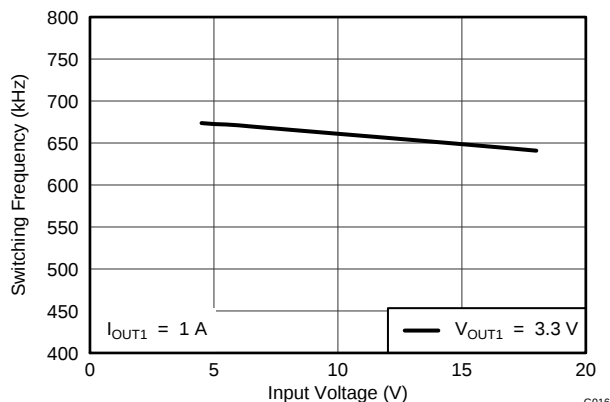


Figure 16. VO1=3.3V, SW-frequency vs Input Voltage

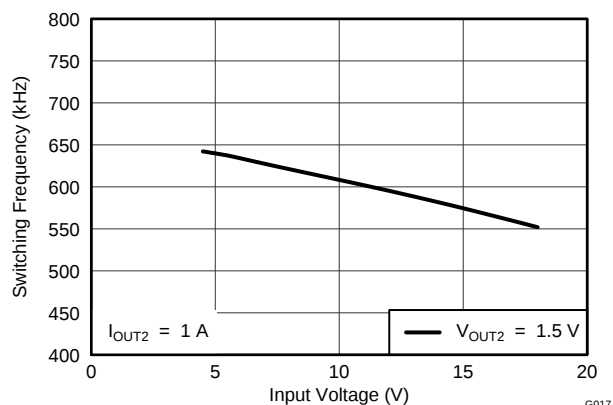


Figure 17. VO2=1.5V, SW-frequency vs Input Voltage

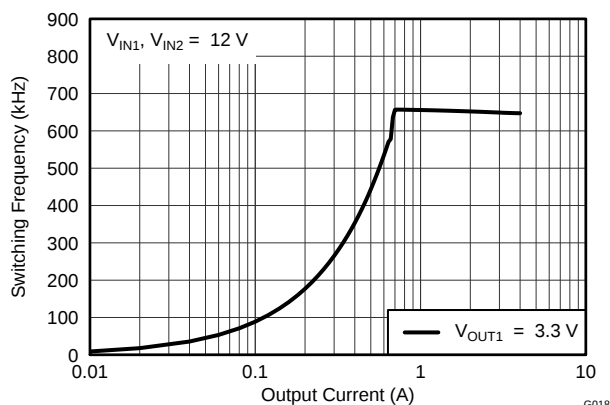


Figure 18. VO1=3.3V, SW-frequency vs Output Current

### TYPICAL CHARACTERISTICS (continued)

One output is enabled unless otherwise noted.  $V_{IN} = V_{IN1}$  or  $V_{IN2}$ .  $V_{IN} = 12\text{ V}$ ,  $T_A = 25^\circ\text{C}$  (unless otherwise noted).

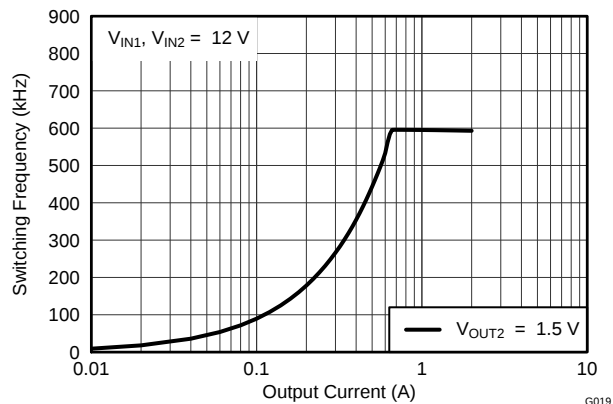


Figure 19.  $V_{O2}=1.5\text{V}$ , SW-frequency vs Output Current

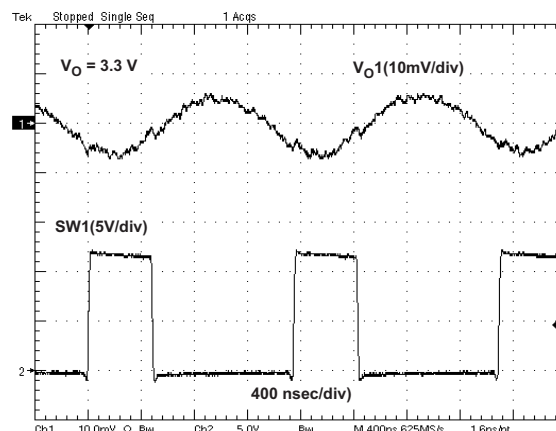


Figure 20.  $V_{O1}=3.3\text{V}$ ,  $V_{O1}$  Ripple Voltage ( $I_{O1} = 4\text{ A}$ )

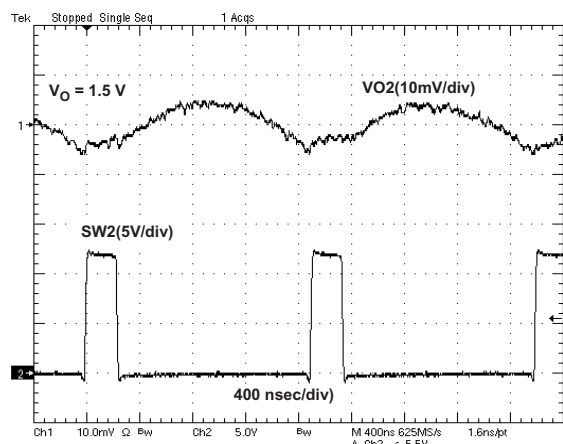


Figure 21.  $V_{O2}=1.5\text{V}$ , Ripple Voltage ( $I_{O2} = 2\text{ A}$ )

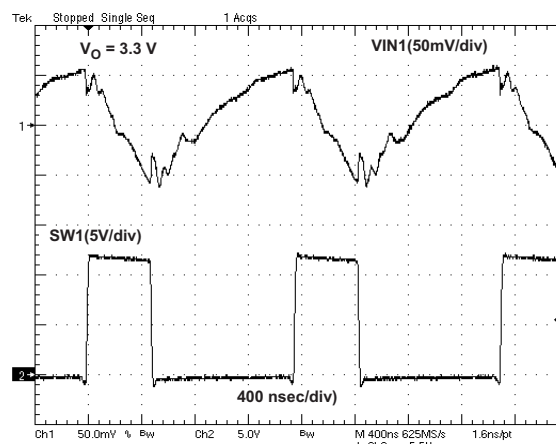


Figure 22.  $V_{IN1}$  Input Voltage Ripple ( $I_{O1} = 4\text{ A}$ )

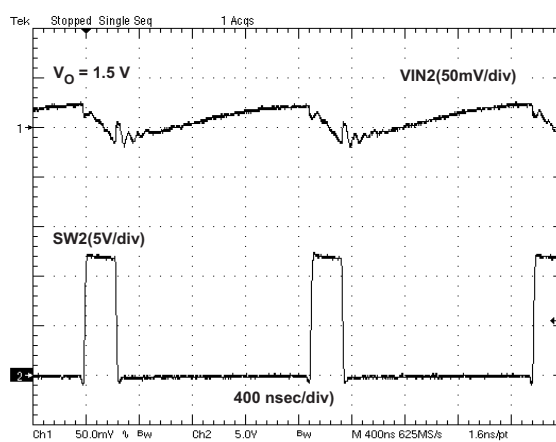


Figure 23.  $V_{IN2}$  Input Voltage Ripple ( $I_{O2} = 2\text{ A}$ )

## DESIGN GUIDE

### Step By Step Design Procedure

To begin the design process, you must know a few application parameters:

- Input voltage range
- Output voltage
- Output current

In all formulas x is used to indicate that they are valid for both converters. For the calculations the estimated switching frequency of 700 kHz is used.

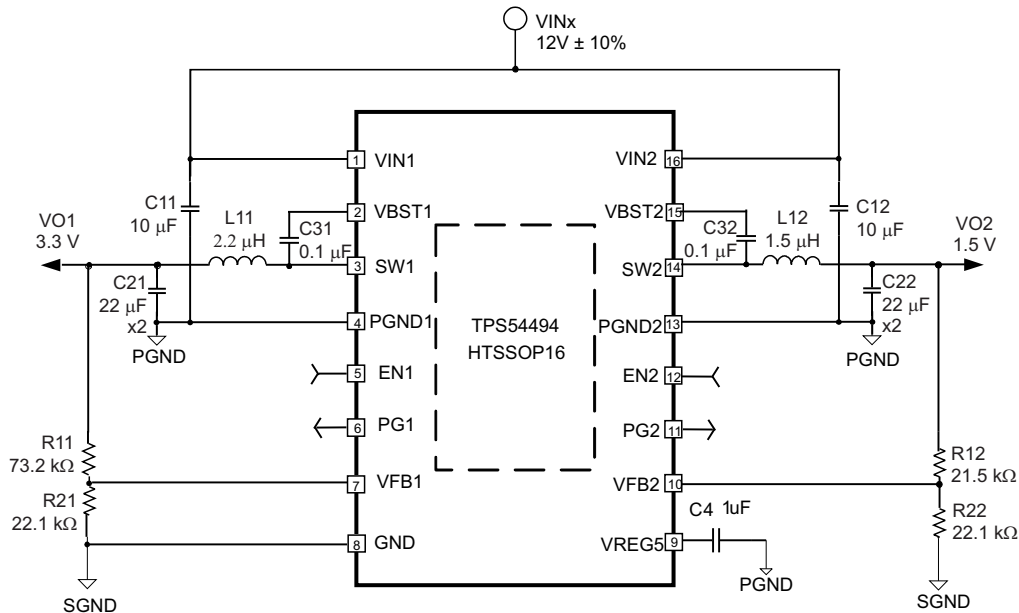


Figure 24. Schematic Diagram for the Design Example

### Output Voltage Resistors Selection

The output voltage is set with a resistor divider from the output node to the VFBx pin. It is recommended to use 1% tolerance or better divider resistors. Start by using Equation 2 to calculate  $V_{Ox}$ .

To improve the efficiency at very light loads consider using larger value resistors, but too high resistance values will be more susceptible to noise and voltage errors due to the VFBx input current will be more noticeable.

$$V_{Ox} = 0.765 \text{ V} \times \left( 1 + \frac{R1x}{R2x} \right) \quad (2)$$

### Output Filter Selection

The output filter used with the TPS54494 is an LC circuit. This LC filter has double pole at:

$$F_p = \frac{1}{2\pi \sqrt{L_{OUT} \times C_{OUT}}} \quad (3)$$

At low frequencies, the overall loop gain is set by the output set-point resistor divider network and the internal gain of the TPS54494. The low frequency phase is 180 degrees. At the output filter pole frequency, the gain rolls off at a –40 dB per decade rate and the phase drops rapidly. D-CAP2™ introduces a high frequency zero that reduces the gain roll off to –20 dB per decade and increases the phase to 90 degrees one decade above the zero frequency. The inductor and capacitor selected for the output filter must be selected so that the double pole of Equation 3 is located below the high frequency zero but close enough that the phase boost provided by the high frequency zero provides adequate phase margin for a stable circuit. To meet this requirement use the values recommended in Table 1.

**Table 1. Recommended Component Values**

| OUTPUT VOLTAGE (V) | R1x (kΩ) | R2x (kΩ) | Cffx (pF) <sup>(1)</sup> | L1x (μH)  | C2x (μF) |
|--------------------|----------|----------|--------------------------|-----------|----------|
| 1                  | 6.81     | 22.1     |                          | 1.5 - 2.2 | 20 - 68  |
| 1.05               | 8.25     | 22.1     |                          | 1.5 - 2.2 | 20 - 68  |
| 1.2                | 12.7     | 22.1     |                          | 1.5 - 2.2 | 20 - 68  |
| 1.5                | 21.5     | 22.1     |                          | 1.5 - 2.2 | 20 - 68  |
| 1.8                | 30.1     | 22.1     | 5 - 22                   | 2.2 - 3.3 | 20 - 68  |
| 2.5                | 49.9     | 22.1     | 5 - 22                   | 2.2 - 3.3 | 20 - 68  |
| 3.3                | 73.2     | 22.1     | 5 - 22                   | 2.2 - 3.3 | 20 - 68  |
| 5                  | 124      | 22.1     | 5 - 22                   | 4.7       | 20 - 68  |
| 6.5                | 165      | 22.1     | 5 - 22                   | 4.7       | 20 - 68  |

(1) Optional

For higher output voltages at or above 1.8 V, additional phase boost can be achieved by adding a feed forward capacitor (Cff) in parallel with R1.

The inductor peak-to-peak ripple current, peak current and RMS current are calculated using Equation 4, Equation 5 and Equation 6. The inductor saturation current rating must be greater than the calculated peak current and the RMS or heating current rating must be greater than the calculated RMS current.

For the calculations, use 700 kHz as the switching frequency,  $f_{SW}$ . Make sure the chosen inductor is rated for the peak current of Equation 5 and the RMS current of Equation 6.

$$\Delta I_{L1x} = \frac{V_{Ox}}{V_{INx(MAX)}} \times \frac{V_{INx(MAX)} - V_{Ox}}{L1x \times f_{SW}} \quad (4)$$

$$I_{Lpeakx} = I_{Ox} + \frac{\Delta I_L}{2} \quad (5)$$

$$I_{LOx(RMS)} = \sqrt{I_{Ox}^2 + \frac{1}{12} \Delta I_L^2} \quad (6)$$

For the above design example, the calculated peak current is 4.46 A and the calculated RMS current is 4.01 A for VO1. The inductor used is a TDK CLF7045-2R2N with a rated current of 5.5 A based on the inductance change and of 4.3 A based on the temperature rise.

The capacitor value and ESR determines the amount of output voltage ripple. The TPS54494 is intended for use with ceramic or other low ESR capacitors. The recommended value range is from 20μF to 68μF. Use Equation 7 to determine the required RMS current rating for the output capacitor(s).

$$I_{COx(RMS)} = \frac{V_{Ox} \times (V_{INx} - V_{Ox})}{\sqrt{12} \times V_{INx} \times L_{Ox} \times f_{SW}} \quad (7)$$

For this design two TDK C3216X5R0J226M 22μF output capacitors are used. The typical ESR is 2 mΩ each. The calculated RMS current is 0.19A and each output capacitor is rated for 4A.

## Input Capacitor Selection

The TPS54494 requires an input decoupling capacitor and a bulk capacitor is needed depending on the application. A ceramic capacitor of or above  $10\mu\text{F}$  is recommended for the decoupling capacitor. Additionally,  $0.1\mu\text{F}$  ceramic capacitors from pin 1 and Pin 16 to ground are recommended to improve the stability and reduce the SWx node overshoots. The capacitors voltage rating needs to be greater than the maximum input voltage.

## Bootstrap Capacitor Selection

A  $0.1\mu\text{F}$  ceramic capacitors must be connected between the VBSTx and SWx pins for proper operation. It is recommended to use ceramic capacitors with a dielectric of X5R or better.

## VREG5 Capacitor Selection


A  $1\mu\text{F}$  ceramic capacitor must be connected between the VREG5 and GND pins for proper operation. It is recommended to use a ceramic capacitor with a dielectric of X5R or better.

## Thermal Information

This 16-pin PWP package incorporates an exposed thermal pad. The thermal pad must be soldered directly to the printed circuit board (PCB). After soldering, the PCB is used as a heatsink. In addition, through the use of thermal vias, the thermal pad can be attached directly to the appropriate copper plane shown in the electrical schematic for the device, or alternatively, can be attached to a special heatsink structure designed into the PCB. This design optimizes the heat transfer from the integrated circuit (IC).

For additional information on the exposed thermal pad and how to use the advantage of its heat dissipating abilities, refer to the Technical Brief, *PowerPAD™ Thermally Enhanced Package*, Texas Instruments Literature No. [SLMA002](#) and Application Brief, *PowerPAD™ Made Easy*, Texas Instruments Literature No. [SLMA004](#).

The exposed thermal pad dimensions for this package are shown in the following illustration.

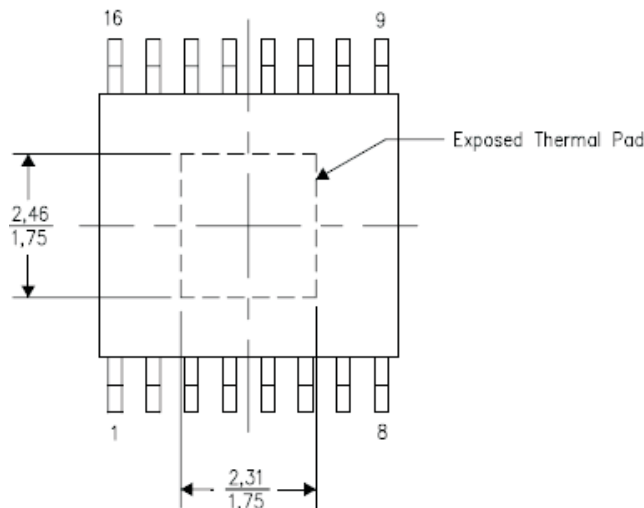


**Figure 25. Thermal Pad Dimensions**

## Layout Considerations

1. Keep the input current loop as small as possible. And avoid the input switching current through the thermal pad.
2. Keep the SW node as physically small and short as possible to minimize parasitic capacitance and inductance and to minimize radiated emissions.
3. Keep analog and non-switching components away from switching components.
4. Make a single point connection from the signal ground to power ground.
5. Do not allow switching currents to flow under the device.
6. Keep the pattern lines for VINx and PGNDx broad.

7. Exposed pad of device must be soldered to PGND.
8. VREG5 capacitor should be placed near the device, and connected to GND.
9. Output capacitors should be connected with a broad pattern to the PGND.
10. Voltage feedback loops should be as short as possible, and preferably with ground shields.
11. Kelvin connections should be brought from the output to the feedback pin of the device.
12. Providing sufficient vias is preferable for VIN, SW and PGND connections.
13. PCB pattern for VIN, SW, and PGND should be as broad as possible.
14. VIN Capacitor should be placed as near as possible to the device.

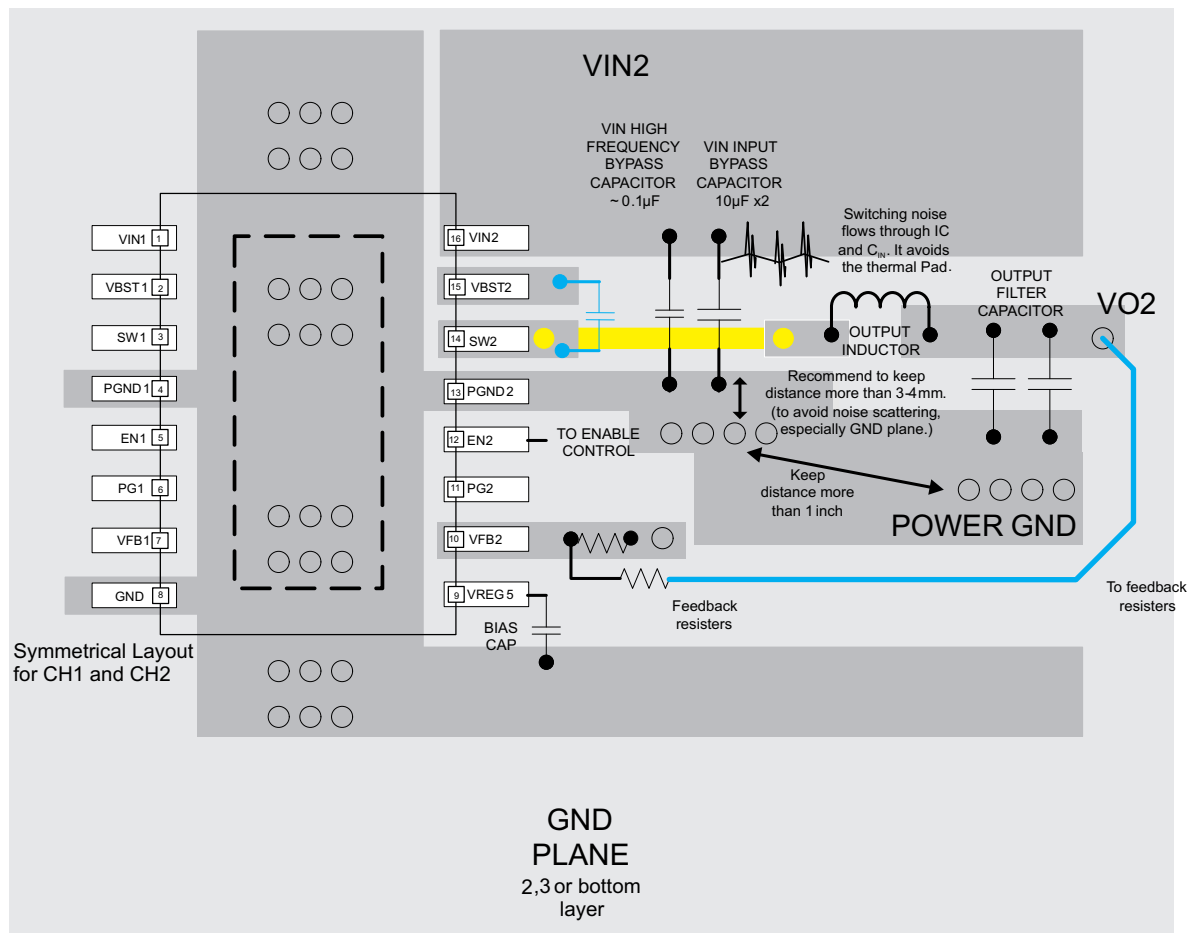

○ Via to GND Plane

- Blue parts can be placed on the bottom side

- Connect the SWx pins through another layer with the inductor (yellow line)

Figure 26. TPS54494 Layout

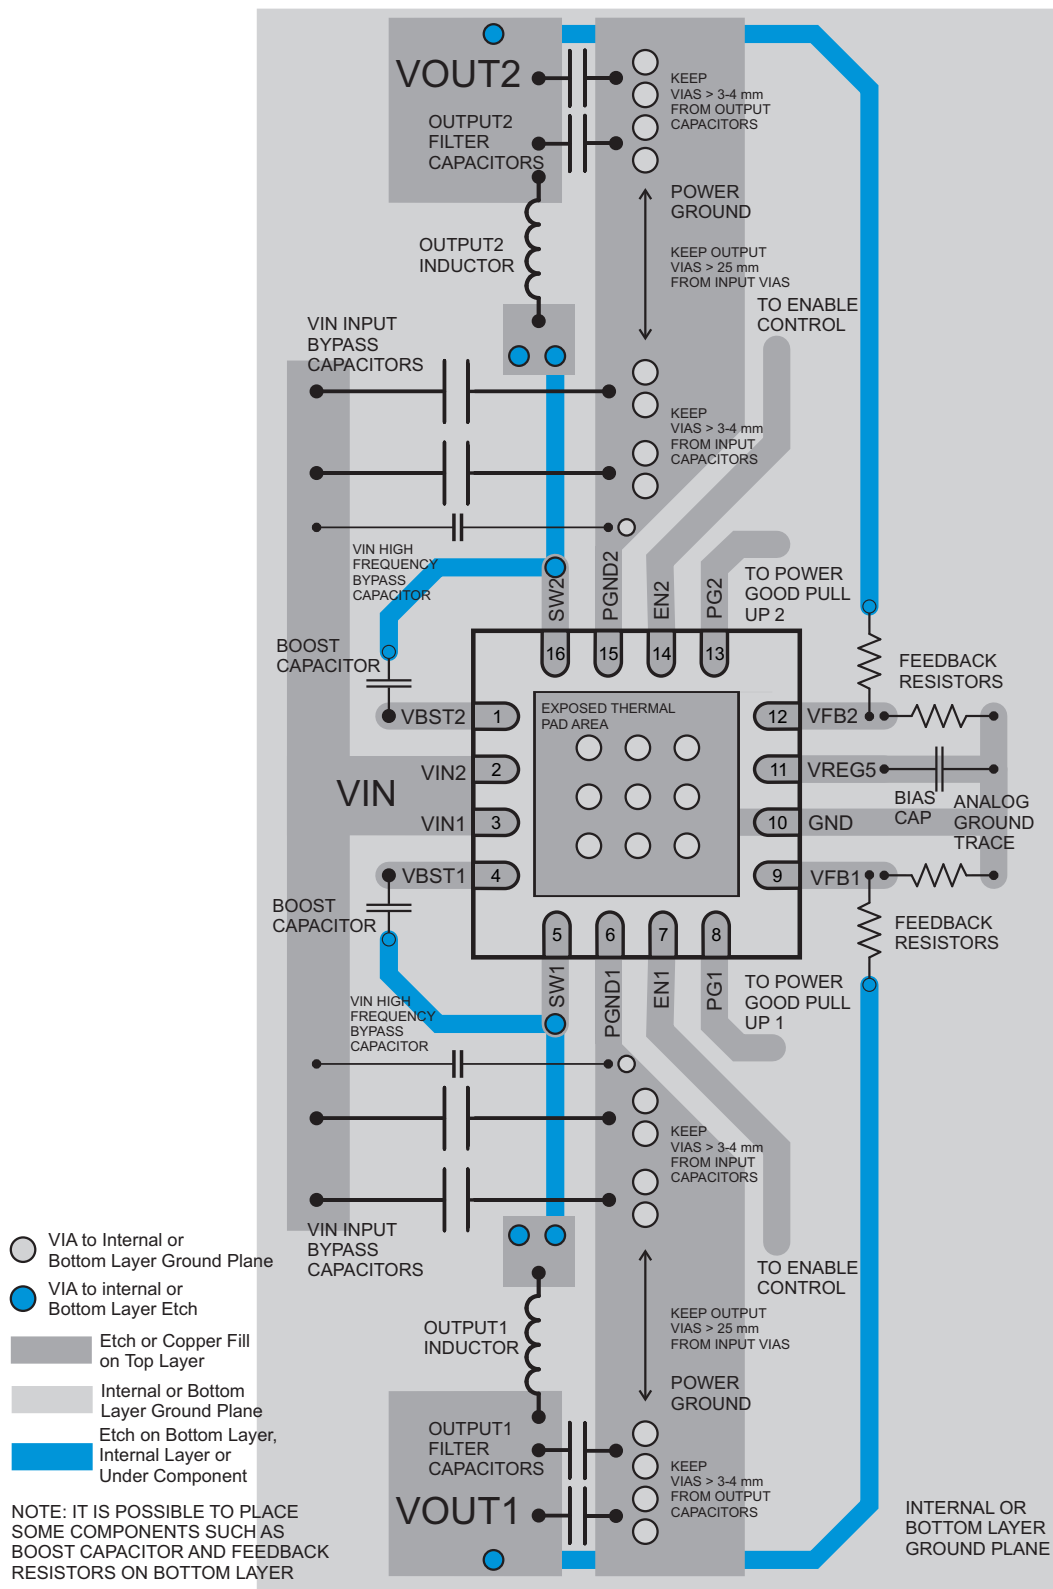


Figure 27. RSA Package Layout

## REVISION HISTORY

| Changes from Original (June 2012) to Revision A                                                                                                                                                                | Page |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|
| • 已在特性和说明中添加 16 引脚 VQFN 封装 .....                                                                                                                                                                               | 1    |
| • Added the RSA 16 pin package to the Ordering Information table .....                                                                                                                                         | 2    |
| • Added the RSA package to the Thermal Information table .....                                                                                                                                                 | 2    |
| • Added the RSA 16 pin package pinout image, pin names and functions to the Device Information Section .....                                                                                                   | 5    |
| • Added <a href="#">Figure 27</a> .....                                                                                                                                                                        | 17   |
| <hr/>                                                                                                                                                                                                          |      |
| Changes from Revision A (May 2013) to Revision B                                                                                                                                                               | Page |
| • Change text in the Auto-Skip Eco-Mode™ Control section From: "The on-time is kept almost half as it was in the continuous..." To: "The on-time is kept almost the same as it was in the continuous..." ..... | 7    |

## PACKAGING INFORMATION

| Orderable part number        | Status<br>(1) | Material type<br>(2) | Package   Pins    | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C) | Part marking<br>(6) |
|------------------------------|---------------|----------------------|-------------------|-----------------------|-------------|--------------------------------------|-----------------------------------|--------------|---------------------|
| <a href="#">TPS54494PWP</a>  | Active        | Production           | HTSSOP (PWP)   16 | 90   TUBE             | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | PS54494             |
| TPS54494PWP.A                | Active        | Production           | HTSSOP (PWP)   16 | 90   TUBE             | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | PS54494             |
| TPS54494PWPG4                | Active        | Production           | HTSSOP (PWP)   16 | 90   TUBE             | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | PS54494             |
| TPS54494PWPG4.A              | Active        | Production           | HTSSOP (PWP)   16 | 90   TUBE             | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | PS54494             |
| <a href="#">TPS54494PWPR</a> | Active        | Production           | HTSSOP (PWP)   16 | 2000   LARGE T&R      | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | PS54494             |
| TPS54494PWPR.A               | Active        | Production           | HTSSOP (PWP)   16 | 2000   LARGE T&R      | Yes         | NIPDAU                               | Level-2-260C-1 YEAR               | -40 to 85    | PS54494             |
| <a href="#">TPS54494RSAR</a> | Active        | Production           | QFN (RSA)   16    | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 85    | TPS<br>54494        |
| TPS54494RSAR.A               | Active        | Production           | QFN (RSA)   16    | 3000   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 85    | TPS<br>54494        |
| <a href="#">TPS54494RSAT</a> | Active        | Production           | QFN (RSA)   16    | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 85    | TPS<br>54494        |
| TPS54494RSAT.A               | Active        | Production           | QFN (RSA)   16    | 250   SMALL T&R       | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 85    | TPS<br>54494        |

<sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).

<sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

<sup>(4)</sup> **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

## TAPE AND REEL INFORMATION



\*All dimensions are nominal

| Device       | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|--------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| TPS54494PWPR | HTSSOP       | PWP             | 16   | 2000 | 330.0              | 12.4               | 6.9     | 5.6     | 1.6     | 8.0     | 12.0   | Q1            |
| TPS54494RSAR | QFN          | RSA             | 16   | 3000 | 330.0              | 12.4               | 4.25    | 4.25    | 1.15    | 8.0     | 12.0   | Q2            |
| TPS54494RSAT | QFN          | RSA             | 16   | 250  | 180.0              | 12.4               | 4.25    | 4.25    | 1.15    | 8.0     | 12.0   | Q2            |

## TAPE AND REEL BOX DIMENSIONS



\*All dimensions are nominal

| Device       | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|--------------|--------------|-----------------|------|------|-------------|------------|-------------|
| TPS54494PWPR | HTSSOP       | PWP             | 16   | 2000 | 350.0       | 350.0      | 43.0        |
| TPS54494RSAR | QFN          | RSA             | 16   | 3000 | 346.0       | 346.0      | 33.0        |
| TPS54494RSAT | QFN          | RSA             | 16   | 250  | 182.0       | 182.0      | 20.0        |

**TUBE**


\*All dimensions are nominal

| Device          | Package Name | Package Type | Pins | SPQ | L (mm) | W (mm) | T (μm) | B (mm) |
|-----------------|--------------|--------------|------|-----|--------|--------|--------|--------|
| TPS54494PWP     | PWP          | HTSSOP       | 16   | 90  | 530    | 10.2   | 3600   | 3.5    |
| TPS54494PWP.A   | PWP          | HTSSOP       | 16   | 90  | 530    | 10.2   | 3600   | 3.5    |
| TPS54494PWPG4   | PWP          | HTSSOP       | 16   | 90  | 530    | 10.2   | 3600   | 3.5    |
| TPS54494PWPG4.A | PWP          | HTSSOP       | 16   | 90  | 530    | 10.2   | 3600   | 3.5    |

## GENERIC PACKAGE VIEW


**RSA 16**

**VQFN - 1 mm max height**

4 x 4, 0.65 mm pitch

PLASTIC QUAD FLATPACK - NO LEAD

This image is a representation of the package family, actual package may vary.  
Refer to the product data sheet for package details.

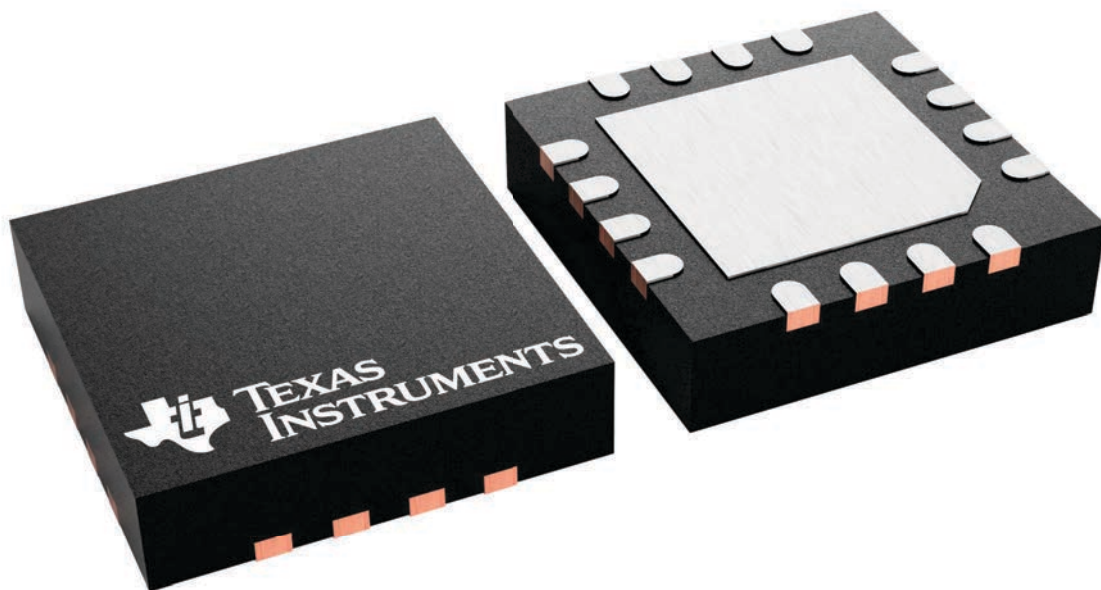


4230969/A



## VQFN - 1 mm max height

PLASTIC QUAD FLATPACK - NO LEAD

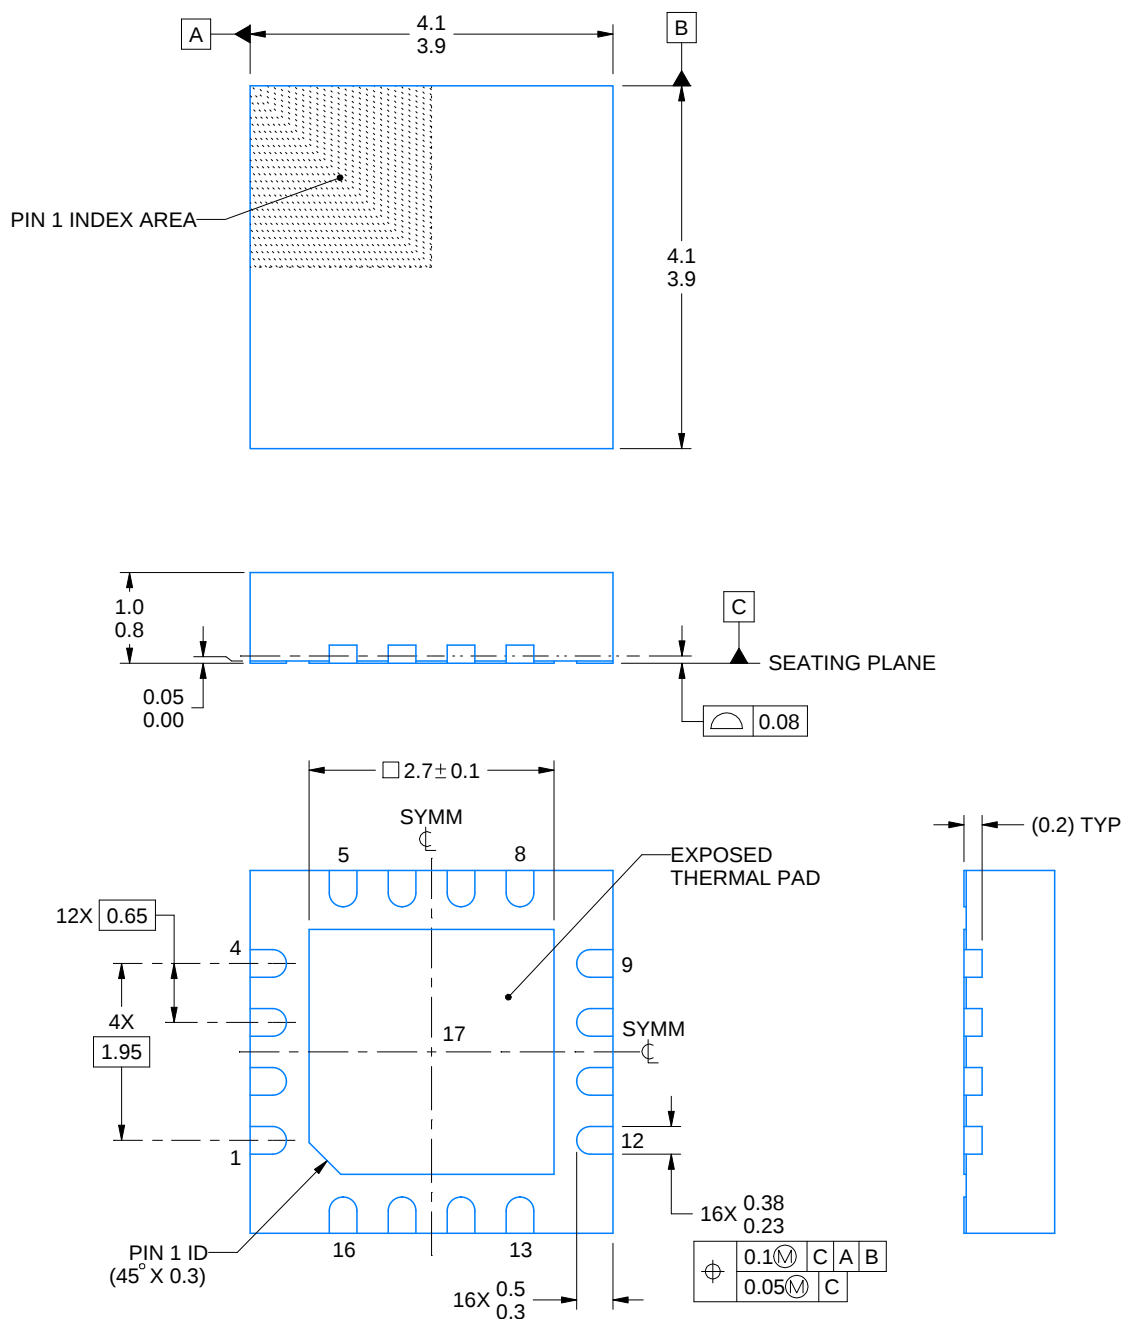

4219093/A 08/2021

NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. The package thermal pad must be soldered to the printed circuit board for thermal and mechanical performance.
4. Reference JEDEC registration MO-220.

# EXAMPLE BOARD LAYOUT



RSA0016B

VQFN - 1 mm max height

PLASTIC QUAD FLATPACK - NO LEAD

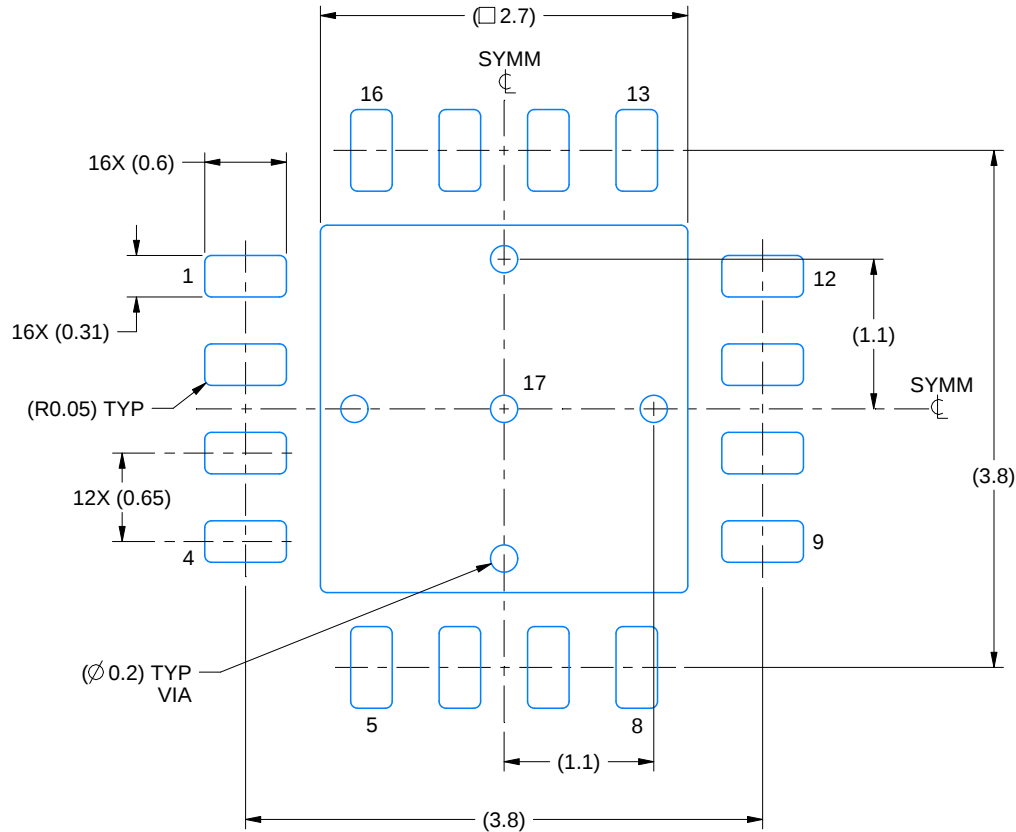

LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE:18X

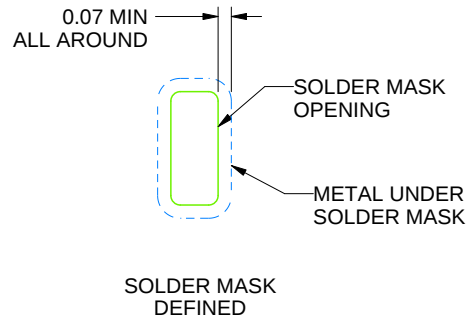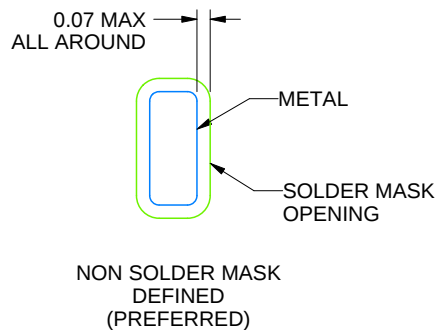

SOLDER MASK DETAILS

4219093/A 08/2021

NOTES: (continued)


5. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 ([www.ti.com/lit/sluea271](http://www.ti.com/lit/sluea271)).
6. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.

# EXAMPLE STENCIL DESIGN

RSA0016B

VQFN - 1 mm max height

PLASTIC QUAD FLATPACK - NO LEAD

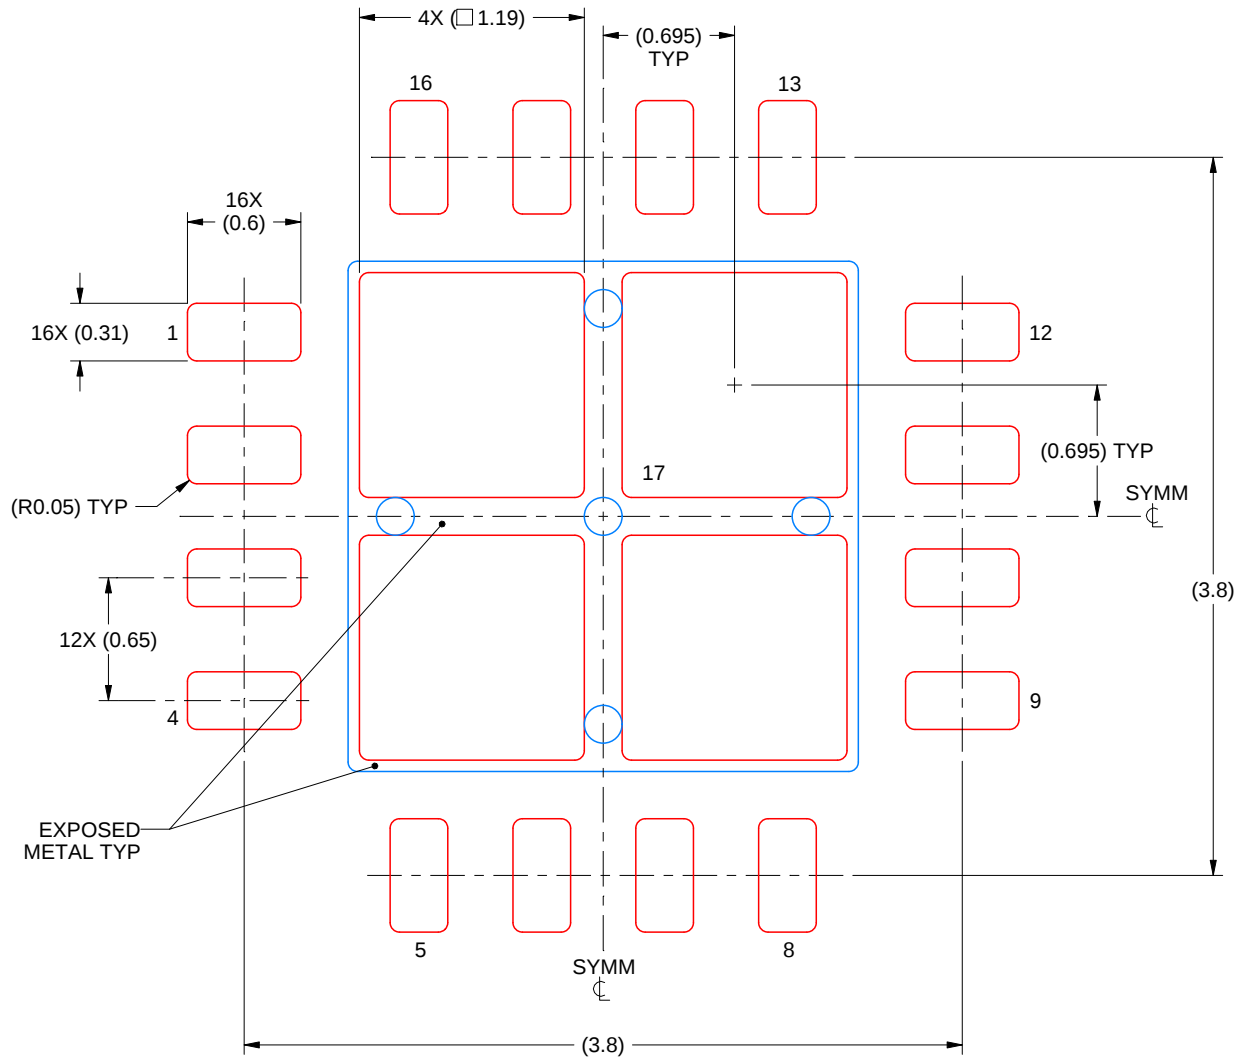


**SOLDER PASTE EXAMPLE**  
BASED ON 0.125 mm THICK STENCIL

EXPOSED PAD  
77% PRINTED SOLDER COVERAGE BY AREA  
SCALE:25X



4219093/A 08/2021

NOTES: (continued)

7. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

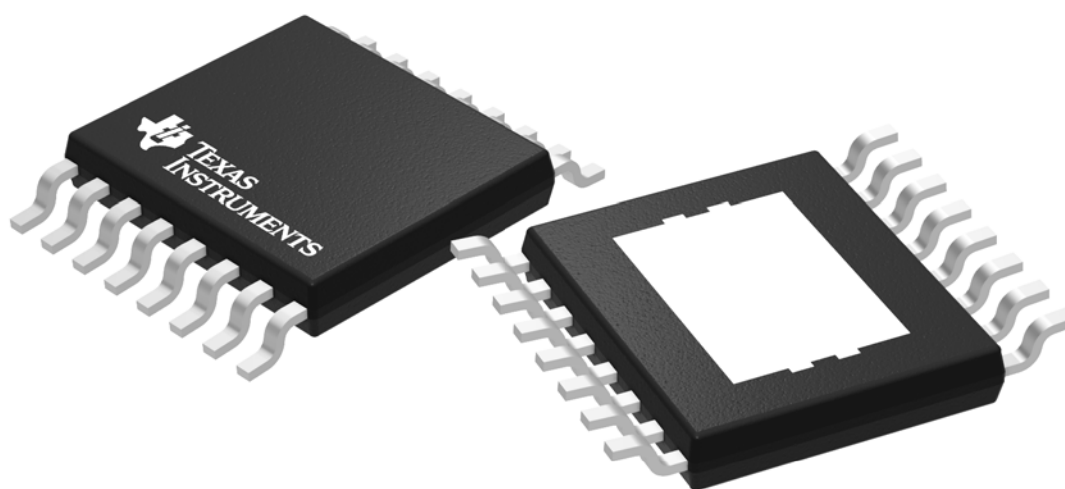

Images above are just a representation of the package family, actual package may vary.  
Refer to the product data sheet for package details.

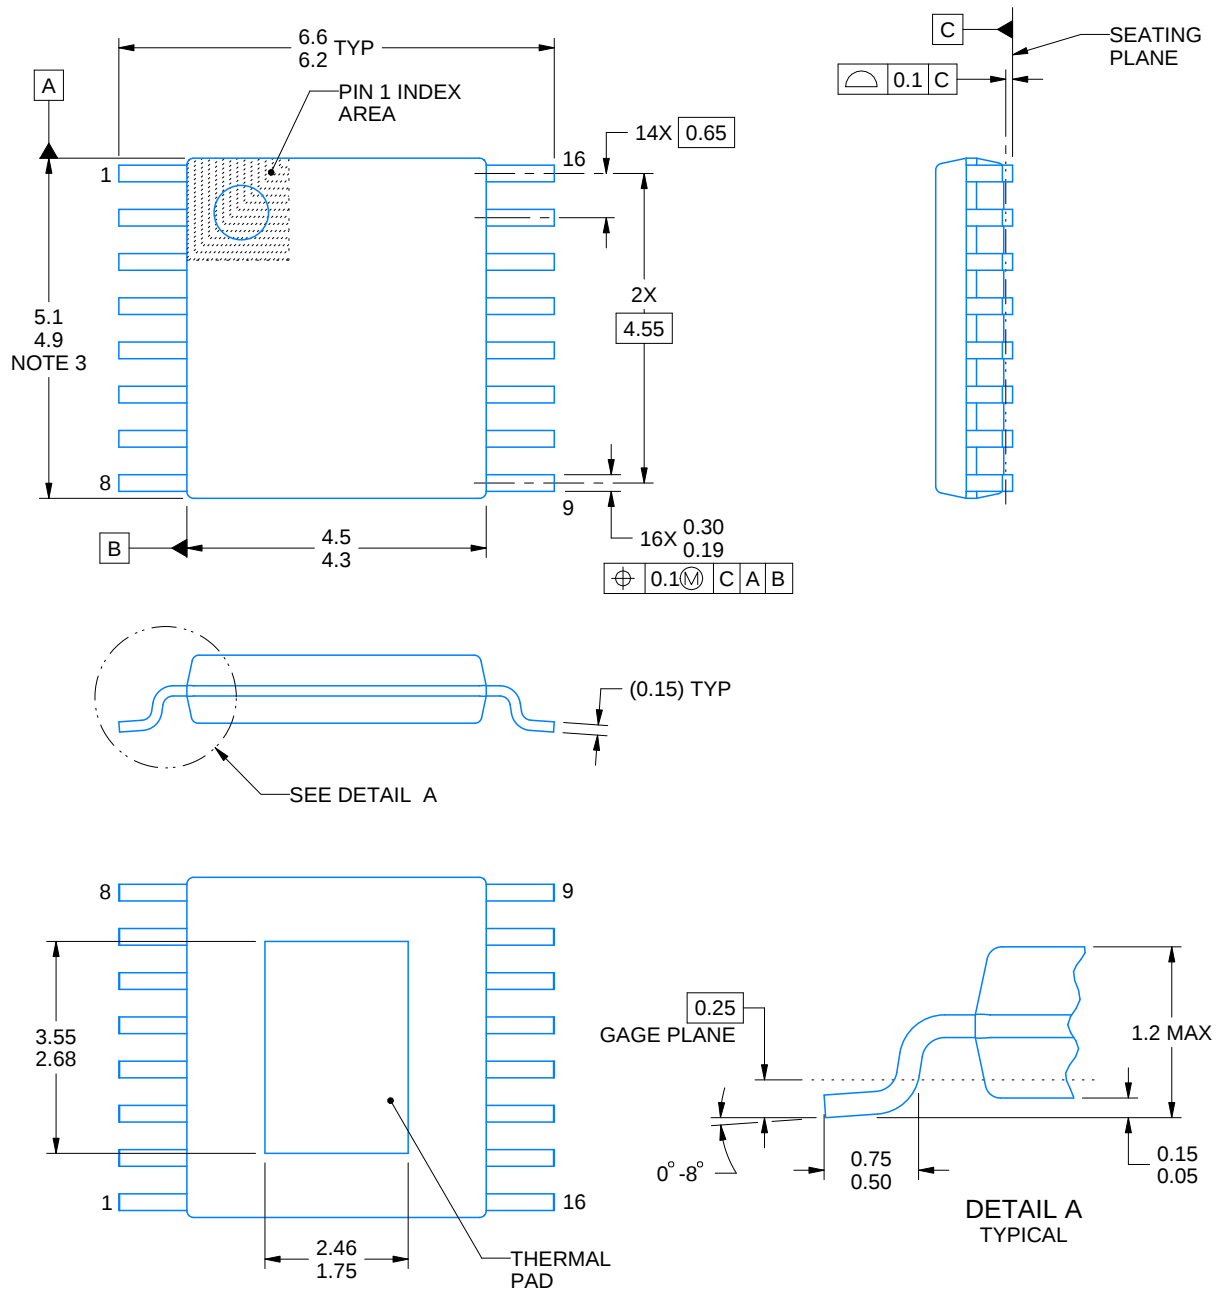

4223595/A 03/2017

## NOTES:

PowerPAD is a trademark of Texas Instruments.


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. Reference JEDEC registration MO-153.

# EXAMPLE BOARD LAYOUT



PWP0016J

PowerPAD™ TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE

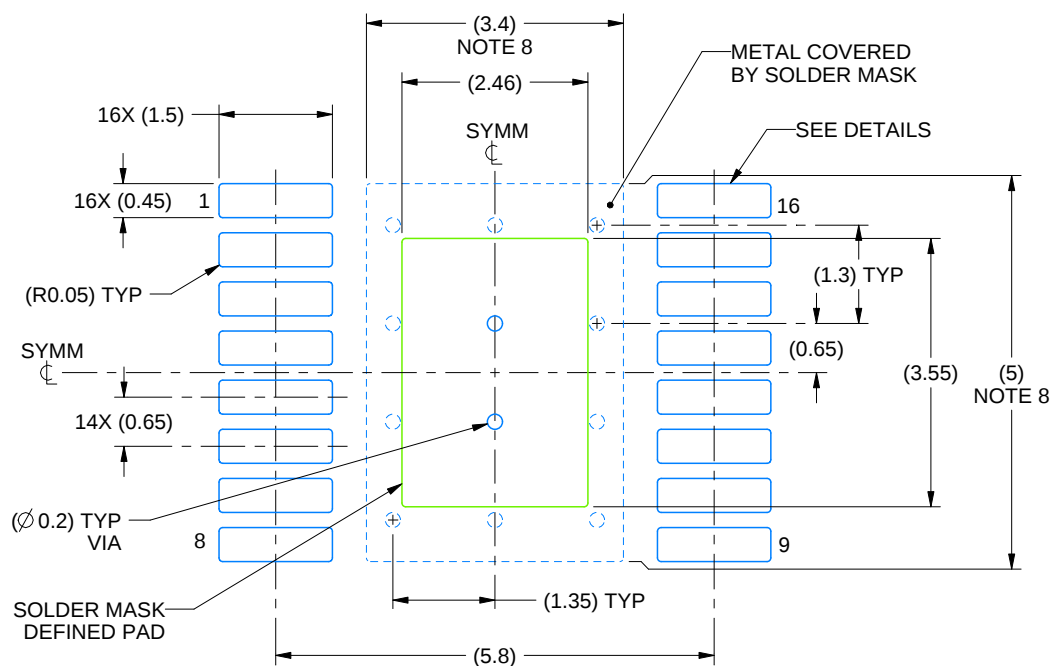

LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE: 10X

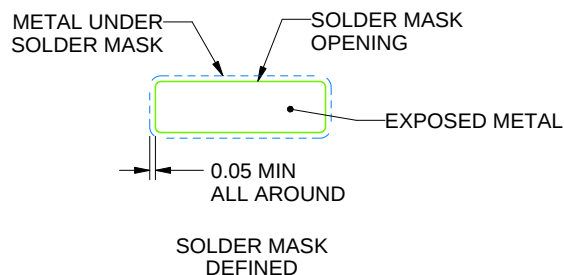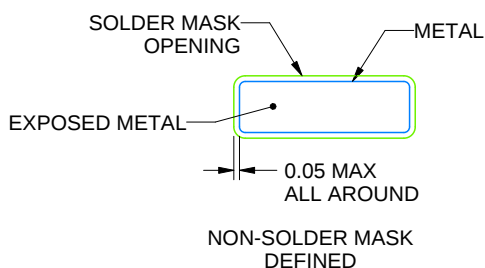

SOLDER MASK DETAILS

4223595/A 03/2017

NOTES: (continued)


5. Publication IPC-7351 may have alternate designs.
6. Solder mask tolerances between and around signal pads can vary based on board fabrication site.
7. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature numbers SLMA002 ([www.ti.com/lit/slma002](http://www.ti.com/lit/slma002)) and SLMA004 ([www.ti.com/lit/slma004](http://www.ti.com/lit/slma004)).
8. Size of metal pad may vary due to creepage requirement.
9. Vias are optional depending on application, refer to device data sheet. It is recommended that vias under paste be filled, plugged or tented.

# EXAMPLE STENCIL DESIGN

PWP0016J

PowerPAD™ TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE

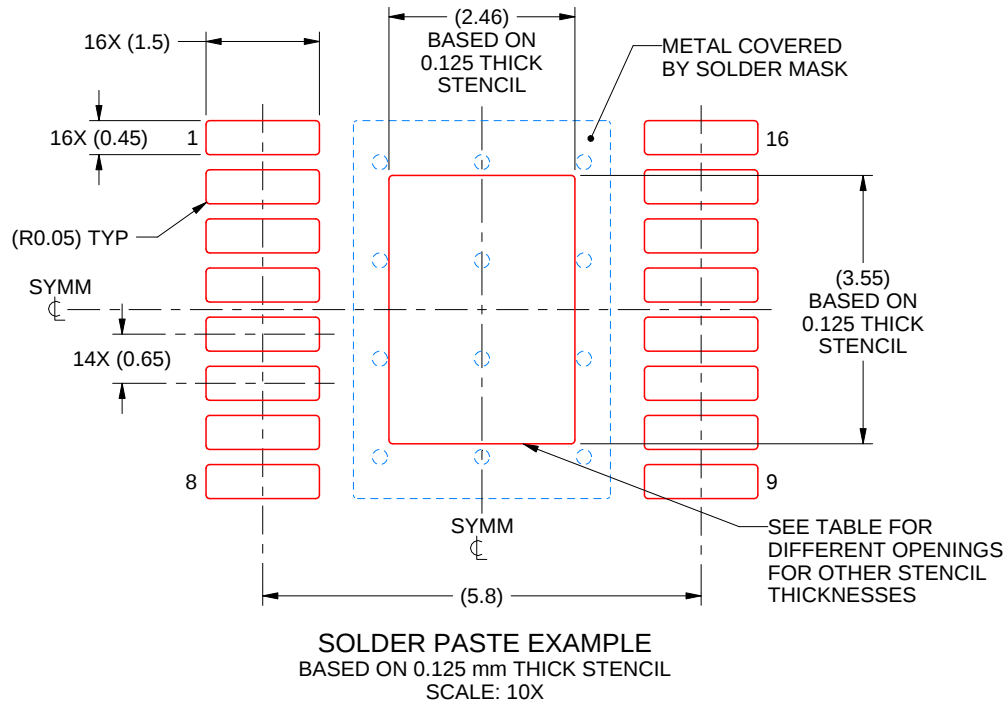

| STENCIL THICKNESS | SOLDER STENCIL OPENING |
|-------------------|------------------------|
| 0.1               | 2.75 X 3.97            |
| 0.125             | 2.46 X 3.55 (SHOWN)    |
| 0.15              | 2.25 X 3.24            |
| 0.175             | 2.08 X 3.00            |

4223595/A 03/2017

NOTES: (continued)

10. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
11. Board assembly site may have different recommendations for stencil design.

## 重要通知和免责声明

TI“按原样”提供技术和可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证没有瑕疵且不做任何明示或暗示的担保，包括但不限于对适销性、与某特定用途的适用性或不侵犯任何第三方知识产权的暗示担保。

这些资源可供使用 TI 产品进行设计的熟练开发人员使用。您将自行承担以下全部责任：(1) 针对您的应用选择合适的 TI 产品，(2) 设计、验证并测试您的应用，(3) 确保您的应用满足相应标准以及任何其他安全、安保法规或其他要求。

这些资源如有变更，恕不另行通知。TI 授权您仅可将这些资源用于研发本资源所述的 TI 产品的相关应用。严禁以其他方式对这些资源进行复制或展示。您无权使用任何其他 TI 知识产权或任何第三方知识产权。对于因您对这些资源的使用而对 TI 及其代表造成的任何索赔、损害、成本、损失和债务，您将全额赔偿，TI 对此概不负责。

TI 提供的产品受 [TI 销售条款](#)、[TI 通用质量指南](#) 或 [ti.com](#) 上其他适用条款或 TI 产品随附的其他适用条款的约束。TI 提供这些资源并不会扩展或以其他方式更改 TI 针对 TI 产品发布的适用的担保或担保免责声明。除非德州仪器 (TI) 明确将某产品指定为定制产品或客户特定产品，否则其产品均为按确定价格收入目录的标准通用器件。

TI 反对并拒绝您可能提出的任何其他或不同的条款。

版权所有 © 2025，德州仪器 (TI) 公司

最后更新日期：2025 年 10 月