

## 8 通道, 高带宽, 模拟前端

 查询样片: [PGA5807A](#)

### 特性

- **8 通道完整模拟前端 (AFE):**
  - 低噪声放大器 (LNA), 可编程增益放大器 (PGA) 和可编程低通滤波器 (LPF)
  - 满通道增益: **12dB 至 30dB**
  - 与输入相关的噪声:  **$2.1\text{nV}/\sqrt{\text{Hz}}$**
- **LNA:**
  - 增益: **12dB**
  - 全差分
  - 宽输入共模支持:  
 **$2.1 \pm 200\text{mV}$**
  - 最大线性输入范围:  **$500\text{mV}_{\text{PP}}$**
- **PGA 增益: 0dB 至 18dB**
  - 具有 **3dB** 增益步长
  - 可通过串口或外部引脚设定
- **最大总通道增益: 30dB**
- **可编程 LPF:**
  - 转角频率: **75MHz, 60MHz**
- **功率 (全链式):**
  - 每通道 **60mW**
- **快速且持续的过载恢复**
- **小尺寸封装: 9mm x 9mm 四方扁平无引线封装**

### (QFN)-64

#### 应用范围

- 数据采集 前端
- 超声波成像

#### 说明

PGA5807A 是一款 8 通道、高带宽、模拟前端 (AFE)。此器件由一个 3.3V 模拟单电源供电运行。此器件支持高带宽输入频率, 每通道的总功率 60mW。PGA5807A 包含一个低噪声放大器 (LNA), 一个可编程增益放大器 (PGA) 和一个可编程低通滤波器 (LPF)。此 LNA 有一个固定的 12dB 增益 (差分放大器支持直接和电容输入耦合) 并且支持  $500\text{mV}_{\text{PP}}$  的最大线性输入范围。

此器件提供增益步长为 3dB 的 0dB 至 18dB 的增益选项。这个 18dB PGA 增益可使用串口或外部引脚设定。PGA5807A 集成了一个形式为 LPF 的抗混叠滤波器以减少噪声。此器件采用极小型, 9mm x 9mm 四方扁平无引线 (QFN)-64 封装, 并且额定运行温度范围为  $-40^{\circ}\text{C}$  至  $+85^{\circ}\text{C}$ 。



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

All trademarks are the property of their respective owners.



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

### ORDERING INFORMATION<sup>(1)</sup>

| PRODUCT  | PACKAGE-LEAD | PACKAGE DESIGNATOR |
|----------|--------------|--------------------|
| PGA5807A | QFN-64       | RGC                |

(1) For the most current package and ordering information, see the Package Option Addendum at the end of this document, or visit the device product folder at [www.ti.com](http://www.ti.com).

### ABSOLUTE MAXIMUM RATINGS

Over operating free-air temperature range, unless otherwise noted.<sup>(1)</sup>

|                                           |                           | VALUE                             | UNIT |
|-------------------------------------------|---------------------------|-----------------------------------|------|
| Supply voltage range                      | AVDD                      | -0.3 to 3.9                       | V    |
| Voltage at analog input and digital input |                           | -0.3 to minimum (3.6, AVDD + 0.3) | V    |
| Temperature range                         | Operating, T <sub>A</sub> | -40 to +85                        | °C   |
|                                           | Storage, T <sub>stg</sub> | -55 to +150                       | °C   |
| Electrostatic discharge (ESD) ratings     | Human body model (HBM)    | 1                                 | kV   |

(1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, and do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

### RECOMMENDED OPERATING CONDITIONS

|                |                                 | MIN  | NOM | MAX | UNIT |
|----------------|---------------------------------|------|-----|-----|------|
| AVDD           | Analog voltage supply           | 3.15 |     | 3.6 | V    |
| T <sub>A</sub> | Operating temperature           | -40  |     | +85 | °C   |
|                | Input common-mode voltage range | 1.9  |     | 2.3 | V    |

### THERMAL INFORMATION

| THERMAL METRIC <sup>(1)</sup> |                                              | PGA5807   | UNITS |
|-------------------------------|----------------------------------------------|-----------|-------|
|                               |                                              | RGC (QFN) |       |
|                               |                                              | 64 PINS   |       |
| θ <sub>JA</sub>               | Junction-to-ambient thermal resistance       | 22.8      | °C/W  |
| θ <sub>JCtop</sub>            | Junction-to-case (top) thermal resistance    | 6.9       |       |
| θ <sub>JB</sub>               | Junction-to-board thermal resistance         | 2.4       |       |
| ψ <sub>JT</sub>               | Junction-to-top characterization parameter   | 0.1       |       |
| ψ <sub>JB</sub>               | Junction-to-board characterization parameter | 2.4       |       |
| θ <sub>JCbot</sub>            | Junction-to-case (bottom) thermal resistance | 0.2       |       |

(1) 有关传统和全新热度的更多信息，请参阅 *IC 封装热量应用报告* (文献号: ZHCA543)。

## ELECTRICAL CHARACTERISTICS

Typical values are at  $T_A = +25^\circ\text{C}$ ,  $AVDD = 3.3\text{ V}$ , input dc-coupled with a 2.1-V common-mode voltage, LNA gain = 12 dB, PGA gain = 18 dB, total channel gain = 30 dB, bandwidth = high, and  $V_{OUT} = -1\text{ dBFS}$ , unless otherwise specified. Minimum and maximum values are specified across the full temperature range of  $T_{MIN} = -40^\circ\text{C}$  to  $T_{MAX} = +85^\circ\text{C}$  with  $AVDD = 3.3\text{ V}$ .

| PARAMETER                           |                                 | TEST CONDITIONS                                                                                                            | MIN                                              | TYP        | MAX | UNIT                         |               |
|-------------------------------------|---------------------------------|----------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------|------------|-----|------------------------------|---------------|
| Input-referred noise                |                                 | $f = 25\text{ MHz}$ , total channel gain = 30 dB                                                                           |                                                  | 2.1        |     | $\text{nV}/\sqrt{\text{Hz}}$ |               |
| Noise figure                        |                                 | $R_S = 100\ \Omega$ , differential                                                                                         |                                                  | 6.4        |     | dB                           |               |
| Maximum linear input voltage        |                                 | Total channel gain = 12 dB, differential                                                                                   |                                                  | 500        |     | $\text{mV}_{PP}$             |               |
| Maximum linear output swing         |                                 |                                                                                                                            |                                                  | 2          |     | $V_{PP}$                     |               |
| $G_{LNA}$                           | LNA gain                        |                                                                                                                            |                                                  | 12         |     | dB                           |               |
| Maximum channel gain                |                                 |                                                                                                                            | 29                                               | 30         | 31  | dB                           |               |
| PGA gain range                      |                                 |                                                                                                                            | 0                                                |            | 18  | dB                           |               |
| Gain step                           |                                 |                                                                                                                            |                                                  | 3          |     | dB                           |               |
| Total output-referred noise         |                                 | Total channel gain = 30 dB                                                                                                 |                                                  | 450        |     | $\mu\text{V}$                |               |
| Input resistance                    |                                 |                                                                                                                            |                                                  | 5          |     | $\text{k}\Omega$             |               |
| $C_i$                               | Input capacitance               |                                                                                                                            |                                                  | 3          |     | pF                           |               |
| LPF -3-dB cutoff frequency          |                                 |                                                                                                                            |                                                  | 75         |     | MHz                          |               |
| Gain matching                       |                                 | Across devices, $T_A = +25^\circ\text{C}$                                                                                  | -1                                               |            | 1   | dB                           |               |
|                                     |                                 | Across channels in the same device                                                                                         |                                                  | $\pm 0.25$ |     | dB                           |               |
| $V_{ICR}$                           | Input common-mode voltage range |                                                                                                                            | 1.9                                              |            | 2.3 | V                            |               |
| Output offset                       |                                 |                                                                                                                            | -50                                              |            | 50  | mV                           |               |
| $V_{OCR}$                           | Output common-mode voltage      |                                                                                                                            |                                                  | 950        |     | mV                           |               |
| HD2                                 | Harmonic distortion             | Second                                                                                                                     | $f = 25\text{ MHz}$ , $V_{OUT} = -1\text{ dBFS}$ |            |     | -55                          | dBc           |
| HD3                                 |                                 | Third                                                                                                                      | $f = 25\text{ MHz}$ , $V_{OUT} = -1\text{ dBFS}$ |            |     | -50                          | dBc           |
| THD                                 |                                 | Total                                                                                                                      | $f = 25\text{ MHz}$ , $V_{OUT} = -1\text{ dBFS}$ |            |     | -48                          | dBc           |
| IMD3                                | Intermodulation distortion      | $f_1 = 25\text{ MHz}$ at $-7\text{ dBFS}$ , $f_2 = 25\text{ MHz}$ , $1\text{ MHz}$ at $-7\text{ dBFS}$ , for all PGA gains |                                                  |            |     | -45                          | dBc           |
| Fundamental crosstalk               |                                 | $f = 25\text{ MHz}$ , $V_{OUT} = -1\text{ dBFS}$                                                                           |                                                  |            |     | -50                          | dBc           |
| $P_D$                               | Power dissipation               | Total, per channel                                                                                                         |                                                  | 60         | 69  | mW/ch                        |               |
|                                     |                                 | Power-down mode                                                                                                            | Partial power-down                               |            | 4.2 | mW/ch                        |               |
|                                     |                                 |                                                                                                                            | Complete power-down                              |            |     | 2.5                          | mW/ch         |
| AVDD current (3.3 V)                |                                 |                                                                                                                            |                                                  | 145        |     | mA                           |               |
| Settling time for overload recovery |                                 | For 12-dB higher signal than linear input                                                                                  |                                                  |            |     | -30                          | ns            |
| Power-up response time              |                                 | Partial power-down                                                                                                         |                                                  |            |     | 1                            | $\mu\text{s}$ |
|                                     |                                 | Full power-down                                                                                                            |                                                  |            |     | 1                            | ms            |
| PSRR                                | Power-supply rejection ratio    | $f = 10\text{ kHz}$ , gain = 30 dB                                                                                         |                                                  |            |     | -40                          | dBc           |
|                                     |                                 | $f = 10\text{ kHz}$ , gain = 12 dB                                                                                         |                                                  |            |     | -38                          | dBc           |


### DIGITAL CHARACTERISTICS

Typical values are at  $T_A = +25^\circ\text{C}$  and  $AVDD = 3.3\text{ V}$ , unless otherwise specified. Minimum and maximum values are specified across the full temperature range of  $T_{MIN} = -40^\circ\text{C}$  to  $T_{MAX} = +85^\circ\text{C}$ .

| PARAMETER                     |                           | TEST CONDITIONS | MIN | TYP  | MAX | UNIT          |
|-------------------------------|---------------------------|-----------------|-----|------|-----|---------------|
| <b>DIGITAL INPUTS/OUTPUTS</b> |                           |                 |     |      |     |               |
| $V_{IH}$                      | Logic high input voltage  |                 | 2   |      |     | V             |
| $V_{IL}$                      | Logic low input voltage   |                 | 0   |      |     | V             |
| $I_{IH}$                      | Logic high input current  |                 |     | 200  |     | $\mu\text{A}$ |
| $I_{IL}$                      | Logic low input current   |                 |     | 200  |     | $\mu\text{A}$ |
| $C_i$                         | Input capacitance         |                 |     | 5    |     | pF            |
| $V_{OH}$                      | Logic high output voltage | SDOUT pin       |     | AVDD |     | V             |
| $V_{OL}$                      | Logic low output voltage  | SDOUT pin       |     | 0    |     | V             |

### PIN CONFIGURATION

**RGC PACKAGE  
QFN-64  
(TOP VIEW)**

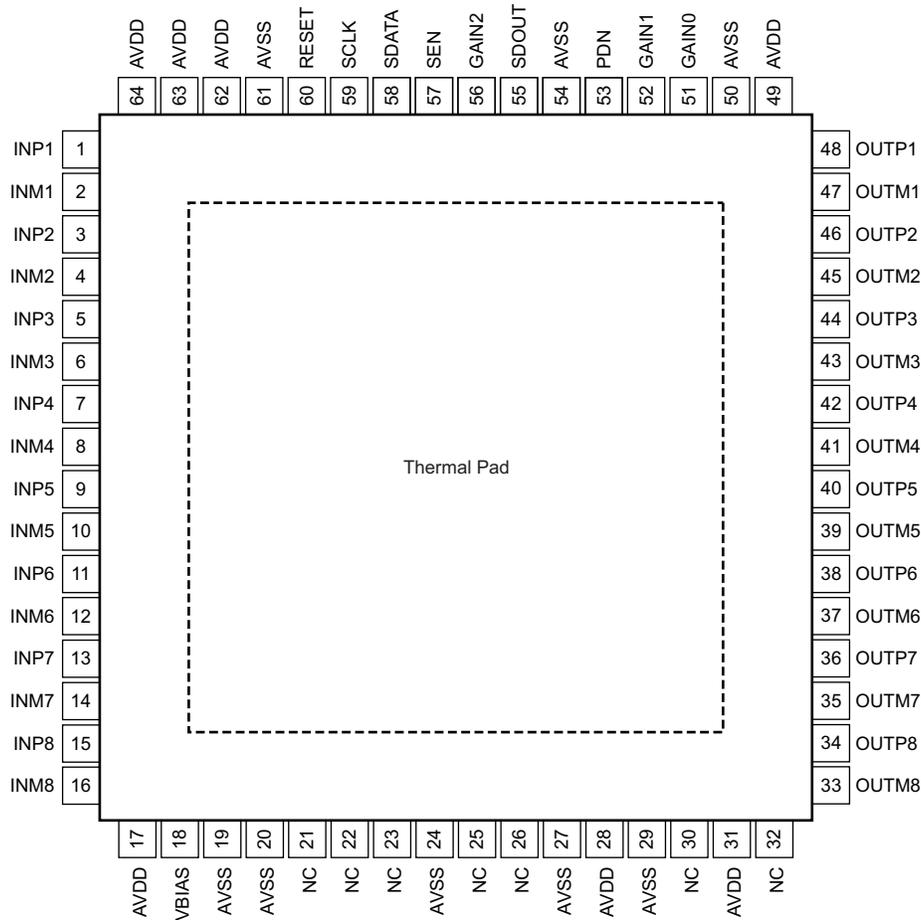

**Table 1. PIN FUNCTIONS**

| NAME  | NO.                            | FUNCTION       | DESCRIPTION                                                                                                                                                                                                                               |
|-------|--------------------------------|----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| AVDD  | 17, 28, 31, 49, 62-64          | Supply         | Analog supply pin, 3.3 V                                                                                                                                                                                                                  |
| AVSS  | 19, 20, 24, 27, 29, 50, 54, 61 | Ground         | Analog ground                                                                                                                                                                                                                             |
| GAIN0 | 51                             | Digital input  | When RESET is high, this pin is used to program the PGA gain. Refer to <a href="#">Table 2</a> for more details. Note: Use 3.3-V logic.                                                                                                   |
| GAIN1 | 52                             | Digital input  | When RESET is high, this pin is used to program the PGA gain. Refer to <a href="#">Table 2</a> for more details. Note: Use 3.3-V logic.                                                                                                   |
| GAIN2 | 56                             | Digital input  | When RESET is high, this pin is used to program the PGA gain. Refer to <a href="#">Table 2</a> for more details. Note: Use 3.3-V logic.                                                                                                   |
| INM1  | 2                              | Input          | Complimentary analog input for channel 1                                                                                                                                                                                                  |
| INP1  | 1                              | Input          | Analog input for channel 1                                                                                                                                                                                                                |
| INM2  | 4                              | Input          | Complimentary analog input for channel 2                                                                                                                                                                                                  |
| INP2  | 3                              | Input          | Analog input for channel 2                                                                                                                                                                                                                |
| INM3  | 6                              | Input          | Complimentary analog input for channel 3                                                                                                                                                                                                  |
| INP3  | 5                              | Input          | Analog input for channel 3                                                                                                                                                                                                                |
| INM4  | 8                              | Input          | Complimentary analog input for channel 4                                                                                                                                                                                                  |
| INP4  | 7                              | Input          | Analog input for channel 4                                                                                                                                                                                                                |
| INM5  | 10                             | Input          | Complimentary analog input for channel 5                                                                                                                                                                                                  |
| INP5  | 9                              | Input          | Analog input for channel 5                                                                                                                                                                                                                |
| INM6  | 12                             | Input          | Complimentary analog input for channel 6                                                                                                                                                                                                  |
| INP6  | 11                             | Input          | Analog input for channel 6                                                                                                                                                                                                                |
| INM7  | 14                             | Input          | Complimentary analog input for channel 7                                                                                                                                                                                                  |
| INP7  | 13                             | Input          | Analog input for channel 7                                                                                                                                                                                                                |
| INM8  | 16                             | Input          | Complimentary analog input for channel 8                                                                                                                                                                                                  |
| INP8  | 15                             | Input          | Analog input for channel 8                                                                                                                                                                                                                |
| NC    | 21-23, 25, 26, 30, 32          | —              | Unused pins; do not connect                                                                                                                                                                                                               |
| OUTM1 | 47                             | Output         | Complimentary output pin for channel 1                                                                                                                                                                                                    |
| OUTP1 | 48                             | Output         | Output pin for channel 1                                                                                                                                                                                                                  |
| OUTM2 | 45                             | Output         | Complimentary output pin for channel 2                                                                                                                                                                                                    |
| OUTP2 | 46                             | Output         | Output pin for channel 2                                                                                                                                                                                                                  |
| OUTM3 | 43                             | Output         | Complimentary output pin for channel 3                                                                                                                                                                                                    |
| OUTP3 | 44                             | Output         | Output pin for channel 3                                                                                                                                                                                                                  |
| OUTM4 | 41                             | Output         | Complimentary output pin for channel 4                                                                                                                                                                                                    |
| OUTP4 | 42                             | Output         | Output pin for channel 4                                                                                                                                                                                                                  |
| OUTM5 | 39                             | Output         | Complimentary output pin for channel 5                                                                                                                                                                                                    |
| OUTP5 | 40                             | Output         | Output pin for channel 5                                                                                                                                                                                                                  |
| OUTM6 | 37                             | Output         | Complimentary output pin for channel 6                                                                                                                                                                                                    |
| OUTP6 | 38                             | Output         | Output pin for channel 6                                                                                                                                                                                                                  |
| OUTM7 | 35                             | Output         | Complimentary output pin for channel 7                                                                                                                                                                                                    |
| OUTP7 | 36                             | Output         | Output pin for channel 7                                                                                                                                                                                                                  |
| OUTM8 | 33                             | Output         | Complimentary output pin for channel 8                                                                                                                                                                                                    |
| OUTP8 | 34                             | Output         | Output pin for channel 8                                                                                                                                                                                                                  |
| PDN   | 53                             | Digital input  | Partial power-down control pin for the entire device with an internal 20-kΩ pull-down resistor; active high. Note: Use 3.3-V logic.                                                                                                       |
| RESET | 60                             | Digital input  | Logic hardware reset pin. Note: Use 3.3-V logic.                                                                                                                                                                                          |
| SCLK  | 59                             | Digital input  | Serial interface clock pin with an internal 20-kΩ pull-down resistor. Note: Use 3.3-V logic.                                                                                                                                              |
| SDATA | 58                             | Digital input  | Serial interface data input with an internal 20-kΩ pull-down resistor. When RESET is high, the corner frequency for the antialias filter can be programmed to a lower frequency (60 MHz) by setting this pin high. Note: Use 3.3-V logic. |
| SDOUT | 55                             | Digital output | Serial interface readout pin                                                                                                                                                                                                              |
| SEN   | 57                             | Digital input  | Serial interface enabled for channels 1 to 8 with an internal 20-kΩ pull-up resistor; active low. Note: Use 3.3-V logic.                                                                                                                  |
| VBIAS | 18                             | Decap          | Bias voltage; bypass to ground with a 1-μF capacitor or greater                                                                                                                                                                           |


The dc input common-mode can be 2.1 V ± 200 mV.

The common-mode voltage is 0.95 V.

**Table 2. PGA Gain Control**

| GAIN[2:0] | PGA_GAIN (dB) |
|-----------|---------------|
| 000       | 18            |
| 001       | 15            |
| 010       | 12            |
| 011       | 9             |
| 100       | 6             |
| 101       | 3             |
| 110       | 0             |

**FUNCTIONAL BLOCK DIAGRAM**

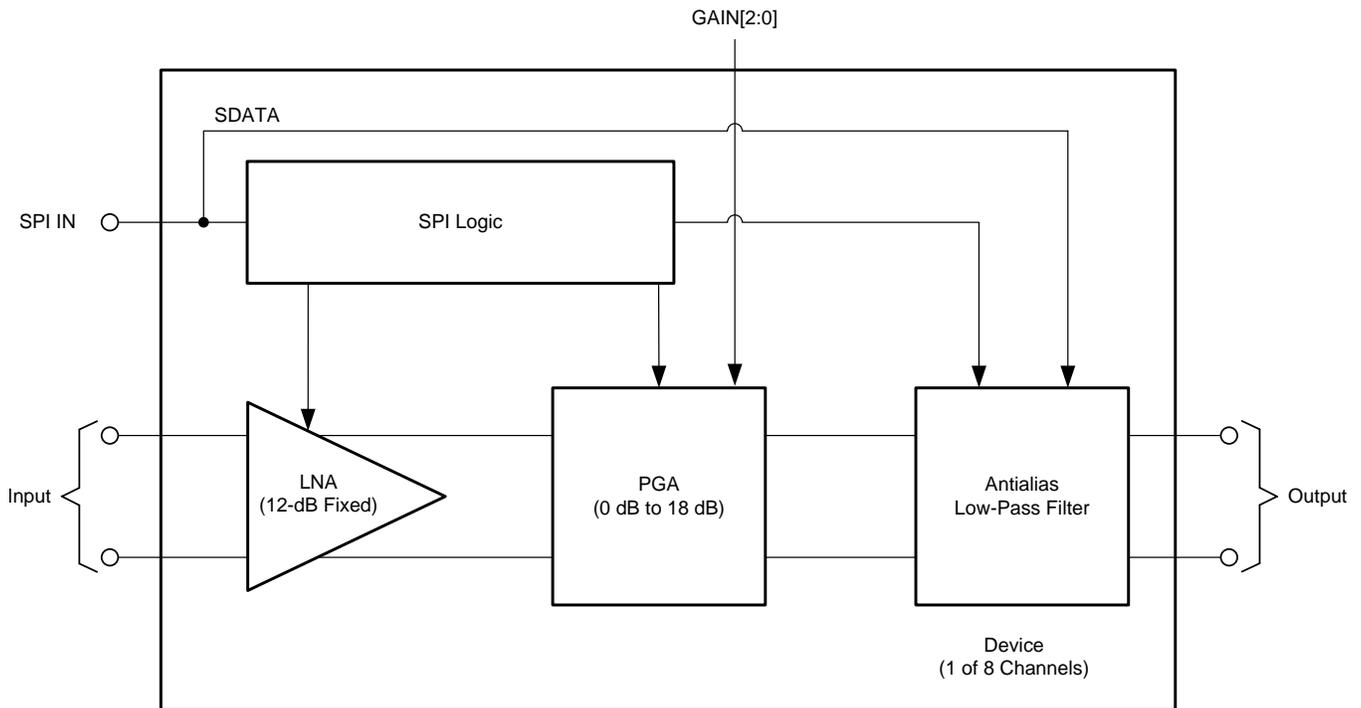

TYPICAL CHARACTERISTICS

At  $T_A = +25^\circ\text{C}$ ,  $AV_{DD} = 3.3\text{ V}$ , input dc-coupled with 2.1-V input common-mode, LNA gain = 12 dB, PGA gain = 18 dB, total channel gain = 30 dB,  $\text{GAIN}[2:0] = 000$ ,  $f_{IN} = 5\text{ MHz}$ , default LPF filter corner, and  $V_{OUT} = -1\text{ dBFS}$ , unless otherwise noted.

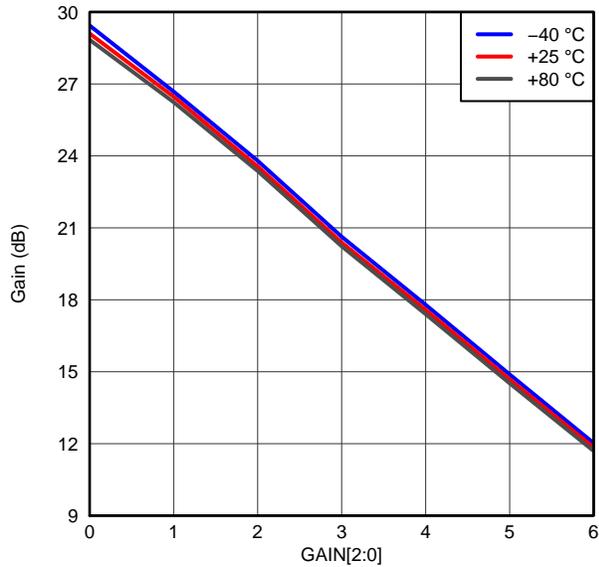


Figure 1. GAIN vs GAIN[2:0] ACROSS TEMPERATURE

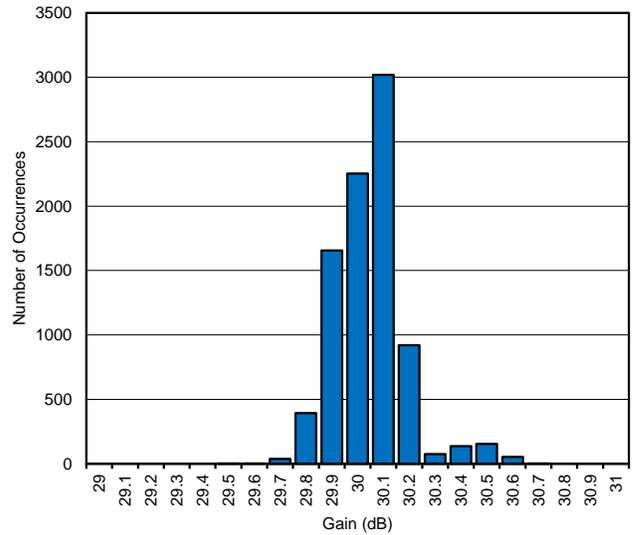


Figure 2. GAIN-MATCHING HISTOGRAM (Gain = 30 dB)

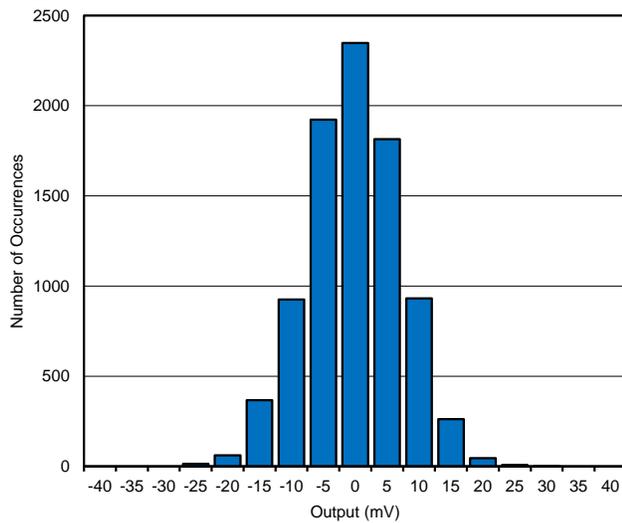


Figure 3. OUTPUT OFFSET HISTOGRAM (Gain = 30 dB)

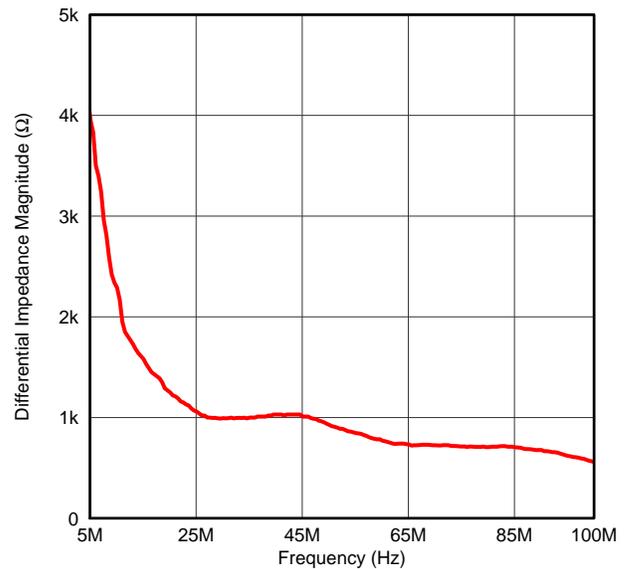


Figure 4. INPUT IMPEDANCE MAGNITUDE

**TYPICAL CHARACTERISTICS (continued)**

At  $T_A = +25^\circ\text{C}$ ,  $AVDD = 3.3\text{ V}$ , input dc-coupled with 2.1-V input common-mode, LNA gain = 12 dB, PGA gain = 18 dB, total channel gain = 30 dB,  $GAIN[2:0] = 000$ ,  $f_{IN} = 5\text{ MHz}$ , default LPF filter corner, and  $V_{OUT} = -1\text{ dBFS}$ , unless otherwise noted.

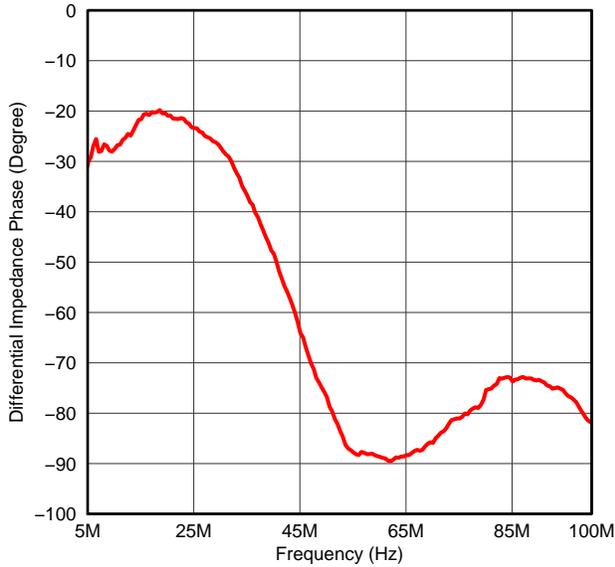


Figure 5. INPUT IMPEDANCE PHASE

G006

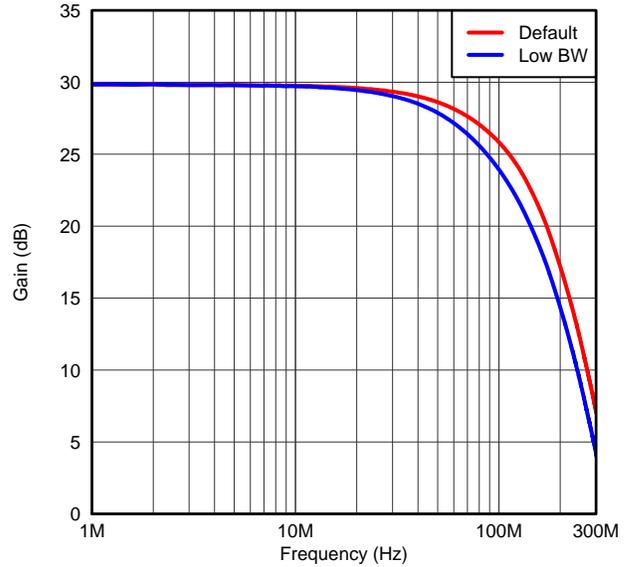


Figure 6. LOW-PASS FILTER RESPONSE

G007

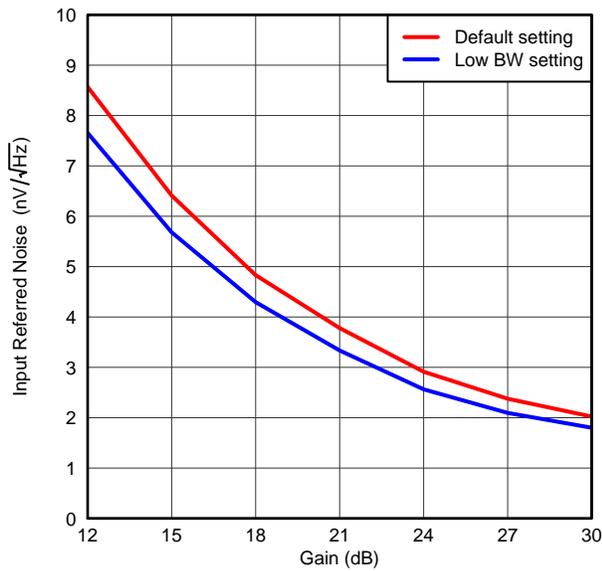


Figure 7. INPUT-REFERRED NOISE vs GAIN

G008


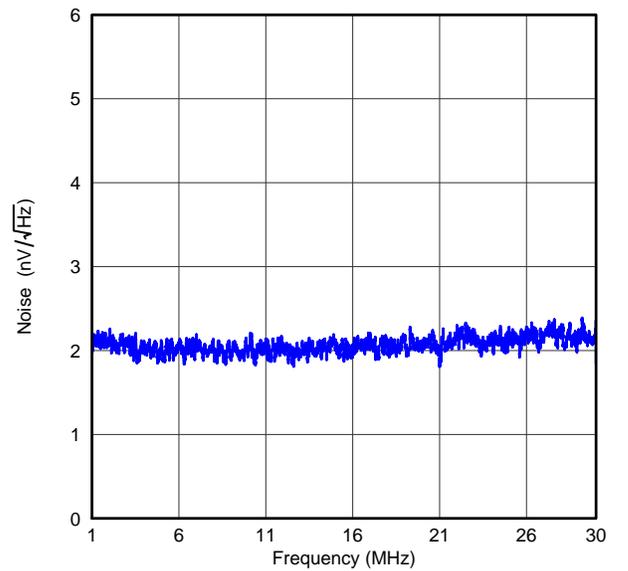


Figure 8. INPUT-REFERRED NOISE vs FREQUENCY (Gain = 30 dB)


G009

**TYPICAL CHARACTERISTICS (continued)**


At  $T_A = +25^\circ\text{C}$ ,  $AV_{DD} = 3.3\text{ V}$ , input dc-coupled with 2.1-V input common-mode, LNA gain = 12 dB, PGA gain = 18 dB, total channel gain = 30 dB,  $\text{GAIN}[2:0] = 000$ ,  $f_{IN} = 5\text{ MHz}$ , default LPF filter corner, and  $V_{OUT} = -1\text{ dBFS}$ , unless otherwise noted.

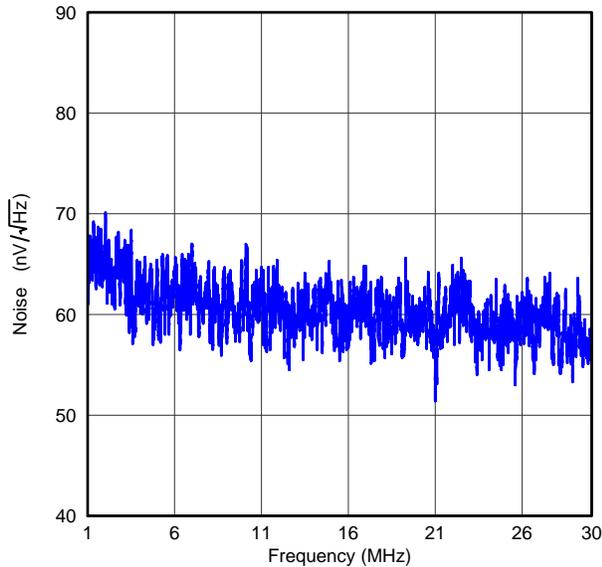


**Figure 9. OUTPUT-REFERRED NOISE vs FREQUENCY (Gain = 30 dB)**

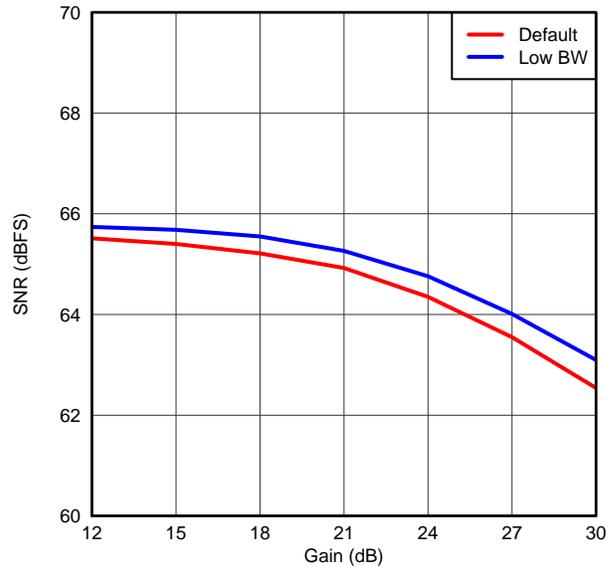

**Figure 10. SIGNAL-TO-NOISE RATIO vs GAIN ACROSS BANDWIDTH MODE**

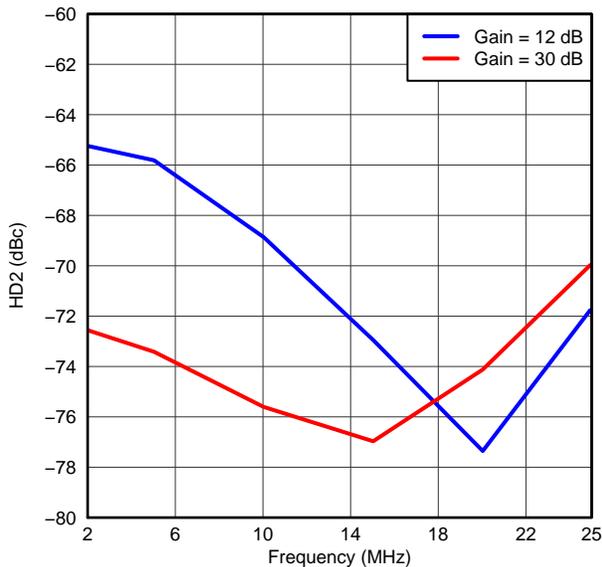

**Figure 11. SECOND-HARMONIC DISTORTION vs FREQUENCY**

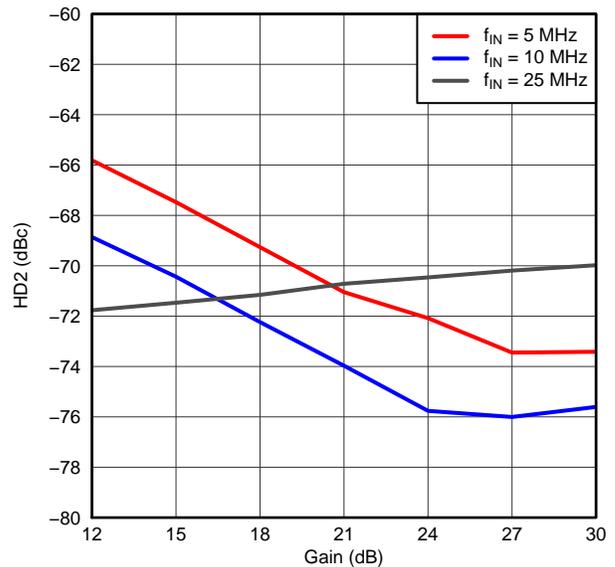

**Figure 12. SECOND-HARMONIC DISTORTION vs GAIN**

**TYPICAL CHARACTERISTICS (continued)**

At  $T_A = +25^\circ\text{C}$ ,  $AV_{DD} = 3.3\text{ V}$ , input dc-coupled with 2.1-V input common-mode, LNA gain = 12 dB, PGA gain = 18 dB, total channel gain = 30 dB,  $\text{GAIN}[2:0] = 000$ ,  $f_{IN} = 5\text{ MHz}$ , default LPF filter corner, and  $V_{OUT} = -1\text{ dBFS}$ , unless otherwise noted.

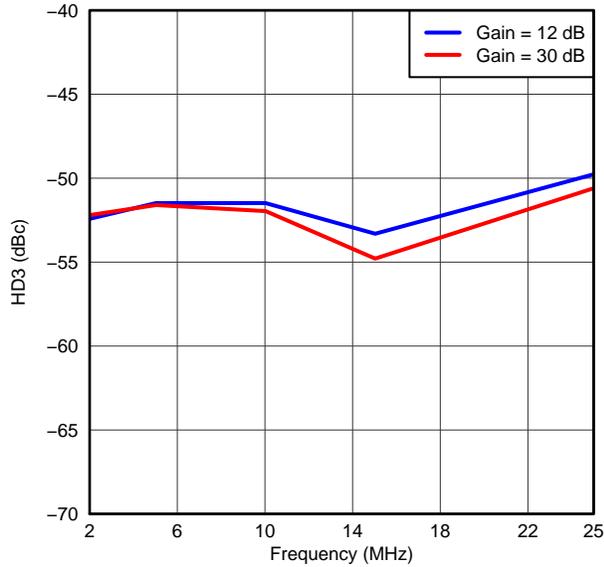


Figure 13. THIRD-HARMONIC DISTORTION vs FREQUENCY G014

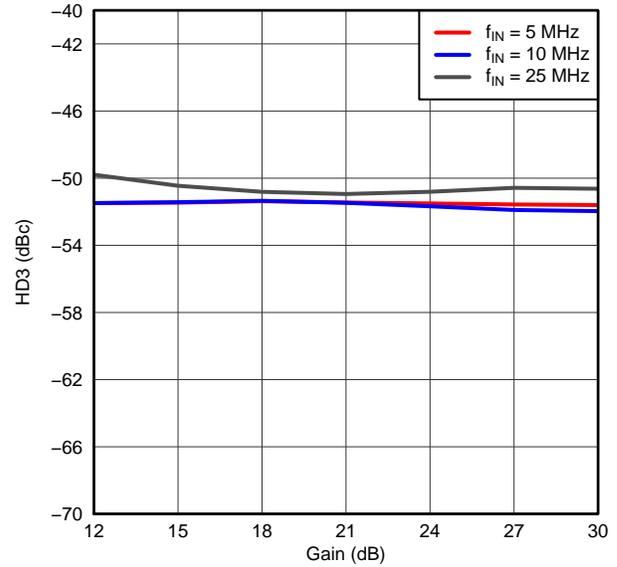


Figure 14. THIRD-HARMONIC DISTORTION vs GAIN G015

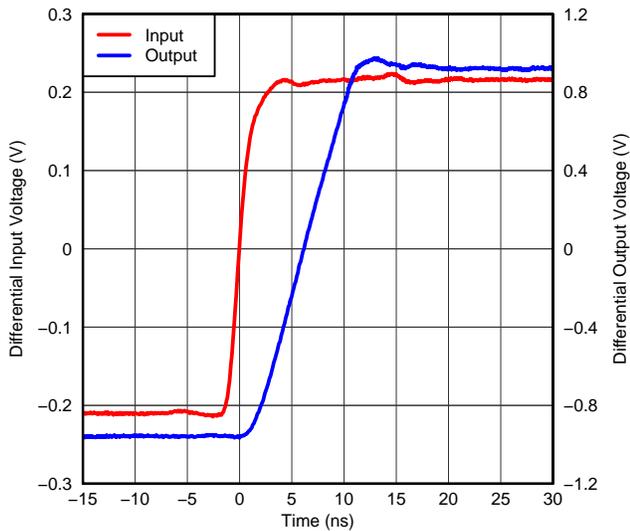


Figure 15. DIFFERENTIAL OUTPUT RESPONSE FOR AN INPUT STEP (12-dB Total Channel Gain) G016


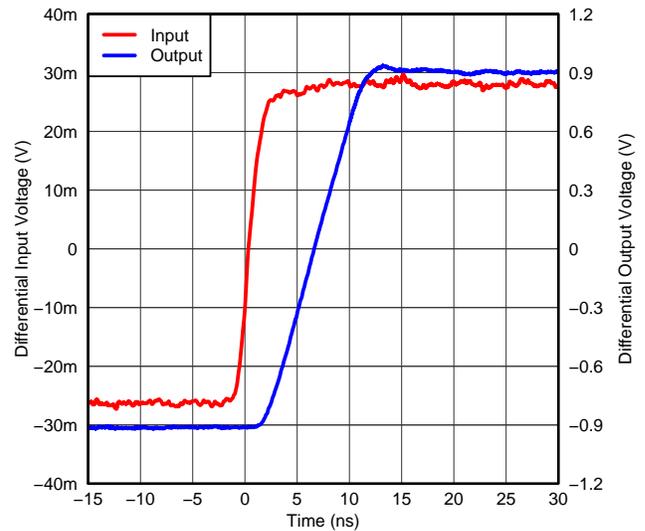


Figure 16. DIFFERENTIAL OUTPUT RESPONSE FOR AN INPUT STEP (30-dB Total Channel Gain) G017

**TYPICAL CHARACTERISTICS (continued)**

At  $T_A = +25^\circ\text{C}$ ,  $AV_{DD} = 3.3\text{ V}$ , input dc-coupled with 2.1-V input common-mode, LNA gain = 12 dB, PGA gain = 18 dB, total channel gain = 30 dB,  $GAIN[2:0] = 000$ ,  $f_{IN} = 5\text{ MHz}$ , default LPF filter corner, and  $V_{OUT} = -1\text{ dBFS}$ , unless otherwise noted.

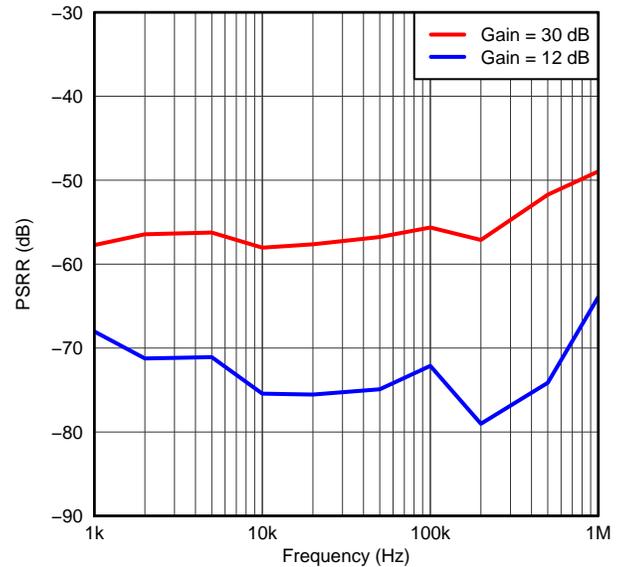

**Figure 17. POWER-SUPPLY REJECTION RATIO (100-mV<sub>PP</sub> Supply Noise with Different Frequencies)**

## SERIAL REGISTER TIMING

### SERIAL REGISTER WRITE DESCRIPTION

Programming different modes can be accomplished through the serial interface formed by the SEN (serial interface enable), SCLK (serial interface clock), SDATA (serial interface data), and RESET pins. Each of these pins has a 20-k $\Omega$  pull-down resistor to GND. Serially shifting bits into the device is enabled when SEN is low. SDATA serial data are latched at every SCLK rising edge when SEN is active (low). Serial data are loaded into the register at every 24th SCLK rising edge when SEN is low. If the word length exceeds a multiple of 24 bits, the excess bits are ignored. Data can be loaded in multiples of 24-bit words within a single active SEN pulse (an internal counter counts groups of 24 clocks after the SEN falling edge). The interface can function with SCLK frequencies from 20 MHz down to low speeds (of a few Hertz) and even with a non-50% duty cycle SCLK. Data are divided into two main portions to load on the addressed register: a register address (eight bits) and the actual data (16 bits). When writing to a register with unused bits, these bits should be set to '0'. Figure 18 shows a timing diagram of the write operation. Table 3 lists the serial interface timing characteristics.

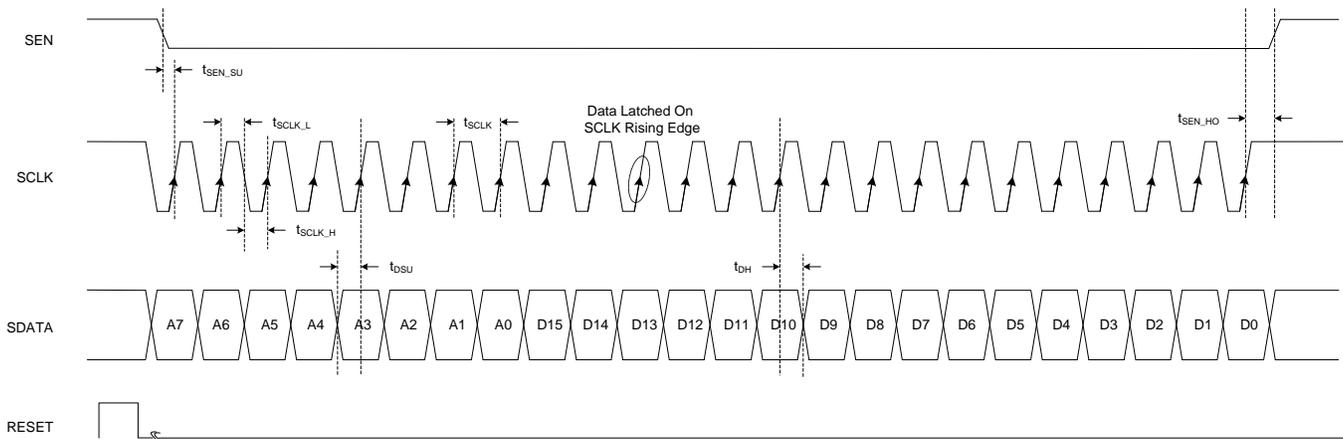


Figure 18. Serial Interface Timing Diagram

Table 3. Serial Interface Timing Characteristics<sup>(1)</sup>

| PARAMETER           |                                                       | MIN | TYP | MAX | UNIT |
|---------------------|-------------------------------------------------------|-----|-----|-----|------|
| $t_{SCLK}$          | SCLK period                                           | 50  |     |     | ns   |
| $t_{SCLK\_H}$       | SCLK high time                                        | 20  |     |     | ns   |
| $t_{SCLK\_L}$       | SCLK low time                                         | 20  |     |     | ns   |
| $t_{DSU}$           | Data setup time                                       | 5   |     |     | ns   |
| $t_{DHO}$           | Data hold time                                        | 5   |     |     | ns   |
| $t_{SEN\_SU}$       | SEN falling edge to SCLK rising edge                  | 8   |     |     | ns   |
| $t_{SEN\_HO}$       | Time between last SCLK rising edge to SEN rising edge | 8   |     |     | ns   |
| $t_{OUT\_DV}^{(2)}$ | Delay from SCLK falling edge to SDOOUT valid          | 12  | 20  | 28  | ns   |

(1) Minimum values are across the full temperature range of  $T_{MIN} = -40^{\circ}\text{C}$  to  $T_{MAX} = +85^{\circ}\text{C}$  and  $AVDD = 3.3\text{ V}$ .

(2) See Figure 19.

## REGISTER READOUT

The device includes an option where the contents of the internal registers can be read back. This readout may be useful as a diagnostic test to verify the serial interface communication between the external controller and the AFE. First, the REGISTER READOUT ENABLE bit (bit 1, register 00h) must be set to '1'. Then, initiate a serial interface cycle specifying the register address (A[7:0]) to be read. The data bits are *don't care*. The device outputs the contents (D[15:0]) of the selected register on the SDOUT pin. SDOUT has a typical 20-ns delay ( $t_{OUT\_DV}$ ) from the SCLK falling edge. For a lower speed SCLK, SDOUT can be latched on the SCLK rising edge. For a higher speed SCLK (for example, with an SCLK period less than 60 ns), latching SDOUT at the next SCLK falling edge is preferable. Figure 19 shows the read operation timing diagram (timing specifications follow the same information provided in Table 3). In readout mode, REGISTER READOUT ENABLE can still be accessed through SDATA, SCLK, and SEN. To enable serial register writes, set the REGISTER READOUT ENABLE bit back to '0'.

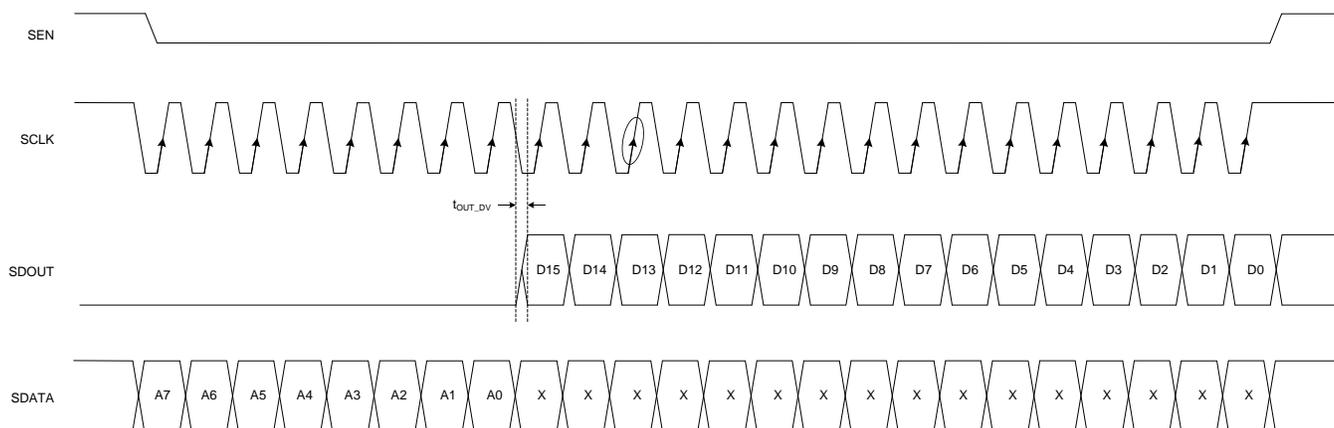


Figure 19. Serial Interface Register Read Timing Diagram

## REGISTER MAP

A reset process is required at the device initialization stage. Initialization can be accomplished in one of two ways:

1. Through a hardware reset, by applying a positive pulse on the RESET pin, or
2. Through a software reset (using the serial interface), by setting the SW\_RESET bit high. Setting this bit initializes the internal registers to the respective default values (all '0's) and then self-resets the SW\_RESET bit low. In this case, the RESET pin can remain low (inactive).

After reset, all PGA registers are set to '0' (default). During register programming, all reserved or unlisted register bits must be set to '0'. Register settings are maintained when the device is in either partial or complete power-down mode. [Table 4](#) lists the PGA register map.

**Table 4. PGA Register Map**

| REGISTER (Hex) | DECIMAL VALUE | Bit 15           | BIT 14      | BIT 13 | BIT 12 | BIT 11 | BIT 10 | BIT 9 | BIT 8 | BIT 7         | BIT 6    | BIT 5 | BIT 4 | BIT 3 | BIT 2 | BIT 1                                  | BIT 0    |
|----------------|---------------|------------------|-------------|--------|--------|--------|--------|-------|-------|---------------|----------|-------|-------|-------|-------|----------------------------------------|----------|
| 00             | 0             | X <sup>(1)</sup> | X           | X      | X      | X      | X      | X     | X     | X             | X        | X     | X     | X     | X     | REGISTER READOUT ENABLE <sup>(2)</sup> | SW_RESET |
| 35             | 53            | COMPLETE PDN     | PARTIAL PDN | X      | X      | X      | X      | X     | X     | X             | X        | X     | X     | X     | X     | X                                      | X        |
| 3B             | 59            | X                | X           | X      | X      | X      | X      | X     | X     | LOW_FILTER_BW | PGA_GAIN |       | X     | X     | X     | X                                      |          |

(1) X = don't care.

(2) Shaded cells indicate used bits.

**Register Descriptions**
**Table 5. Register 00h**

|    |    |    |    |    |    |                               |          |
|----|----|----|----|----|----|-------------------------------|----------|
| 15 | 14 | 13 | 12 | 11 | 10 | 9                             | 8        |
| X  | X  | X  | X  | X  | X  | X                             | X        |
| 7  | 6  | 5  | 4  | 3  | 2  | 1                             | 0        |
| X  | X  | X  | X  | X  | X  | REGISTER<br>READOUT<br>ENABLE | SW_RESET |

**Bits 15:2**      **Don't care**

Default = 0.

**Bit 1**            **REGISTER READOUT ENABLE**

0 = Readout disabled (default)

1 = Register readout enabled at SDOUT pin

**Bit 0**            **SW\_RESET**

0 = Normal operation (default)

1 = Resets the device and self-clears the bit to '0'

**Table 6. Register 35h**

|                 |             |    |    |    |    |   |   |
|-----------------|-------------|----|----|----|----|---|---|
| 15              | 14          | 13 | 12 | 11 | 10 | 9 | 8 |
| COMPLETE<br>PDN | PARTIAL PDN | X  | X  | X  | X  | X | X |
| 7               | 6           | 5  | 4  | 3  | 2  | 1 | 0 |
| X               | X           | X  | X  | X  | X  | X | X |

**Bit 15**            **COMPLETE PDN**
**Bit 14**            **PARTIAL PDN**

0 = Normal operation (default)

1 = LNA and PGA powered down

**Bits 13:0**        **Don't care**

Default = 0.

**Table 7. Register 3Bh**

|                   |          |    |    |    |    |   |   |
|-------------------|----------|----|----|----|----|---|---|
| 15                | 14       | 13 | 12 | 11 | 10 | 9 | 8 |
| X                 | X        | X  | X  | X  | X  | X | X |
| 7                 | 6        | 5  | 4  | 3  | 2  | 1 | 0 |
| LOW_FILTER_<br>BW | PGA_GAIN |    |    | X  | X  | X | X |

**Bits 15:8****Don't care**

Default = 0.

**Bit 7****LOW\_FILTER\_BW**

0 = 75-MHz bandwidth (default)

1 = 60-MHz bandwidth

**Bits 6:4****PGA\_GAIN**

000 = 18-dB PGA gain (default)

001 = 15-dB PGA gain

010 = 12-dB PGA gain

011 = 9-dB PGA gain

100 = 6-dB PGA gain

101 = 3-dB PGA gain

110 = 0-dB PGA gain

**Bits 3:0****Don't care**

Default = 0.

## APPLICATION INFORMATION

### THEORY OF OPERATION

The PGA5807A is a programmable gain amplifier (PGA) for applications with input frequencies up to 25 MHz. The device includes a low-noise amplifier (LNA) with a fixed gain, followed by a PGA and an antialiasing filter to reduce noise. The LNA is a fully-differential amplifier with a 12-dB fixed gain and can support a 500-mV<sub>PP</sub> maximum linear differential input swing. The PGA is implemented as an attenuator followed by a fixed-gain amplifier with 18-dB gain. The attenuator can provide attenuation from 0 dB to –18 dB in 3-dB steps. The attenuator can be controlled by the GAIN[2:0] pins or by using register 3Bh (bits 6 to 4). The antialiasing filter is combined with the fixed-gain amplifier. The filter has one active pole and a passive pole for a combined bandwidth of 75 MHz. For low-frequency applications, bandwidth can be reduced to 60 MHz where better noise can be achieved. The device can be programmed in this mode either by using the SDATA pin while RESET is high or by using bit 7 of register 3Bh. This device can directly drive ADCs such as the [ADS5296](#).

### Low-Noise Amplifier (LNA)

In most data-acquisition systems, an LNA is required at the front-end to obtain good noise performance. The PGA5807A has a fully-differential LNA with a 12-dB fixed gain. The LNA input-referred noise is 1.9 nV/ $\sqrt{\text{Hz}}$ , and supports a differential 500-mV<sub>PP</sub> input swing. The LNA input can be applied either directly or through an ac-coupling capacitor. Internally, the LNA input is connected to a 2.1-V common-mode voltage via a large resistor (8 k $\Omega$ ). For direct input coupling, the LNA supports an input common-mode range from 1.9 V to 2.3 V. The LNA input circuits are shown in [Figure 20](#).





Figure 20. INP and INM Equivalent Circuits of LNA Inputs

## Programmable Gain Amplifier (PGA) and Filter

The LNA output is transmitted to a PGA with a programmable gain from 0 dB to 18 dB in 3-dB steps. This gain can either be controlled through a serial interface or through pins, as explained in the [Serial Register Write Description](#) section. The PGA is implemented as a programmable attenuator and as a fixed-gain amplifier with an 18-dB gain. This architecture helps achieve the same bandwidth across different gain settings. The attenuator provides programmable attenuation from 0 dB to 18 dB.

The attenuator architecture is shown in [Figure 21](#). There are six shunt resistors that can be connected or disconnected to achieve programmable attenuation. The network provides 0-dB attenuation when no shunt resistors are connected. When the first shunt resistor ( $RS_1$ ) is turned on, an attenuation of 3 dB is obtained. For achieving 6-dB attenuation, both  $RS_1$  and  $RS_2$  are turned on. Similarly, by turning on additional resistors, greater attenuation can be achieved; by turning on all resistors, an effective 18-dB attenuation is achieved.

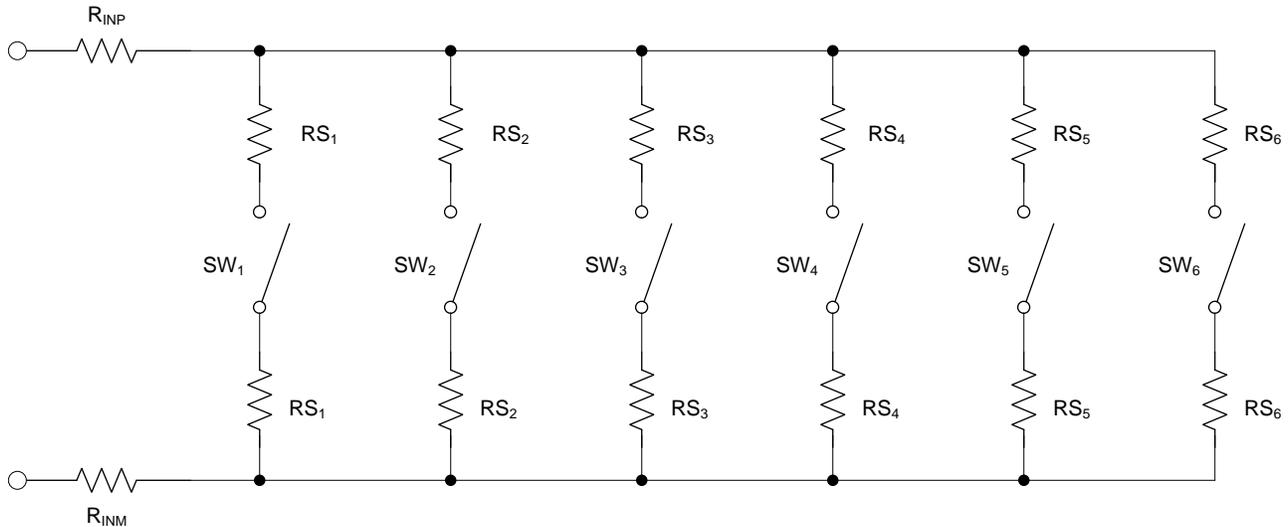

**Figure 21. Programmable Attenuator**

The attenuator is followed by a 18-dB fixed-gain amplifier. The amplifier is implemented as a voltage-to-current (V-to-I) converter followed by a current-to-voltage (I-to-V) converter. The I-to-V bandwidth is limited so that it functions as an LPF and is followed by a passive filter, as shown in Figure 22. Both the active and passive filters provide an antialiasing filter action, which helps reduce noise when the PGA output is sampled by an ADC. The architecture of the passive filter is selected to reduce the glitches that can occur when the PGA5807A output is sampled by an ADC. For example, the PGA5807A can be directly connected to ADC devices (such as the ADS5295 or ADS5296) without any external components between the ADC and PGA5807A. Figure 23 shows an example of the PGA5807A connected directly to the ADS5296.

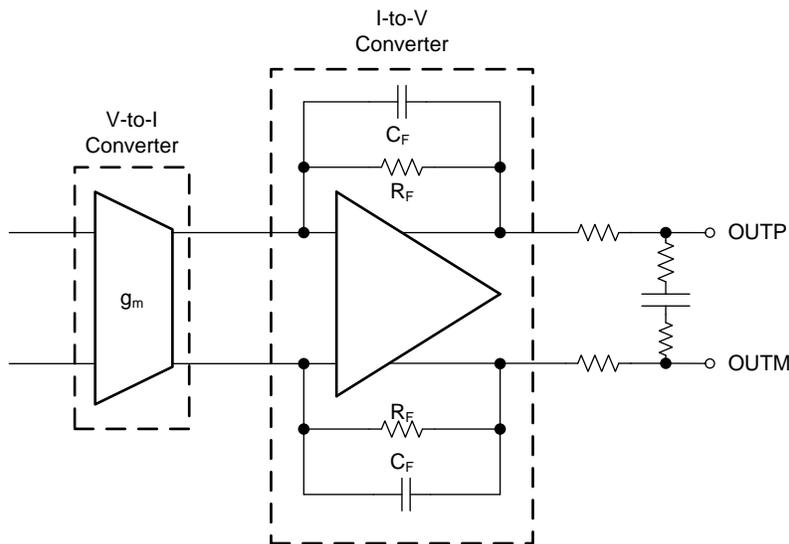


Figure 22. Antialias Filter

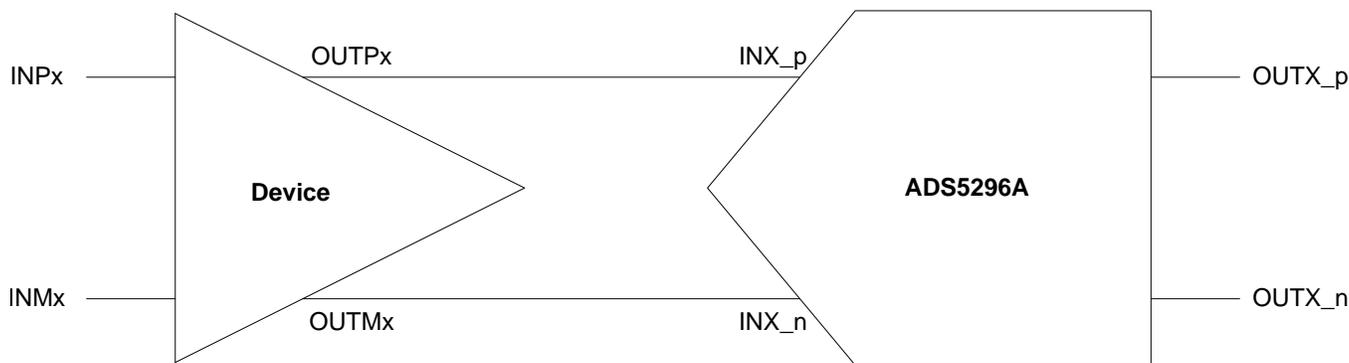


Figure 23. PGA Connected to an ADC

### DEVICE CONFIGURATION USING SERIAL INTERFACE OR PARALLEL PINS

Different device modes (such as channel gain and bandwidth) can be programmed by either using the serial interface or external pins. The device can be configured via the serial interface only when the device RESET pin is pulsed and remains low. In this configuration, device gain can be programmed through register 3Bh (bits 6 to 4) and bandwidth can be programmed by register 3Bh (bit 7). When the RESET pin is connected to 3.3 V or is pulled high, the serial interface is unable to control the device. In this configuration, the GAIN[2:0] pins can be used to control gain and the SDATA pin can be used to control bandwidth.

**PACKAGING INFORMATION**

| Orderable Device | Status<br>(1) | Package Type | Package Drawing | Pins | Package Qty | Eco Plan<br>(2) | Lead finish/<br>Ball material<br>(6) | MSL Peak Temp<br>(3) | Op Temp (°C) | Device Marking<br>(4/5) | Samples                 |
|------------------|---------------|--------------|-----------------|------|-------------|-----------------|--------------------------------------|----------------------|--------------|-------------------------|-------------------------|
| PGA5807ARGCR     | ACTIVE        | VQFN         | RGC             | 64   | 2000        | RoHS & Green    | NIPDAU                               | Level-3-260C-168 HR  | -40 to 85    | PGA5807                 | <a href="#">Samples</a> |
| PGA5807ARGCT     | ACTIVE        | VQFN         | RGC             | 64   | 250         | RoHS & Green    | NIPDAU                               | Level-3-260C-168 HR  | -40 to 85    | PGA5807                 | <a href="#">Samples</a> |

(1) The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSELETE:** TI has discontinued the production of the device.

(2) **RoHS:** TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

**RoHS Exempt:** TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

**Green:** TI defines "Green" to mean the content of Chlorine (Cl) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <=1000ppm threshold. Antimony trioxide based flame retardants must also meet the <=1000ppm threshold requirement.

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:**The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.




## GENERIC PACKAGE VIEW

**RGC 64**

**VQFN - 1 mm max height**


9 x 9, 0.5 mm pitch

PLASTIC QUAD FLATPACK - NO LEAD

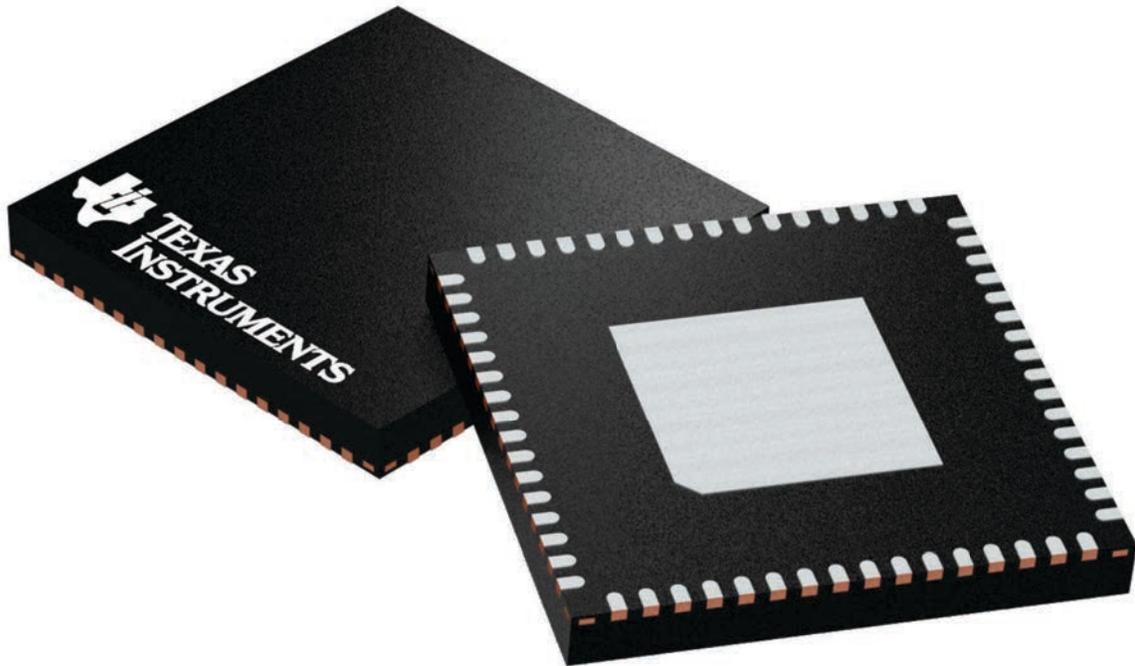


Images above are just a representation of the package family, actual package may vary.  
Refer to the product data sheet for package details.

4224597/A

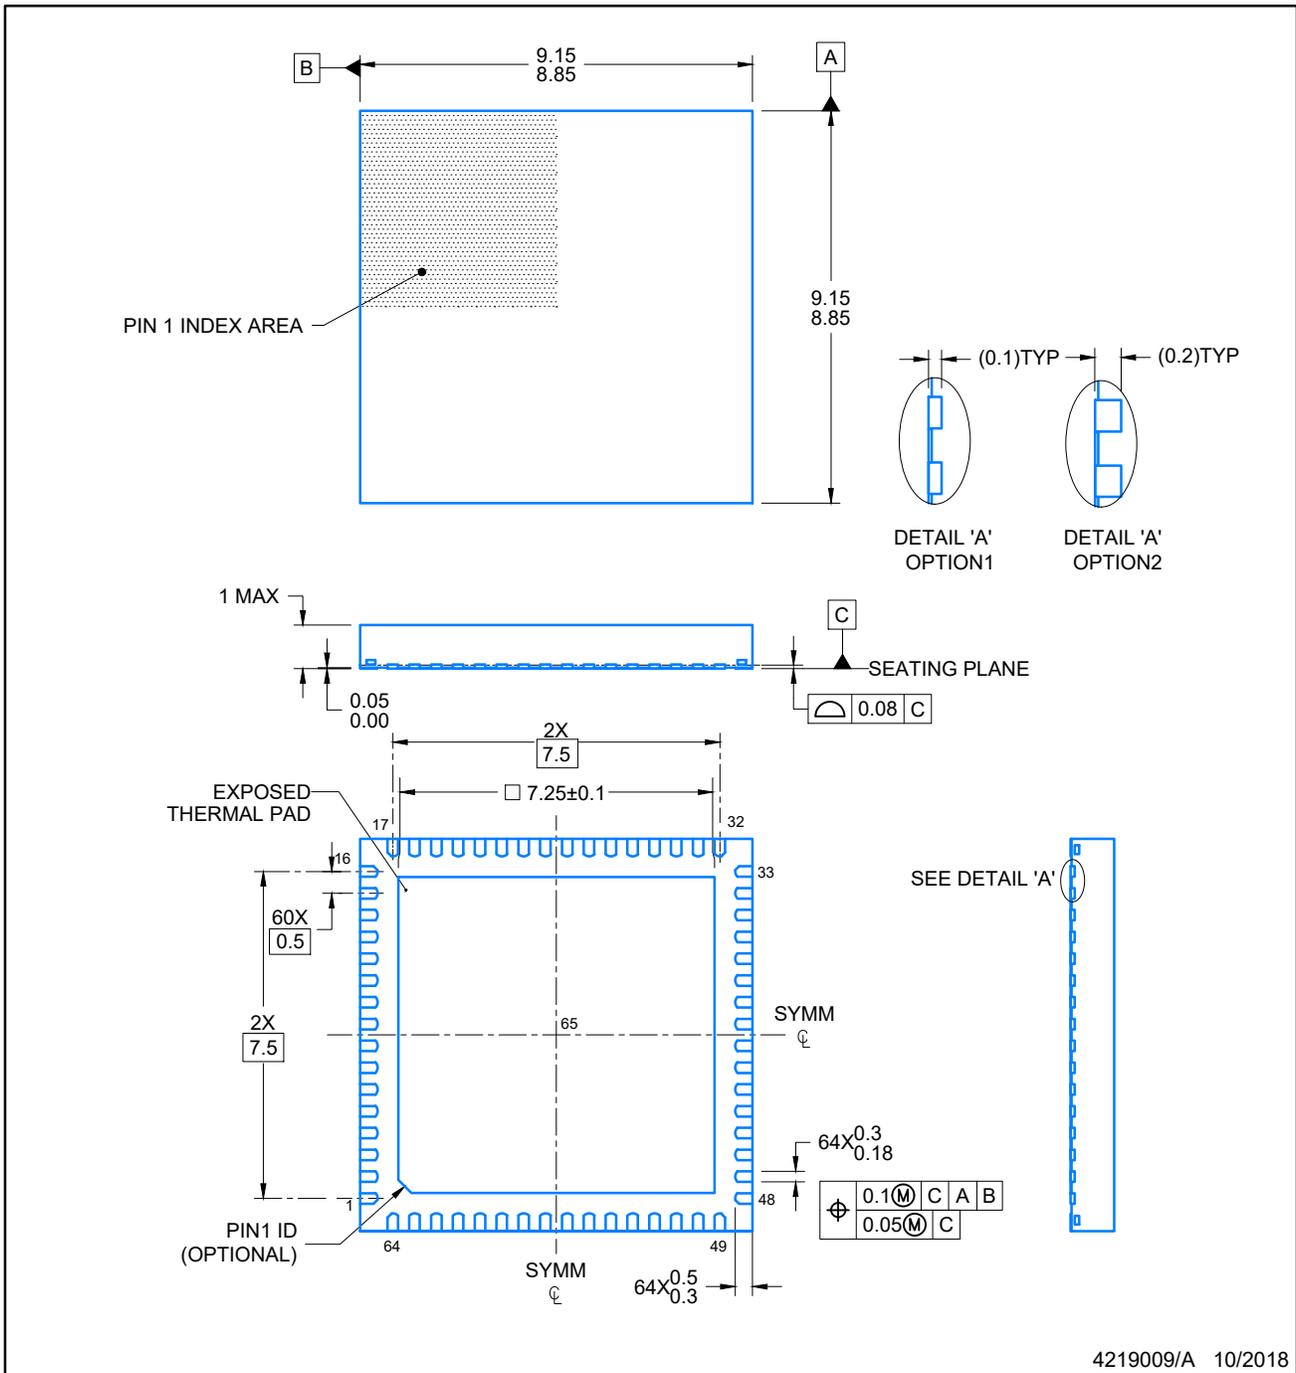


NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. The package thermal pad must be soldered to the printed circuit board for optimal thermal and mechanical performance.

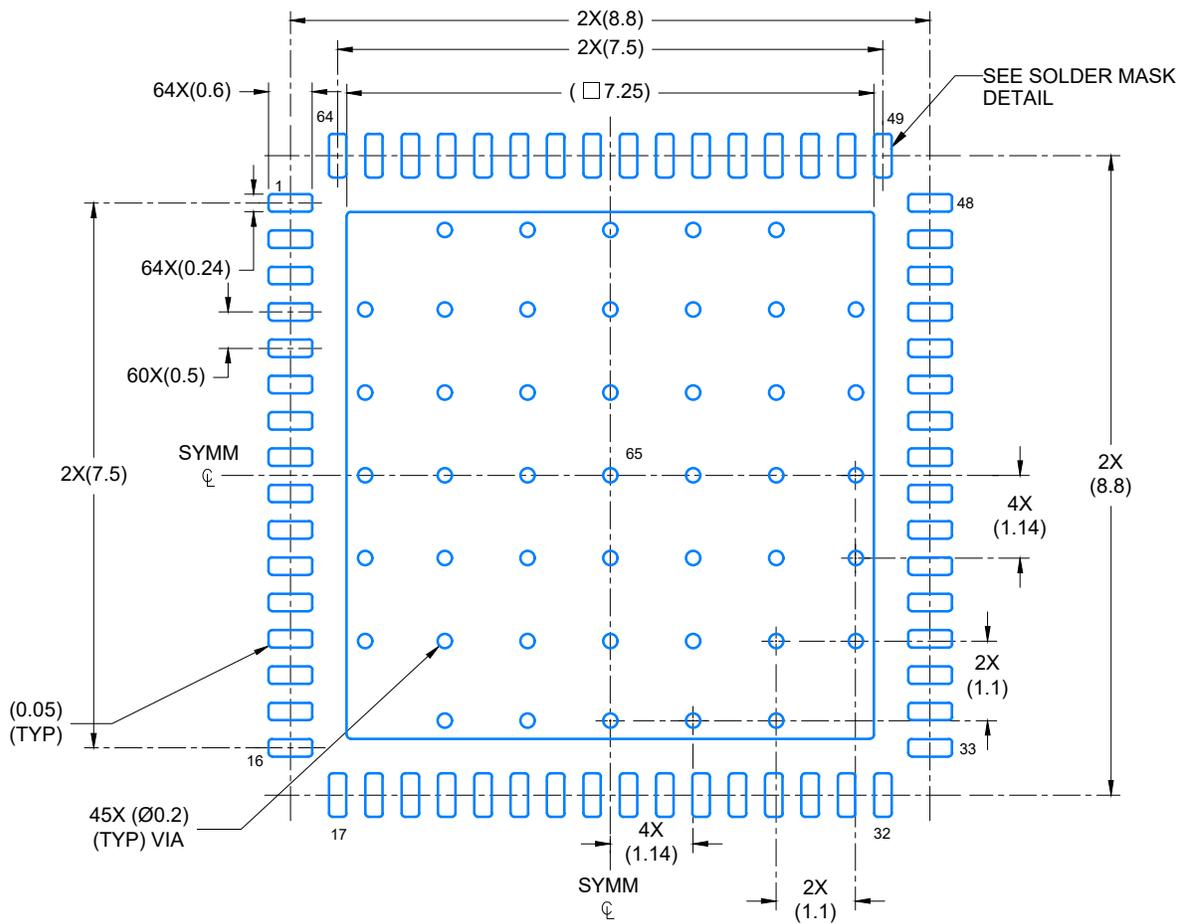

LAND PATTERN EXAMPLE  
SCALE: 10X

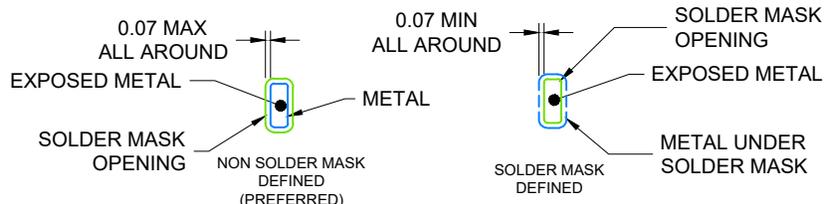


SOLDER MASK DETAILS

4219009/A 10/2018

NOTES: (continued)

4. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 ([www.ti.com/lit/sluea271](http://www.ti.com/lit/sluea271)).
5. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.

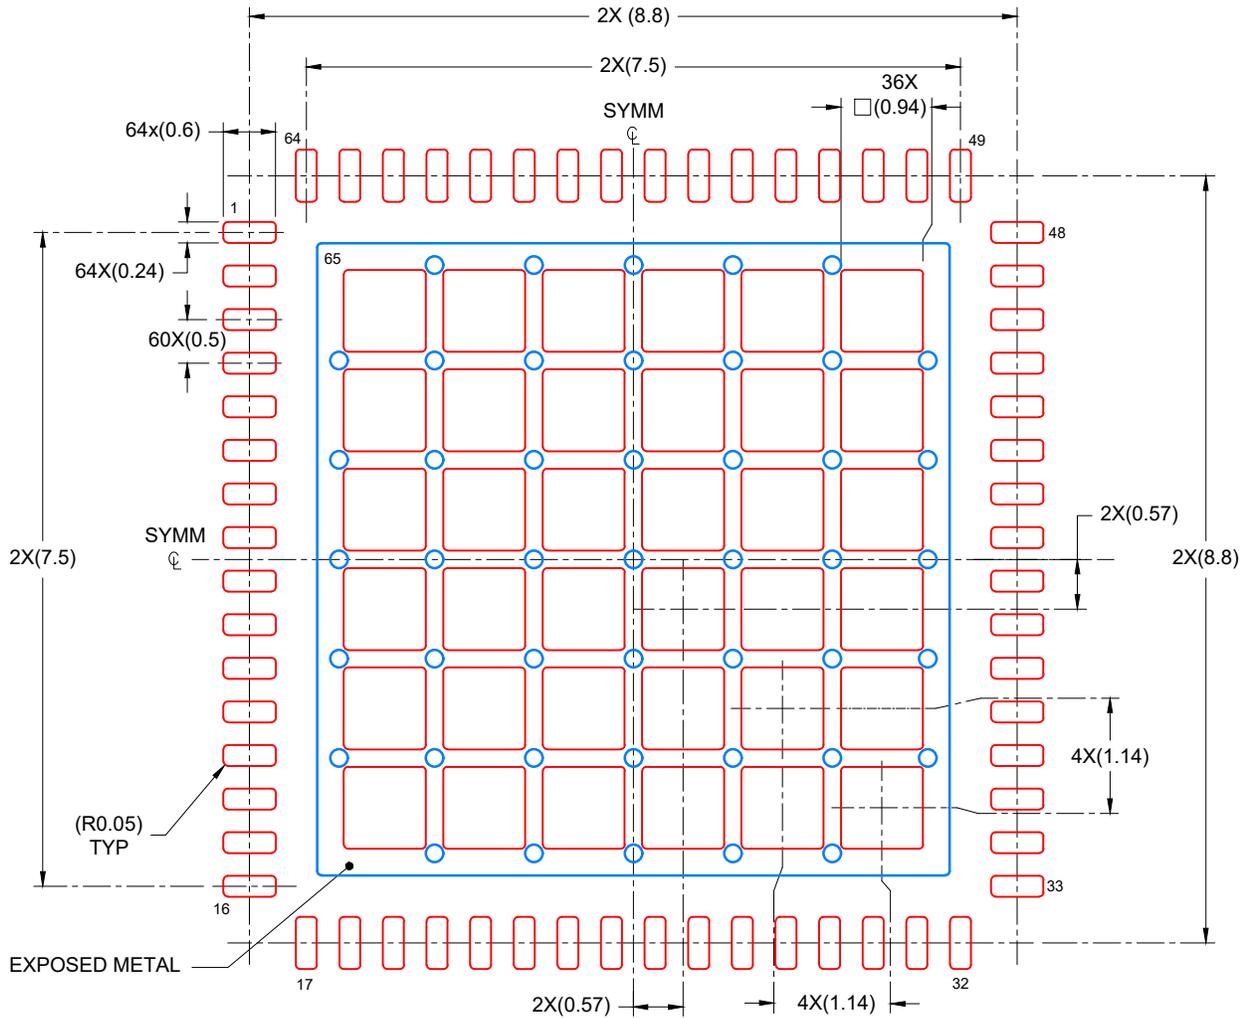

SOLDER PASTE EXAMPLE  
 BASED ON 0.125 mm THICK STENCIL

EXPOSED PAD  
 60% PRINTED COVERAGE BY AREA  
 SCALE: 12X

4219009/A 10/2018

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

## 重要声明和免责声明

TI 均以“原样”提供技术性及其可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证其中不含任何瑕疵，且不做任何明示或暗示的担保，包括但不限于对适销性、适合某特定用途或不侵犯任何第三方知识产权的暗示担保。

所述资源可供专业开发人员应用TI 产品进行设计使用。您将对以下行为独自承担全部责任：(1) 针对您的应用选择合适的TI 产品；(2) 设计、验证并测试您的应用；(3) 确保您的应用满足相应标准以及任何其他安全、安保或其他要求。所述资源如有变更，恕不另行通知。TI 对您使用所述资源的授权仅限于开发资源所涉及TI 产品的相关应用。除此之外不得复制或展示所述资源，也不提供其它TI 或任何第三方的知识产权授权许可。如因使用所述资源而产生任何索赔、赔偿、成本、损失及债务等，TI 对此概不负责，并且您须赔偿由此对TI 及其代表造成的损害。

TI 所提供产品均受TI 的销售条款 (<http://www.ti.com.cn/zh-cn/legal/termsofsale.html>) 以及ti.com.cn 上或随附TI 产品提供的其他可适用条款的约束。TI 提供所述资源并不扩展或以其他方式更改TI 针对TI 产品所发布的可适用的担保范围或担保免责声明。

邮寄地址：上海市浦东新区世纪大道 1568 号中建大厦 32 楼，邮政编码：200122

Copyright © 2020 德州仪器半导体技术（上海）有限公司