ISO606x Low Power and Propagation Delay, Reinforced, 6-Channel Digital Isolator With 0.47mA/ch, 200Mbps, 9ns t_{PD}, 9ps (RMS) jitter and 1.8V Logic Support

ADVANCE INFORMATION

1 Features

- Functional Safety-Capable
  - Documentation available to aid IEC 61508 system design
- Supports High Bandwidth and Clock Sensitive Applications
  - Up to 200Mbps data rate
  - Low Propagation Delay: 9ns maximum at 5V, 10ns maximum at 3.3V
  - SPI up to: 27.75MHz at 5V, 25MHz at 3.3V
  - Low Pulse Width Distortion: 1.2ns maximum at 5V, 1.2ns maximum at 3.3V
  - Low Jitter: 9ps (RMS) typical supports low impact to ADC and DAC SNR for the sample clock signal
  - Low Channel to Channel Skew: 1.2ns maximum at 5V, 1.2ns maximum at 3.3V
  - Low Part to Part Skew: 3ns maximum at 5V, 3ns maximum at 3.3V
- Supports High Channel Density Applications:
  - Low Power: 0.47mA per channel typical at 1Mbps and 3.3V (ISO6063)
- Robust SiO_2 isolation barrier:
  - High lifetime at up to 1061V_{RMS} and 1500V_{DC} working voltage
  - Wide temperature range: –40°C to 125°C
  - Up to 5000V_{RMS} isolation rating
  - Up to 10.4kV surge capability
  - Up to ±175kV/µs typical CMTI
- Supply range: 1.71V to 5.5V
- Overvoltage tolerant inputs
- Default output *high* (ISO606xH) and *low* (ISO606xL) options
- Robust electromagnetic compatibility (EMC)
  - System-level ESD, EFT, and surge immunity
  - Low emissions
- Safety-Related Certifications (Planned):
  - DIN EN IEC 60747-17 (VDE 0884-17)
  - UL 1577 and CSA CAS Notice No. 5A
  - IEC 62368-1, IEC 61010-1 and GB 4943.1 certifications

2 Applications

- Test and Measurement, Data Acquisition
- Factory Automation
- Medical and Healthcare

3 Description

The ISO606x devices are high performance digital isolators. The devices are certified by VDE, UL, TUV, and CQC. See the Safety-Related Certifications section for details.


The ISO606x devices provide high data rates at very low supply current with low propagation delay, low jitter and low channel to channel and part to part skew while isolating CMOS or LVCMOS digital I/Os. These devices come with enable pins that can be used to put the respective outputs in high impedance.

Devices in the family have configurations for the number of forward and reverse channels across the isolation barrier, default output levels, and packaging. See the Device Comparison section for details on the device configurations. Six channel device configurations accommodate any six channel design, including SPI, RS-485, and digital I/O applications. Multiple six channel devices or combinations with two and four channel devices can be used to transmit any number of parallel I/O, SPI chip selects, status or fault signals required by the application.

Package Information

PART NUMBER(1)(3)	PACKAGE	PACKAGE SIZE(2)
ISO606xH, ISO606xL	Wide-SOIC (DW-16)(3)	10.3mm × 10.3mm

(1) For more information, see Mechanical, Packaging, and Orderable Information.
(2) The package size (length × width) is a nominal value and includes pins, where applicable.
(3) Please refer to Device Comparison and Packaging Information table on the Package Option Addendum page in the Mechanical, Packaging, and Orderable Information section for device details and Production or Preproduction status for specific device and package.

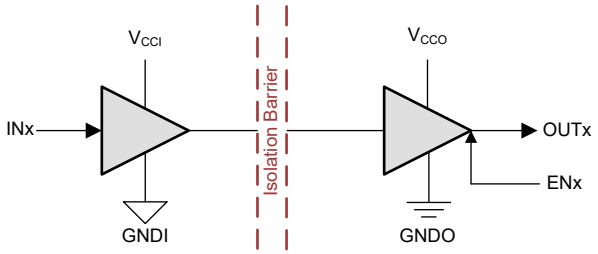

V_{CCI}=Input supply, V_{CCO}=Output supply
GNDI=Input ground, GNDO=Output ground

Simplified Schematic

An IMPORTANT NOTICE at the end of this data sheet addresses availability, warranty, changes, use in safety-critical applications, intellectual property matters and other important disclaimers. ADVANCE INFORMATION for preproduction products; subject to change without notice.

ADVANCE INFORMATION

Table of Contents

1 Features....1
2 Applications....1
3 Description....1
4 Device Comparison....3
5 Pin Configuration and Functions....4
6 Specifications....6
6.1 Absolute Maximum Ratings....6
6.2 ESD Ratings....6
6.3 Recommended Operating Conditions....7
6.4 Thermal Information....7
6.5 Power Ratings....8
6.6 Insulation Specifications....9
6.7 Safety-Related Certifications....11
6.8 Safety Limiting Values....11
6.9 Electrical Characteristics—5V Supply....12
6.10 Supply Current Characteristics—5V Supply....13
6.11 Electrical Characteristics—3.3V Supply....15
6.12 Supply Current Characteristics—3.3V Supply....16
6.13 Electrical Characteristics—2.5V Supply....18
6.14 Supply Current Characteristics—2.5V Supply....19
6.15 Electrical Characteristics—1.8V Supply....21
6.16 Supply Current Characteristics—1.8V Supply....22
6.17 Switching Characteristics—5V Supply....24
6.18 Switching Characteristics—3.3V Supply....25
6.19 Switching Characteristics—2.5V Supply....26
6.20 Switching Characteristics—1.8V Supply....27
6.21 Insulation Characteristics Curves....28
6.22 Typical Characteristics....29
7 Parameter Measurement Information....32
8 Detailed Description....34
8.1 Overview....34
8.2 Functional Block Diagram....34
8.3 Feature Description....35
8.4 Device Functional Modes....35
8.5 Device I/O Schematics....36
8.6 Overvoltage Tolerant Input....36
9 Application and Implementation....37
9.1 Application Information....37
9.2 Typical Application....37
9.3 Power Supply Recommendations....41
9.4 Layout....41
10 Device and Documentation Support....43
10.1 Documentation Support....43
10.2 Receiving Notification of Documentation Updates....43
10.3 Support Resources....43
10.4 Device Nomenclature....44
10.5 Trademarks....44
10.6 Electrostatic Discharge Caution....44
10.7 Glossary....44
11 Revision History....44
12 Mechanical, Packaging, and Orderable Information....44

Copyright © 2026 Texas Instruments Incorporated

4 Device Comparison

Table 4-1. Device Comparison Table

DEVICE NAME	TOTAL CHANNELS	REVERSE CHANNELS	DEFAULT OUTPUT	PACKAGE	CREEPAGE & CLEARANCE	VDE RATING	UL V_{ISO}
ISO6060HDWR	6	0	HIGH	Wide-SOIC (DW-16)	>8.15mm	Reinforced	5000V_{RMS}
ISO6060LDWR			LOW				
ISO6061HDWR		1	HIGH				
ISO6061LDWR			LOW				
ISO6062HDWR		2	HIGH				
ISO6062LDWR			LOW				
ISO6063HDWR		3	HIGH				
ISO6063LDWR			LOW				

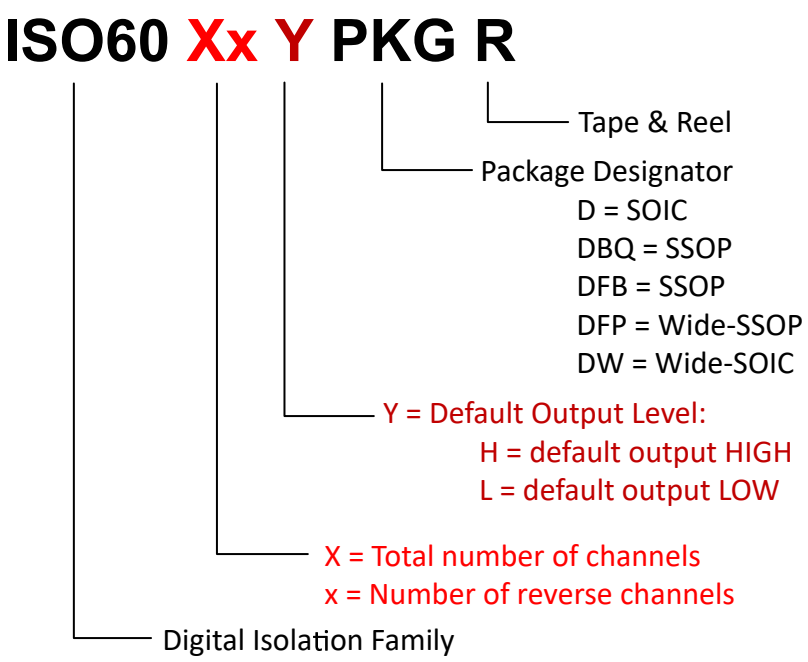


Figure 4-1. Device Nomenclature

ADVANCE INFORMATION

ADVANCE INFORMATION

5 Pin Configuration and Functions

Pin Configuration for Wide-SOIC (DW-16)

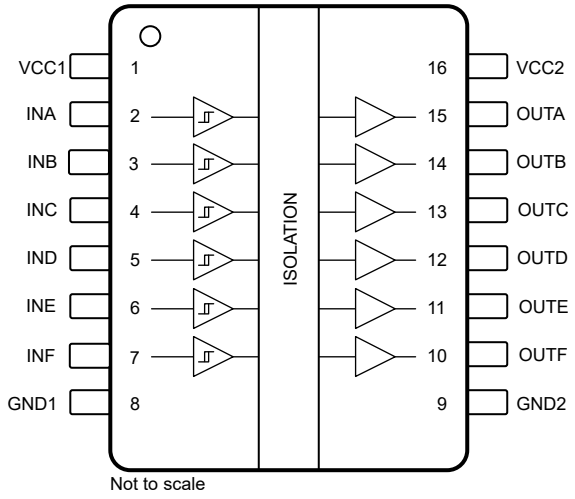


Figure 5-1. ISO6060Hand ISO6060L Top View

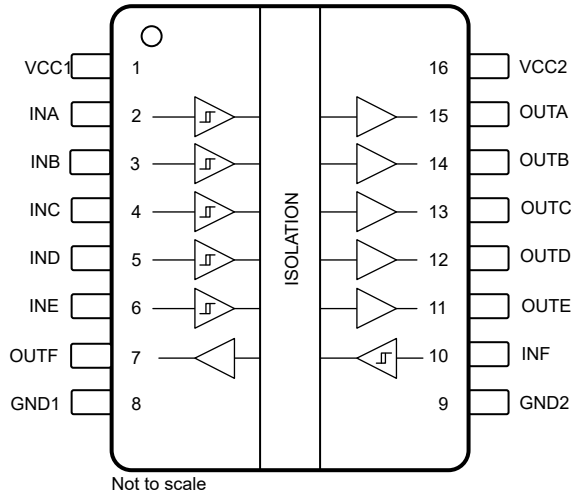


Figure 5-2. ISO6061Hand ISO6061L Top View

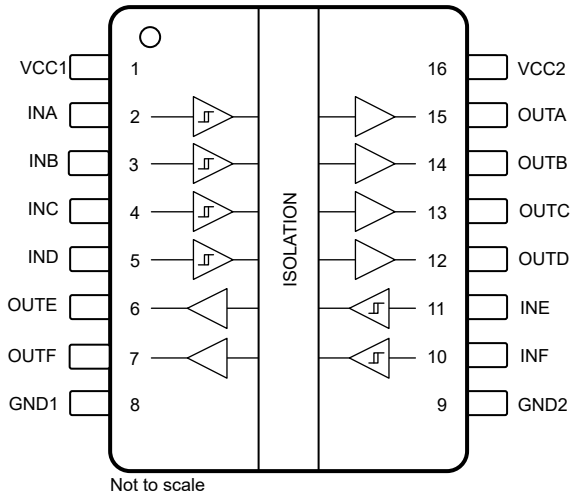


Figure 5-3. ISO6062Hand ISO6062L Top View

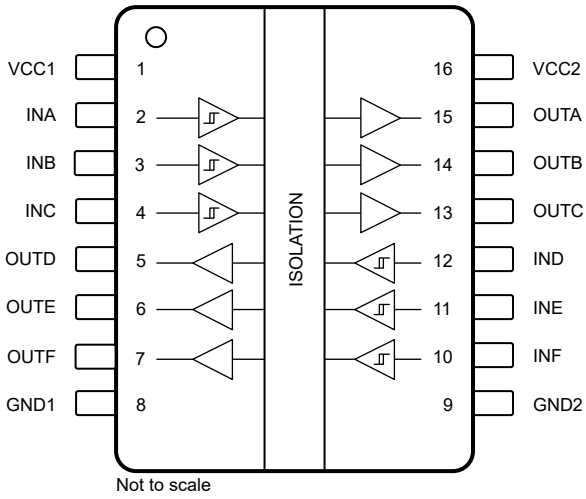


Figure 5-4. ISO6063Hand ISO6063L Top View

Copyright © 2026 Texas Instruments Incorporated

Table 5-1. Pin Functions for Wide-SOIC (DW-16)

PIN					TYPE (1)	DESCRIPTION
NAME	NO.					
	ISO6060H, ISO6060L	ISO6061H, ISO6061L	ISO6062H, ISO6062L	ISO6063H, ISO6063L		
GND1	8	8	8	8	—	Ground connection for V_{CC1}
GND2	9	9	9	9	—	Ground connection for V_{CC2}
INA	2	2	2	2	I	Input, channel A
INB	3	3	3	3	I	Input, channel B
INC	4	4	4	4	I	Input, channel C
IND	5	5	5	12	I	Input, channel D
INE	6	6	11	11	I	Input, channel E
INF	7	10	10	10	I	Input, channel F
OUTA	15	15	15	15	O	Output, channel A
OUTB	14	14	14	14	O	Output, channel B
OUTC	13	13	13	13	O	Output, channel C
OUTD	12	12	12	5	O	Output, channel D
OUTE	11	11	6	6	O	Output, channel E
OUTF	10	7	7	7	O	Output, channel F
V_{CC1}	1	1	1	1	—	Power supply, side 1
V_{CC2}	16	16	16	16	—	Power supply, side 2

(1) I = Input, O = Output

ADVANCE INFORMATION

Copyright © 2026 Texas Instruments Incorporated

ADVANCE INFORMATION

6 Specifications

6.1 Absolute Maximum Ratings

See(1)

		MIN	MAX	UNIT
Supply voltage (2)	V_{CC1} to GND1	-0.5	7	V
	V_{CC2} to GND2	-0.5	7	
Digital Input Voltage	INx to GNDx	-0.5	7	V
Digital Input Voltage	ENx to GNDx	-0.5	7	V
Digital Output Voltage	OUTx to GNDx	-0.5	V_{CCX} + 0.5 (3)	V
Digital Output current	I_O	-15	15	mA
Temperature	Operating junction temperature, T_J		150	°C
	Storage temperature, T_{stg}	-65	150	°C

(1) Operation outside the Absolute Maximum Ratings may cause permanent device damage. Absolute Maximum Ratings do not imply functional operation of the device at these or any other conditions beyond those listed under Recommended Operating Conditions. If used outside the Recommended Operating Conditions but within the Absolute Maximum Ratings, the device may not be fully functional, and this may affect device reliability, functionality, performance, and shorten the device lifetime.
(2) All voltage values except differential I/O bus voltages are with respect to the local ground terminal (GND1 or GND2) and are peak voltage values
(3) Maximum voltage must not exceed 7V.

6.2 ESD Ratings

			VALUE	UNIT
$V_{(ESD)}$	Electrostatic discharge	Human body model (HBM), per ANSI/ESDA/JEDEC JS-001, all pins(1)	±4000	V
		Charged device model (CDM), per JEDEC specification JESD22-C101, all pins(2)	±1500	

(1) JEDEC document JEP155 states that 500V HBM allows safe manufacturing with a standard ESD control process.
(2) JEDEC document JEP157 states that 250V CDM allows safe manufacturing with a standard ESD control process.

Copyright © 2026 Texas Instruments Incorporated

6.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

			MIN	NOM	MAX	UNIT
V_{CC_RO} (1)	Supply Voltage Side 1 and Side 2 (Recommended Operating Range)	V_{CC1} = 1.8V to 5V (3)	1.71		5.5	V
V_{CC_UVLO+}	V_{CC} UVLO threshold when supply voltage is rising			1.52	1.70	V
V_{CC_UVLO-}	V_{CC} UVLO threshold when supply voltage is falling		1.2	1.41		
$V_{CC_UVLO_HYS}$	V_{CC} Supply voltage UVLO hysteresis		0.075	0.09		
$V_{IH(ENx)}$	Enable (ENx): High level input voltage		0.7 × V_{CCI} (2)		V_{CCI}	V
$V_{IL(ENx)}$	Enable (ENx): High level input voltage		0		0.3 × V_{CCI}	
$V_{IMAX(ENx)}$	Enable (ENx): maximum input voltage		0		5.5	
$V_{IH(INx)}$	Input (INx): High level input voltage		0.7 × V_{CCI} (2)		V_{CCI}	V
$V_{IL(INx)}$	Input (INx): Low level input voltage		0		0.3 × V_{CCI}	
$V_{IMAX(INx)}$	Input (INx): maximum input voltage		0		5.5	
I_{OH}	Output (OUTx): High level output current	V_{CCO} = 5V (2)	-4			mA
		V_{CCO} = 3.3V (2)	-2			
		V_{CCO} = 2.5V (2)	-1			
		V_{CCO} = 1.8V (2)	-1			
I_{OL}	Output (OUTx): Low level output current	V_{CCO} = 5V (2)			4	mA
		V_{CCO} = 3.3V (2)			2	
		V_{CCO} = 2.5V (2)			1	
		V_{CCO} = 1.8V (2)			1	
DR	Data Rate	2.25V ≤ V_{CCx} ≤ 5.5V and C_L ≤ 15pF (4)	0		200	Mbps
		1.71V ≤ V_{CCx} < 2.25V C_L ≤ 10pF (4)	0		200	
		1.71V ≤ V_{CCx} < 2.25V and 10pF < C_L ≤ 15pF (4)	0		150	
T_A	Ambient temperature		-40	25	125	°C

(1) V_{CC1} and V_{CC2} can be set independent of one another
(2) V_{CCI} = Input-side V_{CC}; V_{CCO} = Output-side V_{CC}
(3) The channel outputs are in undetermined state when $V_{CC_UVLO-} \le V_{CC1}$, $V_{CC2} < V_{CC_RO(MIN)}$.
(4) See Section 7 .

6.4 Thermal Information

		THERMAL METRIC(1)						UNIT
PACKAGE	PINS	$R_{\theta JA}$	$R_{\theta JC(top)}$	$R_{\theta JB}$	Ψ_{JT}	Ψ_{JB}	$R_{\theta JC(bot)}$	
DW (Wide-SOIC)	16	64.6	29.3	31.4	12.5	30.8	NA	°C/W

(1) For more information about traditional and new thermal metrics, see the Semiconductor and IC Package Thermal Metrics application note.

ADVANCE INFORMATION

Copyright © 2026 Texas Instruments Incorporated

ADVANCE INFORMATION

6.5 Power Ratings

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
ISO6060d (d = H for default high and d = L for default low)						
P_D	Maximum power dissipation (both sides)	V_{CC1} = V_{CC2} = 5.5V, T_J = 150°C, C_L = 15pF, Input at 100MHz 50% duty cycle square wave			539.9	mW
P_{D1}	Maximum power dissipation (side-1)				130.5	mW
P_{D2}	Maximum power dissipation (side-2)				409.4	mW
ISO6061d (d = H for default high and d = L for default low)						
P_D	Maximum power dissipation (both sides)	V_{CC1} = V_{CC2} = 5.5V, T_J = 150°C, C_L = 15pF, Input at 100MHz 50% duty cycle square wave			539.6	mW
P_{D1}	Maximum power dissipation (side-1)				177.5	mW
P_{D2}	Maximum power dissipation (side-2)				362.1	mW
ISO6062d (d = H for default high and d = L for default low)						
P_D	Maximum power dissipation (both sides)	V_{CC1} = V_{CC2} = 5.5V, T_J = 150°C, C_L = 15pF, Input at 100MHz 50% duty cycle square wave			538.3	mW
P_{D1}	Maximum power dissipation (side-1)				223.4	mW
P_{D2}	Maximum power dissipation (side-2)				314.9	mW
ISO6063d (d = H for default high and d = L for default low)						
P_D	Maximum power dissipation (both sides)	V_{CC1} = V_{CC2} = 5.5V, T_J = 150°C, C_L = 15pF, Input at 100MHz 50% duty cycle square wave			539.2	mW
P_{D1}	Maximum power dissipation (side-1)				270.4	mW
P_{D2}	Maximum power dissipation (side-2)				268.8	mW

Copyright © 2026 Texas Instruments Incorporated

6.6 Insulation Specifications

PARAMETER		TEST CONDITIONS	PACKAGE	UNIT
			16-DW	
Intrinsic Insulation Capability				
V_{AC_RMS}	Intrinsic Working Voltage(1)	AC voltage, bipolar	1061	V_{RMS}
V_{AC_PK}			1500	V_{PK}
V_{DC}		DC voltage	2121	V_{DC}
IEC 60664-1				
CLR	External clearance(2)	Side 1 to side 2 distance through air	>8.15	mm
CPG	External creepage(2)	Side 1 to side 2 distance across package surface	>8.15	mm
DTI	Distance through the insulation	Minimum internal gap (internal clearance)	>17	µm
CTI	Comparative tracking index	IEC 60112	> 600	V
	Material Group	According to IEC 60664-1	I	
	Overvoltage category	Rated mains voltage ≤ 150V_{RMS}	I-IV	
		Rated mains voltage ≤ 300V_{RMS}	I-IV	
		Rated mains voltage ≤ 600V_{RMS}	I-IV	
		Rated mains voltage ≤ 1000V_{RMS}	I-III	
DIN EN IEC 60747-17 (VDE 0884-17)(3)				
	Certification Rating(3)		Reinforced	
V_{IORM}	Maximum repetitive peak isolation voltage	AC voltage (bipolar)	1500	V_{PK}
V_{IOWM}	Maximum isolation working voltage	AC voltage (sine wave); time-dependent dielectric breakdown (TDDB) test.	1061	V_{RMS}
		DC voltage	1500	V_{DC}
V_{IOTM}	Maximum transient isolation voltage	$V_{TEST} = V_{IOTM}$, t = 60s (qualification); $V_{TEST} = 1.2 \times V_{IOTM}$, t= 1s (100% production)	7071	V_{PK}
V_{IMP}	Maximum impulse voltage(4)	Tested in air, 1.2/50µs waveform per IEC 62368-1	8000	V_{PK}
V_{IOSM}	Maximum surge isolation voltage(5)	$V_{IOSM} \geq 1.3 \times V_{IMP}$; Tested in oil (qualification test), 1.2/50µs waveform per IEC 62368-1	10400	V_{PK}
q_{pd}	Apparent charge(6)	Method a, After Input-output safety test subgroup 2/3, $V_{ini} = V_{IOTM}$, t_{ini} = 60s; $V_{pd(m)} = 1.2 \times V_{IORM}$, t_m = 10s	≤5	pC
		Method a, After environmental tests subgroup 1, $V_{ini} = V_{IOTM}$, t_{ini} = 60s; $V_{pd(m)} = 1.6 \times V_{IORM}$, t_m = 10s	≤5	
		Method b: At routine test (100% production); $V_{ini} = 1.2 \times V_{IOTM}$, t_{ini} = 1s; $V_{pd(m)} = 1.875 \times V_{IORM}$, t_m = 1s (method b1) or $V_{pd(m)} = V_{ini}$, $t_m = t_{ini}$ (method b2)	≤5	
C_{IO}	Barrier capacitance, input to output(7)	V_{IO} = 0.4 × sin (2 πft), f = 1MHz	≅2.4	pF
R_{IO}	Insulation resistance, input to output(7)	V_{IO} = 500V, T_A = 25°C	$>10^{12}$	Ω
		V_{IO} = 500V, 100°C ≤ T_A ≤ 125°C	$>10^{11}$	
		V_{IO} = 500V at T_S = 150°C	$>10^{9}$	
	Pollution degree		2	
	Climatic category		40/125/21	
UL 1577				

ADVANCE INFORMATION

PARAMETER		TEST CONDITIONS	PACKAGE	UNIT
			16-DW	
V_{ISO}	Withstand isolation voltage	$V_{TEST} = V_{ISO}$, t = 60s (qualification); $V_{TEST} = 1.2 \times V_{ISO}$, t = 1s (100% production)	5000	V_{RMS}

(1) Intrinsic Insulation Capability: this is the capability of the device assuming material group matching the package, 2000m altitude, and pollution degree 1. Please refer to the VDE and UL sections for certification values to a specific standard or rating. Please refer to IEC 60664-1, IEC 60664-3 or relevant standard for other use cases, ratings (basic or reinforced), altitudes and pollution degrees.
(2) Creepage and clearance requirements should be applied according to the specific equipment isolation standards of an application. Care should be taken to maintain the creepage and clearance distance of a board design to ensure that the mounting pads of the isolator on the printed-circuit board do not reduce this distance. Creepage and clearance on a printed-circuit board become equal in certain cases. Techniques such as inserting grooves, ribs, or both on a printed circuit board are used to help increase these specifications.
(3) This device is suitable for *safe electrical insulation* only within the safety ratings. Compliance with the safety ratings shall be ensured by means of suitable protective circuits.
(4) Testing is carried out in air to determine the surge immunity of the package.
(5) Testing is carried out in oil to determine the intrinsic surge immunity of the isolation barrier.
(6) Apparent charge is electrical discharge caused by a partial discharge (pd).
(7) All pins on each side of the barrier tied together creating a two-pin device.

ADVANCE INFORMATION

Copyright © 2026 Texas Instruments Incorporated

6.7 Safety-Related Certifications

VDE	UL	CQC	TUV
Plan to certify according to DIN EN IEC 60747-17 (VDE 0884-17)	Plan to certify according to UL 1577 and CSA CAS Notice No. 5A	Plan to certify according to GB4943.1	Plan to certify according to EN 61010-1 and EN 62368-1
Certificate planned	Certificate planned	Certificate planned	Certificate planned

6.8 Safety Limiting Values

Safety limiting(1) intends to minimize potential damage to the isolation barrier upon failure of input or output circuitry.

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
DW-16 (Wide-SOIC) Package						
I_S	Safety input, output, or supply current	$R_{\theta JA}$ = 64.6°C/W, V_I = 5.5V, T_J = 150°C, T_A = 25°C			351.8	mA
		$R_{\theta JA}$ = 64.6°C/W, V_I = 3.6V, T_J = 150°C, T_A = 25°C			537.5	
		$R_{\theta JA}$ = 64.6°C/W, V_I = 2.75V, T_J = 150°C, T_A = 25°C			703.6	
		$R_{\theta JA}$ = 64.6°C/W, V_I = 1.89V, T_J = 150°C, T_A = 25°C			1023.8	
P_S	Safety input, output, or total power	$R_{\theta JA}$ = 64.6°C/W, T_J = 150°C, T_A = 25°C			1935	mW
T_S	Maximum safety temperature				150	°C

(1) The maximum safety temperature, T_S, has the same value as the maximum junction temperature, T_J, specified for the device. The I_S and P_S parameters represent the safety current and safety power respectively. The maximum limits of I_S and P_S should not be exceeded. These limits vary with the ambient temperature, T_A.
The junction-to-air thermal resistance, $R_{\theta JA}$, in the table is that of a device installed on a high-K test board for leaded surface-mount packages. Use these equations to calculate the value for each parameter:
$T_J = T_A + R_{\theta JA} \times P$, where P is the power dissipated in the device.
$T_{J(max)} = T_S = T_A + R_{\theta JA} \times P_S$, where $T_{J(max)}$ is the maximum allowed junction temperature.
$P_S = I_S \times V_I$, where V_I is the maximum input voltage.

ADVANCE INFORMATION

Copyright © 2026 Texas Instruments Incorporated

6.9 Electrical Characteristics—5V Supply

V_{CC1} = V_{CC2} = 5V ±10% (over recommended operating conditions unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
$V_{OH(OUTx)}$	OUTx (output) high-level output voltage	I_{OH} = -4mA; See Section 7	V_{CCO} - 0.4(1)			V
$V_{OL(OUTx)}$	OUTx (output) low-level output voltage	I_{OL} = 4mA; See Section 7			0.4	V
$V_{IT+(INx)}$	INx (input) switching threshold voltage, rising				0.7 × V_{CCI}(1)	V
$V_{IT-(INx)}$	INx (input) switching threshold voltage, falling		0.3 × V_{CCI}(1)			V
$V_{I_HYS(INx)}$	INx (input) switching threshold voltage hysteresis		0.02 × V_{CCI}(1)	0.04 × V_{CCI}(1)		V
$I_{I(INx)}$	INx (input) input current (default high device, with H suffix)	HIGH Input Current: V_{IH} = V_{CCI} (1) at INx (leakage current)			1	µA
		LOW Input Current: V_{IL} = 0V at INx (leakage and current through default high pull-up resistance)	-10			
	INx (input) input current (default low device, with L suffix)	HIGH Input Current: V_{IH} = V_{CCI} (1) at INx (leakage and current through default low pull-down resistance)			10	
		LOW Input Current: V_{IL} = 0V at INx (leakage current)	-1			
$V_{IH(ENx)}$	ENx (enable) threshold voltage, rising				0.7 × V_{CCI}(1)	V
$V_{IL(ENx)}$	ENx (enable) threshold voltage, falling		0.3 × V_{CCI}(1)			V
$V_{I_HYS(ENx)}$	ENx (enable) threshold voltage hysteresis		0.02 × V_{CCI}(1)	0.04 × V_{CCI}(1)		V
$I_{I(ENx)}$	ENx (enable) input current (integrated pull-up)	HIGH Input Current: V_{IH} = V_{CCI} (1) at ENx (leakage current)			1	µA
		LOW Input Current: V_{IL} = 0V at ENx (leakage and current through default high pull-up resistance)	-10			
CMTI	Common mode transient immunity	V_I = V_{CC} or 0V, V_{CM} = 1200V, V_{ENx} = V_{CC}; See Section 7	100	175		kV/µs
C_i	Input Capacitance (2)	V_I = V_{CC}/ 2 + 0.4×sin(2πft), f = 2MHz, V_{CC} = 5V		1.5		pF

(1) V_{CCI} = Input-side V_{CC}; V_{CCO} = Output-side V_{CC}
(2) Measured from input pin to same side ground.

ADVANCE INFORMATION

Copyright © 2026 Texas Instruments Incorporated

6.10 Supply Current Characteristics—5V Supply

V_{CC1} = V_{CC2} = 5V ±10% (over recommended operating conditions unless otherwise noted)

PARAMETER	TEST CONDITIONS		SUPPLY CURRENT	MIN	TYP	MAX	UNIT
ISO6060d (d = H for default high and d = L for default low)							
Supply current - DC signal (2)	V_I = V_{CC1} (1)(default high device, H); V_I = 0V (default low device, L)		I_{CC1}		1.08	1.25	mA
			I_{CC2}		1.58	1.93	
	V_I = 0V (default high device, H); V_I = V_{CC1} (default low device, L)		I_{CC1}		1.08	1.25	
			I_{CC2}		1.58	1.93	
Supply current - AC signal (3)	All channels switching with square wave clock input; C_L = 0pF	1Mbps	I_{CC1}		1.13	1.37	
			I_{CC2}		1.68	2.1	
		10Mbps	I_{CC1}		2.04	2.42	
			I_{CC2}		2.71	3.33	
		25Mbps	I_{CC1}		3.57	4.29	
			I_{CC2}		4.41	5.56	
		100Mbps	I_{CC1}		11.33	13.72	
			I_{CC2}		12.98	16.83	
ISO6061d (d = H for default high and d = L for default low)							
Supply current - DC signal (2)	V_I = V_{CC1} (1) (default high device, H); V_I = 0V (default low device, L)		I_{CC1}		1.19	1.37	mA
			I_{CC2}		1.41	1.64	
	V_I = 0V (default high device, H); V_I = V_{CC1} (default low device, L)		I_{CC1}		1.19	1.37	
			I_{CC2}		1.41	1.64	
Supply current - AC signal (3)	All channels switching with square wave clock input; C_L = 0pF	1Mbps	I_{CC1}		1.26	1.44	
			I_{CC2}		1.5	1.79	
		10Mbps	I_{CC1}		2.2	2.64	
			I_{CC2}		2.51	2.97	
		25Mbps	I_{CC1}		3.77	4.58	
			I_{CC2}		4.18	5.06	
		100Mbps	I_{CC1}		11.75	14.3	
			I_{CC2}		12.57	15.52	
ISO6062d (d = H for default high and d = L for default low)							
Supply current - DC signal (2)	V_I = V_{CC1} (1) (default high device, H); V_I = 0V (default low device, L)		I_{CC1}		1.15	1.39	mA
			I_{CC2}		1.25	1.47	
	V_I = 0V (default high device, H); V_I = V_{CC1} ((default low device, L)		I_{CC1}		1.17	1.39	
			I_{CC2}		1.26	1.47	
Supply current - AC signal (3)	All channels switching with square wave clock input; C_L = 0pF	1Mbps	I_{CC1}		1.23	1.47	
			I_{CC2}		1.34	1.58	
		10Mbps	I_{CC1}		2.18	2.62	
			I_{CC2}		2.32	2.77	
		25Mbps	I_{CC1}		3.77	4.56	
			I_{CC2}		3.94	4.79	
		100Mbps	I_{CC1}		11.79	14.39	
			I_{CC2}		12.14	14.8	
ISO6063d (d = H for default high and d = L for default low)							

ADVANCE INFORMATION

Copyright © 2026 Texas Instruments Incorporated

V_{CC1} = V_{CC2} = 5V ±10% (over recommended operating conditions unless otherwise noted)

PARAMETER	TEST CONDITIONS		SUPPLY CURRENT	MIN	TYP	MAX	UNIT
Supply current - DC signal (2)	V_I = V_{CC1} (1) (default high device, H); V_I = 0V (default low device, L)		I_{CC1}		1.36	1.58	mA
			I_{CC2}		1.35	1.63	
	V_I = 0V (default high device, H); V_I = V_{CC1} (default low device, L)		I_{CC1}		1.36	1.58	
			I_{CC2}		1.35	1.63	
Supply current - AC signal (3)	All channels switching with square wave clock input; C_L = 0pF	1Mbps	I_{CC1}		1.45	1.7	
			I_{CC2}		1.44	1.73	
		10Mbps	I_{CC1}		2.47	2.92	
			I_{CC2}		2.43	2.86	
		25Mbps	I_{CC1}		4.18	4.98	
			I_{CC2}		4.06	4.86	
		100Mbps	I_{CC1}		12.76	15.41	
			I_{CC2}		12.38	15.07	

(1) V_{CCI} = Input-side V_{CC}
(2) Supply current valid for ENx = V_{CCx}
(3) Supply current valid for ENx = V_{CCx}

ADVANCE INFORMATION

Copyright © 2026 Texas Instruments Incorporated

6.11 Electrical Characteristics—3.3V Supply

V_{CC1} = V_{CC2} = 3.3V ±10% (over recommended operating conditions unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
$V_{OH(OUTx)}$	OUTx (output) high-level output voltage	I_{OH} = -2mA; See Section 7	V_{CCO} - 0.2(1)			V
$V_{OL(OUTx)}$	OUTx (output) low-level output voltage	I_{OL} = 2mA; See Section 7			0.2	V
$V_{IT+(INx)}$	INx (input) switching threshold voltage, rising				0.7 × V_{CCI}(1)	V
$V_{IT-(INx)}$	INx (input) switching threshold voltage, falling		0.3 × V_{CCI}(1)			V
$V_{I_HYS(INx)}$	INx (input) switching threshold voltage hysteresis		0.02 × V_{CCI}(1)	0.04 × V_{CCI}(1)		V
$I_{I(INx)}$	INx (input) input current (default high device, with H suffix)	HIGH Input Current: V_{IH} = V_{CCI} (1) at INx (leakage current)			1	µA
		LOW Input Current: V_{IL} = 0V at INx (leakage and current through default high pull-up resistance)	-10			
	INx (input) input current (default low device, with L suffix)	HIGH Input Current: V_{IH} = V_{CCI} (1) at INx (leakage and current through default low pull-down resistance)			10	
		LOW Input Current: V_{IL} = 0V at INx (leakage current)	-1			
$V_{IH(ENx)}$	ENx (enable) threshold voltage, rising				0.7 × V_{CCI}(1)	V
$V_{IL(ENx)}$	ENx (enable) threshold voltage, falling		0.3 × V_{CCI}(1)			V
$V_{I_HYS(ENx)}$	ENx (enable) threshold voltage hysteresis		0.02 × V_{CCI}(1)	0.04 × V_{CCI}(1)		V
$I_{I(ENx)}$	ENx (enable) input current (integrated pull-up)	HIGH Input Current: V_{IH} = V_{CCI} (1) at ENx (leakage current)			1	µA
		LOW Input Current: V_{IL} = 0V at ENx (leakage and current through default high pull-up resistance)	-10			
CMTI	Common mode transient immunity	V_I = V_{CC} or 0V, V_{CM} = 1200V, V_{ENx} = V_{CC}; See Section 7	100	175		kV/µs
C_i	Input Capacitance (2)	V_I = V_{CC}/ 2 + 0.4×sin(2πft), f = 2MHz, V_{CC} = 3.3V		1.6		pF

(1) V_{CCI} = Input-side V_{CC}; V_{CCO} = Output-side V_{CC}
(2) Measured from input pin to same side ground.

ADVANCE INFORMATION

ADVANCE INFORMATION

6.12 Supply Current Characteristics—3.3V Supply

V_{CC1} = V_{CC2} = 3.3V ±10% (over recommended operating conditions unless otherwise noted)

PARAMETER	TEST CONDITIONS		SUPPLY CURRENT	MIN	TYP	MAX	UNIT
ISO6060d (d = H for default high and d = L for default low)							
Supply current - DC signal (2)	V_I = V_{CC1} (1)(default high device, H); V_I = 0V (default low device, L)		I_{CC1}		1.05	1.21	mA
			I_{CC2}		1.54	1.89	
	V_I = 0V (default high device, H); V_I = V_{CC1} (default low device, L)		I_{CC1}		1.05	1.21	
			I_{CC2}		1.54	1.89	
Supply current - AC signal (3)	All channels switching with square wave clock input; C_L = 0pF	1Mbps	I_{CC1}		1.09	1.26	
			I_{CC2}		1.62	2.01	
		10Mbps	I_{CC1}		1.94	2.29	
			I_{CC2}		2.35	2.84	
		25Mbps	I_{CC1}		3.37	4.02	
			I_{CC2}		3.57	4.37	
		100Mbps	I_{CC1}		10.57	12.8	
			I_{CC2}		9.75	12.14	
ISO6061d (d = H for default high and d = L for default low)							
Supply current - DC signal (2)	V_I = V_{CC1} (1) (default high device, H); V_I = 0V (default low device, L)		I_{CC1}		1.17	1.33	mA
			I_{CC2}		1.38	1.6	
	V_I = 0V (default high device, H); V_I = V_{CC1} (default low device, L)		I_{CC1}		1.17	1.33	
			I_{CC2}		1.38	1.6	
Supply current - AC signal (3)	All channels switching with square wave clock input; C_L = 0pF	1Mbps	I_{CC1}		1.22	1.39	
			I_{CC2}		1.45	1.7	
		10Mbps	I_{CC1}		2.06	2.44	
			I_{CC2}		2.2	2.57	
		25Mbps	I_{CC1}		3.46	4.13	
			I_{CC2}		3.44	4	
		100Mbps	I_{CC1}		10.56	12.72	
			I_{CC2}		9.74	11.73	
ISO6062d (d = H for default high and d = L for default low)							
Supply current - DC signal (2)	V_I = V_{CC1} (1) (default high device, H); V_I = 0V (default low device, L)		I_{CC1}		1.12	1.35	mA
			I_{CC2}		1.22	1.43	
	V_I = 0V (default high device, H); V_I = V_{CC1} ((default low device, L)		I_{CC1}		1.12	1.35	
			I_{CC2}		1.22	1.43	
Supply current - AC signal (3)	All channels switching with square wave clock input; C_L = 0pF	1Mbps	I_{CC1}		1.19	1.41	
			I_{CC2}		1.29	1.51	
		10Mbps	I_{CC1}		2.01	2.38	
			I_{CC2}		2.06	2.42	
		25Mbps	I_{CC1}		3.37	4.02	
			I_{CC2}		3.32	3.94	
		100Mbps	I_{CC1}		10.27	12.32	
			I_{CC2}		9.85	11.64	
ISO6063d (d = H for default high and d = L for default low)							

Copyright © 2026 Texas Instruments Incorporated

V_{CC1} = V_{CC2} = 3.3V ±10% (over recommended operating conditions unless otherwise noted)

PARAMETER	TEST CONDITIONS		SUPPLY CURRENT	MIN	TYP	MAX	UNIT
Supply current - DC signal (2)	V_I = V_{CC1} (1) (default high device, H); V_I = 0V (default low device, L)		I_{CC1}		1.33	1.55	mA
			I_{CC2}		1.32	1.59	
	V_I = 0V (default high device, H); V_I = V_{CC1} (default low device, L)		I_{CC1}		1.34	1.55	
			I_{CC2}		1.33	1.59	
Supply current - AC signal (3)	All channels switching with square wave clock input; C_L = 0pF	1Mbps	I_{CC1}		1.4	1.63	
			I_{CC2}		1.39	1.66	
		10Mbps	I_{CC1}		2.22	2.6	
			I_{CC2}		2.19	2.55	
		25Mbps	I_{CC1}		3.59	4.25	
			I_{CC2}		3.52	4.15	
		100Mbps	I_{CC1}		10.5	12.58	
			I_{CC2}		10.28	12.11	

(1) V_{CCI} = Input-side V_{CC}
(2) Supply current valid for ENx = V_{CCx}
(3) Supply current valid for ENx = V_{CCx}

ADVANCE INFORMATION

Copyright © 2026 Texas Instruments Incorporated

ADVANCE INFORMATION

6.13 Electrical Characteristics—2.5V Supply

V_{CC1} = V_{CC2} = 2.5V ±10% (over recommended operating conditions unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
$V_{OH(OUTx)}$	OUTx (output) high-level output voltage	I_{OH} = -1mA; See Section 7	V_{CCO} - 0.1(1)			V
$V_{OL(OUTx)}$	OUTx (output) low-level output voltage	I_{OL} = 1mA; See Section 7			0.1	V
$V_{IT+(INx)}$	INx (input) switching threshold voltage, rising				0.7 × V_{CCI}(1)	V
$V_{IT-(INx)}$	INx (input) switching threshold voltage, falling		0.3 × V_{CCI}(1)			V
$V_{I_HYS(INx)}$	INx (input) switching threshold voltage hysteresis		0.02 × V_{CCI}(1)	0.044 × V_{CCI}(1)		V
$I_{I(INx)}$	INx (input) input current (default high device, with H suffix)	HIGH Input Current: V_{IH} = V_{CCI} (1) at INx (leakage current)			1	µA
		LOW Input Current: V_{IL} = 0V at INx (leakage and current through default high pull-up resistance)	-10			
	INx (input) input current (default low device, with L suffix)	HIGH Input Current: V_{IH} = V_{CCI} (1) at INx (leakage and current through default low pull-down resistance)			10	
		LOW Input Current: V_{IL} = 0V at INx (leakage current)	-1			
$V_{IH(ENx)}$	ENx (enable) threshold voltage, rising				0.7 × V_{CCI}(1)	V
$V_{IL(ENx)}$	ENx (enable) threshold voltage, falling		0.3 × V_{CCI}(1)			V
$V_{I_HYS(ENx)}$	ENx (enable) threshold voltage hysteresis		0.02 × V_{CCI}(1)	0.04 × V_{CCI}(1)		V
$I_{I(ENx)}$	ENx (enable) input current (integrated pull-up)	HIGH Input Current: V_{IH} = V_{CCI} (1) at ENx (leakage current)			1	µA
		LOW Input Current: V_{IL} = 0V at ENx (leakage and current through default high pull-up resistance)	-10			
CMTI	Common mode transient immunity	V_I = V_{CC} or 0V, V_{CM} = 1200V, V_{ENx} = V_{CC}; See Section 7	100	175		kV/µs
C_i	Input Capacitance (2)	V_I = V_{CC}/ 2 + 0.4×sin(2πft), f = 2MHz, V_{CC} = 2.5V		1.7		pF

(1) V_{CCI} = Input-side V_{CC}; V_{CCO} = Output-side V_{CC}
(2) Measured from input pin to same side ground.

Copyright © 2026 Texas Instruments Incorporated

6.14 Supply Current Characteristics—2.5V Supply

V_{CC1} = V_{CC2} = 2.5V ±10% (over recommended operating conditions unless otherwise noted)

PARAMETER	TEST CONDITIONS		SUPPLY CURRENT	MIN	TYP	MAX	UNIT
ISO6060d (d = H for default high and d = L for default low)							
Supply current - DC signal (2)	V_I = V_{CC1} (1)(default high device, H); V_I = 0V (default low device, L)		I_{CC1}		1.03	1.19	mA
			I_{CC2}		1.53	1.87	
	V_I = 0V (default high device, H); V_I = V_{CC1} (default low device, L)		I_{CC1}		1.03	1.19	
			I_{CC2}		1.53	1.87	
Supply current - AC signal (3)	All channels switching with square wave clock input; C_L = 0pF	1Mbps	I_{CC1}		1.08	1.25	
			I_{CC2}		1.59	1.96	
		10Mbps	I_{CC1}		1.91	2.25	
			I_{CC2}		2.14	2.58	
		25Mbps	I_{CC1}		3.3	3.94	
			I_{CC2}		3.07	3.74	
		100Mbps	I_{CC1}		10.32	12.52	
			I_{CC2}		7.7	9.6	
ISO6061d (d = H for default high and d = L for default low)							
Supply current - DC signal (2)	V_I = V_{CC1} (1) (default high device, H); V_I = 0V (default low device, L)		I_{CC1}		1.15	1.31	mA
			I_{CC2}		1.36	1.59	
	V_I = 0V (default high device, H); V_I = V_{CC1} (default low device, L)		I_{CC1}		1.15	1.31	
			I_{CC2}		1.36	1.59	
Supply current - AC signal (3)	All channels switching with square wave clock input; C_L = 0pF	1Mbps	I_{CC1}		1.2	1.37	
			I_{CC2}		1.42	1.66	
		10Mbps	I_{CC1}		1.99	2.37	
			I_{CC2}		2.01	2.36	
		25Mbps	I_{CC1}		3.31	3.99	
			I_{CC2}		3.02	3.56	
		100Mbps	I_{CC1}		10	12.09	
			I_{CC2}		7.99	9.41	
ISO6062d (d = H for default high and d = L for default low)							
Supply current - DC signal (2)	V_I = V_{CC1} (1) (default high device, H); V_I = 0V (default low device, L)		I_{CC1}		1.11	1.33	mA
			I_{CC2}		1.21	1.42	
	V_I = 0V (default high device, H); V_I = V_{CC1} ((default low device, L)		I_{CC1}		1.11	1.33	
			I_{CC2}		1.21	1.42	
Supply current - AC signal (3)	All channels switching with square wave clock input; C_L = 0pF	1Mbps	I_{CC1}		1.17	1.38	
			I_{CC2}		1.27	1.48	
		10Mbps	I_{CC1}		1.91	2.27	
			I_{CC2}		1.91	2.25	
		25Mbps	I_{CC1}		3.15	3.76	
			I_{CC2}		2.97	3.53	
		100Mbps	I_{CC1}		9.42	11.37	
			I_{CC2}		8.32	9.97	
ISO6063d (d = H for default high and d = L for default low)							

ADVANCE INFORMATION

Copyright © 2026 Texas Instruments Incorporated

V_{CC1} = V_{CC2} = 2.5V ±10% (over recommended operating conditions unless otherwise noted)

PARAMETER	TEST CONDITIONS		SUPPLY CURRENT	MIN	TYP	MAX	UNIT
Supply current - DC signal (2)	V_I = V_{CC1} (1) (default high device, H); V_I = 0V (default low device, L)		I_{CC1}		1.32	1.53	mA
			I_{CC2}		1.31	1.57	
	V_I = 0V (default high device, H); V_I = V_{CC1} (default low device, L)		I_{CC1}		1.32	1.53	
			I_{CC2}		1.32	1.57	
Supply current - AC signal (3)	All channels switching with square wave clock input; C_L = 0pF	1Mbps	I_{CC1}		1.37	1.6	
			I_{CC2}		1.37	1.63	
		10Mbps	I_{CC1}		2.08	2.45	
			I_{CC2}		2.06	2.41	
		25Mbps	I_{CC1}		3.27	3.86	
			I_{CC2}		3.22	3.81	
		100Mbps	I_{CC1}		9.22	11.15	
			I_{CC2}		9.08	10.94	

(1) V_{CCI} = Input-side V_{CC}
(2) Supply current valid for ENx = V_{CCx}
(3) Supply current valid for ENx = V_{CCx}

ADVANCE INFORMATION

Copyright © 2026 Texas Instruments Incorporated

6.15 Electrical Characteristics—1.8V Supply

V_{CC1} = V_{CC2} = 1.8V ±5% (over recommended operating conditions unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
$V_{OH(OUTx)}$	OUTx (output) high-level output voltage	I_{OH} = -1mA; See Section 7	V_{CCO} - 0.1(1)			V
$V_{OL(OUTx)}$	OUTx (output) low-level output voltage	I_{OL} = 1mA; See Section 7			0.1	V
$V_{IT+(INx)}$	INx (input) switching threshold voltage, rising				0.7 × V_{CCI}(1)	V
$V_{IT-(INx)}$	INx (input) switching threshold voltage, falling		0.3 × V_{CCI}(1)			V
$V_{I_HYS(INx)}$	INx (input) switching threshold voltage hysteresis		0.02 × V_{CCI}(1)	0.07 × V_{CCI}(1)		V
$I_{I(INx)}$	INx (input) input current (default high device, with H suffix)	HIGH Input Current: V_{IH} = V_{CCI} (1) at INx (leakage current)			1	µA
		LOW Input Current: V_{IL} = 0V at INx (leakage and current through default high pull-up resistance)	-10			
	INx (input) input current (default low device, with L suffix)	HIGH Input Current: V_{IH} = V_{CCI} (1) at INx (leakage and current through default low pull-down resistance)			10	
		LOW Input Current: V_{IL} = 0V at INx (leakage current)	-1			
$V_{IH(ENx)}$	ENx (enable) threshold voltage, rising				0.7 × V_{CCI}(1)	V
$V_{IL(ENx)}$	ENx (enable) threshold voltage, falling		0.3 × V_{CCI}(1)			V
$V_{I_HYS(ENx)}$	ENx (enable) threshold voltage hysteresis		0.02 × V_{CCI}(1)	0.06 × V_{CCI}(1)		V
$I_{I(ENx)}$	ENx (enable) input current (integrated pull-up)	HIGH Input Current: V_{IH} = V_{CCI} (1) at ENx (leakage current)			1	µA
		LOW Input Current: V_{IL} = 0V at ENx (leakage and current through default high pull-up resistance)	-10			
CMTI	Common mode transient immunity	V_I = V_{CC} or 0V, V_{CM} = 1200V, V_{ENx} = V_{CC}; See Section 7	75	175		kV/µs
C_i	Input Capacitance (2)	V_I = V_{CC}/ 2 + 0.4×sin(2πft), f = 2MHz, V_{CC} = 2.5V		1.8		pF

(1) V_{CCI} = Input-side V_{CC}; V_{CCO} = Output-side V_{CC}
(2) Measured from input pin to same side ground.

ADVANCE INFORMATION

ADVANCE INFORMATION

6.16 Supply Current Characteristics—1.8V Supply

V_{CC1} = V_{CC2} = 1.8V ±5% (over recommended operating conditions unless otherwise noted)

PARAMETER	TEST CONDITIONS		SUPPLY CURRENT	MIN	TYP	MAX	UNIT
ISO6060d (d = H for default high and d = L for default low)							
Supply current - DC signal (2)	V_I = V_{CC1} (1)(default high device, H); V_I = 0V (default low device, L)		I_{CC1}		1.01	1.18	mA
			I_{CC2}		1.51	1.86	
	V_I = 0V (default high device, H); V_I = V_{CC1} (default low device, L)		I_{CC1}		1.01	1.18	
			I_{CC2}		1.51	1.86	
Supply current - AC signal (3)	All channels switching with square wave clock input; C_L = 0pF	1Mbps	I_{CC1}		1.06	1.23	
			I_{CC2}		1.56	1.91	
		10Mbps	I_{CC1}		1.88	2.21	
			I_{CC2}		1.97	2.34	
		25Mbps	I_{CC1}		3.25	3.86	
			I_{CC2}		2.66	3.15	
		100Mbps	I_{CC1}		10.1	12.35	
			I_{CC2}		5.93	7.27	
ISO6061d (d = H for default high and d = L for default low)							
Supply current - DC signal (2)	V_I = V_{CC1} (1) (default high device, H); V_I = 0V (default low device, L)		I_{CC1}		1.13	1.29	mA
			I_{CC2}		1.34	1.57	
	V_I = 0V (default high device, H); V_I = V_{CC1} (default low device, L)		I_{CC1}		1.13	1.29	
			I_{CC2}		1.34	1.57	
Supply current - AC signal (3)	All channels switching with square wave clock input; C_L = 0pF	1Mbps	I_{CC1}		1.18	1.35	
			I_{CC2}		1.39	1.62	
		10Mbps	I_{CC1}		1.93	2.29	
			I_{CC2}		1.86	2.17	
		25Mbps	I_{CC1}		3.2	3.82	
			I_{CC2}		2.66	3.09	
		100Mbps	I_{CC1}		9.5	11.53	
			I_{CC2}		6.5	7.67	
ISO6062d (d = H for default high and d = L for default low)							
Supply current - DC signal (2)	V_I = V_{CC1} (1) (default high device, H); V_I = 0V (default low device, L)		I_{CC1}		1.1	1.31	mA
			I_{CC2}		1.2	1.4	
	V_I = 0V (default high device, H); V_I = V_{CC1} ((default low device, L)		I_{CC1}		1.1	1.31	
			I_{CC2}		1.2	1.4	
Supply current - AC signal (3)	All channels switching with square wave clock input; C_L = 0pF	1Mbps	I_{CC1}		1.15	1.36	
			I_{CC2}		1.25	1.45	
		10Mbps	I_{CC1}		1.83	2.14	
			I_{CC2}		1.78	2.08	
		25Mbps	I_{CC1}		2.97	3.53	
			I_{CC2}		2.67	3.14	
		100Mbps	I_{CC1}		8.62	10.49	
			I_{CC2}		7.05	8.48	
ISO6063d (d = H for default high and d = L for default low)							

Copyright © 2026 Texas Instruments Incorporated

V_{CC1} = V_{CC2} = 1.8V ±5% (over recommended operating conditions unless otherwise noted)

PARAMETER	TEST CONDITIONS		SUPPLY CURRENT	MIN	TYP	MAX	UNIT
Supply current - DC signal (2)	V_I = V_{CC1} (1) (default high device, H); V_I = 0V (default low device, L)		I_{CC1}		1.3	1.52	mA
			I_{CC2}		1.29	1.55	
	V_I = 0V (default high device, H); V_I = V_{CC1} (default low device, L)		I_{CC1}		1.3	1.52	
			I_{CC2}		1.3	1.55	
Supply current - AC signal (3)	All channels switching with square wave clock input; C_L = 0pF	1Mbps	I_{CC1}		1.35	1.57	
			I_{CC2}		1.34	1.6	
		10Mbps	I_{CC1}		1.97	2.31	
			I_{CC2}		1.95	2.27	
		25Mbps	I_{CC1}		3.02	3.53	
			I_{CC2}		2.97	3.49	
		100Mbps	I_{CC1}		8.06	9.83	
			I_{CC2}		7.74	9.93	

(1) V_{CCI} = Input-side V_{CC}
(2) Supply current valid for ENx = V_{CCx}
(3) Supply current valid for ENx = V_{CCx}

ADVANCE INFORMATION

Copyright © 2026 Texas Instruments Incorporated

6.17 Switching Characteristics—5V Supply

V_{CC1} = V_{CC2} = 5V ±10% (over recommended operating conditions unless otherwise noted)

PARAMETER			TEST CONDITIONS	MIN	TYP	MAX	UNIT
t_{PLH}, t_{PHL}	Propagation delay time		at 100kbps See Section 7			9	ns
PWD	Pulse width distortion(1) $\lvert t_{PHL} - t_{PLH} \rvert$		at 100kbps See Section 7			1.2	ns
$t_{sk(o)}$	Channel-to-channel output skew time(2)		Same-direction channels			1.2	ns
			Opposite-direction channels			1.2	ns
$t_{sk(pp)}$	Part-to-part skew time(3)					3	ns
t_r	Output signal rise time		See Section 7			3.5	ns
t_f	Output signal fall time		See Section 7			3.5	ns
t_{PHZ}	Disable propagation delay, high-to-high impedance output	device versions with output enable (ENx)	See Section 7			16	ns
t_{PLZ}	Disable propagation delay, low-to-high impedance output	device versions with output enable (ENx)	See Section 7			16	ns
t_{PZH}	Enable propagation delay, high impedance-to-high output	device versions with output enable (ENx)	See Section 7			13	ns
t_{PZL}	Enable propagation delay, high impedance-to-low output	device versions with output enable (ENx)	See Section 7			13.5	ns
t_{PU}	Time from V_{CC} UVLO to valid output data		V_{CC} ramp < 1µs			90	µs
t_{DO}	Default output delay time from input power loss		Measured from the time VCC goes below $V_{CC_UVLO-(MIN)}$. See Section 7			20	µs
t_{ie}	Time interval error		2^{16} – 1 PRBS data at 200Mbps, C_L as defined in Recommended Operating Conditions, one channel switching		162		ps
$t_{JCLK(RMS)}$	Clock Jitter (RMS)		10MHz clock input, rising/falling edges, C_L as defined in Recommended Operating Conditions, one channel switching		9		ps

(1) Also known as pulse skew.
(2) $t_{sk(o)}$ is the skew between outputs of a single device with all driving inputs connected together and the outputs switching in the same direction while driving identical loads.
(3) $t_{sk(pp)}$ is the magnitude of the difference in propagation delay times between any terminals of different devices switching in the same direction while operating at identical supply voltages, temperature, input signals and loads.

ADVANCE INFORMATION

Copyright © 2026 Texas Instruments Incorporated

6.18 Switching Characteristics—3.3V Supply

V_{CC1} = V_{CC2} = 3.3V ±10% (over recommended operating conditions unless otherwise noted)

PARAMETER			TEST CONDITIONS	MIN	TYP	MAX	UNIT
t_{PLH}, t_{PHL}	Propagation delay time		at 100kbps See Section 7			10	ns
PWD	Pulse width distortion(1) $\lvert t_{PHL} - t_{PLH} \rvert$		at 100kbps See Section 7			1.2	ns
$t_{sk(o)}$	Channel-to-channel output skew time(2)		Same-direction channels			1.2	ns
			Opposite-direction channels			1.2	ns
$t_{sk(pp)}$	Part-to-part skew time(3)					3	ns
t_r	Output signal rise time		See Section 7			4	ns
t_f	Output signal fall time		See Section 7			4	ns
t_{PHZ}	Disable propagation delay, high-to-high impedance output	device versions with output enable (ENx)	See Section 7			22.5	ns
t_{PLZ}	Disable propagation delay, low-to-high impedance output	device versions with output enable (ENx)	See Section 7			22.5	ns
t_{PZH}	Enable propagation delay, high impedance-to-high output	device versions with output enable (ENx)	See Section 7			19	ns
t_{PZL}	Enable propagation delay, high impedance-to-low output	device versions with output enable (ENx)	See Section 7			20	ns
t_{PU}	Time from V_{CC} UVLO to valid output data		V_{CC} ramp < 1µs			70	µs
t_{DO}	Default output delay time from input power loss		Measured from the time VCC goes below $V_{CC_UVLO-(MIN)}$. See Section 7			20	µs
t_{ie}	Time interval error		2^{16} – 1 PRBS data at 200Mbps, C_L as defined in Recommended Operating Conditions, one channel switching		142		ps
$t_{JCLK(RMS)}$	Clock Jitter (RMS)		10MHz clock input, rising/falling edges, C_L as defined in Recommended Operating Conditions, one channel switching		9		ps

(1) Also known as pulse skew.
(2) $t_{sk(o)}$ is the skew between outputs of a single device with all driving inputs connected together and the outputs switching in the same direction while driving identical loads.
(3) $t_{sk(pp)}$ is the magnitude of the difference in propagation delay times between any terminals of different devices switching in the same direction while operating at identical supply voltages, temperature, input signals and loads.

ADVANCE INFORMATION

Copyright © 2026 Texas Instruments Incorporated

6.19 Switching Characteristics—2.5V Supply

V_{CC1} = V_{CC2} = 2.5V ±10% (over recommended operating conditions unless otherwise noted)

PARAMETER			TEST CONDITIONS	MIN	TYP	MAX	UNIT
t_{PLH}, t_{PHL}	Propagation delay time		at 100kbps See Section 7			13.1	ns
PWD	Pulse width distortion(1) $\lvert t_{PHL} - t_{PLH} \rvert$		at 100kbps See Section 7			1.2	ns
$t_{sk(o)}$	Channel-to-channel output skew time(2)		Same-direction channels			1.2	ns
			Opposite-direction channels			1.2	ns
$t_{sk(pp)}$	Part-to-part skew time(3)					3	ns
t_r	Output signal rise time		See Section 7			5	ns
t_f	Output signal fall time		See Section 7			5	ns
t_{PHZ}	Disable propagation delay, high-to-high impedance output	device versions with output enable (ENx)	See Section 7			31.1	ns
t_{PLZ}	Disable propagation delay, low-to-high impedance output	device versions with output enable (ENx)	See Section 7			31.1	ns
t_{PZH}	Enable propagation delay, high impedance-to-high output	device versions with output enable (ENx)	See Section 7			27.5	ns
t_{PZL}	Enable propagation delay, high impedance-to-low output	device versions with output enable (ENx)	See Section 7			29.1	ns
t_{PU}	Time from V_{CC} UVLO to valid output data		V_{CC} ramp < 1µs			80	µs
t_{DO}	Default output delay time from input power loss		Measured from the time VCC goes below $V_{CC_UVLO-(MIN)}$. See Section 7			20	µs
t_{ie}	Time interval error		2^{16} – 1 PRBS data at 200Mbps, C_L as defined in Recommended Operating Conditions, one channel switching		161		ps
$t_{JCLK(RMS)}$	Clock Jitter (RMS)		10MHz clock input, rising/falling edges, C_L as defined in Recommended Operating Conditions, one channel switching		9		ps

(1) Also known as pulse skew.
(2) $t_{sk(o)}$ is the skew between outputs of a single device with all driving inputs connected together and the outputs switching in the same direction while driving identical loads.
(3) $t_{sk(pp)}$ is the magnitude of the difference in propagation delay times between any terminals of different devices switching in the same direction while operating at identical supply voltages, temperature, input signals and loads.

ADVANCE INFORMATION

Copyright © 2026 Texas Instruments Incorporated

6.20 Switching Characteristics—1.8V Supply

V_{CC1} = V_{CC2} = 1.8V ±5% (over recommended operating conditions unless otherwise noted)

PARAMETER			TEST CONDITIONS	MIN	TYP	MAX	UNIT
t_{PLH}, t_{PHL}	Propagation delay time		at 100kbps See Section 7			14.5	ns
PWD	Pulse width distortion(1) $\lvert t_{PHL} - t_{PLH} \rvert$					1.2	ns
$t_{sk(o)}$	Channel-to-channel output skew time(2)		Same-direction channels			1.2	ns
			Opposite-direction channels			1.2	ns
$t_{sk(pp)}$	Part-to-part skew time(3)					5	ns
t_r	Output signal rise time		See Section 7			5	ns
t_f	Output signal fall time		See Section 7			5	ns
t_{PHZ}	Disable propagation delay, high-to-high impedance output	device versions with output enable (ENx)	See Section 7			48	ns
t_{PLZ}	Disable propagation delay, low-to-high impedance output					48	
t_{PZH}	Enable propagation delay, high impedance-to-high output					45	
t_{PZL}	Enable propagation delay, high impedance-to-low output					48	
t_{PU}	Time from V_{CC} UVLO to valid output data		V_{CC} ramp < 1µs			80	µs
t_{DO}	Default output delay time from input power loss		Measured from the time VCC goes below $V_{CC_UVLO-(MIN)}$. See Section 7			20	µs
t_{ie}	Time interval error		2^{16} – 1 PRBS data at 200Mbps, C_L as defined in Recommended Operating Conditions, one channel switching		249		ps
$t_{JCLK(RMS)}$	Clock Jitter (RMS)		10MHz clock input, rising/falling edges, C_L as defined in Recommended Operating Conditions, one channel switching		9		ps

(1) Also known as pulse skew.
(2) $t_{sk(o)}$ is the skew between outputs of a single device with all driving inputs connected together and the outputs switching in the same direction while driving identical loads.
(3) $t_{sk(pp)}$ is the magnitude of the difference in propagation delay times between any terminals of different devices switching in the same direction while operating at identical supply voltages, temperature, input signals and loads.

ADVANCE INFORMATION

Copyright © 2026 Texas Instruments Incorporated

6.21 Insulation Characteristics Curves

Insulation Characteristics Curves for Wide-SOIC (DW-16) Package

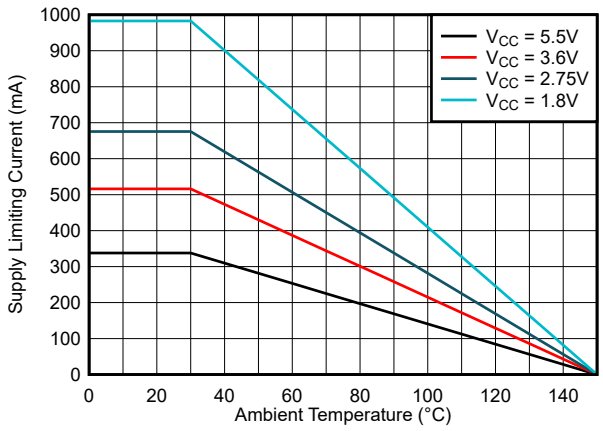


Figure 6-1. Thermal Derating Curve for Safety Limiting Current for Wide-SOIC (DW-16) Package

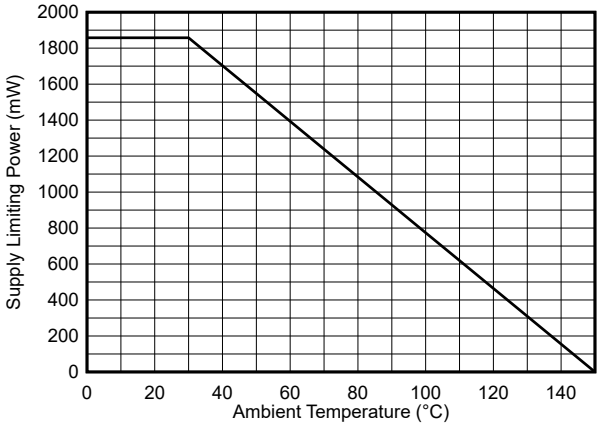


Figure 6-2. Thermal Derating Curve for Safety Limiting Power for Wide-SOIC (DW-16) Package

ADVANCE INFORMATION

Copyright © 2026 Texas Instruments Incorporated

6.22 Typical Characteristics

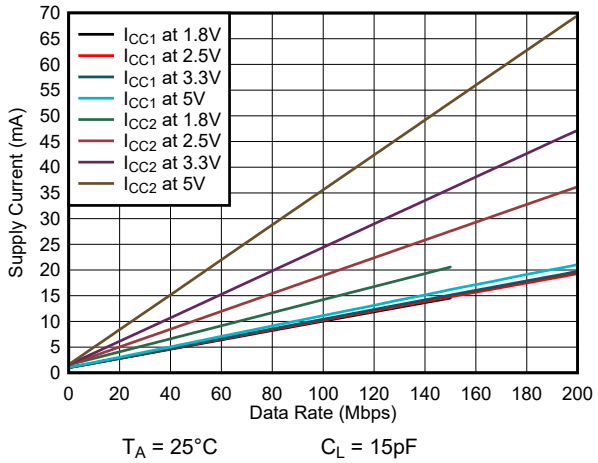


Figure 6-3. ISO6060H or ISO6060L Supply Current vs Data Rate (With 15pF Load)

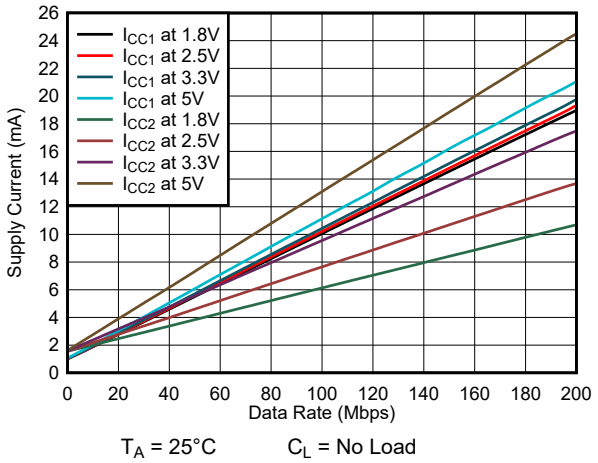


Figure 6-4. ISO6060H or ISO6060L Supply Current vs Data Rate (With No Load)

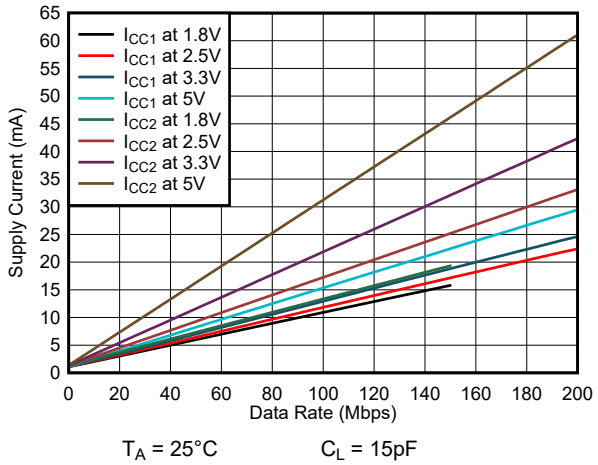


Figure 6-5. ISO6061H or ISO6061L Supply Current vs Data Rate (With 15pF Load)

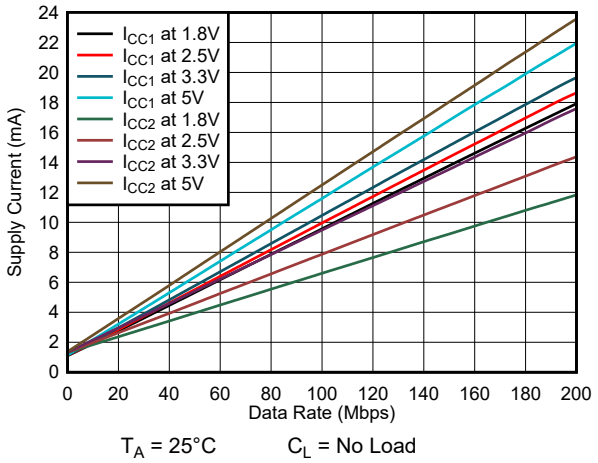


Figure 6-6. ISO6061H or ISO6061L Supply Current vs Data Rate (With No Load)

ADVANCE INFORMATION

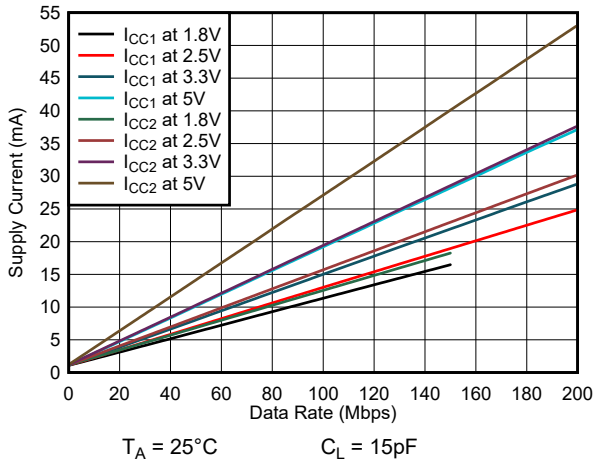


Figure 6-7. ISO6062H or ISO6062L Supply Current vs Data Rate (With 15pF Load)

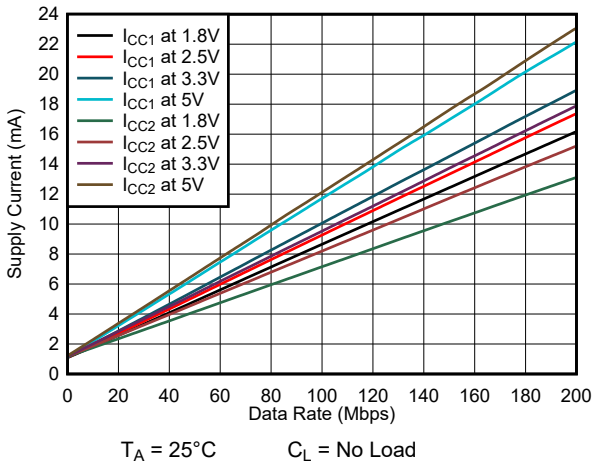


Figure 6-8. ISO6062H or ISO6062L Supply Current vs Data Rate (With No Load)

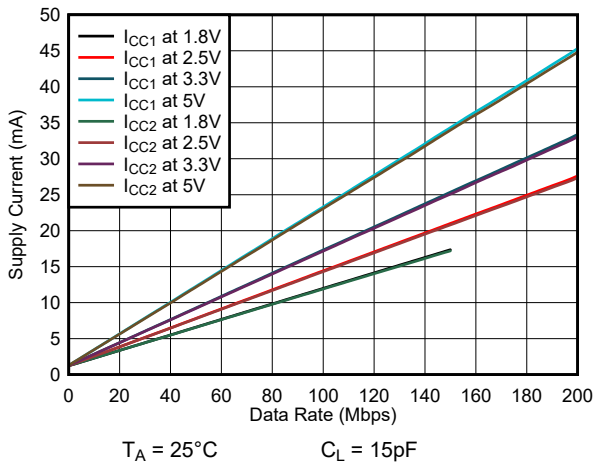


Figure 6-9. ISO6063H or ISO6063L Supply Current vs Data Rate (With 15pF Load)

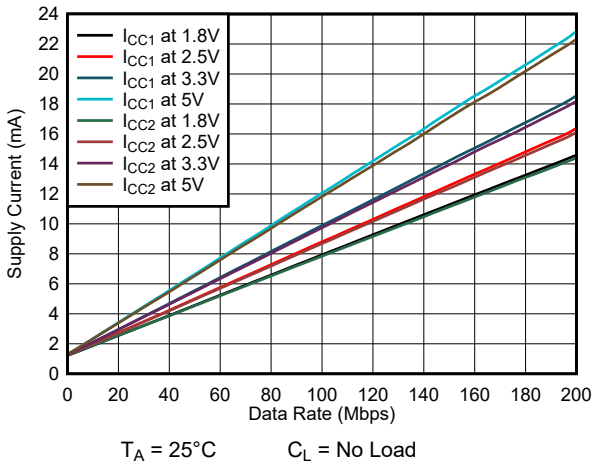


Figure 6-10. ISO6063H or ISO6063L Supply Current vs Data Rate (With No Load)

Copyright © 2026 Texas Instruments Incorporated

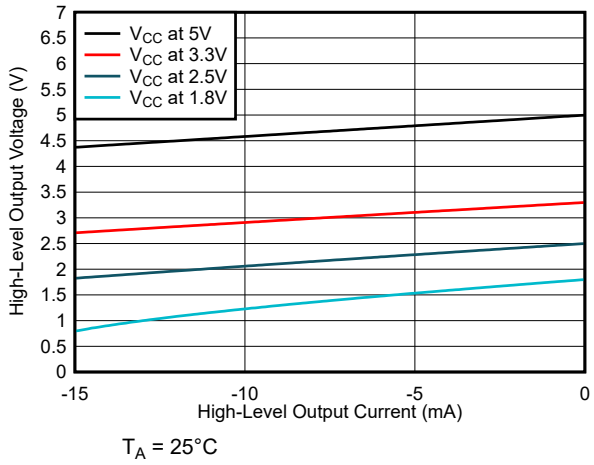


Figure 6-11. High-Level Output Voltage vs High-level Output Current

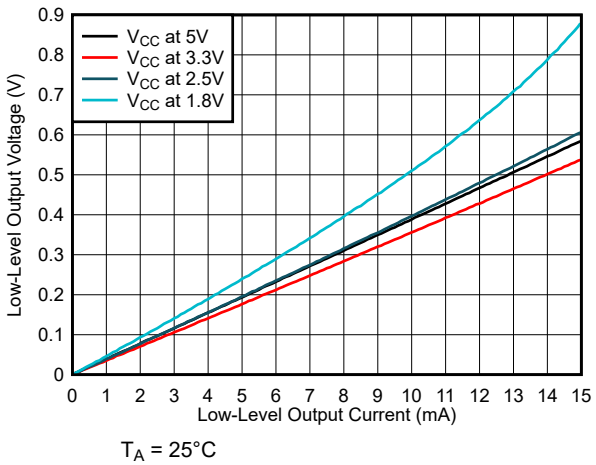


Figure 6-12. Low-Level Output Voltage vs Low-Level Output Current

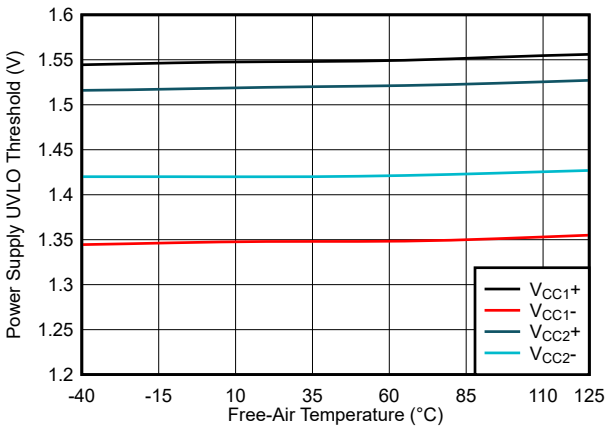


Figure 6-13. Power Supply Undervoltage Threshold vs Free-Air Temperature


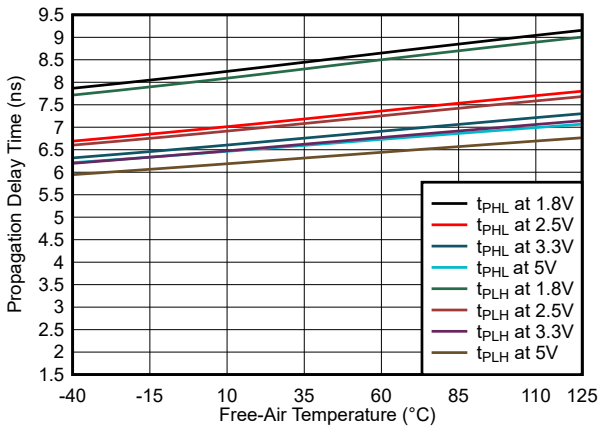


Figure 6-14. Propagation Delay Time vs Free-Air Temperature

ADVANCE INFORMATION


7 Parameter Measurement Information

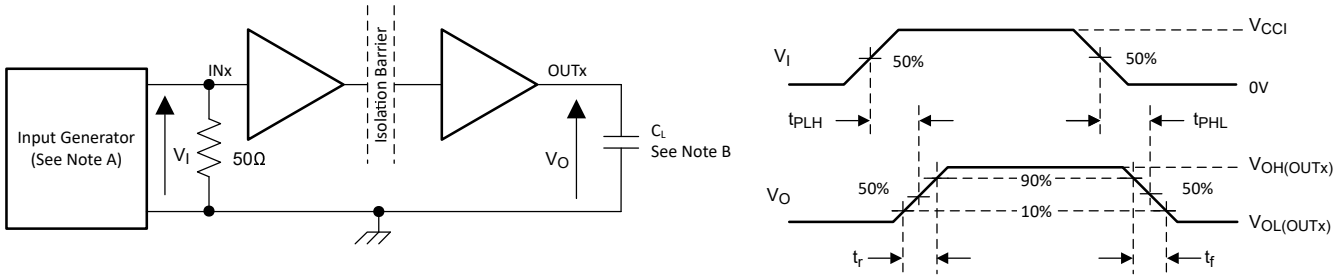

A. The input pulse is supplied by a generator having the following characteristics: PRR ≤ 50kHz, 50% duty cycle, t_r ≤ 1ns, t_f ≤ 1ns, Z_O = 50Ω. At the input, 50Ω resistor is required to terminate INx (input) generator signal. The 50Ω resistor is not needed in the actual application.

B. C_L = 15pF and includes instrumentation and fixture capacitance within ±20%.


Figure 7-1. Switching Characteristics Test Circuit and Voltage Waveforms

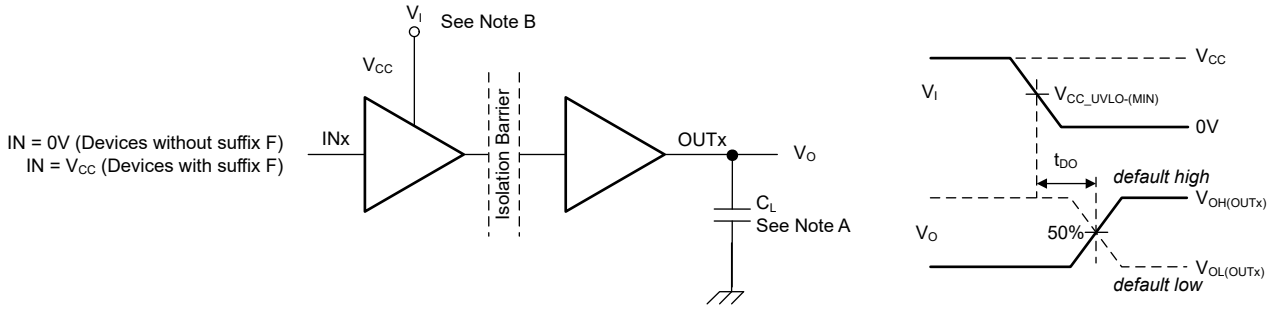

A. C_L = 15pF and includes instrumentation and fixture capacitance within ±20%.

B. Power Supply Ramp Rate = 10mV/ns

Figure 7-2. Default Output Delay Time Test Circuit and Voltage Waveforms

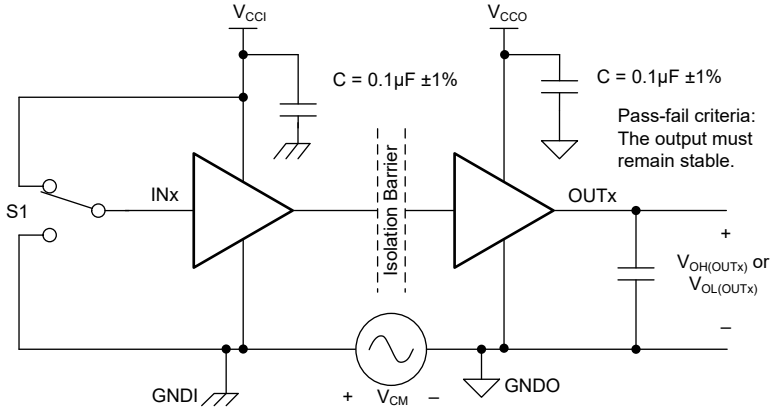


A. C_L = 15pF and includes instrumentation and fixture capacitance within ±20%.

B. ENx = V_{CC}, channels are enabled during CMTI test.

Figure 7-3. Common-Mode Transient Immunity Test Circuit

ADVANCE INFORMATION

Copyright © 2026 Texas Instruments Incorporated

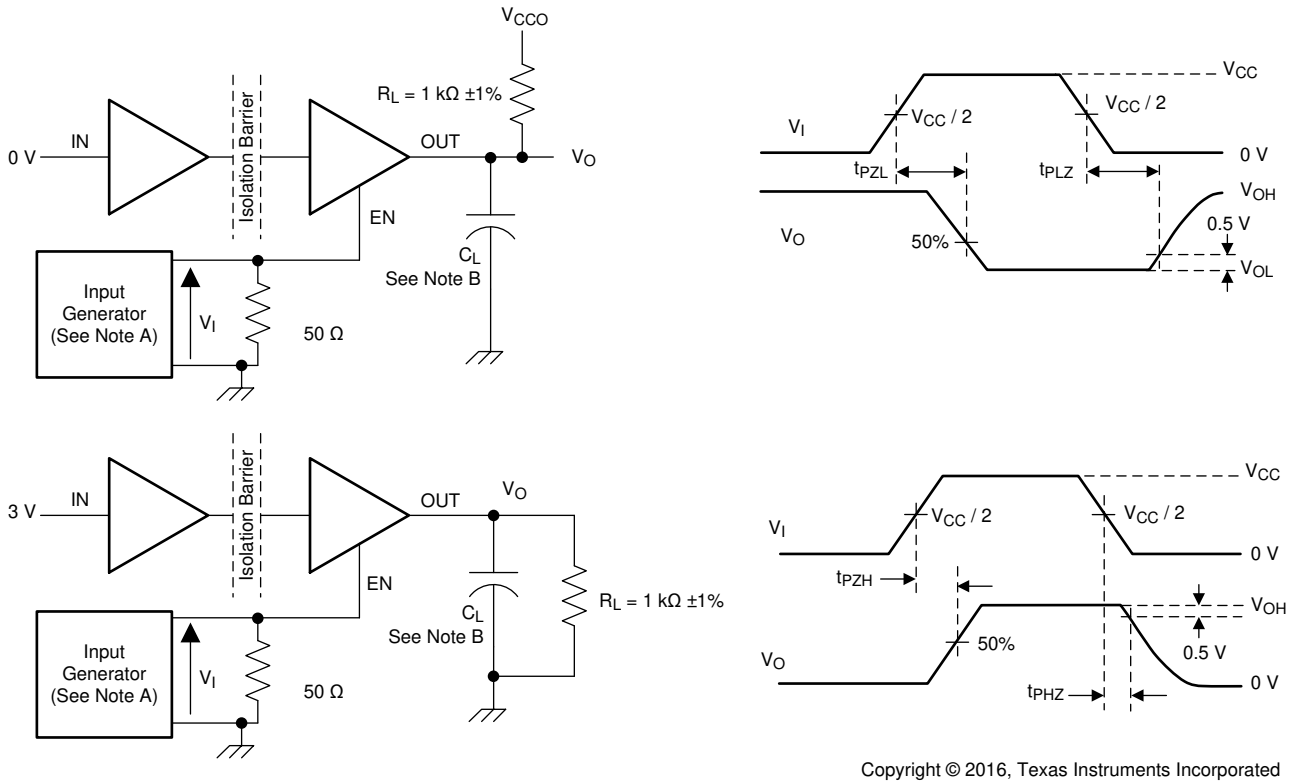

Copyright © 2016, Texas Instruments Incorporated

A. The input pulse is supplied by a generator having the following characteristics: PRR ≤ 10kHz, 50% duty cycle, t_r ≤ 3ns, t_f ≤ 3ns, Z_O = 50Ω.

B. C_L = 15pF and includes instrumentation and fixture capacitance within ±20%.

Figure 7-4. Enable Propagation Delay Time Test Circuit and Waveform

ADVANCE INFORMATION

8 Detailed Description

8.1 Overview

The ISO606x family of devices have an edge based scheme to transmit the digital data across a silicon dioxide based isolation barrier.

The digital input signal (IN) of the device is sampled by a transmitter and at every data edge the transmitter sends a corresponding differential signal across the isolation barrier. When the input signal is static, the refresh logic periodically sends the necessary differential signal from the transmitter. On the other side of the isolation barrier, the receiver converts the differential signal into a single-ended signal which is output on the OUT pin through a buffer. If the receiver does not receive a data or refresh signal, the timeout logic detects the loss of signal or power from the input side and drives the output to the default level.

8.2 Functional Block Diagram

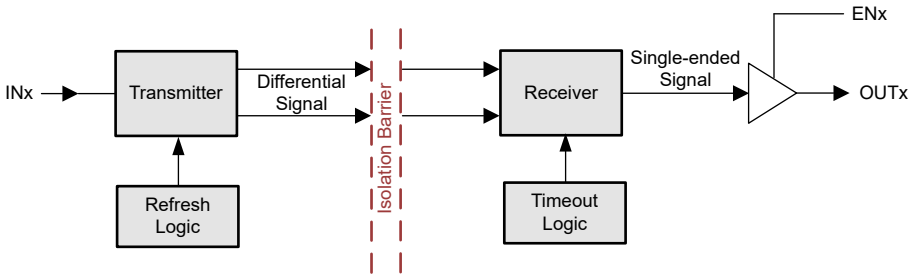


Figure 8-1. Conceptual Block Diagram of an Edge Based Digital Isolator

ADVANCE INFORMATION

Copyright © 2026 Texas Instruments Incorporated

8.3 Feature Description

Table 8-1 provides an overview of the device features.

Table 8-1. Device Features

PART NUMBER	CHANNEL DIRECTION	MAXIMUM DATA RATE	DEFAULT OUTPUT
ISO6060H	6 Forward 0 Reverse	200Mbps	High
ISO6060L	6 Forward 0 Reverse	200Mbps	Low
ISO6061H	5 Forward 1 Reverse	200Mbps	High
ISO6061L	5 Forward 1 Reverse	200Mbps	Low
ISO6062H	4 Forward 2 Reverse	200Mbps	High
ISO6062L	4 Forward 2 Reverse	200Mbps	Low
ISO6063H	3 Forward 3 Reverse	200Mbps	High
ISO6063L	3 Forward 3 Reverse	200Mbps	Low

8.3.1 Electromagnetic Compatibility (EMC) Considerations

Many applications in harsh industrial environment are sensitive to disturbances such as electrostatic discharge (ESD), electrical fast transient (EFT), surge and electromagnetic emissions. These electromagnetic disturbances are defined and tested by international standards such as IEC 61000-4-x and CISPR 32. Although system-level performance and reliability depends, to a large extent, on the application board design and layout, the ISO606x family of devices incorporates many chip-level design techniques to help overall system robustness.

8.4 Device Functional Modes

The following table lists the functional modes for the ISO606x devices.

Table 8-2. Function Table

V_{CCI}(1)	V_{CCO}	INPUT (INx)	OUTPUT ENABLE (ENx)	OUTPUT (OUTx)	COMMENTS
PU	PU	H	H or open	H	Normal Operation: A channel output assumes the logic state of the input.
		L	H or open	L	
		Open	H or open	Default	Default mode: When INx is open, the corresponding channel output goes to the default logic state. Default is *High* for ISO606xH and *Low* for ISO606xL (with F suffix).
X	PU	X	L	Z	A low value of output enable causes the outputs to be high-impedance.
PD	PU	X	H or open	Default	Default mode: When V_{CCI} is unpowered, a channel output assumes the logic state based on the selected default option. Default is *High* for ISO606xH and *Low* for ISO606xL (with F suffix). When V_{CCI} transitions from unpowered to powered-up, a channel output assumes the logic state of the input. When V_{CCI} transitions from powered-up to unpowered, channel output assumes the selected default state.
X	PD	X	X	Undetermined	When V_{CCO} is unpowered, a channel output is undetermined(2). When V_{CCO} transitions from unpowered to powered-up, a channel output assumes the logic state of the input.

(1) V_{CCI} = Input-side V_{CC}; V_{CCO} = Output-side V_{CC}; PU = Powered up ($V_{CC} \geq V_{CC_RO(MIN)}$); PD = Powered down ($V_{CC} \leq V_{CC_UVLO-}$); X = Irrelevant; H = High level; L = Low level; Z = High Impedance

(2) The outputs are in undetermined state when $V_{CC_UVLO-} \leq V_{CCI}$ or $V_{CCO} < V_{CC} \geq V_{CC_RO(MIN)}$.

ADVANCE INFORMATION

ADVANCE INFORMATION

8.5 Device I/O Schematics




Figure 8-2. Input (INx) Default High (Device With H Suffix) Schematics

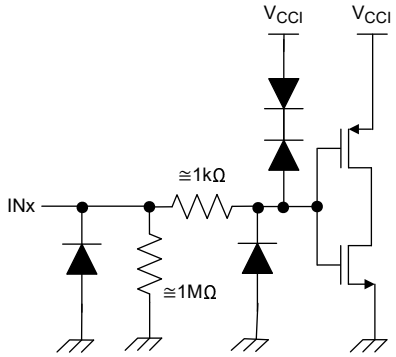


Figure 8-3. Input (INx) Default High (Device With L Suffix) Schematics

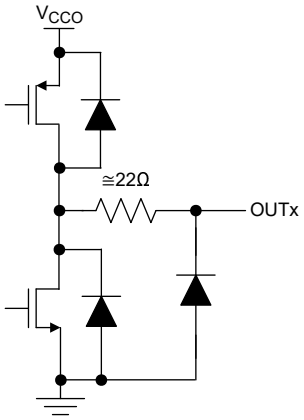


Figure 8-4. Output (OUTx) Schematics




Figure 8-5. Enable (ENx) Schematics

8.6 Overvoltage Tolerant Input

The input pins of this device, INx and ENx, support input signal voltage in excess of the supply voltage (V_{CCI}) on the input side of the device as long as the voltage on the inputs remains below the voltages listed in the Recommended Operating Conditions and Absolute Maximum Ratings sections.

This allows the device to support input signal voltages on the inputs when the input supply, V_{CCI}, is unpowered. In this use case, the outputs transition to the default output state when the input side no longer has a valid supply.

These inputs also provide the capability of the inputs to down translate input signal voltages up to the V_{IMAX} in the Recommended Operating Conditions section. For example, an input signal 5V high-level can be used while V_{CCI} is operating a 3.3V.

Copyright © 2026 Texas Instruments Incorporated

9 Application and Implementation

Note

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

9.1 Application Information

The ISO606x devices are high-performance, low power, six-channel digital isolators. These devices come with enable pins on each side which can be used to put the respective outputs in high impedance for parallel (multiple) driver applications. TheISO606x devices use single-ended CMOS-logic switching technology.

The supply voltage range is from 1.71V to 5.5V for both supplies, V_{CC1} and V_{CC2}. Since an isolation barrier separates the two sides, each side can be sourced independently with any voltage within the Recommended Operating Conditions section. As an example, supplying ISO606x V_{CC1} with 3.3V (which is within 1.71V to 5.5V) and V_{CC2} with 5V (which is also within 1.71V to 5.5V) is possible. You can use the digital isolator as a logic-level translator in addition to providing isolation. When designing with digital isolators, keep in mind that because of the single-ended design structure, digital isolators do not conform to any specific interface standard and are only intended for isolating single-ended CMOS or TTL digital signal lines. The isolator is typically placed between the data controller (that is, MCU or FPGA), and a data converter or a line transceiver, regardless of the interface type or standard.

9.2 Typical Application

Isolated SPI for an Analog Input, Basic SPI Connections to ADC shows an isolated serial peripheral interface (SPI) for analog input with basic SPI connections and Isolated SPI for an Analog Input, Full IO Connection to the ADC shows the same ADC with full digital IOs and SPI isolated.

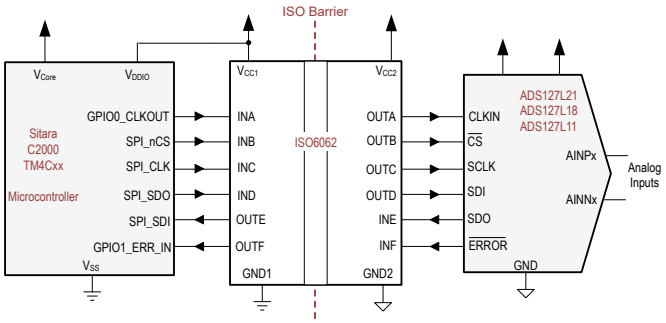


Figure 9-1. Isolated SPI for an Analog Input, Basic SPI Connections to ADC

ADVANCE INFORMATION

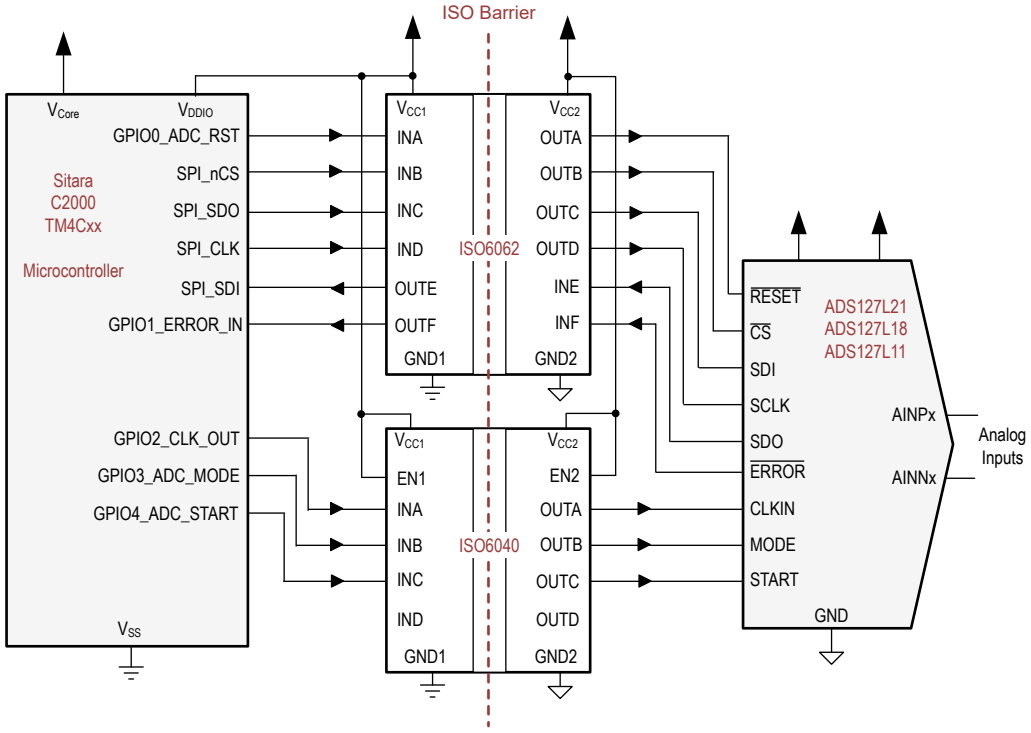


Figure 9-2. Isolated SPI for an Analog Input, Full IO Connection to the ADC

ADVANCE INFORMATION

Copyright © 2026 Texas Instruments Incorporated

9.2.1 Design Requirements

To design with these devices, use the parameters listed in Table 9-1.

Table 9-1. Design Parameters

PARAMETER	VALUE
Supply voltage, V_{CC1} and V_{CC2}	1.71V to 5.5V
Decoupling capacitor between V_{CC1} and GND1	0.1µF
Decoupling capacitor from V_{CC2} and GND2	0.1µF

9.2.2 Detailed Design Procedure

Unlike optocouplers, which require external components to improve performance, provide bias, or limit current, the ISO606x family of devices only require two external bypass capacitors to operate.

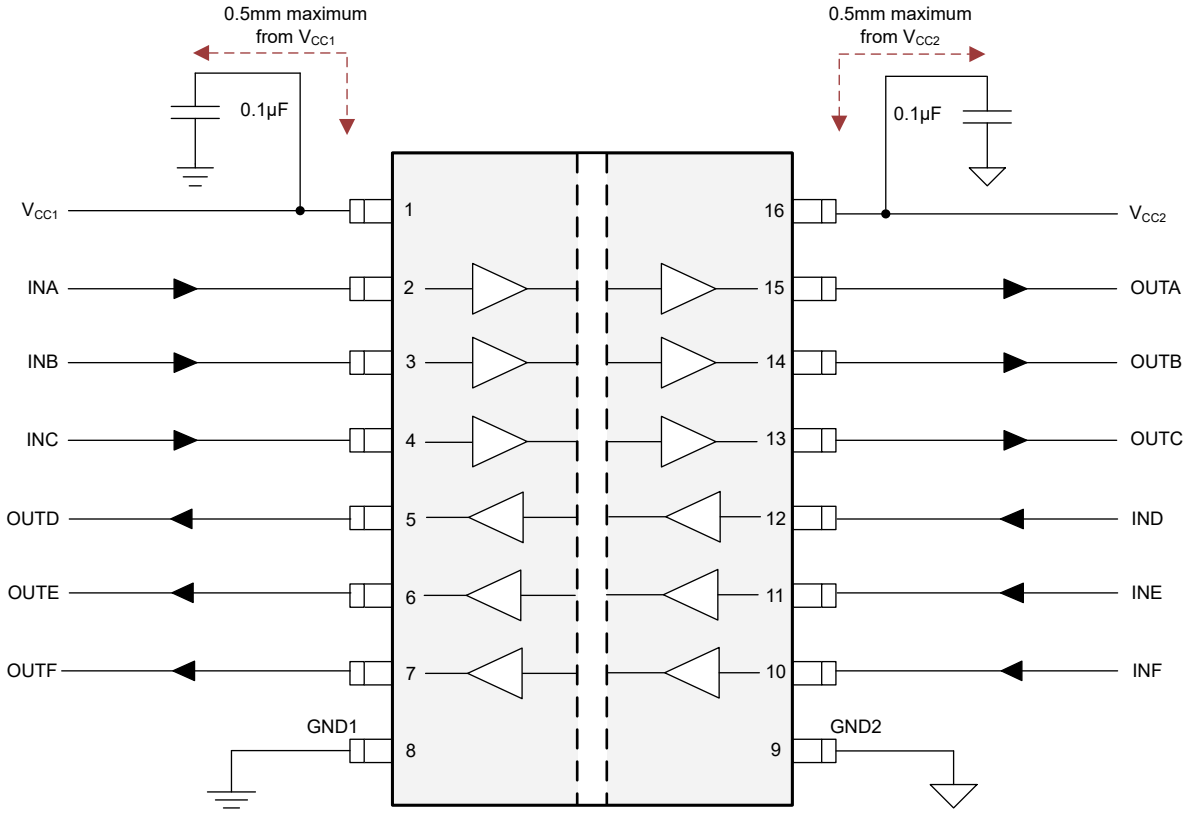



Figure 9-3. Typical ISO606x Circuit

ADVANCE INFORMATION

ADVANCE INFORMATION


9.2.3 Application Curve

The following typical eye diagrams of the ISO606x family of devices indicates low jitter and wide open eye at the maximum data rate of 200Mbps.

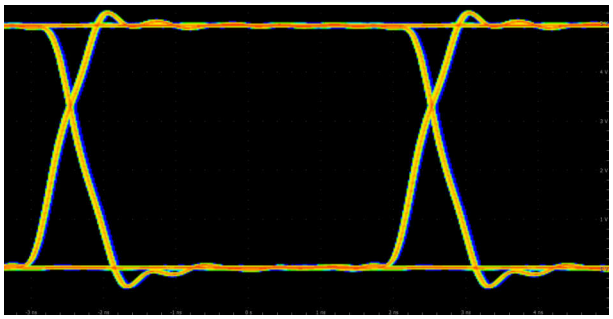


Horizontal 1ns / division, Vertical 1V / division.

Figure 9-4. ISO606x Eye Diagram at 200Mbps PRBS 2^{16} – 1, 5V and 25°C

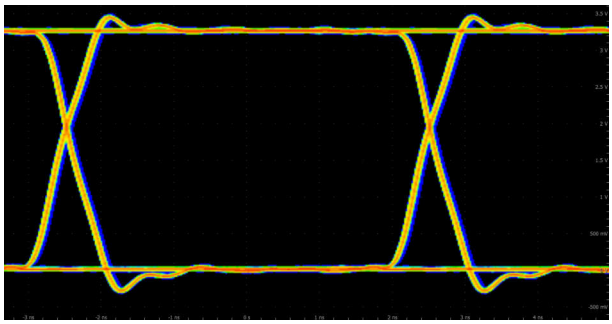


Horizontal 1ns / division, Vertical 500mV / division.

Figure 9-5. ISO606x Eye Diagram at 200Mbps PRBS 2^{16} – 1, 3.3V and 25°C

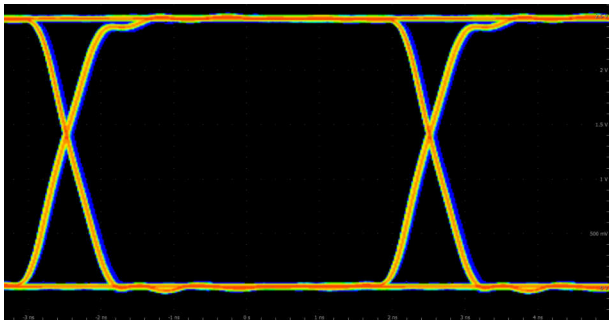

Horizontal 1ns / division, Vertical 500mV / division.

Figure 9-6. ISO606x Eye Diagram at 200Mbps PRBS 2^{16} – 1, 2.5V and 25°C

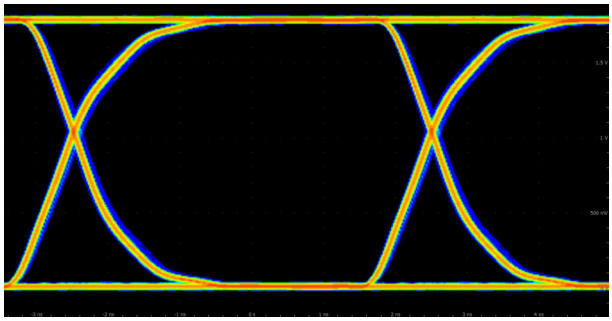

Horizontal 1ns / division, Vertical 500mV / division.

Figure 9-7. ISO606x Eye Diagram at 200Mbps PRBS 2^{16} – 1, 1.8V and 25°C

Copyright © 2026 Texas Instruments Incorporated

9.3 Power Supply Recommendations

To provide reliable operation at data rates and supply voltages, a 0.1µF bypass capacitor is recommended at the input and output supply pins (V_{CC1} and V_{CC2}). The capacitors must be placed as close to the supply pins as possible. If only a single primary-side power supply is available in an application, isolated power can be generated for the secondary-side with the help of a transformer driver. For industrial applications, please use Texas Instruments' SN6501 or SN6505B. For such applications, detailed power supply design and transformer selection recommendations are available in *SN6501 Transformer Driver for Isolated Power Supplies* or *SN6505B Low-noise, 1A Transformer Drivers for Isolated Power Supplies*.

9.4 Layout

9.4.1 Layout Guidelines

A minimum of two layers is required to accomplish a cost optimized and low EMI PCB design. To further improve EMI, a four layer board can be used (see Figure 9-8). Layer stacking for a four layer board must be in the following order (top-to-bottom): high-speed signal layer, ground plane, power plane and low-frequency signal layer.

- Routing the high-speed traces on the top layer avoids the use of vias (and the introduction of the inductances) and allows for clean interconnects between the isolator and the transmitter and receiver circuits of the data link.
- Placing a solid ground plane next to the high-speed signal layer establishes controlled impedance for transmission line interconnects and provides an excellent low-inductance path for the return current flow.
- Placing the power plane next to the ground plane creates additional high-frequency bypass capacitance of approximately 100pF/inch^2.
- Routing the slower speed control signals on the bottom layer allows for greater flexibility as these signal links typically have margin to tolerate discontinuities such as vias.

If an additional supply voltage plane or signal layer is needed, add a second power or ground plane system to the stack to keep the planes symmetrical. This design makes the stack mechanically stable and prevents warping. Also the power and ground plane of each power system can be placed closer together, thus increasing the high-frequency bypass capacitance significantly.

For detailed layout recommendations, refer to the *Digital Isolator Design Guide* application note.

ADVANCE INFORMATION

Copyright © 2026 Texas Instruments Incorporated

9.4.2 Layout Example

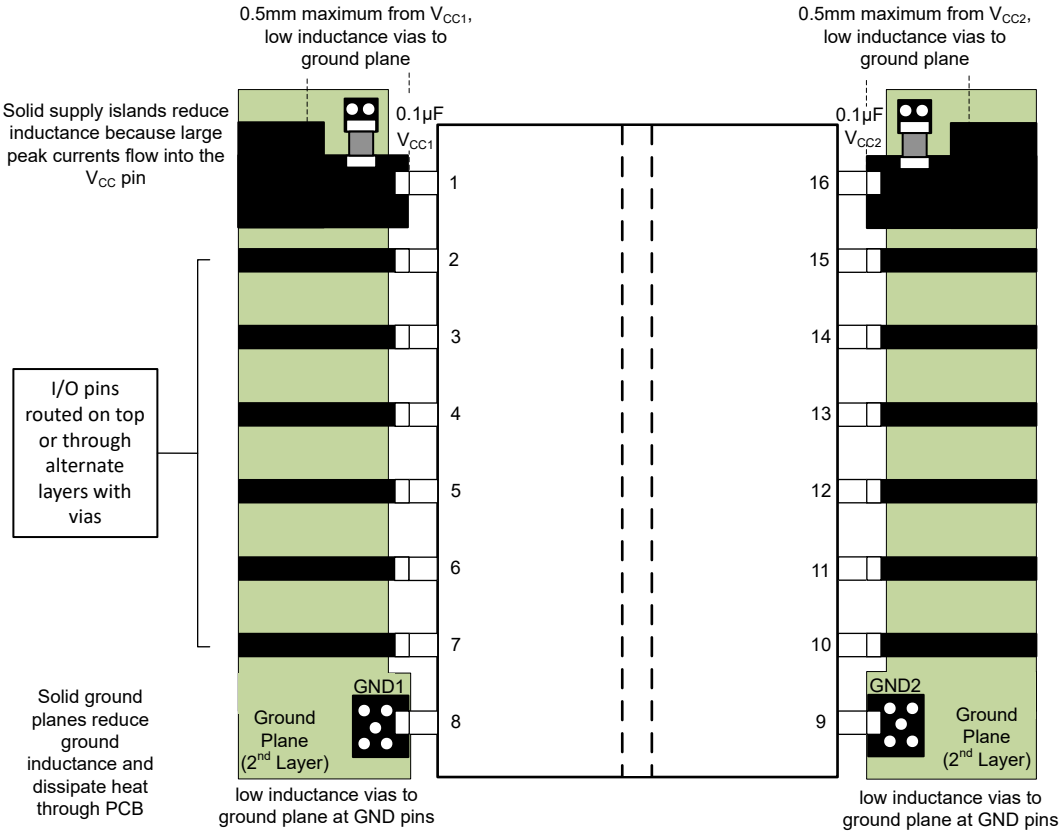


Figure 9-8. Layout Example

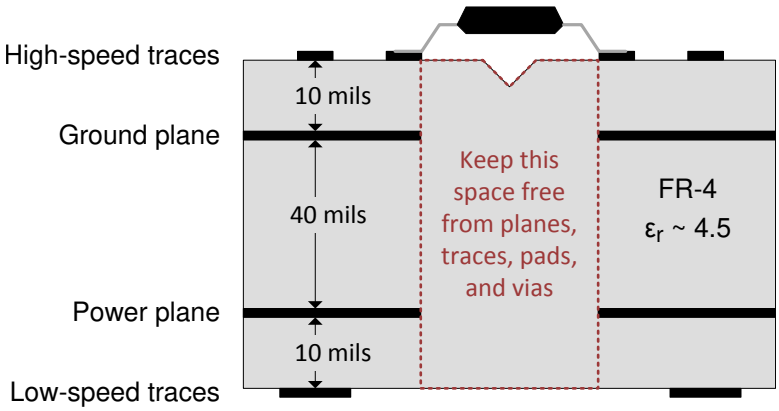


Figure 9-9. Layout Example PCB cross section

ADVANCE INFORMATION

Copyright © 2026 Texas Instruments Incorporated

10 Device and Documentation Support

10.1 Documentation Support

10.1.1 Related Documentation

For related documentation, see the following:

- Texas Instruments, *ISO6060 Technical Documents*
- Texas Instruments, *ISO6061 Technical Documents*
- Texas Instruments, *ISO6062 Technical Documents*
- Texas Instruments, *ISO6063 Technical Documents*

- Texas Instruments, *Digital Isolator Design Guide*, application note
- Texas Instruments, *Isolation Glossary*, application note
- Texas Instruments, *Maintain Isolation Ratings in Half the Size with DFB and DFP Digital Isolator Packaging*, application note
- Texas Instruments, *How to use isolation to improve ESD, EFT, and Surge immunity in industrial systems*, application note

- Texas Instruments, *SN6501 Transformer Driver for Isolated Power Supplies*, data sheet
- Texas Instruments, *ADS127L21 512kSPS, Programmable Filter, 24-Bit, Wideband Delta-Sigma ADC*, datasheet
- Texas Instruments, *ADS127L1x 512kSPS, Quad and Octal, Simultaneous-Sampling, 24-Bit ADCs*, datasheet
- Texas Instruments, *ADS127L11 400-kSPS, Wide-Bandwidth, 24-Bit, Delta-Sigma ADC*, datasheet

10.2 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. Click on *Notifications* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

10.3 Support Resources

TI E2E™ support forums are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's Terms of Use.

ADVANCE INFORMATION

ADVANCE INFORMATION

10.4 Device Nomenclature

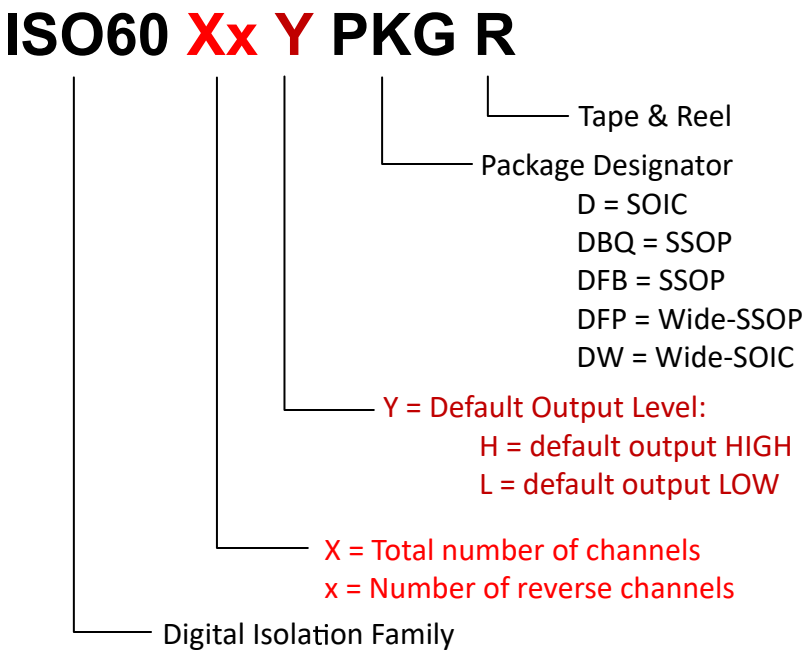


Figure 10-1. Device Nomenclature

10.5 Trademarks

TI E2E™ is a trademark of Texas Instruments.
All trademarks are the property of their respective owners.

10.6 Electrostatic Discharge Caution

This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

10.7 Glossary

TI Glossary — This glossary lists and explains terms, acronyms, and definitions.

11 Revision History


NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

DATE	REVISION	NOTES
October 2026	*	Initial Release

12 Mechanical, Packaging, and Orderable Information

The following pages include mechanical packaging and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this datasheet, refer to the left-hand navigation.

Copyright © 2026 Texas Instruments Incorporated




PACKAGE OUTLINE

DW0016C-C01

SOIC - 2.55 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT

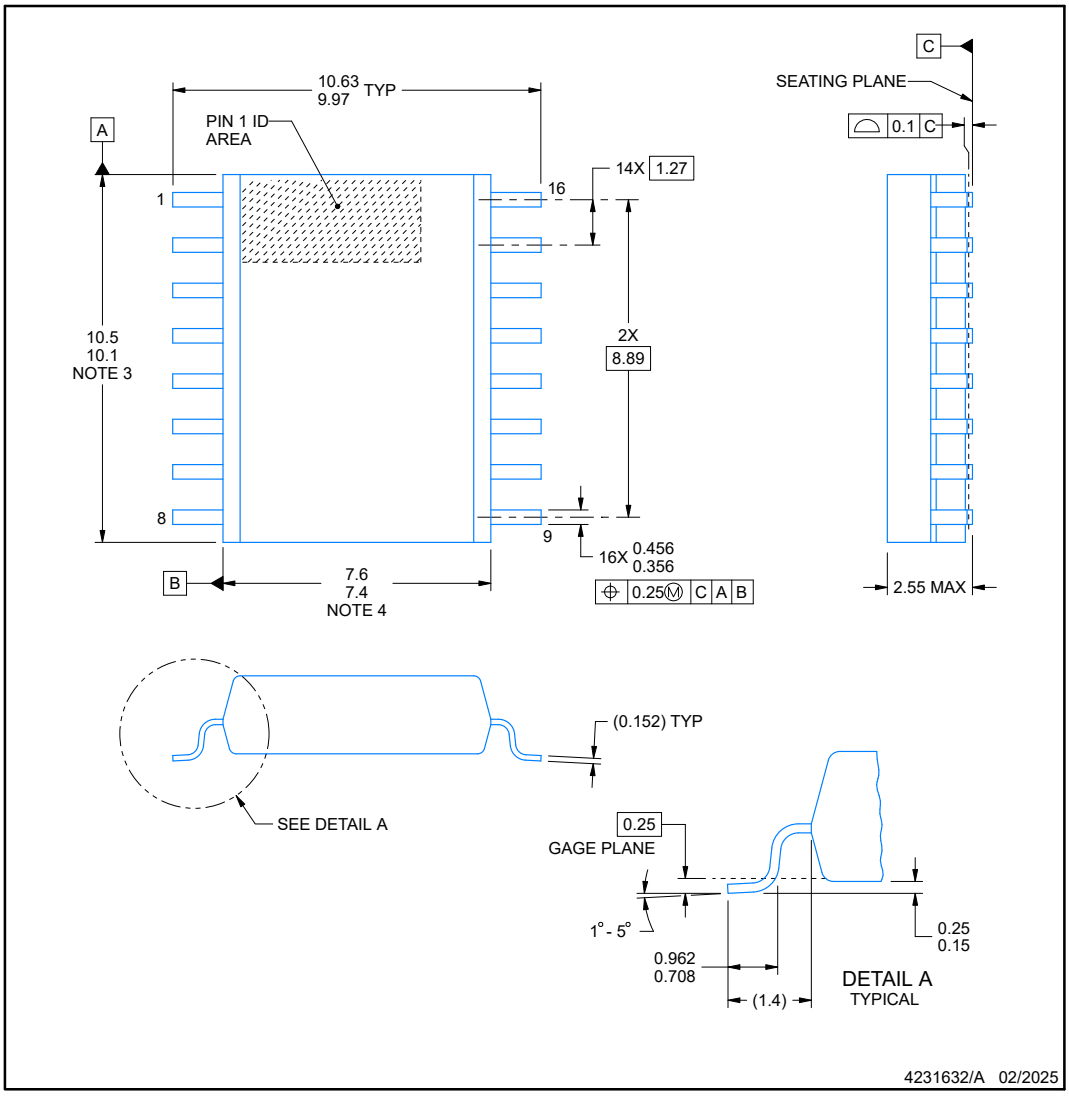

NOTES:

1. All linear dimensions are in millimeters. Dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm, per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm, per side.
5. Reference JEDEC registration MS-013.

ADVANCE INFORMATION

Copyright © 2026 Texas Instruments Incorporated


ADVANCE INFORMATION

EXAMPLE BOARD LAYOUT

DW0016C-C01

SOIC - 2.55 mm max height


SMALL OUTLINE INTEGRATED CIRCUIT

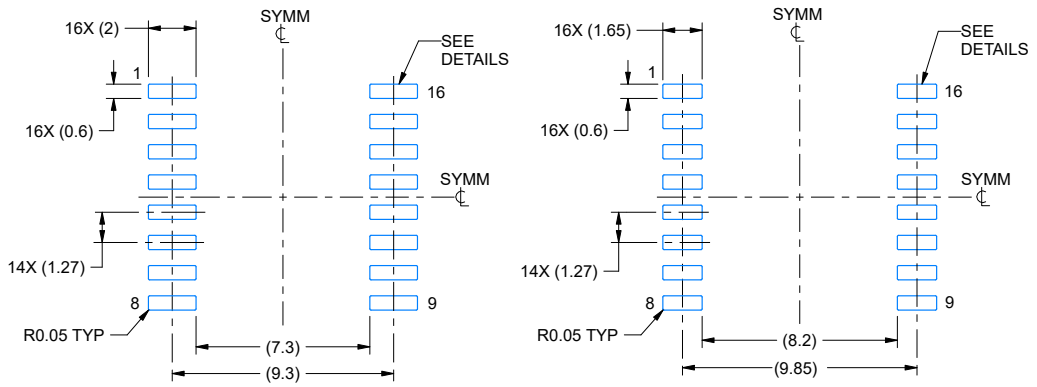

IPC-7351 NOMINAL
7.3 mm CLEARANCE/CREEPAGE

HV / ISOLATION OPTION
8.2 mm CLEARANCE/CREEPAGE

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE:4X

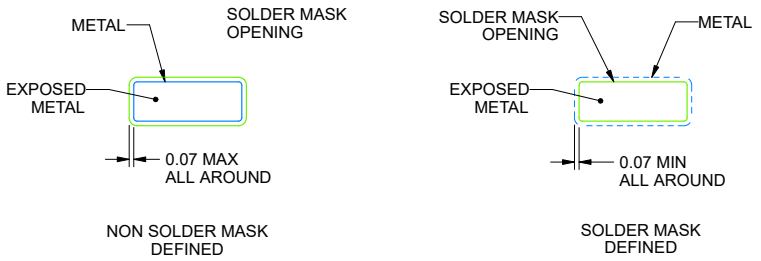

SOLDER MASK DETAILS

4231632/A 02/2025

NOTES: (continued)


6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

Copyright © 2026 Texas Instruments Incorporated

EXAMPLE STENCIL DESIGN

DW0016C-C01 — **SOIC - 2.55 mm max height**

SMALL OUTLINE INTEGRATED CIRCUIT

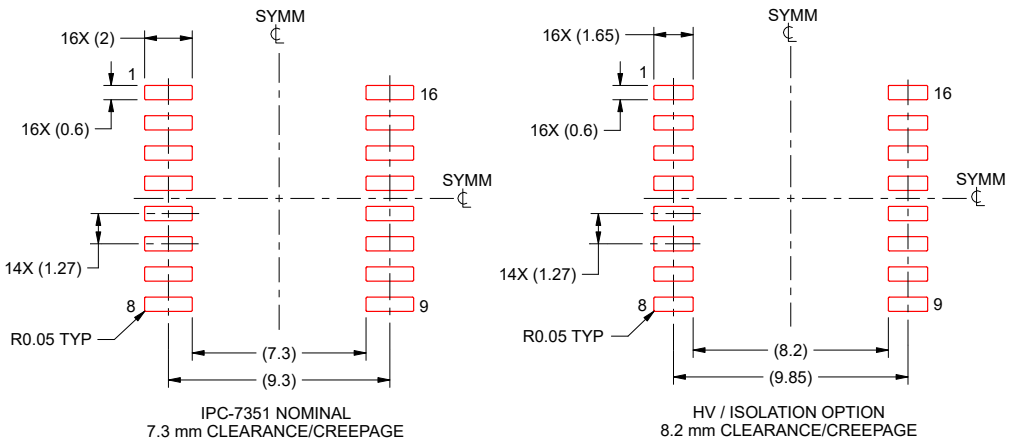

SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL
SCALE:4X

4231632/A 02/2025

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

ADVANCE INFORMATION

Copyright © 2026 Texas Instruments Incorporated

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package | Pins	Package qty | Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
XISO6061HDWR	Active	Preproduction	SOIC (DW) | 16	2000 | LARGE T&R	-	Call TI	Call TI	-	
XISO6061LDWR	Active	Preproduction	SOIC (DW) | 16	2000 | LARGE T&R	-	Call TI	Call TI	-	
XISO6062HDWR	Active	Preproduction	SOIC (DW) | 16	2000 | LARGE T&R	-	Call TI	Call TI	-	
XISO6062LDWR	Active	Preproduction	SOIC (DW) | 16	2000 | LARGE T&R	-	Call TI	Call TI	-	
XISO6063HDWR	Active	Preproduction	SOIC (DW) | 16	2000 | LARGE T&R	-	Call TI	Call TI	-	
XISO6063LDWR	Active	Preproduction	SOIC (DW) | 16	2000 | LARGE T&R	-	Call TI	Call TI	-	

(1) **Status:** For more details on status, see our product life cycle.

(2) **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

(3) **RoHS values:** Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

(4) **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

(5) **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

(6) **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

GENERIC PACKAGE VIEW


DW 16

SOIC - 2.65 mm max height

7.5 x 10.3, 1.27 mm pitch


SMALL OUTLINE INTEGRATED CIRCUIT

This image is a representation of the package family, actual package may vary.
Refer to the product data sheet for package details.

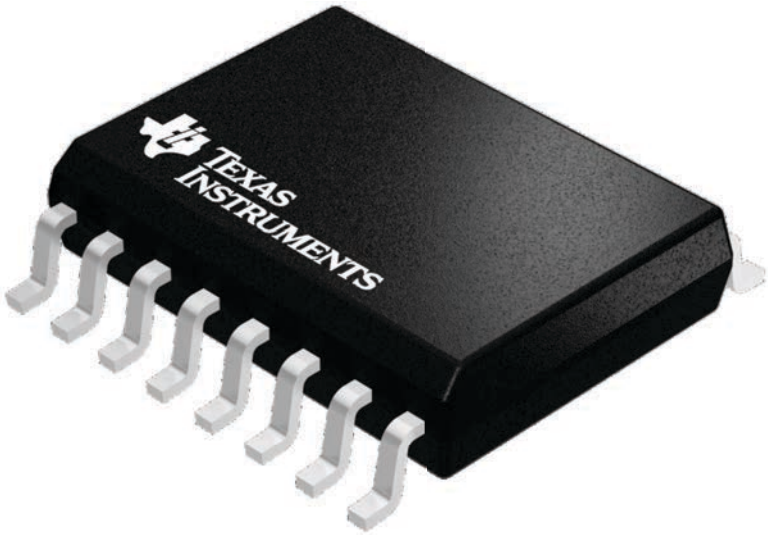


4224780/A

SOIC

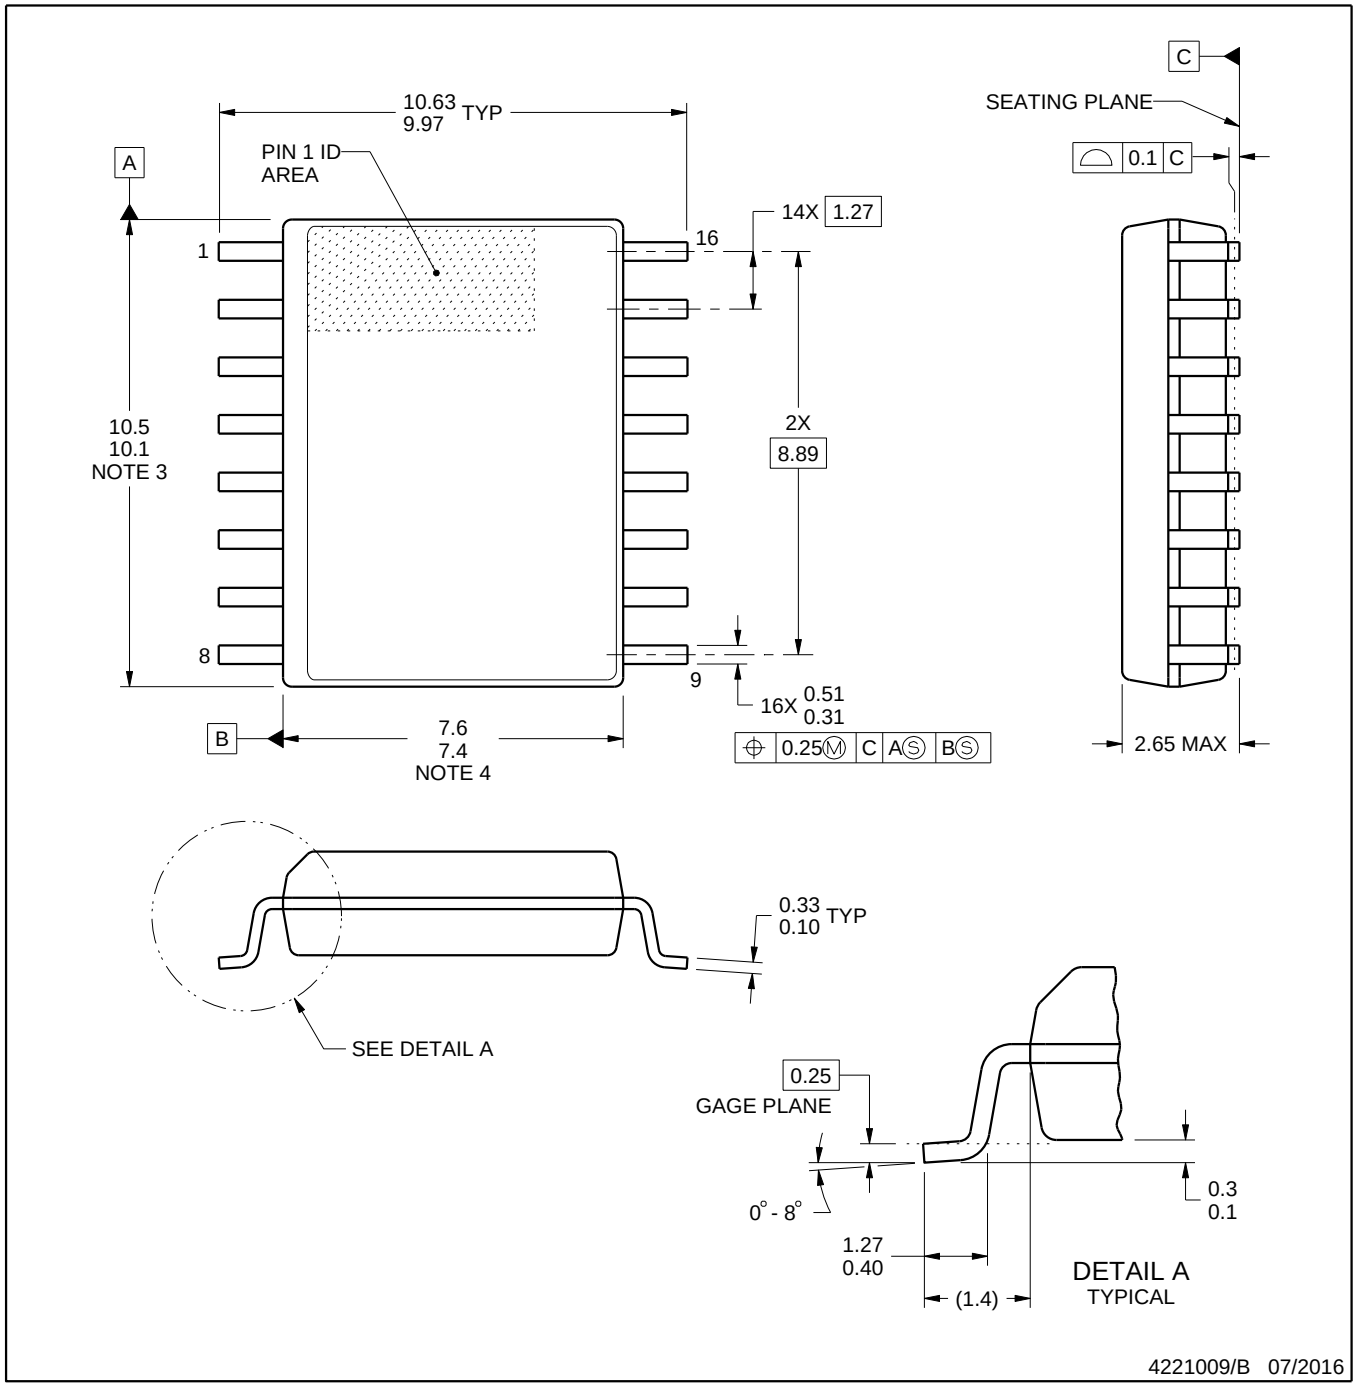

NOTES:


1. All linear dimensions are in millimeters. Dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm, per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm, per side.
5. Reference JEDEC registration MS-013.

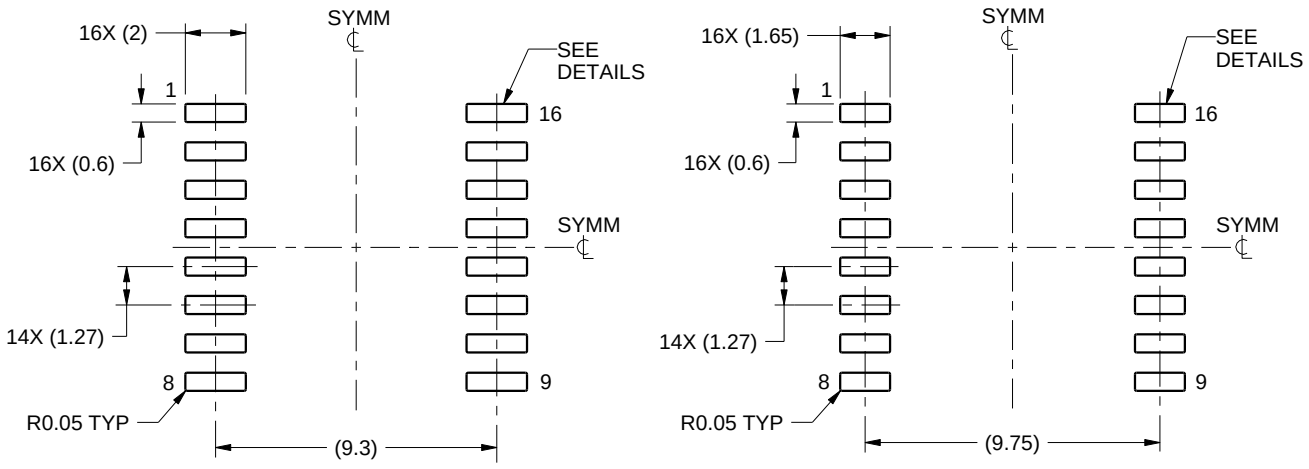

IPC-7351 NOMINAL
7.3 mm CLEARANCE/CREEPAGE

HV / ISOLATION OPTION
8.1 mm CLEARANCE/CREEPAGE

LAND PATTERN EXAMPLE
SCALE:4X

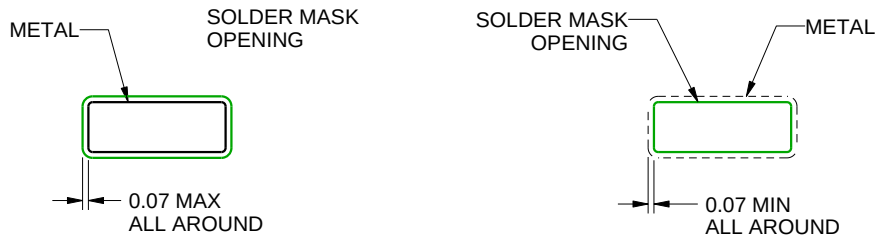

NON SOLDER MASK DEFINED


SOLDER MASK DEFINED

SOLDER MASK DETAILS

4221009/B 07/2016

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

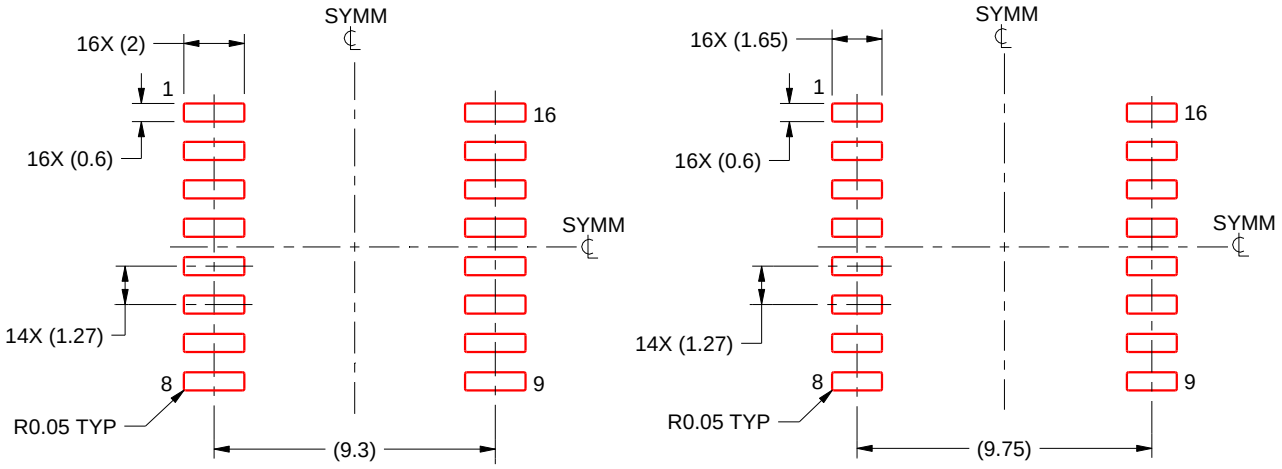

IPC-7351 NOMINAL
7.3 mm CLEARANCE/CREEPAGE

HV / ISOLATION OPTION
8.1 mm CLEARANCE/CREEPAGE

SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL
SCALE:4X

4221009/B 07/2016

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES “AS IS” AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI’s products are provided subject to TI’s Terms of Sale, TI’s General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI’s provision of these resources does not expand or otherwise alter TI’s applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2026, Texas Instruments Incorporated

Last updated 10/2025