
LP2951-Q1 Automotive, Adjustable Micropower Voltage Regulator With Shutdown

1 Features

- AEC-Q100 qualified for automotive applications:
  - Temperature grade 1: −40°C to +125°C, T_A
  - Temperature grade 1: −40°C to +125°C, T_J
- Wide input voltage range
  - V_{IN} range (new chip): 2V to 30V
- Wide output voltage range V_{OUT}
  - Fixed option: 3.3V, 5.0V
  - Adjustable option: V_{REF} to 29V
- Output current: Up to 100mA
- V_{OUT} accuracy:
  - ±2% over line, load, and temperature for legacy chip
  - ±1% over line, load, and temperature for new chip
- Quiescent current I_Q (new chip): 50µA (typical)
- Low dropout: 340mV (typical) for new chip
- Output current limiting and thermal shutdown
- Open-drain error output
- Stable over a wide range of ceramic output capacitor values:
  - C_L range: 1µF to 100µF (new chip)
  - ESR range: 0Ω to 2Ω (new chip)
- Package options:
  - D (8-pin SOIC)
  - DRG (8-pin WSON)

2 Applications

- Infotainment and clusters
- HEV/EV battery-management systems (BMS)
- HEV/EV inverters and motor controls
- HEV/EV onboard chargers (OBC) and wireless chargers
- HEV/EV DC/DC converters

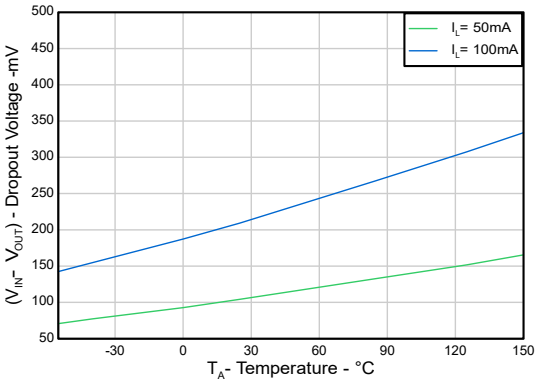

V_{IN} = 4.9V

Dropout Voltage vs Temperature (New Chip)

3 Description


The LP2951-Q1 is a wide input low-dropout regulator (LDO) supporting an input voltage range from 2V to 30V and can supply up to 100mA of load current. The LP2951-Q1 is able to output either a fixed or adjustable output from the same device. By tying the OUTPUT and SENSE pins together, and the FEEDBACK and V_{TAP} pins together, the LP2951-Q1 gives 3.3V or 5V fixed output voltages. Alternatively, leave the SENSE and V_{TAP} pins open and connect FEEDBACK to an external resistor divider. This configuration allows the output to be set to any value between V_{REF} to 29V (refer to Electrical Characteristics (Both Legacy and New Chip) section).

The LP2951-Q1 has a $\overline{\text{ERROR}}$ output that monitors the voltage at the feedback pin to indicate the status of the output voltage. The SHUTDOWN input and $\overline{\text{ERROR}}$ output are used for sequencing multiple power supplies in the system.

Package Information

PART NUMBER	PACKAGE(1)	PACKAGE SIZE(2)
LP2951-33-Q1	DRG (WSON, 8)	3mm × 3mm
LP2951-50-Q1		
LP2951-50-Q1	D (SOIC, 8)	4.9mm × 6mm

(1) For more information, see the *Section 10*.
(2) The package size (length × width) is a nominal value and includes pins, where applicable.

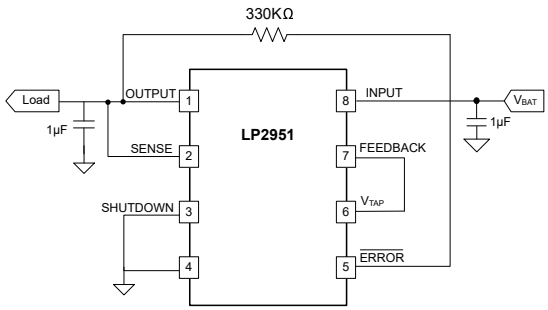

Typical Application Circuit

An IMPORTANT NOTICE at the end of this data sheet addresses availability, warranty, changes, use in safety-critical applications, intellectual property matters and other important disclaimers. PRODUCTION DATA.

Table of Contents

1 Features....1
2 Applications....1
3 Description....1
4 Pin Configuration and Functions....3
5 Specifications....4
5.1 Absolute Maximum Ratings....4
5.2 ESD Ratings....4
5.3 Recommended Operating Conditions....5
5.4 Thermal Information....5
5.5 Electrical Characteristics (Both Legacy and New Chip)....5
5.6 Timing Requirements (New Chip only)....9
5.7 Typical Characteristics....10
6 Detailed Description....19
6.1 Overview....19
6.2 Functional Block Diagram....19
6.3 Feature Description....20
6.4 Device Functional Modes....21
7 Application and Implementation....22
7.1 Application Information....22
7.2 Typical Application....24
7.3 Power Supply Recommendations....30
7.4 Layout....30
8 Device and Documentation Support....31
8.1 Device Support....31
8.2 Documentation Support....31
8.3 Receiving Notification of Documentation Updates....31
8.4 Support Resources....31
8.5 Trademarks....31
8.6 Electrostatic Discharge Caution....32
8.7 Glossary....32
9 Revision History....32
10 Mechanical, Packaging, and Orderable Information....32

Copyright © 2026 Texas Instruments Incorporated

4 Pin Configuration and Functions

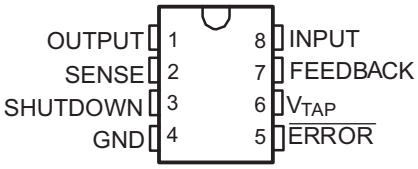


Figure 4-1. D Package (LP2951-50-Q1), 8-Pin SOIC (Top View)

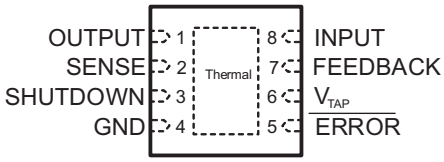


Figure 4-2. DRG Package, 8-Pin WSON With Exposed Thermal Pad (Top View)

Table 4-1. Pin Functions

PIN		TYPE[1]	DESCRIPTION
NAME	NO.		
$\overline{ERROR}$	5	O	Active-low, open-drain error output. Goes low when V_{OUT} drops by 6% of the nominal value.
FEEDBACK	7	I	Determines the output voltage. Connect to V_{TAP} (with OUTPUT tied to SENSE) for fixed output option, or connect to a resistor divider for adjustable output option.
GND	4	—	Ground
INPUT	8	I	Input supply pin. Use a capacitor with a value of 1µF or larger from this pin to ground is recommended. See the *Input and Output Capacitor Requirements* section for more information.
OUTPUT	1	O	A capacitor is required from OUTPUT to GND for stability. For best transient response, use the nominal recommended value or larger ceramic capacitor from OUTPUT to GND[2]. Place the output capacitor as close to the device output as possible. See the *Input and Output Capacitor Requirements* section for more details.
SENSE	2	I	Senses the output voltage. Connect to OUTPUT (with FEEDBACK tied to V_{TAP}) for fixed output option only. If using the device as adjustable output, this pin must be left floating.
SHUTDOWN	3	I	Active-high input. A high signal disables the device; a low signal enables the device.
V_{TAP}	6	O	Connect to FEEDBACK for fixed output option. If using the device as adjustable output, this pin must be left floating.

(1) I = Input, O = Output.
(2) The nominal output capacitance must be greater than 1µF. Throughout this document, the nominal derating on these capacitors is assumed to be 50%. Verify that the effective capacitance at the pin is greater than 1µF.

Copyright © 2026 Texas Instruments Incorporated

5 Specifications

5.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)(1)

		MIN	MAX	UNIT
V_{IN}	Continuous input voltage (legacy chip)	–0.3	35	V
	Continuous input voltage (new chip)	–0.3	42	
V_{OUT}	Output voltage	–0.3	VIN+0.3(4)	
V_{SHDN}	SHUTDOWN input voltage (legacy chip)	–1.5	35	
	SHUTDOWN input voltage (new chip)	–0.3	42	
$V_{\overline{ERROR}}$	$\overline{ERROR}$ comparator output voltage (legacy chip) (2)	–1.5	30	
	$\overline{ERROR}$ comparator output voltage (new chip)(2)	–0.3	39	
V_{FDBK}	FEEDBACK input voltage (legacy chip)(2) (3)	–1.5	30	
	FEEDBACK input voltage (new chip)(2) (3)	–0.3	5	
V_{TAP}	Internal resistor divider (fixed voltage option only, new chip)	–0.3	5	
V_{SENSE}	Output voltage sense (fixed voltage option only, new chip)	–0.3	6	
T_{stg}	Storage temperature	–65	150	°C

(1) Operation outside the Absolute Maximum Ratings may cause permanent device damage. Absolute Maximum Ratings do not imply functional operation of the device at these or any other conditions beyond those listed under Recommended Operating Conditions. If used outside the Recommended Operating Conditions but within the Absolute Maximum Ratings, the device may not be fully functional, and this may affect device reliability, functionality, performance, and shorten the device lifetime.
(2) Can exceed input supply voltage.
(3) If load is returned to a negative power supply, the output must be diode clamped to GND.
(4) The absolute maximum rating is V_{IN} + 0.3V or 39V, whichever is smaller.

5.2 ESD Ratings

				VALUE (Legacy Chip)	VALUE (New Chip)	UNIT
$V_{(ESD)}$	Electrostatic discharge	Human body model (HBM), per AEC Q100-002(1)		±2000	±3000	V
		Charged-device model (CDM), per AEC V Q100-011	All pins	±1000	±1000	
		Charged-device model (CDM), per AEC V Q100-011	Corner pins	±1000	±1000	

(1) AEC Q100-002 indicates that HBM stressing shall be in accordance with the ANSI/ESDA/JEDEC JS-001 specification.

Copyright © 2026 Texas Instruments Incorporated

5.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

		MIN	NOM	MAX	UNIT
V_{IN}	Input voltage	2.0		30	V
V_{EN}	Enable voltage	0		30	
V_{OUT}	Output voltage	1.2		30	
I_L	Output current	0		100	mA
C_{OUT}	Output capacitor(1)	1	2.2	100	µF
C_{OUT} ESR	Output capacitor ESR (legacy chip)	30m		5	Ω
	Output capacitor ESR (new chip)(3)	0		2	
C_{IN}	Input capacitor		1		µF
C_{FF}	Feed-forward capacitor (optional(2), for adjustable device only)		10		pF
$I_{FB_DIVIDER}$	Feedback divider current(2) (adjustable device only)	12			µA
T_J	Junction temperature	–40		125	°C

(1) Effective output capacitance of 0.5µF minimum required for stability.
(2) C_{FF} required for stability if the feedback divider current < 12µA. Feedback divider current = V_{OUT} / (R_1 + R_2). See the *Feed-Forward Capacitor (C_{FF})* section for details.
(3) Maximum supported ESR range for new chip is 2Ω. For output capacitor with higher ESR values, place a low ESR MLCC capacitor.

5.4 Thermal Information

THERMAL METRIC(1) (2)		Legacy Chip		New Chip		UNIT
		D	DRG	D	DRG	
		8 PINS	8 PINS	8 PINS	8 PINS	
$R_{\theta JA}$	Junction-to-ambient thermal resistance	121.6	55.7	123	61.7	°C/W
$R_{\theta JC(top)}$	Junction-to-case (top) thermal resistance	69.8	66.5	67.8	63.1	°C/W
$R_{\theta JB}$	Junction-to-board thermal resistance	61.9	30.2	70.7	31.0	°C/W
Ψ_{JT}	Junction-to-top characterization parameter	22.2	1.1	18.0	2.2	°C/W
Ψ_{JB}	Junction-to-board characterization parameter	69.8	30.4	61.4	30.9	°C/W
$R_{\theta JC(bot)}$	Junction-to-case (bottom) thermal resistance	n/a	10	n/a	2.9	°C/W

(1) The thermal data is based on the JEDEC standard high K profile,JESD 51-7. Two-signal, two-plane, four-layer board with 2-oz. copper. The copper pad is soldered to the thermal land pattern. Also, correct attachment procedure must be incorporated.
(2) For more information about traditional and new thermal metrics, see the *Semiconductor and IC Package Thermal Metrics* application note.

5.5 Electrical Characteristics (Both Legacy and New Chip)

V_{IN} = V_{OUT} (nominal) + 1V, I_L = 100µA, C_L = 1µF (for new chip) and C_L = 2.2µF (for legacy chip), FEEDBACK tied to V_{TAP}, OUTPUT tied to SENSE, $V_{SHUTDOWN}$ ≤ 0.7V

PARAMETER	TEST CONDITIONS		T_J	MIN	TYP	MAX	UNIT
3.3-V VERSION (LP295x-33)							
Output voltage	I_L = 100µA	Legacy chip	25°C	3.267	3.3	3.333	V
			–40°C to 125°C	3.234	3.3	3.366	
		New chip	25°C	3.2868	3.3	3.3132	
			–40°C to 125°C	3.2736	3.3	3.3264	
3.3-V ADJ VERSION (LP295x-33ADJ)							

Copyright © 2026 Texas Instruments Incorporated

5.5 Electrical Characteristics (Both Legacy and New Chip) (continued)

V_{IN} = V_{OUT} (nominal) + 1V, I_L = 100µA, C_L = 1µF (for new chip) and C_L = 2.2µF (for legacy chip), FEEDBACK tied to V_{TAP}, OUTPUT tied to SENSE, $V_{SHUTDOWN}$ ≤ 0.7V

PARAMETER	TEST CONDITIONS		T_J	MIN	TYP	MAX	UNIT
Output voltage	I_L = 100µA	New chip (LP295x-33ADJ)	25°C	3.3451	3.37	3.3923	V
			–40°C to 125°C	3.3283	3.37	3.4091	V
5-V VERSION (LP295x-50)							
Output voltage	I_L = 100µA	Legacy chip	25°C	4.95	5	5.05	V
			–40°C to 125°C	4.900	5	5.100	
		New chip	25°C	4.98	5	5.02	
			–40°C to 125°C	4.96	5	5.04	
5-V ADJ VERSION (LP295x-50ADJ)							
Output voltage	I_L = 100µA	New chip (LP295x-50ADJ)	25°C	5.0608	5.1	5.1475	V
			–40°C to 125°C	5.0353	5.1	5.1731	V
ALL VOLTAGE OPTIONS							
Output voltage accuracy	V_{IN} = [$V_{OUT(NOM)}$ + 1V] to 30V, I_L = 100µA to 100mA	New chip	–40°C to 125°C	–1		1	%
		New chip (LP295x-XXADJ)	–40°C to 125°C	–1.35		1.35	%
Output voltage temperature coefficient(1)	I_L = 100µA	Legacy chip	–40°C to 125°C		20	100	ppm/°C
		New chip			20	60	
Line regulation(2)	V_{IN} = [$V_{OUT(NOM)}$ + 1V] to 30V	Legacy chip	25°C		0.03	0.2	%/V
			–40°C to 125°C			0.4	
		New chip	25°C		0.0006	0.01	
			–40°C to 125°C			0.015	
Load regulation(2)	I_L = 100µA to 100mA	Legacy chip	25°C		0.04	0.2	%
			–40°C to 125°C			0.3	
		New chip	25°C		0.04	0.1	
			–40°C to 125°C			0.2	
Dropout voltage	V_{IN} = 2V, I_L = 100µA	Legacy chip	25°C		50	80	mV
			–40°C to 125°C			150	
		New chip	25°C		1	4	
			–40°C to 125°C			5	
	V_{IN} = 2V, I_L = 100mA	Legacy chip	25°C		380	450	
			–40°C to 125°C			600	
		New chip	25°C		340	420	
			–40°C to 125°C			570	

Copyright © 2026 Texas Instruments Incorporated

5.5 Electrical Characteristics (Both Legacy and New Chip) (continued)

V_{IN} = V_{OUT} (nominal) + 1V, I_L = 100µA, C_L = 1µF (for new chip) and C_L = 2.2µF (for legacy chip), FEEDBACK tied to V_{TAP}, OUTPUT tied to SENSE, $V_{SHUTDOWN}$ ≤ 0.7V

PARAMETER	TEST CONDITIONS		T_J	MIN	TYP	MAX	UNIT
GND current	I_L = 100µA	Legacy chip	25°C		75	120	µA
			–40°C to 125°C			140	
		New chip	25°C		50	65	
			–40°C to 125°C			80	
	I_L = 100mA	Legacy chip	25°C		8	12	mA
			–40°C to 125°C			14	
		New chip	25°C			0.8	
			–40°C to 125°C			0.9	
Dropout ground current	V_{IN} = $V_{OUT(NOM)}$ – 0.5V, I_L = 100µA	Legacy chip	25°C		110	170	µA
			–40°C to 125°C			200	
		New chip	25°C		78	120	
			–40°C to 125°C			150	
UVLO V_{IN} rising	I_L = 100µA	New chip	–40°C to 125°C	1.8	1.9	2.0	V
UVLO V_{IN} falling				1.7	1.8	1.9	
Hysteresis					100		mV
Current limit	V_{OUT} = 0V	Legacy chip	25°C		160	200	mA
			–40°C to 125°C			220	
		New chip	25°C		180	200	
			–40°C to 125°C			230	
Thermal regulation[3]	I_L = 100µA	Legacy chip	25°C		0.05	0.2	%/W
		New chip			0.05	0.2	
Output noise (RMS), 10Hz to 100kHz	C_L = 1µF (5V only)	Legacy chip	25°C		430		µV
		New chip			265		
	C_L = 200µF	Legacy chip	25°C		160		
	C_L = 100µF	New chip			250		
	C_L = 3.3µF, C_{Bypass} = 0.01µF between pins 1 and 7	Legacy chip	25°C		100		
		New chip			100		
Power-supply ripple rejection	V_{IN} - V_{OUT} = 1V, frequency = 100Hz, I_{OUT} ≥ 5mA	New chip	25°C		80		dB
(LP2951-xx & LP2951-xxADJ) 8-PIN VERSION ONLY ADJUSTABLE							
Reference voltage	V_{IN} = 2.3V to 30V, I_L = 100µA to 100mA	Legacy chip	–40°C to 125°C	1.2		1.272	V
		New chip		1.188	1.2	1.212	
		New chip (LP295x-XXADJ)		1.212	1.226	1.257	
Reference voltage temperature coefficient[1]		Legacy chip	25°C		20		ppm/°C
		New chip			5		

Copyright © 2026 Texas Instruments Incorporated

5.5 Electrical Characteristics (Both Legacy and New Chip) (continued)

V_{IN} = V_{OUT} (nominal) + 1V, I_L = 100µA, C_L = 1µF (for new chip) and C_L = 2.2µF (for legacy chip), FEEDBACK tied to V_{TAP}, OUTPUT tied to SENSE, $V_{SHUTDOWN}$ ≤ 0.7V

PARAMETER	TEST CONDITIONS		T_J	MIN	TYP	MAX	UNIT
FEEDBACK bias current		New chip	25°C		10	50	nA
			–40°C to 125°C			60	
FEEDBACK bias current temperature coefficient		New chip	25°C		0.1		nA/°C
$\overline{\text{ERROR}}$ COMPARATOR							
Output leakage current	V_{OUT} = 30V	Legacy chip	25°C		0.01	1	µA
			–40°C to 125°C			2	
		New chip	25°C		0.2	0.5	
			–40°C to 125°C			1	
Output low voltage	V_{IN} ≥ 2V I_{OL} = 400µA	Legacy chip	25°C		150	250	mV
			–40°C to 125°C			400	
		New chip	25°C		180	250	
			–40°C to 125°C			350	
Upper threshold voltage ($\overline{\text{ERROR}}$ output high)(4)		Legacy chip	25°C	40	60		mV
			–40°C to 125°C	25			
		New chip	25°C	40	60		
			–40°C to 125°C	25			
Lower threshold voltage ($\overline{\text{ERROR}}$ output low)(4)		Legacy chip	25°C		75	95	mV
			–40°C to 125°C			140	
		New chip	25°C		75	95	
			–40°C to 125°C			140	
Hysteresis(4)		Legacy chip	25°C		15		mV
		New chip			15		
SHUTDOWN INPUT							
Input logic voltage	Low (regulator ON)	Legacy chip	–40°C to 125°C			0.7	V
		New chip				0.7	
	High (regulator OFF)	Legacy chip	–40°C to 125°C	2			
		New chip		2			

Copyright © 2026 Texas Instruments Incorporated

5.5 Electrical Characteristics (Both Legacy and New Chip) (continued)

V_{IN} = V_{OUT} (nominal) + 1V, I_L = 100µA, C_L = 1µF (for new chip) and C_L = 2.2µF (for legacy chip), FEEDBACK tied to V_{TAP}, OUTPUT tied to SENSE, $V_{SHUTDOWN}$ ≤ 0.7V

PARAMETER	TEST CONDITIONS		T_J	MIN	TYP	MAX	UNIT
SHUTDOWN input current	SHUTDOWN = 2.4V	Legacy chip	25°C		30	50	µA
			–40°C to 125°C			100	
		New chip	25°C		0.2	0.5	
			–40°C to 125°C			1	
	SHUTDOWN = 30V	Legacy chip	25°C		450	600	
			–40°C to 125°C			750	
		New chip	25°C		0.3	0.5	
			–40°C to 125°C			1	
Regulator output current in shutdown	$V_{SHUTDOWN}$ ≥ 2V, V_{IN} ≥ 30V, V_{OUT} = 0, FEEDBACK tied to V_{TAP}	Legacy chip	25°C		3	10	µA
			–40°C to 125°C			20	
		New chip	25°C		4	6	
			–40°C to 125°C			7.5	

(1) Output or reference voltage temperature coefficient is defined as the worst-case voltage change divided by the total temperature range.
(2) Regulation is measured at constant junction temperature, using pulse testing with a low duty cycle. Changes in output voltage resulting from heating effects are covered under the specification for thermal regulation.
(3) Thermal regulation is defined as the change in output voltage at a time (T) after a change in power dissipation is applied, excluding load or line regulation effects. Specifications are for a 50-mA load pulse at V_{IN} = 30V, V_{OUT} = 5V (1.25W pulse) for t = 10ms.
(4) Comparator thresholds are expressed in terms of a voltage differential equal to the nominal reference voltage (measured at V_{IN} – V_{OUT} = 1V) minus FEEDBACK terminal voltage. To express these thresholds in terms of output voltage change, multiply by the error amplifier gain = V_{OUT}/V_{REF} = (R1 + R2)/R2. For example, at a programmed output voltage of 5V, the $\overline{\text{ERROR}}$ output is specified to go low when the output drops by 95mV × 5V/V_{REF}. Thresholds remain constant as a percentage of V_{OUT} (as V_{OUT} is varied), with the low-output warning occurring at 6% below nominal (typ) and 7.7%(max).

5.6 Timing Requirements (New Chip only)

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
t_{PGDH}	PG delay time rising, time from 92% V_{OUT} to 20% of PG(1)		40		µs
t_{PGDL}	PG delay time falling, time from 90% V_{OUT} to 80% of PG(1)		10		µs

(1) Output Overdrive = 10%.

Copyright © 2026 Texas Instruments Incorporated

5.7 Typical Characteristics

at V_{IN} = V_{OUT} (nominal) + 1V, I_L = 100µA, C_L = 1µF (for new chip) and C_L = 2.2µF (for legacy chip) (unless otherwise noted)



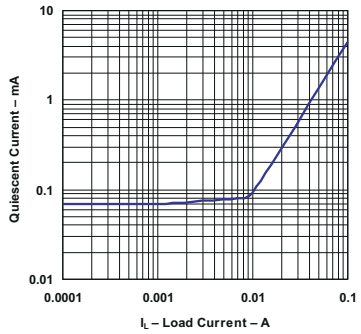


Figure 5-1. Quiescent Current vs Load Current (Legacy Chip)

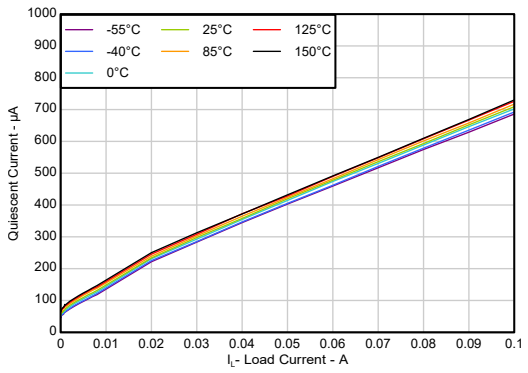


V_{IN} = 6V, V_{OUT} = 5V

Figure 5-2. Quiescent Current vs Load Current (New Chip)

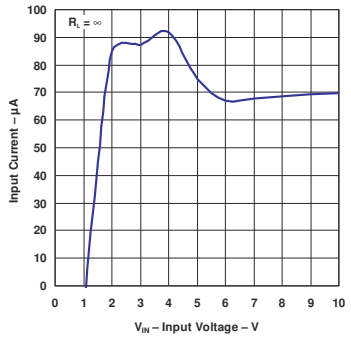


V_{OUT} = 5V, I_L = 0mA

Figure 5-3. Input Current vs Input Voltage (Legacy Chip)

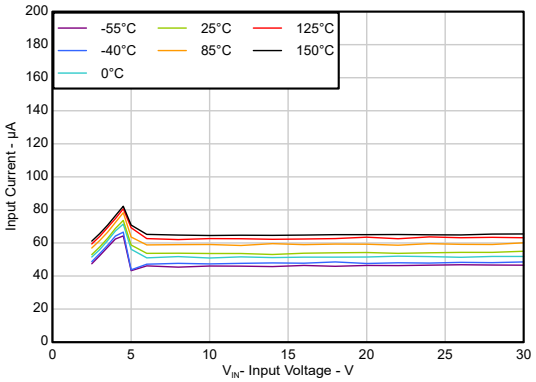


V_{OUT} = 5V, I_L = 0mA

Figure 5-4. Input Current vs Input Voltage (New Chip)

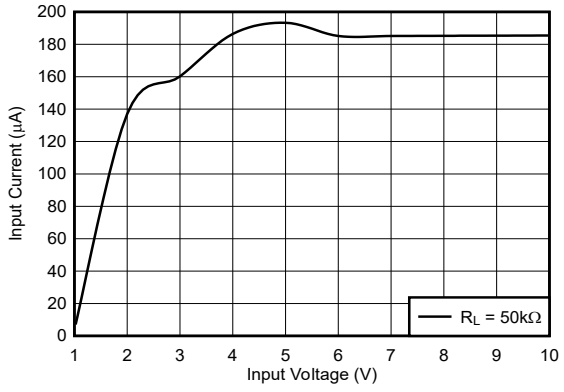

V_{OUT} = 5V, I_L = 100µA

Figure 5-5. Input Current vs Input Voltage (Legacy Chip)

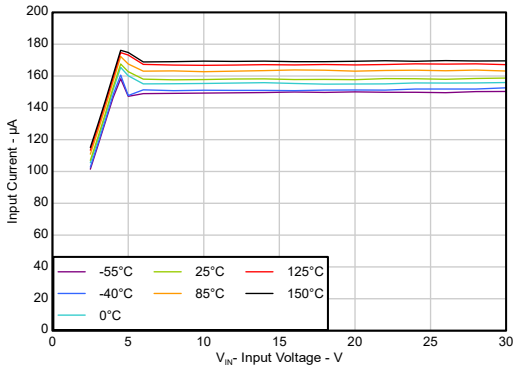


V_{OUT} = 5V, I_L = 100µA

Figure 5-6. Input Current vs Input Voltage (New Chip)

Copyright © 2026 Texas Instruments Incorporated


5.7 Typical Characteristics (continued)

at V_{IN} = V_{OUT} (nominal) + 1V, I_L = 100µA, C_L = 1µF (for new chip) and C_L = 2.2µF (for legacy chip) (unless otherwise noted)

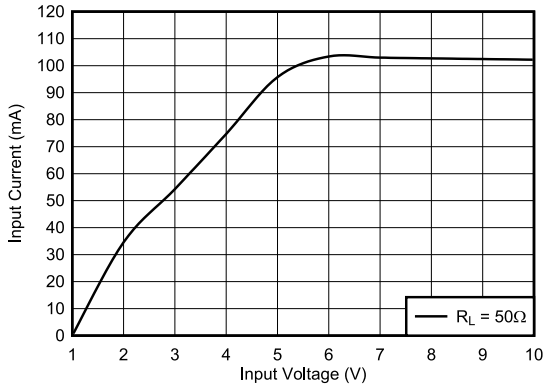

V_{OUT} = 5V, I_L = 100mA

Figure 5-7. Input Current vs Input Voltage (Legacy Chip)

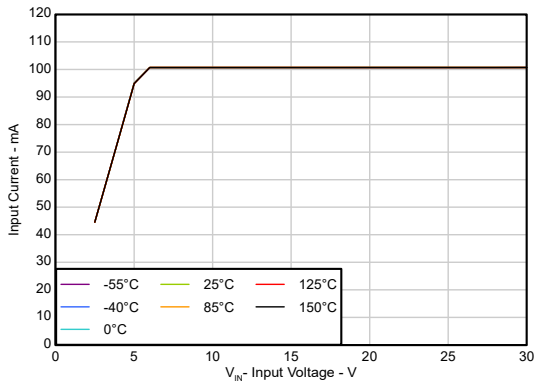

V_{OUT} = 5V, I_L = 100mA

Figure 5-8. Input Current vs Input Voltage (New Chip)



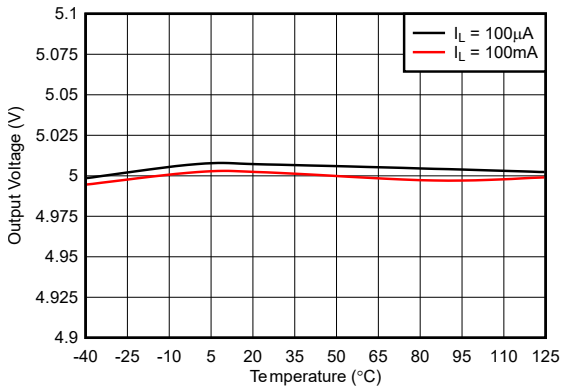


Figure 5-9. Output Voltage vs Temperature (Legacy Chip)

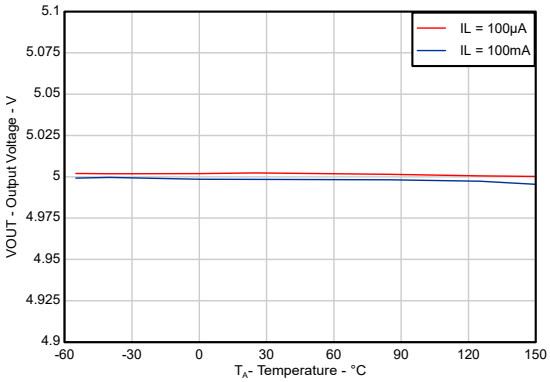


V_{IN} = 6V, V_{OUT} = 5V

Figure 5-10. Output Voltage vs Temperature (New Chip)

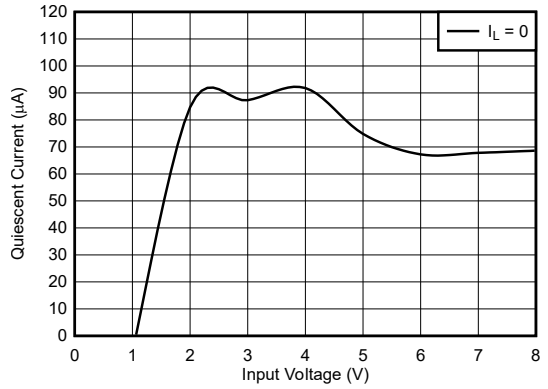

V_{OUT} = 5V, I_L = 0mA

Figure 5-11. Quiescent Current vs Input Voltage (Legacy Chip)

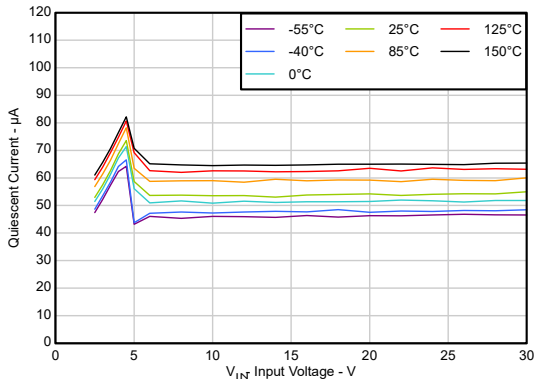


V_{OUT} = 5V, I_L = 0mA

Figure 5-12. Quiescent Current vs Input Voltage (New Chip)

Copyright © 2026 Texas Instruments Incorporated


5.7 Typical Characteristics (continued)

at V_{IN} = V_{OUT} (nominal) + 1V, I_L = 100µA, C_L = 1µF (for new chip) and C_L = 2.2µF (for legacy chip) (unless otherwise noted)

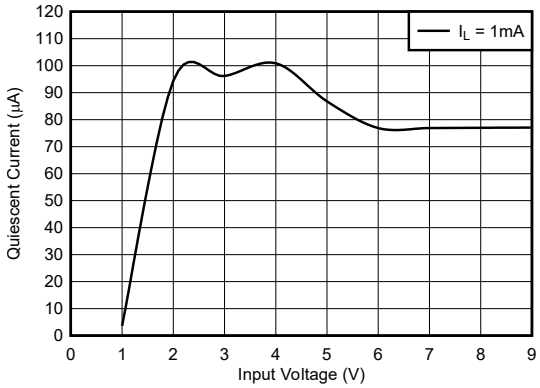


V_{OUT} = 5V, I_L = 1mA

Figure 5-13. Quiescent Current vs Input Voltage (I_L = 1mA) (Legacy Chip)

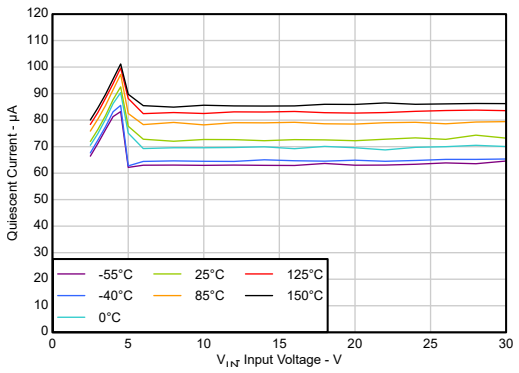


V_{OUT} = 5V, I_L = 1mA

Figure 5-14. Quiescent Current vs Input Voltage (New Chip)

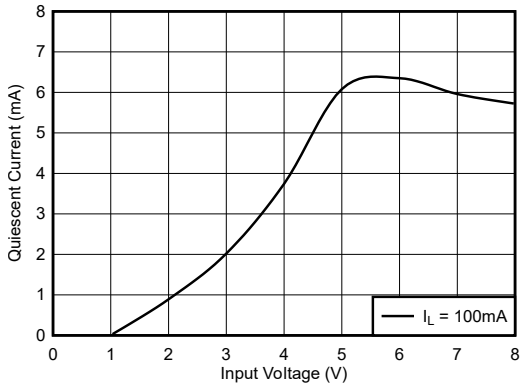

V_{OUT} = 5V, I_L = 100mA

Figure 5-15. Quiescent Current vs Input Voltage (Legacy Chip)

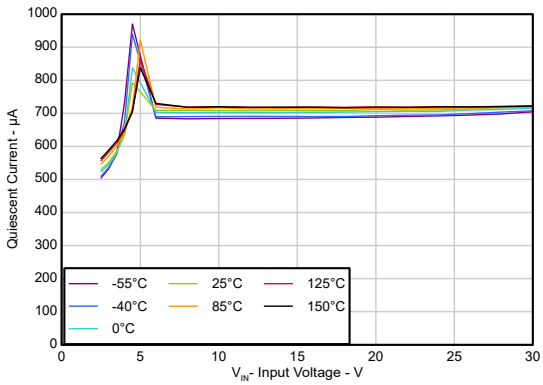

V_{OUT} = 5V, I_L = 100mA

Figure 5-16. Quiescent Current vs Input Voltage (New Chip)


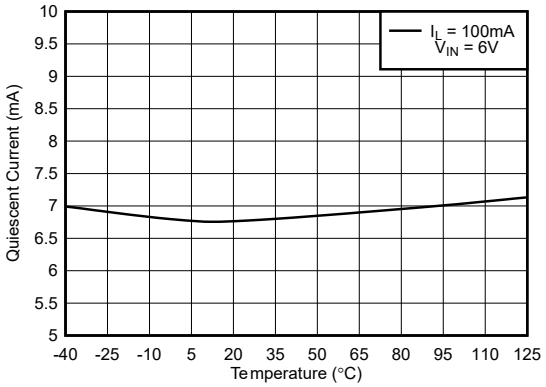


Figure 5-17. Quiescent Current vs Temperature (I_L = 100mA) (Legacy Chip)

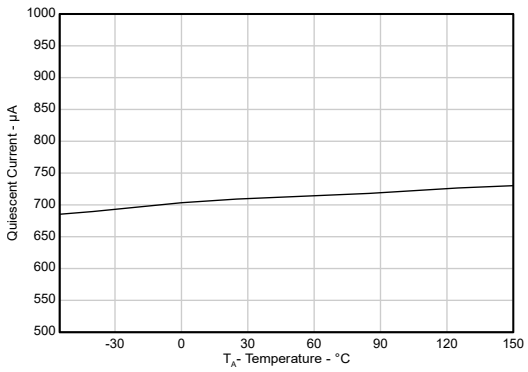

V_{IN} = 6V, V_{OUT} = 5V

Figure 5-18. Quiescent Current vs Temperature (I_L = 100mA) (New Chip)

Copyright © 2026 Texas Instruments Incorporated

5.7 Typical Characteristics (continued)

at V_{IN} = V_{OUT} (nominal) + 1V, I_L = 100µA, C_L = 1µF (for new chip) and C_L = 2.2µF (for legacy chip) (unless otherwise noted)


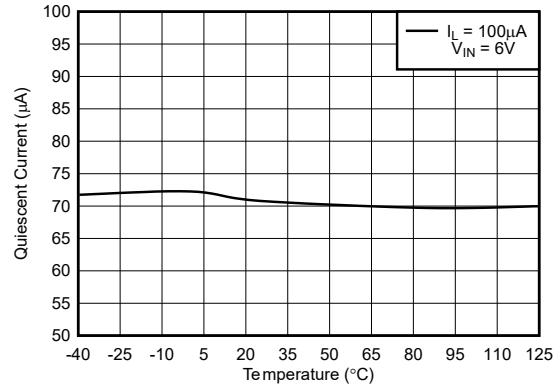


Figure 5-19. Quiescent Current vs Temperature (I_L = 100µA) (Legacy Chip)

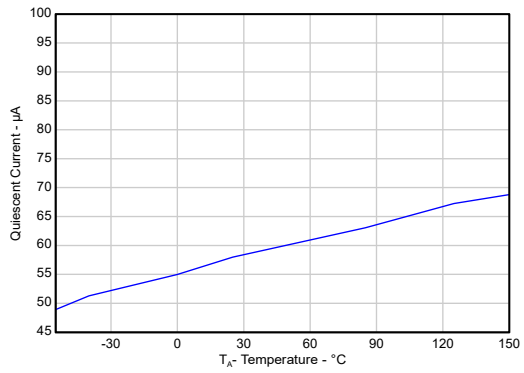

V_{IN} = 6V, V_{OUT} = 5V

Figure 5-20. Quiescent Current vs Temperature (I_L = 100µA) (New Chip)


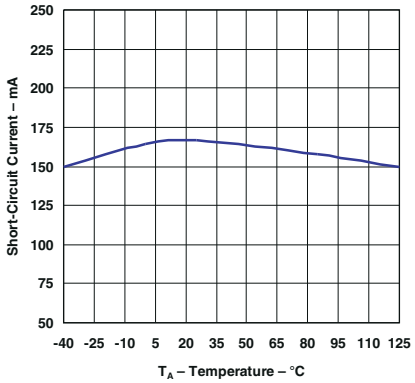


Figure 5-21. Short-Circuit Current vs Temperature (Legacy Chip)

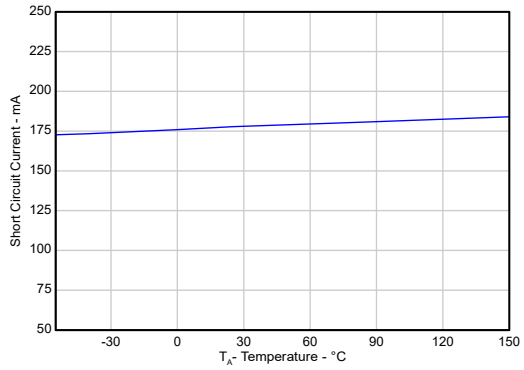

V_{IN} = 6V, V_{OUT} = 0V

Figure 5-22. Short-Circuit Current vs Temperature (New Chip)


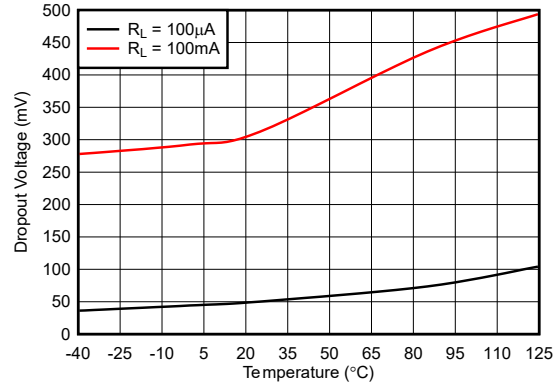


Figure 5-23. Dropout Voltage vs Temperature (Legacy Chip)

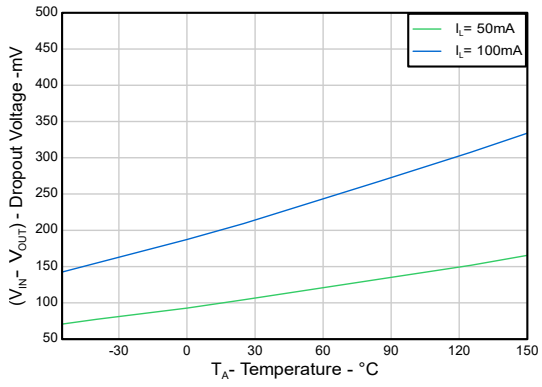

V_{IN} = 4.9V

Figure 5-24. Dropout Voltage vs Temperature (New Chip)

Copyright © 2026 Texas Instruments Incorporated

5.7 Typical Characteristics (continued)

at V_{IN} = V_{OUT} (nominal) + 1V, I_L = 100µA, C_L = 1µF (for new chip) and C_L = 2.2µF (for legacy chip) (unless otherwise noted)





Figure 5-25. Dropout Voltage vs Dropout Current (Legacy Chip)

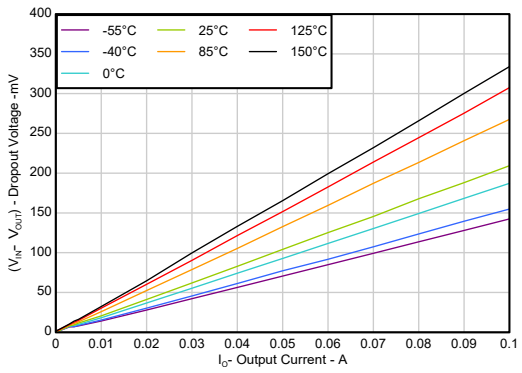

V_{IN} = 4.9V

Figure 5-26. Dropout Voltage vs Dropout Current (New Chip)




Figure 5-27. Minimum Operating Voltage vs Temperature (Legacy Chip)

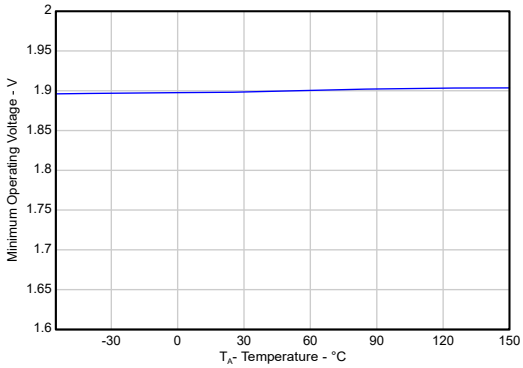


Figure 5-28. Minimum Operating Voltage vs Temperature (New Chip)




Figure 5-29. LP2951 FEEDBACK Bias Current vs Temperature (Legacy Chip)

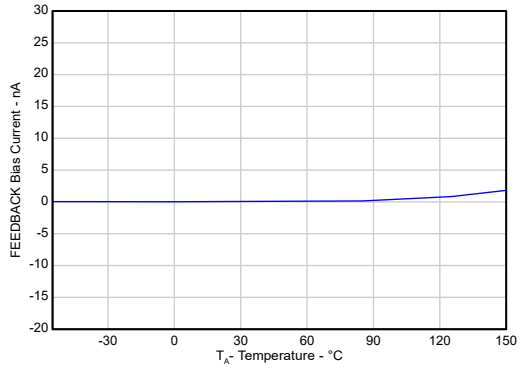


Figure 5-30. FEEDBACK Bias Current vs Temperature (New Chip)

Copyright © 2026 Texas Instruments Incorporated

5.7 Typical Characteristics (continued)

at V_{IN} = V_{OUT} (nominal) + 1V, I_L = 100µA, C_L = 1µF (for new chip) and C_L = 2.2µF (for legacy chip) (unless otherwise noted)

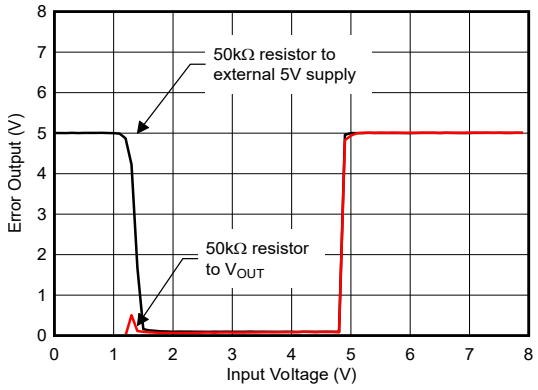


Figure 5-31. $\overline{\text{ERROR}}$ Comparator Output vs Input Voltage (Legacy Chip)

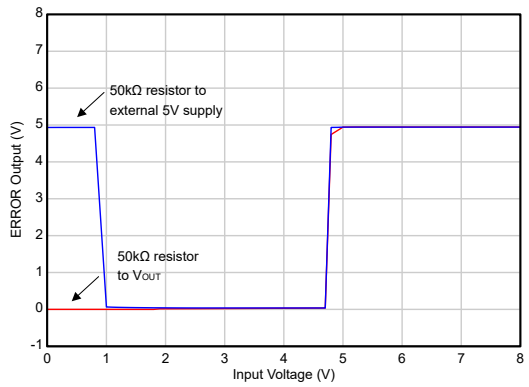


Figure 5-32. $\overline{\text{ERROR}}$ Comparator Output vs Input Voltage (New Chip)




Figure 5-33. $\overline{\text{ERROR}}$ Comparator Sink Current vs Output Low Voltage (Legacy Chip)

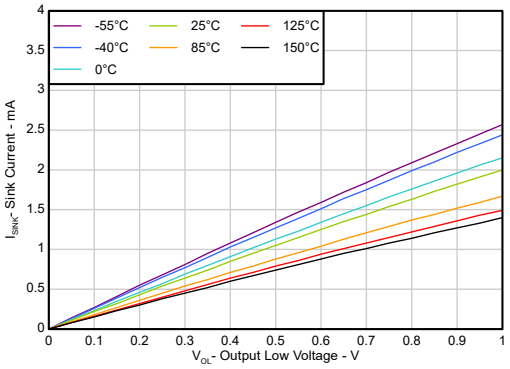


Figure 5-34. $\overline{\text{ERROR}}$ Comparator Sink Current vs Output Low Voltage (New Chip)

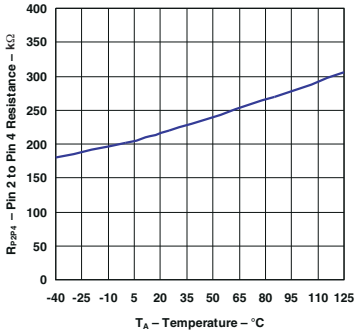


Figure 5-35. Divider Resistance vs Temperature (Legacy Chip)

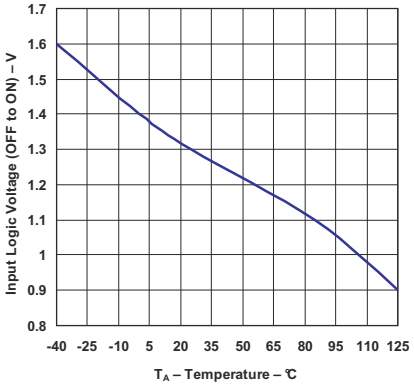


Figure 5-36. Shutdown Threshold Voltage (Off to On) vs Temperature (Legacy Chip)

5.7 Typical Characteristics (continued)

at V_{IN} = V_{OUT} (nominal) + 1V, I_L = 100µA, C_L = 1µF (for new chip) and C_L = 2.2µF (for legacy chip) (unless otherwise noted)

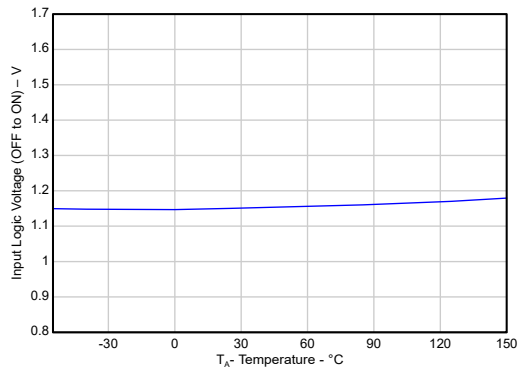


Figure 5-37. Shutdown Threshold Voltage (Off to On) vs Temperature (New Chip)




Figure 5-38. Shutdown Threshold Voltage (On to Off) vs Temperature (Legacy Chip)

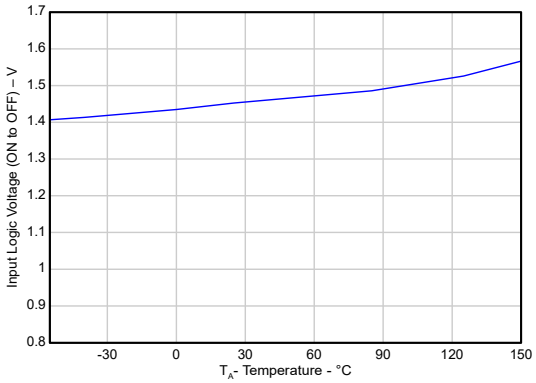


Figure 5-39. Shutdown Threshold Voltage (On to Off) vs Temperature (New Chip)






Figure 5-40. Line Regulation vs Input Voltage (Legacy Chip)

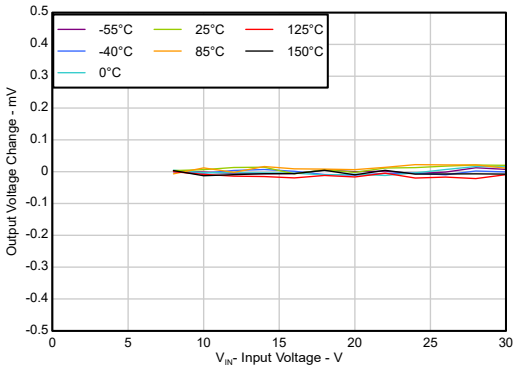

V_{OUT} = 5V, I_L = 100µA

Figure 5-41. Line Regulation vs Input Voltage (New Chip)

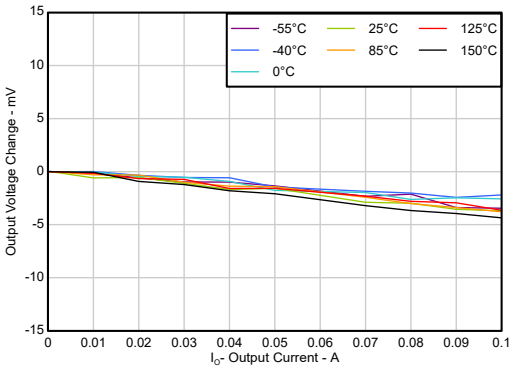


V_{IN} = 6V, V_{OUT} = 5V

Figure 5-42. Load Regulation vs Load Current (New Chip)

Copyright © 2026 Texas Instruments Incorporated


5.7 Typical Characteristics (continued)

at V_{IN} = V_{OUT} (nominal) + 1V, I_L = 100µA, C_L = 1µF (for new chip) and C_L = 2.2µF (for legacy chip) (unless otherwise noted)

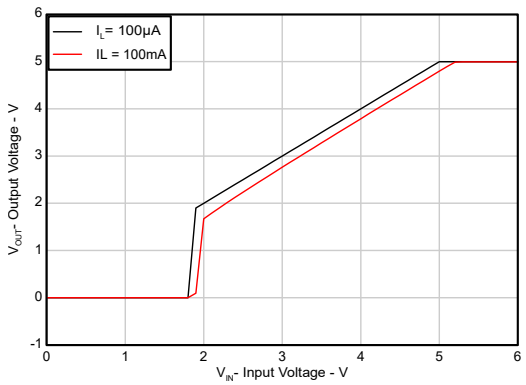

V_{IN} = 6V, V_{OUT} = 5V

Figure 5-43. Output Voltage vs Input Voltage (New Chip)

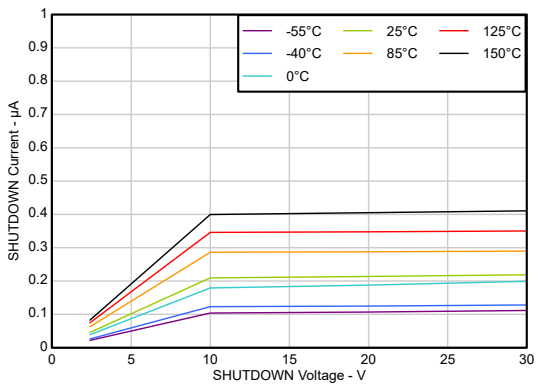

V_{IN} = 6V, V_{OUT} = 5V

Figure 5-44. SHUTDOWN Input Current vs SHUTDOWN Voltage (New Chip)

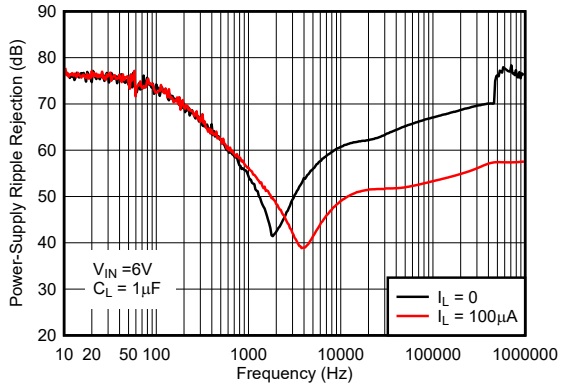


Figure 5-45. Ripple Rejection vs Frequency (Legacy Chip)

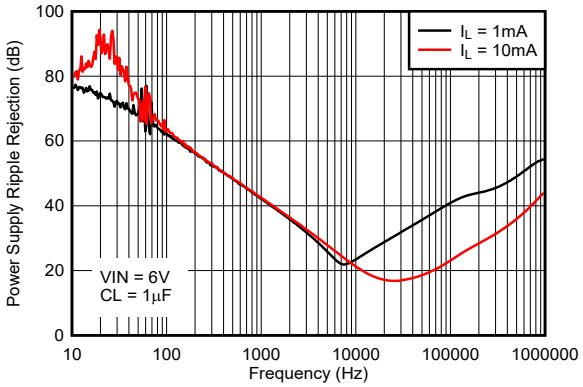


Figure 5-46. Ripple Rejection vs Frequency (Legacy Chip)


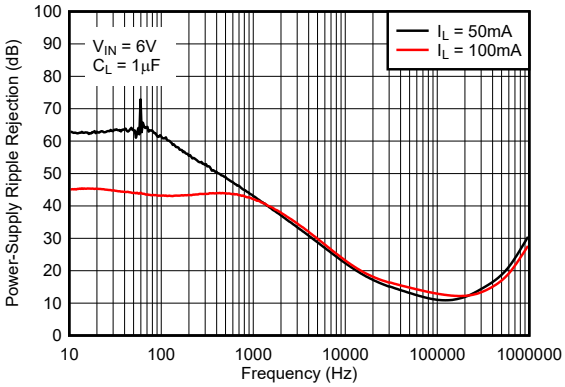


Figure 5-47. Ripple Rejection vs Frequency (Legacy Chip)

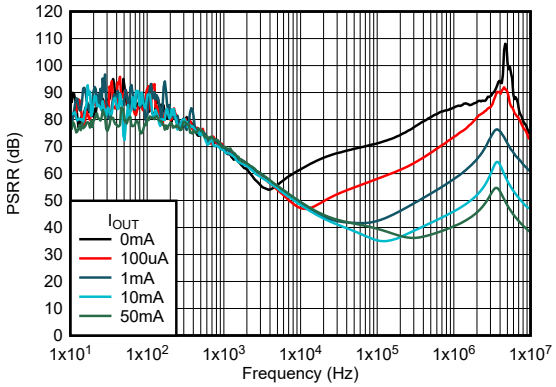


V_{IN} = 6V, V_{OUT} = 5V, C_L = 1µF

Figure 5-48. Ripple Rejection vs Frequency (New Chip)

Copyright © 2026 Texas Instruments Incorporated


5.7 Typical Characteristics (continued)

at V_{IN} = V_{OUT} (nominal) + 1V, I_L = 100µA, C_L = 1µF (for new chip) and C_L = 2.2µF (for legacy chip) (unless otherwise noted)

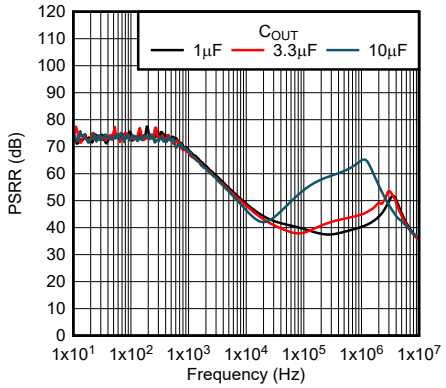

V_{IN} = 6V, V_{OUT} = 5V, I_L = 100mA

Figure 5-49. Ripple Rejection vs Frequency (New Chip)

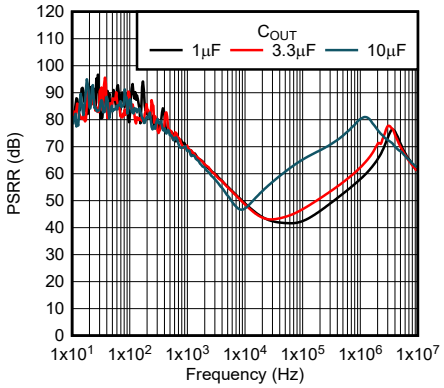

V_{IN} = 6V, V_{OUT} = 5V, I_L = 1mA

Figure 5-50. Ripple Rejection vs Frequency (New Chip)



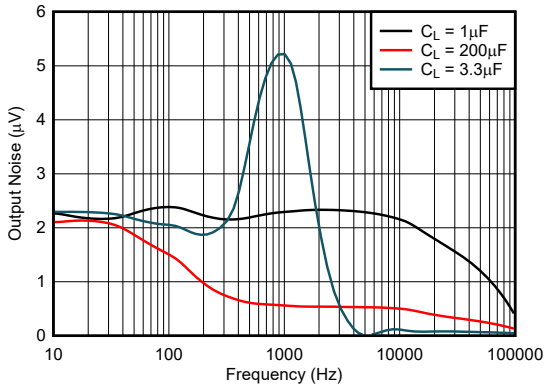


Figure 5-51. Output Noise vs Frequency (Legacy Chip)

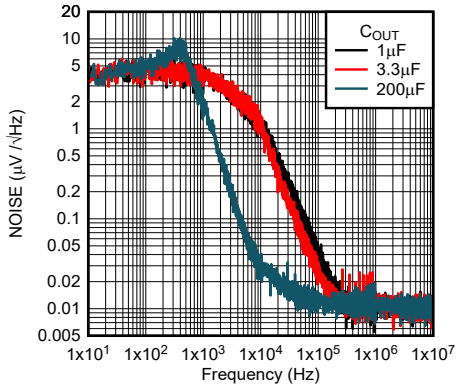

V_{IN} = 6V, V_{OUT} = 5V, I_L = 100µA

Figure 5-52. Output Noise vs Frequency (New Chip)

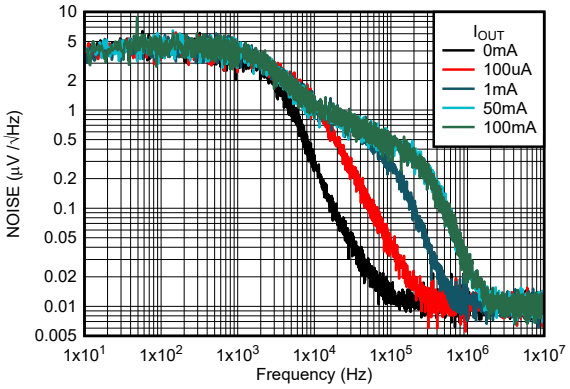

V_{IN} = 6V, V_{OUT} = 5V, C_L = 1µF

Figure 5-53. Output Noise vs Frequency (New Chip)

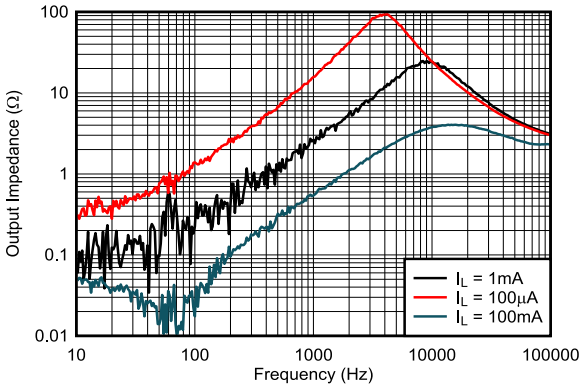


Figure 5-54. Output Impedance vs Frequency (Legacy Chip)

Copyright © 2026 Texas Instruments Incorporated

6 Detailed Description


6.1 Overview

The LP2951-Q1 is low-dropout voltage regulator that accommodates a wide input supply voltage range up to 30V. The 8-pin LP2951-Q1 outputs either a fixed or adjustable output from the same device. By tying the OUTPUT and SENSE pins together, and the FEEDBACK and V_{TAP} pins together, the LP2951-Q1 outputs a fixed 5V or 3.3V (depending on the version). Alternatively, by leaving the SENSE and V_{TAP} pins unconnected and connecting FEEDBACK to an external resistor divider, the output can be set to any value between V_{REF} to 30V (for V_{REF} details refer to Electrical Characteristics (Both Legacy and New Chip)).

The LP2951-Q1 has a error flag output ($\overline{\text{ERROR}}$) that monitors the voltage at the feedback pin to indicate the status of the output voltage. The SHUTDOWN input and $\overline{\text{ERROR}}$ output are used for sequencing multiple power supplies in the system.

The LP2951-Q1 is stable with small ceramic output capacitors, allowing for a small overall solution size. The LP2951-Q1 has an output tolerance of ±1% across line, load, and temperature variation (new chip) and is capable of delivering 100mA of continuous load current. This device includes integrated thermal shutdown, current limit, and undervoltage lockout (UVLO) features. This device delivers excellent line and load transient performance. The operating ambient temperature range of the device is –40°C to 125°C.

6.2 Functional Block Diagram

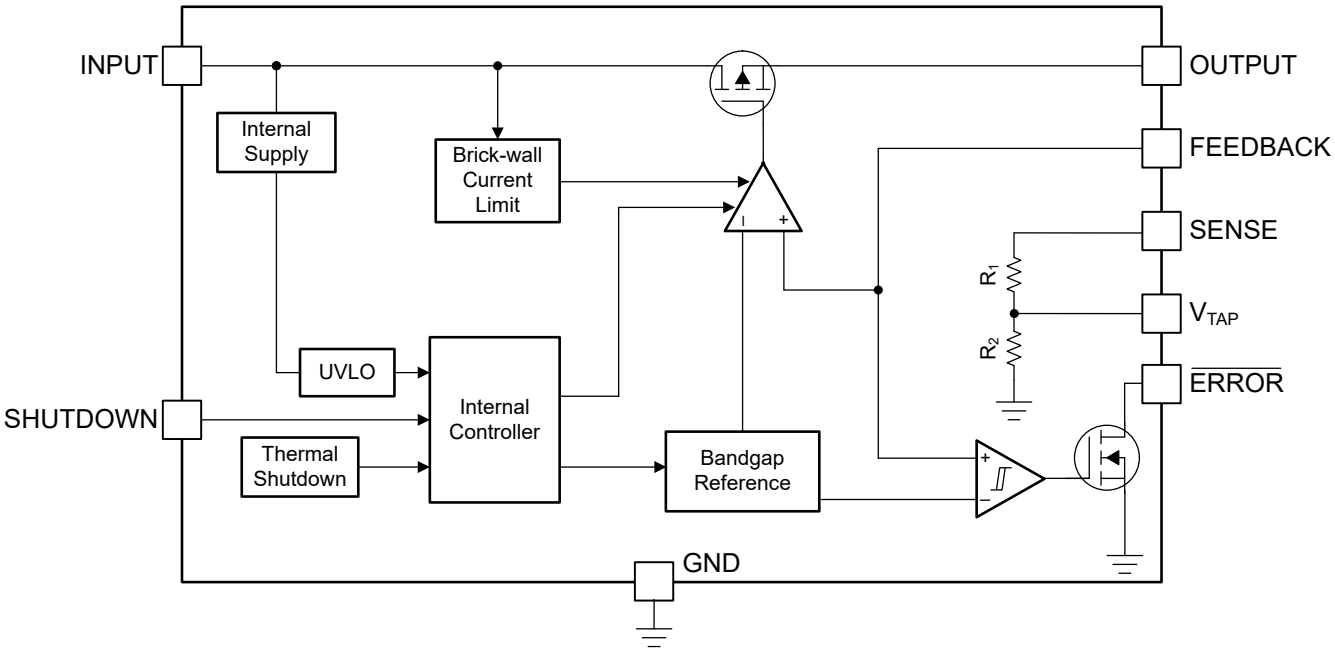

6.3 Feature Description

6.3.1 Output Enable

The SHUTDOWN pin for the device is an active-high pin. The output voltage is enabled when the SHUTDOWN pin voltage is less than the low-level input voltage of the SHUTDOWN pin. The output voltage is disabled when the SHUTDOWN pin voltage is greater than the high-level input voltage of the SHUTDOWN pin. If independent control of the output voltage is not needed, connect the SHUTDOWN pin to the GND of the device.

6.3.2 Dropout Voltage

Dropout voltage (V_{DO}) is defined as $V_{IN} – V_{OUT}$ at the rated output current (I_{RATED}), where the pass transistor is fully on. V_{IN} is the input voltage, V_{OUT} is the output voltage, and I_{RATED} is the maximum I_L listed in the *Recommended Operating Conditions* table. At this operating point, the pass transistor is driven fully on. Dropout voltage indirectly specifies a minimum input voltage greater than the nominal programmed output voltage where the output voltage is expected to stay in regulation. If the input voltage falls to less than the nominal output regulation, then the output voltage falls as well.

For a CMOS regulator, the dropout voltage is determined by the drain-source, on-state resistance ($R_{DS(ON)}$) of the pass transistor. Therefore, if the linear regulator operates at less than the rated current, the dropout voltage for that current scales accordingly. The following equation calculates the $R_{DS(ON)}$ of the device.

$$R_{DS(ON)} = \frac{V_{DO}}{I_{RATED}} \quad (1)$$

6.3.3 Current Limit

The device has an internal current limit circuit that protects the regulator during transient high-load current faults or shorting events. The current limit is a brick-wall scheme. In a high-load current fault, the brick-wall scheme limits the output current to the current limit (I_{CL}). I_{CL} is listed in the *Electrical Characteristics* table.

The output voltage is not regulated when the device is in current limit. When a current limit event occurs, the device begins to heat up because of the increase in power dissipation. When the device is in brick-wall current limit, the pass transistor dissipates power [$(V_{IN} – V_{OUT}) \times I_{CL}$]. If thermal shutdown is triggered, the device turns off. After the device cools down, the internal thermal shutdown circuit turns the device back on. If the output current fault condition continues, the device cycles between current limit and thermal shutdown. For more information on current limits, see the *Know Your Limits* application note.

Figure 6-1 shows a diagram of the current limit.

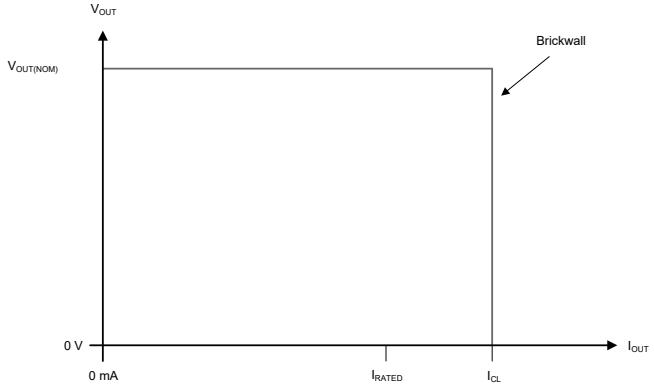


Figure 6-1. Current Limit

Copyright © 2026 Texas Instruments Incorporated

6.3.4 Undervoltage Lockout (UVLO)

The device has an independent undervoltage lockout (UVLO) circuit that monitors the input voltage, allowing a controlled and consistent turn on and off of the output voltage. To prevent the device from turning off if the input drops during turn on, the UVLO has hysteresis as specified in the *Electrical Characteristics* table.

6.3.5 Thermal Shutdown

The device contains a thermal shutdown protection circuit to disable the device when the junction temperature (T_J) of the pass transistor rises to $T_{SD(shutdown)}$ (typical). Thermal shutdown hysteresis verifies that the device resets (turns on) when the temperature falls to $T_{SD(reset)}$ (typical).

The thermal time-constant of the semiconductor die is fairly short, thus the device cycles on and off when thermal shutdown is reached until power dissipation is reduced. Power dissipation during start up is potentially high from large $V_{IN} – V_{OUT}$ voltage drops across the device or from high inrush currents charging large output capacitors. Under some conditions, the thermal shutdown protection disables the device before start-up completes.

For reliable operation, limit the junction temperature to the maximum listed in the *Recommended Operating Conditions* table. Operation above this maximum temperature causes the device to exceed operational specifications. Although the internal protection circuitry of the device is designed to protect against thermal overall conditions, this circuitry is not intended to replace proper heat sinking. Continuously running the device into thermal shutdown or above the maximum recommended junction temperature reduces long-term reliability.

6.4 Device Functional Modes

6.4.1 Shutdown Mode

This device can be placed in shutdown mode with a logic high at the SHUTDOWN pin. Return the logic level low to restore operation or tie SHUTDOWN to ground if the feature is not being used.

Copyright © 2026 Texas Instruments Incorporated

7 Application and Implementation

Note

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes, as well as validating and testing their design implementation to confirm system functionality.

7.1 Application Information

The LP2951-Q1 is used as a low-dropout regulator with a wide range of input voltages.

7.1.1 Reverse Current

Excessive reverse current potentially damages this device. Reverse current flows through the intrinsic body diode of the pass transistor instead of the normal conducting channel. At high magnitudes, this current flow degrades the long-term reliability of the device.

Conditions where reverse current occurs are outlined in this section, all of which potentially exceed the absolute maximum rating of $V_{OUT} \leq V_{IN} + 0.3V$.

- If the device has a large C_{OUT} and the input supply collapses with little or no load current
- The output is biased when the input supply is not established
- The output is biased above the input supply

If reverse current flow is expected in the application, use external protection to protect the device. Reverse current is not limited in the device, so external limiting is required if extended reverse voltage operation is anticipated.

Figure 7-1 shows one approach for protecting the device.

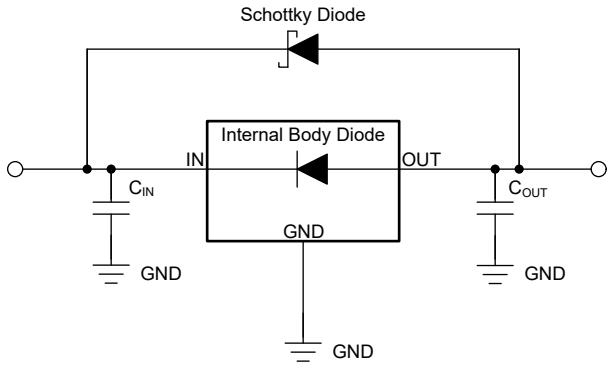


Figure 7-1. Example Circuit for Reverse Current Protection Using a Schottky Diode

7.1.2 Input and Output Capacitor Requirements

Although an input capacitor is not required for stability, good analog design practice is to connect a capacitor from IN to GND. This capacitor counteracts reactive input sources and improves transient response, input ripple, and PSRR. Use an input capacitor if the source impedance is more than 0.5Ω. Use a higher value capacitor if large, fast rise-time load or line transients are anticipated or if the device is located several inches from the input power source.

Dynamic device performance is improved by using an output capacitor. Use an output capacitor within the range specified in the *Recommended Operating Conditions* table for stability.

Copyright © 2026 Texas Instruments Incorporated

7.1.3 Estimating Junction Temperature

The JEDEC standard now recommends the use of psi (Ψ) thermal metrics to estimate the junction temperatures of the linear regulator when in-circuit on a typical PCB board application. These metrics are not thermal resistance parameters and instead offer a practical and relative way to estimate junction temperature. These psi metrics are determined to be significantly independent of the copper area available for heat-spreading. The *Thermal Information* table lists the primary thermal metrics, which are the junction-to-top characterization parameter (ψ_{JT}) and junction-to-board characterization parameter (ψ_{JB}). These parameters provide two methods for calculating the junction temperature (T_J), as described in the following equations. Use the junction-to-top characterization parameter (ψ_{JT}) with the temperature at the center-top of device package (T_T) to calculate the junction temperature. Use the junction-to-board characterization parameter (ψ_{JB}) with the PCB surface temperature 1mm from the device package (T_B) to calculate the junction temperature.

$$T_J = T_T + \psi_{JT} \times P_D \quad (2)$$

where:

- P_D is the dissipated power
- T_T is the temperature at the center-top of the device package

$$T_J = T_B + \psi_{JB} \times P_D \quad (3)$$

where:

- T_B is the PCB surface temperature measured 1mm from the device package and centered on the package edge

For detailed information on the thermal metrics and how to use the metrics, see the *Semiconductor and IC Package Thermal Metrics* application note.

7.1.4 Power Dissipation (P_D)

Circuit reliability requires consideration of the device power dissipation, location of the circuit on the printed circuit board (PCB), and correct sizing of the thermal plane. The PCB area around the regulator must have few or no other heat-generating devices that cause added thermal stress.

To first-order approximation, power dissipation in the regulator depends on the input-to-output voltage difference and load conditions. The following equation calculates power dissipation (P_D).

$$P_D = (V_{IN} – V_{OUT}) \times I_{OUT} \quad (4)$$

Note

Power dissipation is minimized, and therefore greater efficiency is achieved, by correct selection of the system voltage rails. For the lowest power dissipation use the minimum input voltage required for correct output regulation.

For devices with a thermal pad, the primary heat conduction path for the device package is through the thermal pad to the PCB. Solder the thermal pad to a copper pad area under the device. Make sure this pad area contains an array of plated vias that conduct heat to additional copper planes for increased heat dissipation.

The maximum power dissipation determines the maximum allowable ambient temperature (T_A) for the device. According to the following equation, power dissipation and junction temperature are most often related by the junction-to-ambient thermal resistance ($R_{\theta JA}$) of the combined PCB and device package and the temperature of the ambient air (T_A).

$$T_J = T_A + (R_{\theta JA} \times P_D) \quad (5)$$

Copyright © 2026 Texas Instruments Incorporated

Thermal resistance ($R_{\theta JA}$) is highly dependent on the heat-spreading capability built into the particular PCB design, and therefore varies according to the total copper area, copper weight, and location of the planes. The junction-to-ambient thermal resistance listed in the *Thermal Information* table is determined by the JEDEC standard PCB and copper-spreading area. This thermal resistance is used as a relative measure of package thermal performance.

7.2 Typical Application

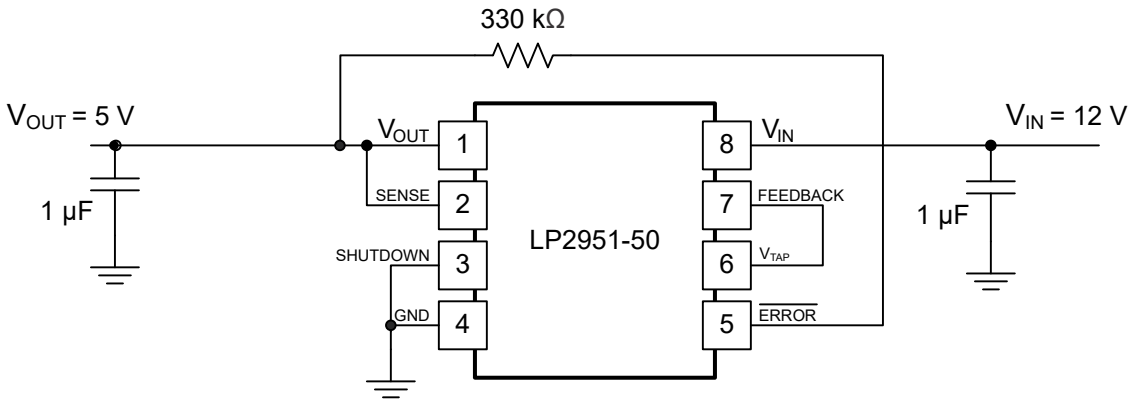


Figure 7-2. 12V to 5V Converter

7.2.1 Design Requirements

7.2.1.1 Recommended Capacitor Types

7.2.1.1.1 Recommended Capacitors (Legacy Chip)

Most tantalum or aluminum electrolytics are used at the input. Film-type capacitors also work but at higher cost. Ceramic capacitors are available for use at the output, but the low ESR (as low as 5mΩ to 10mΩ) potentially causes the output to not meet the minimum ESR requirement. If a ceramic capacitor is used, add a series resistor between 0.1Ω to 2Ω to meet the minimum ESR requirement.

Ceramic capacitors can be used, but because of the low ESR (as low as 5mΩ to 10mΩ), these capacitors can possibly not meet the minimum ESR requirement previously discussed. If a ceramic capacitor is used, a series resistor between 0.1Ω to 2Ω must be added to meet the minimum ESR requirement. In addition, ceramic capacitors have one glaring disadvantage that must be taken into account — a poor temperature coefficient, where the capacitance can vary significantly with temperature. For instance, a large-value ceramic capacitor (≥ 2.2µF) can lose more than half of the capacitance as temperature rises from 25°C to 85°C. Thus, a 2.2µF capacitor at 25°C drops well below the minimum C_L required for stability as ambient temperature rises. For this reason, select an output capacitor that maintains the minimum 2.2µF required for stability for the entire operating temperature range.

Copyright © 2026 Texas Instruments Incorporated

7.2.1.1.1.1 ESR Range (Legacy Chip)

The regulator control loop relies on the ESR of the output capacitor to provide a zero to add sufficient phase margin to provide unconditional regulator stability. This condition requires the closed-loop gain to intersect the open-loop response in a region where the open-loop gain rolls off at 20dB/decade. This roll off makes sure that the phase is always less than 180° (phase margin greater than 0°) at unity gain. Thus, a minimum-maximum range for the ESR must be observed.

The upper limit of this ESR range is established by the fact that an ESR that is too high can result in the zero occurring too soon, causing the gain to roll off too slowly. This effect, in turn, allows a third pole to appear before unity gain and introduces enough phase shift to cause instability. This phase shift typically limits the maximum ESR to approximately 5Ω.

Conversely, the lower limit of the ESR range is tied to the fact that an ESR that is too low shifts the zero too far out, past unity gain, which allows the gain to roll off at 40dB/decade at unity gain, resulting in a phase shift of greater than 180°. Typically, limit the minimum ESR to approximately 20mΩ to 30mΩ.

7.2.1.1.2 Recommended Capacitors (New Chip)

The new chip requires an output capacitor of at least 1µF for stability and an equivalent series resistance (ESR) between 0Ω and 2Ω. Without the output capacitor, the regulator oscillates. For best transient performance, use X5R- and X7R-type ceramic capacitors because these capacitors have minimal variation in value and ESR over temperature. When choosing a capacitor for a specific application,be mindful of the DC bias characteristics for the capacitor. Higher output voltages cause a significant derating of the capacitor. For best performance, the maximum recommended output capacitor is 100µF. An input capacitor is not required for stability. However, good analog practice is to connect a capacitor (500nF or higher) between the GND and IN pins. Some input supplies have a high impedance, thus placing the input capacitor on the input supply helps reduce input impedance. This capacitor counteracts reactive input sources and improves transient response, input ripple, and PSRR. If the input supply has a high impedance over a large range of frequencies, use several input capacitors in parallel to lower the impedance over frequency. Use a higher-value capacitor if large, fast rise-time load transients are anticipated, or if the device is located several inches from the input power source.

Copyright © 2026 Texas Instruments Incorporated

7.2.2 Detailed Design Procedure

7.2.2.1 Feedback Resistor Selection

V_{OUT} is set by the external feedback resistors R_1 and R_2, according to the following equation:

$$V_{OUT} = V_{REF} \times \left(1 + \frac{R_1}{R_2}\right) \quad (6)$$

Refer to Electrical Characteristics (Both Legacy and New Chip) section for V_{REF} details.

To ignore the FEEDBACK pin current (I_{FB}) error term in the V_{OUT} equation, set the feedback divider current to 100 times the FEEDBACK pin current listed in the Electrical Characteristics (Both Legacy and New Chip) section. This setting provides the maximum feedback divider series resistance, as shown in the following equation:

$$R_1 + R_2 \leq \frac{V_{OUT}}{(I_{FB} \times 100)} \quad (7)$$

7.2.2.2 Feedforward Capacitor

Connect a feedforward capacitor (C_{FF}) between the OUT pin and the FEEDBACK pin. C_{FF} improves transient, noise, and PSRR performance. A higher capacitance C_{FF} is possible; however, the start-up time increases. For a detailed description of C_{FF} tradeoffs, see the *Pros and Cons of Using a Feedforward Capacitor with a Low-Dropout Regulator* application note.

As shown in Formation of Parasitic Capacitor at the FEEDBACK Pin, poor layout practices and using long traces at the FEEDBACK pin results in the formation of a parasitic capacitor (C_{FB}).

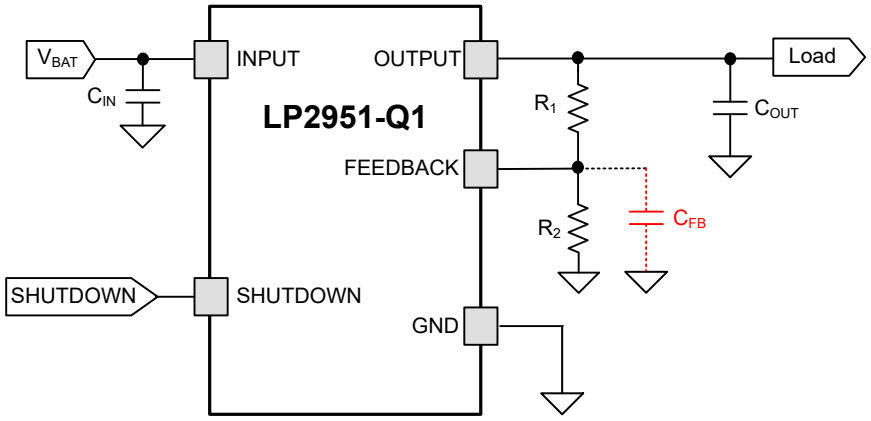


Figure 7-3. Formation of Parasitic Capacitor at the FEEDBACK Pin

C_{FB}, along with the feedback resistors R_1 and R_2 potentially result in the formation of an uncompensated pole in the transfer function of the loop gain. A C_{FB} value as small as 6pF potentially causes the parasitic pole frequency, given by Equation 8, to fall within the bandwidth of the LDO and result in instability.

$$f_P = \frac{1}{(2 \times \pi \times C_{FB} \times (R_1 \parallel R_2))} \quad (8)$$

Adding a feedforward capacitor (C_{FF}), as shown in Figure 7-4, creates a zero in the loop gain transfer function that compensates for the parasitic pole created by C_{FB}. Equation 9 and Equation 10 calculate the pole and zero frequencies.

Copyright © 2026 Texas Instruments Incorporated

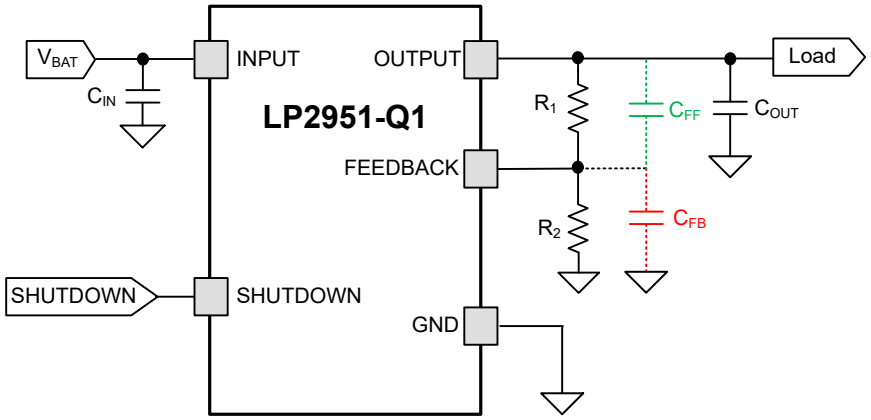


Figure 7-4. Feedforward Capacitor Compensates the Effects of the Parasitic Capacitor

$$f_P = \frac{1}{(2 \times \pi \times (R_1 \parallel R_2) \times (C_{FF} + C_{FB}))} \quad (9)$$

$$f_Z = \frac{1}{(2 \times \pi \times C_{FF} \times R_1)} \quad (10)$$

The C_{FF} value that makes f_P equal to f_Z, and results in a pole-zero cancellation, depends on the values of C_{FB} and the feedback resistors used in the application. Alternatively, if the feedforward capacitor is selected so that $C_{FF} \gg C_{FB}$, then the pole and zero frequencies given by Equation 9 and Equation 10 are related as:

$$\frac{f_p}{f_z} \cong \left(1 + \frac{R_1}{R_2}\right) = \frac{V_{OUT}}{V_{FB}}, \text{ where } V_{FB} \text{ is the voltage on FEEDBACK pin.} \quad (11)$$

In most applications, particularly where a 3.3V or 5V V_{OUT} is generated, this ratio is not very large. Thus, implying that the frequencies are located close to each other and therefore the parasitic pole is compensated. Even for large V_{OUT} values, where this ratio is as large as 20, a C_{FF} value in the range 100pF ≤ C_{FF} ≤ 10nF typically helps prevent instability caused by the parasitic capacitance on the feedback node.

7.2.3 Application Curves

at V_{IN} = V_{OUT} (nominal) + 1V, I_L = 100µA, C_L = 1µF (for new chip) and C_L = 2.2µF (for legacy chip) FEEDBACK tied to V_{TAP}, OUTPUT tied to SENSE, $V_{SHUTDOWN}$ ≥ 0.7V (unless otherwise noted)


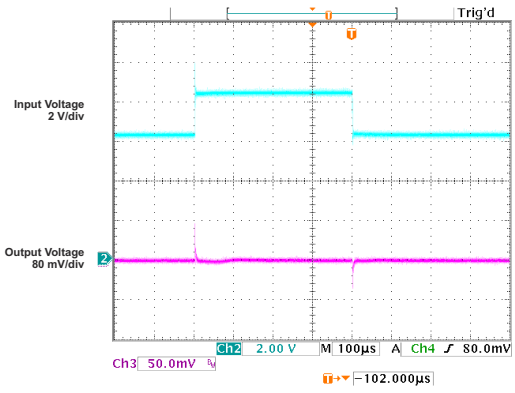


Figure 7-5. Line Transient Response vs Time (Legacy Chip)

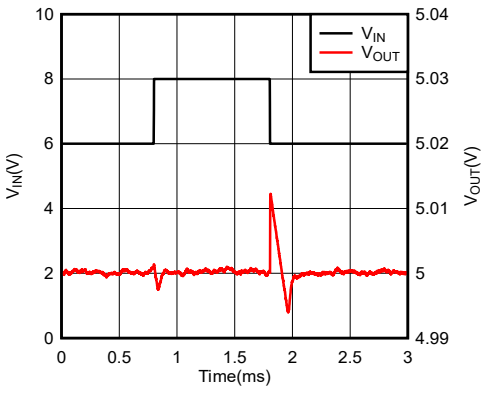


V_{IN} = 6V to 8V, V_{OUT} = 5V, C_L = 1µF, I_L = 100µA

Figure 7-6. Line Transient Response vs Time (New Chip)


7.2.3 Application Curves (continued)

at V_{IN} = V_{OUT} (nominal) + 1V, I_L = 100µA, C_L = 1µF (for new chip) and C_L = 2.2µF (for legacy chip) FEEDBACK tied to V_{TAP}, OUTPUT tied to SENSE, $V_{SHUTDOWN}$ ≥ 0.7V (unless otherwise noted)

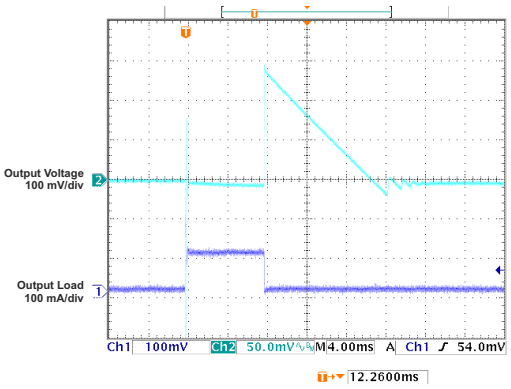


V_{OUT} = 5V, C_L = 10µF

Figure 7-7. Load Transient Response vs Time (Legacy Chip)

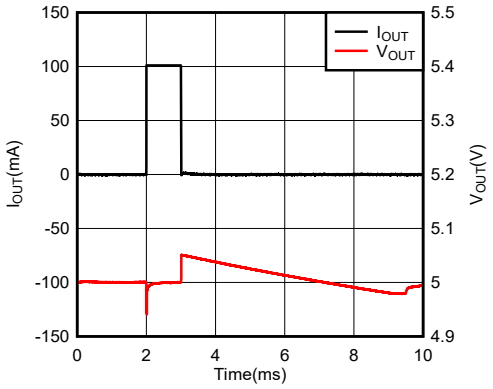


V_{IN} = 6V, V_{OUT} = 5V, I_L = 0mA to 100mA, C_L = 10µF

Figure 7-8. Load Transient Response vs Time (New Chip)

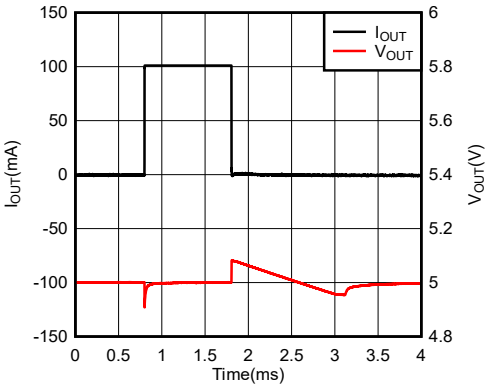


V_{IN} = 6V, V_{OUT} = 5V, I_L = 0mA to 100mA, C_L = 1µF

Figure 7-9. Load Transient Response vs Time (New Chip)

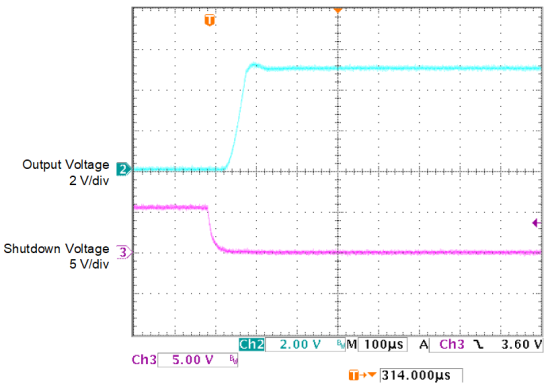


I_L = 1mA, C_L = 1µF

Figure 7-10. Enable Transient Response vs Time (Legacy Chip)

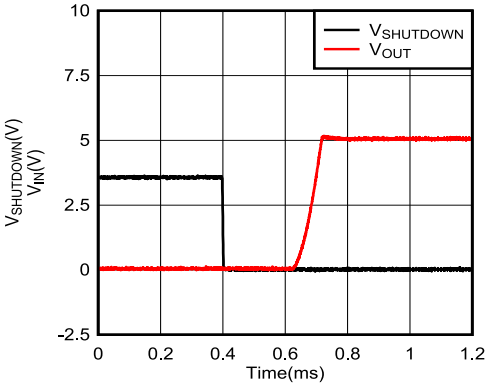

V_{IN} = 6V, V_{OUT} = 5V, C_L = 1µF, I_L = 1mA

Figure 7-11. Enable Transient Response vs Time (New Chip)

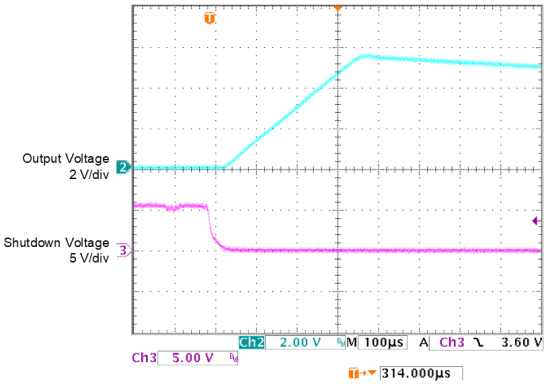


I_L = 1mA, C_L = 10µF

Figure 7-12. Enable Transient Response vs Time

Copyright © 2026 Texas Instruments Incorporated

7.2.3 Application Curves (continued)

at V_{IN} = V_{OUT} (nominal) + 1V, I_L = 100µA, C_L = 1µF (for new chip) and C_L = 2.2µF (for legacy chip) FEEDBACK tied to V_{TAP}, OUTPUT tied to SENSE, $V_{SHUTDOWN}$ ≥ 0.7V (unless otherwise noted)

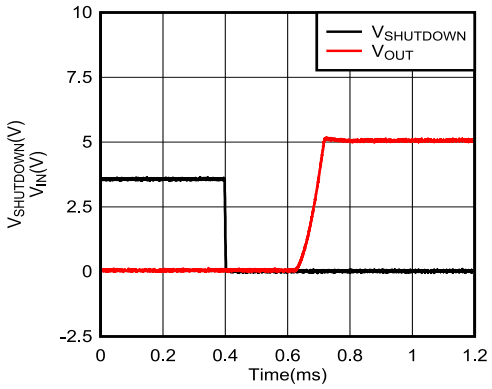

V_{IN} = 6V, V_{OUT} = 5V, C_L = 10µF, I_L = 1mA

Figure 7-13. Enable Transient Response vs Time (New Chip)

7.3 Power Supply Recommendations

Limit maximum input voltage to 30V for proper operation. Place input and output capacitors as close to the device as possible to take advantage of the high-frequency, noise-filtering properties.

7.4 Layout

7.4.1 Layout Guidelines

Make sure that traces on the input and outputs of the device are wide enough to handle the desired currents. For this device, the output trace must be larger to accommodate the larger available current.

Place input and output capacitors as close to the device as possible to take advantage of the high-frequency, noise-filtering properties.

7.4.2 Layout Example

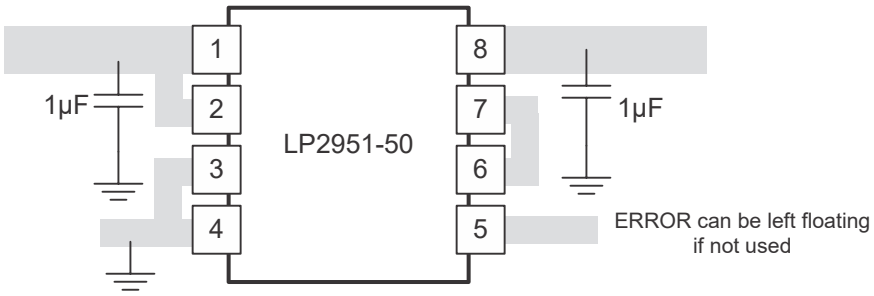


Figure 7-14. Layout Example (D Package)

Copyright © 2026 Texas Instruments Incorporated

8 Device and Documentation Support

8.1 Device Support

8.1.1 Development Support

An evaluation module (EVM) is available to assist in the initial circuit performance evaluation. The LP2951EVM (and related user guide) can be requested at the Texas Instruments website through the product folders or purchased directly from the TI eStore.

8.1.2 Device Nomenclature

Table 8-1. Device Nomenclature

PRODUCT(1)	V_{OUT}
LP2951**xx**Q**yyyz**Q1	**xx** is the nominal output voltage (for example, 50 = 5.0V, 33 = 3.3V). **Q** indicates that this device is a grade-1 device in accordance with the AEC-Q100 standard. **yyy** is the package designator. **z** is the package quantity. **Q1** indicates that this device is an automotive grade (AEC-Q100) device. This device can be configured to have both adjustable or fixed output. Devices ship with either the legacy chip (CSO: SHE) or the new chip (CSO: RFB). The reel packaging label provides the CSO information to distinguish which chip is being used. Device performance for new and legacy chips is denoted throughout the document.
LP2951**xx**Q**yyyz**M3Q1	**xx** is the nominal output voltage (for example, 50 = 5.0V, 33 = 3.3V). **Q** indicates that this device is a grade-1 device in accordance with the AEC-Q100 standard. **yyy** is the package designator. **z** is the package quantity. **M3** indicates that this device only ships with the new chip. **Q1** indicates that this device is an automotive grade (AEC-Q100) device. This device can be configured to have both adjustable or fixed output..
LP2951**xx ADJ**Q**yyyz**Q1	**xx** is the nominal output voltage (for example, 50 = 5.0V, 33 = 3.3V). **Q** indicates that this device is a grade-1 device in accordance with the AEC-Q100 standard. **ADJ** indicates that this device only ships with the new chip and retains legacy chip internal reference (V_{REF}) limits in adjustable configuration.**yyy** is the package designator. **z** is the package quantity. **Q1** indicates that this device is an automotive grade (AEC-Q100) device. This device can be configured to have both adjustable or fixed output.

(1) For the most current package and ordering information, see the Package Option Addendum at the end of this document, or see the TI website at www.ti.com.

8.2 Documentation Support

8.2.1 Related Documentation

For related documentation, see the following:

- Texas Instruments, *LP2951EVM*, EVM user's guide

8.3 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. Click on *Notifications* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

8.4 Support Resources

TI E2E™ support forums are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's Terms of Use.

8.5 Trademarks

TI E2E™ is a trademark of Texas Instruments.
All trademarks are the property of their respective owners.

Copyright © 2026 Texas Instruments Incorporated

8.6 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

8.7 Glossary

TI Glossary — This glossary lists and explains terms, acronyms, and definitions.

9 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

Changes from Revision I (November 2025) to Revision J (June 2026)	Page
• Updated output range for adjustable configuration	1
• Updated the output range for adjustable configuration	1
• Updated thermal information for DRG package	5
• Added Electrical limits for LP295X-XXADJ variant	5
• Updated output range for Adjustable config and added details about V_{REF}	19
• Updated details about I_{FB} current and updated equation about the V_{OUT} voltage	26
• Updated details about FEEDBACK pin and V_{FB}, voltage on FEEDBACK pin	26
• Added nomenclature details about LP2951xxADJ device	31

Changes from Revision H (November 2024) to Revision I (November 2025)	Page
• Updated tables for correct formatting throughout the document	1
• Updated legacy and new chip nomenclature throughout the document	1
• Updated *Absolute Maximum* continuous input voltage on Legacy chip	4
• Changed *Absolute Maximum* output voltage	4
• Changed *Absolute Maximum* SHUTDOWN input voltage on legacy chip	4
• Changed *Absolute Maximum* output voltage sense on new chip	4
• Added *Absolute Maximum* ratings for junction temperature	4
• Added note for maximum supported ESR range for new chip	4

10 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

Copyright © 2026 Texas Instruments Incorporated

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package | Pins	Package qty | Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
LP2951-33ADJQDRGQ1	Active	Production	SON (DRG) | 8	5000 | LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	33ADRQ
LP2951-33QDRGRM3Q1	Active	Production	SON (DRG) | 8	3000 | LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	RACQ
LP2951-33QDRGRQ1	Active	Production	SON (DRG) | 8	3000 | LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	RACQ
LP2951-33QDRGRQ1.A	Active	Production	SON (DRG) | 8	3000 | LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	RACQ
LP2951-50ADJQDRGQ1	Active	Production	SON (DRG) | 8	5000 | LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	50ADRQ
LP2951-50ADJQDRQ1	Active	Production	SOIC (D) | 8	3000 | LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	50ADJQ
LP2951-50QDRGRM3Q1	Active	Production	SON (DRG) | 8	3000 | LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	ZUFQ
LP2951-50QDRGRQ1	Active	Production	SON (DRG) | 8	3000 | LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	ZUFQ
LP2951-50QDRGRQ1.A	Active	Production	SON (DRG) | 8	3000 | LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	ZUFQ
LP2951-50QDRM3Q1	Active	Production	SOIC (D) | 8	3000 | LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	KY515Q
LP2951-50QDRM3Q1.A	Active	Production	SOIC (D) | 8	3000 | LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	KY515Q
LP2951-50QDRQ1	Active	Production	SOIC (D) | 8	2500 | LARGE T&R	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 125	KY515Q
LP2951-50QDRQ1.A	Active	Production	SOIC (D) | 8	2500 | LARGE T&R	Yes	NIPDAU	Level-3-260C-168 HR	-40 to 125	KY515Q

(1) **Status:** For more details on status, see our product life cycle.

(2) **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

(3) **RoHS values:** Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

(4) **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

(5) **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

(6) **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

OTHER QUALIFIED VERSIONS OF LP2951-Q1 :


- Catalog : LP2951

NOTE: Qualified Version Definitions:


- Catalog - TI's standard catalog product

TAPE AND REEL INFORMATION

REEL DIMENSIONS

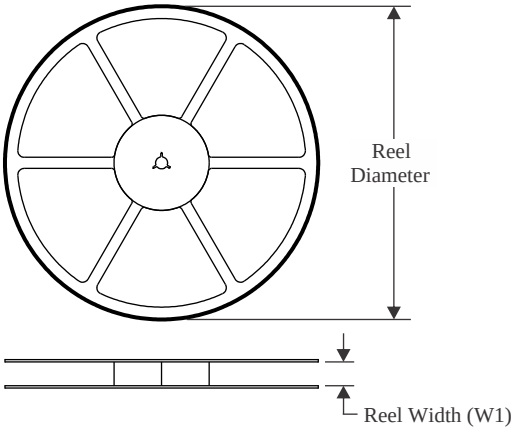


TAPE DIMENSIONS

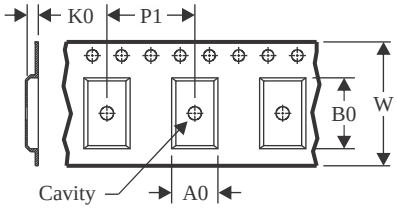

A0	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers


QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

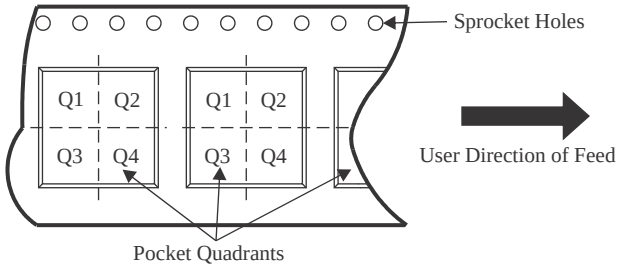

*All dimensions are nominal


Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
LP2951-33QDRGRM3Q1	SON	DRG	8	3000	330.0	12.4	3.3	3.3	1.1	8.0	12.0	Q2
LP2951-33QDRGRQ1	SON	DRG	8	3000	330.0	12.4	3.3	3.3	1.1	8.0	12.0	Q2
LP2951-50QDRGRM3Q1	SON	DRG	8	3000	330.0	12.4	3.3	3.3	1.1	8.0	12.0	Q2
LP2951-50QDRGRQ1	SON	DRG	8	3000	330.0	12.4	3.3	3.3	1.1	8.0	12.0	Q2
LP2951-50QDRQ1	SOIC	D	8	2500	330.0	12.5	6.4	5.2	2.1	8.0	12.0	Q1

TAPE AND REEL BOX DIMENSIONS

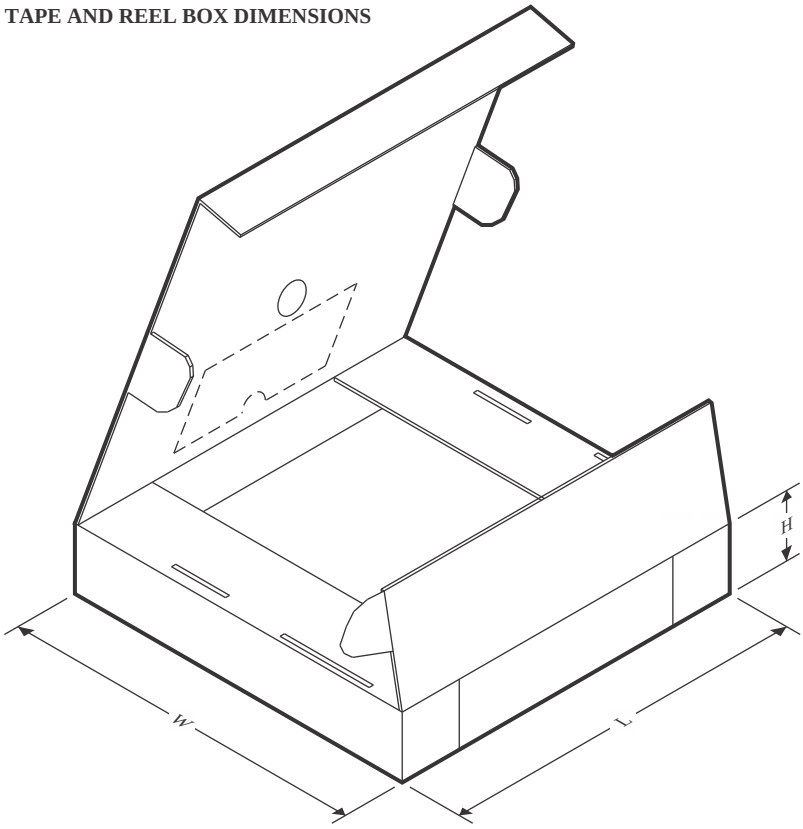

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
LP2951-33QDRGRM3Q1	SON	DRG	8	3000	346.0	346.0	33.0
LP2951-33QDRGRQ1	SON	DRG	8	3000	353.0	353.0	32.0
LP2951-50QDRGRM3Q1	SON	DRG	8	3000	346.0	346.0	33.0
LP2951-50QDRGRQ1	SON	DRG	8	3000	353.0	353.0	32.0
LP2951-50QDRQ1	SOIC	D	8	2500	353.0	353.0	32.0




PACKAGE OUTLINE

D0008A


SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT

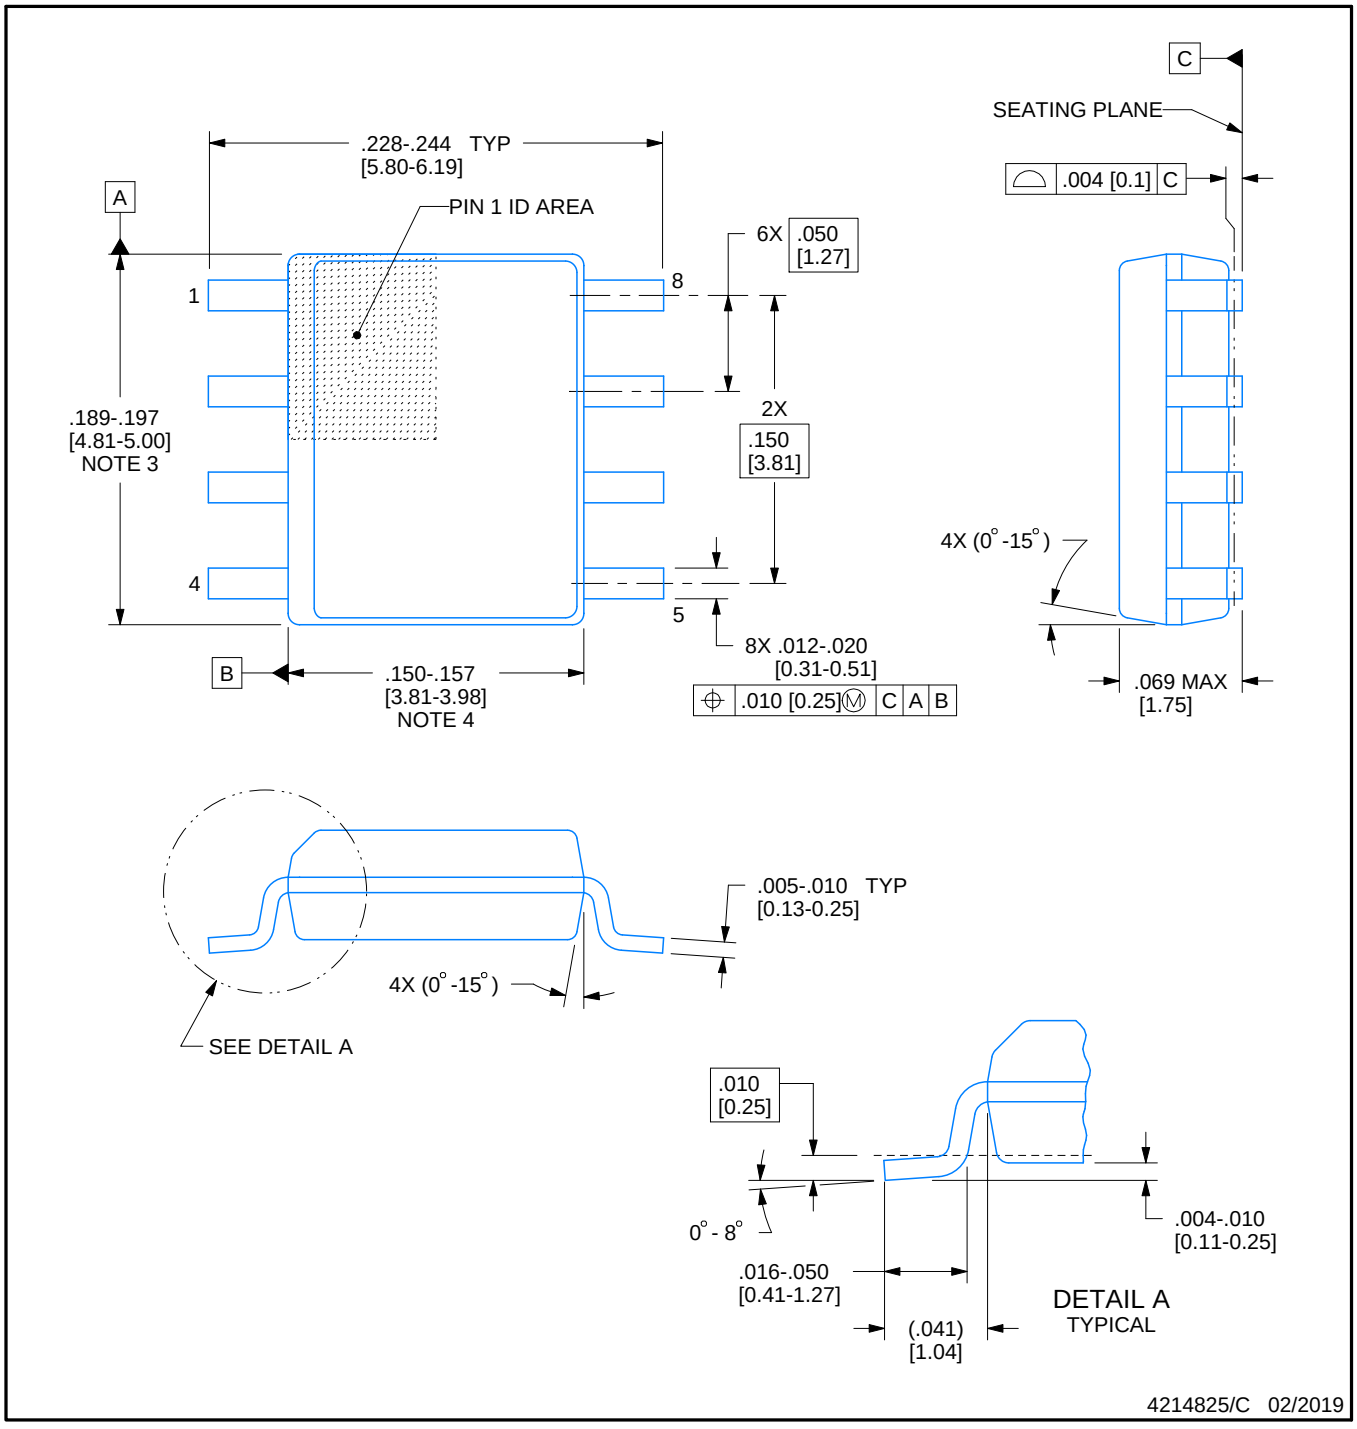


NOTES:

1. Linear dimensions are in inches [millimeters]. Dimensions in parenthesis are for reference only. Controlling dimensions are in inches. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed .006 [0.15] per side.
4. This dimension does not include interlead flash.
5. Reference JEDEC registration MS-012, variation AA.

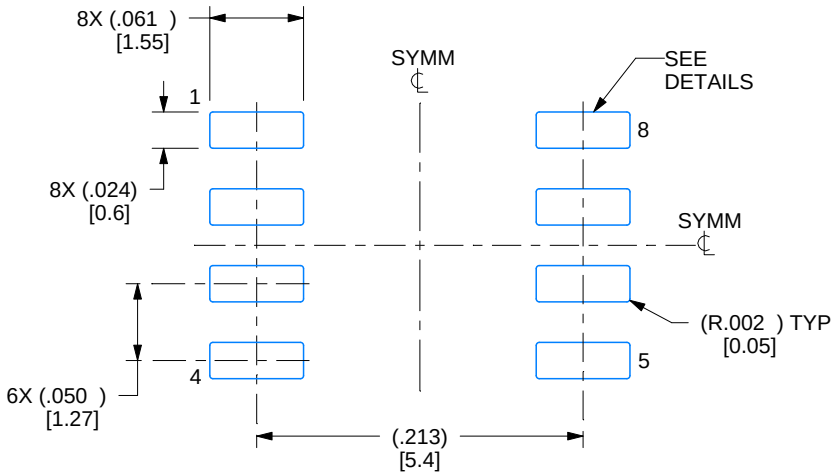

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE:8X

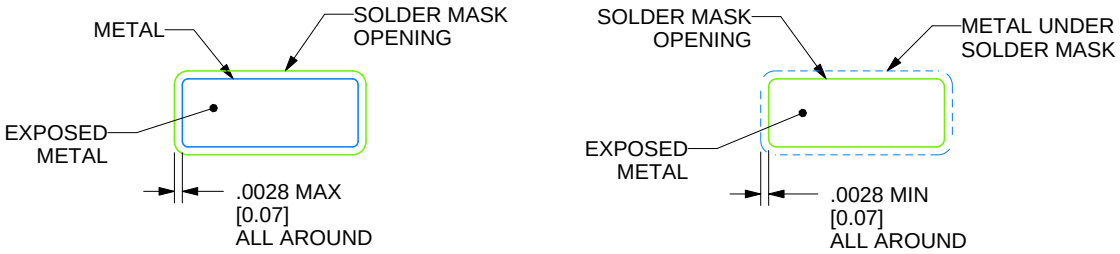

SOLDER MASK DETAILS

4214825/C 02/2019

NOTES: (continued)


6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

EXAMPLE STENCIL DESIGN

D0008A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT

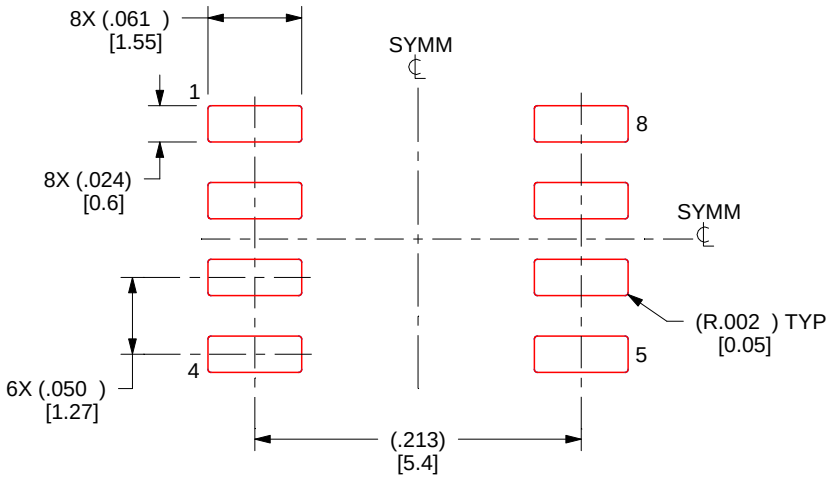

SOLDER PASTE EXAMPLE
BASED ON .005 INCH [0.125 MM] THICK STENCIL
SCALE:8X

4214825/C 02/2019

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

GENERIC PACKAGE VIEW


DRG 8

WSON - 0.8 mm max height

3 x 3, 0.5 mm pitch

PLASTIC SMALL OUTLINE - NO LEAD

This image is a representation of the package family, actual package may vary.
Refer to the product data sheet for package details.

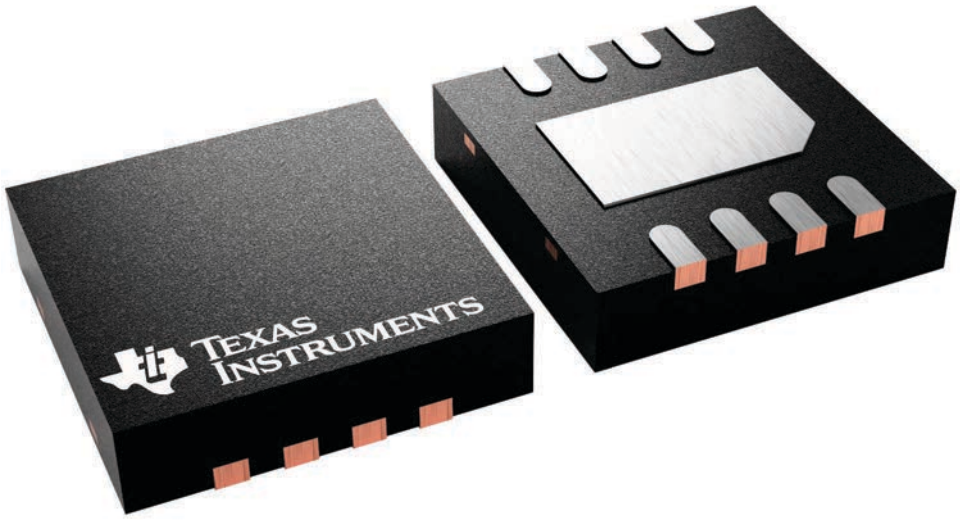


4225794/A

PACKAGE OUTLINE

DRG0008A

WSON - 0.8 mm max height


PLASTIC SMALL OUTLINE - NO LEAD

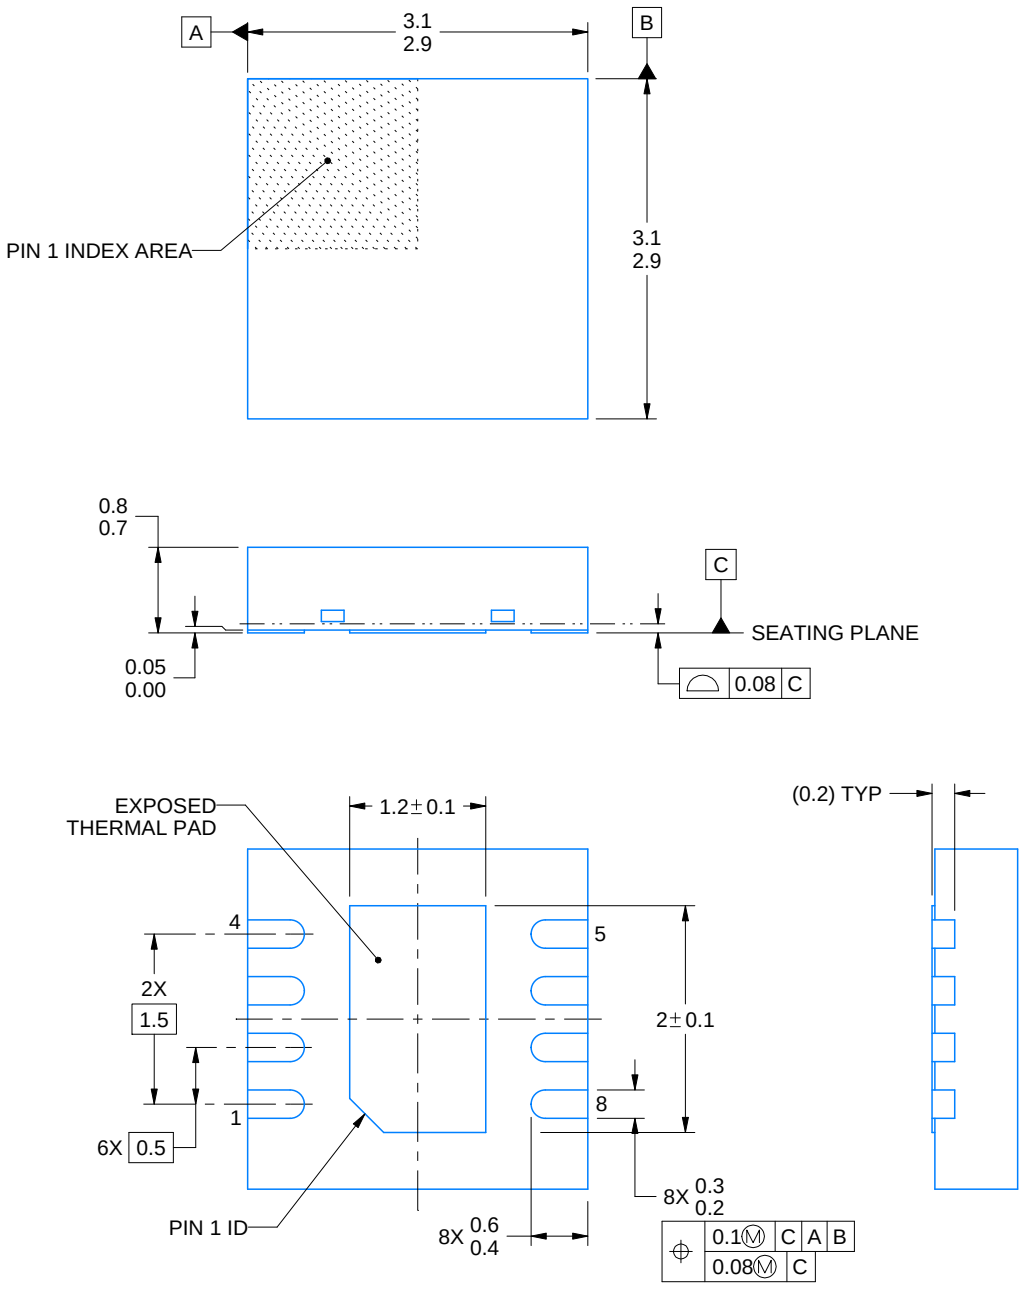


4218885/A 03/2020

NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. The package thermal pad must be soldered to the printed circuit board for thermal and mechanical performance.

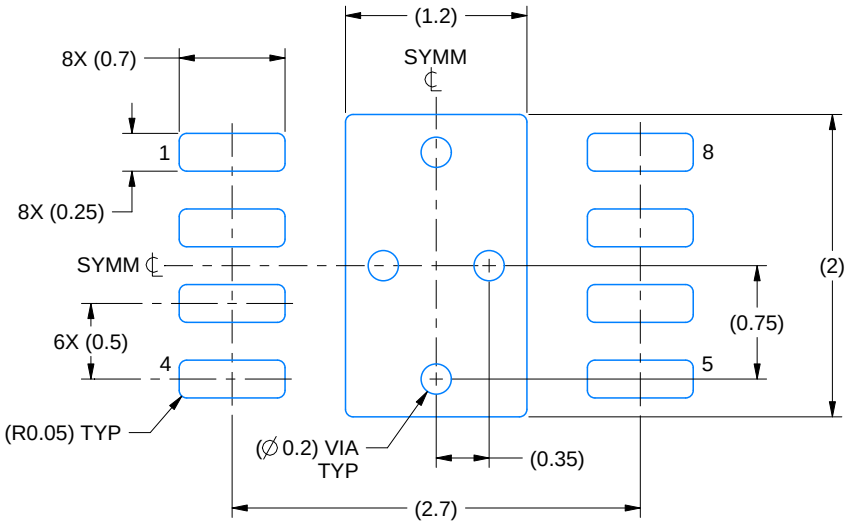

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE:20X

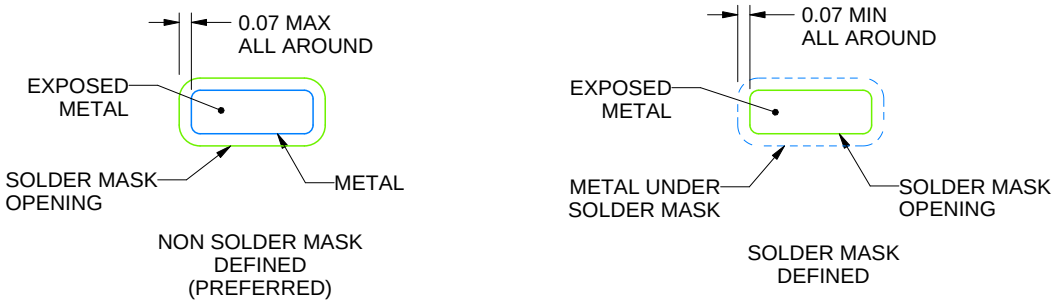


SOLDER MASK DETAILS

4218885/A 03/2020

NOTES: (continued)

4. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 (www.ti.com/lit/slua271).
5. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.

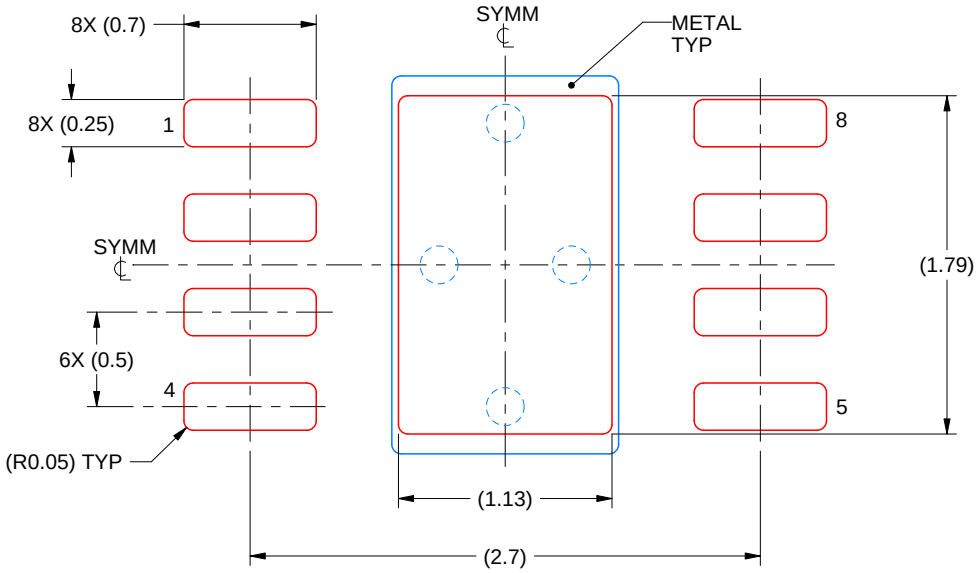

SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL

EXPOSED PAD
84% PRINTED SOLDER COVERAGE BY AREA
SCALE:25X

4218885/A 03/2020

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES “AS IS” AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI’s products are provided subject to TI’s Terms of Sale, TI’s General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI’s provision of these resources does not expand or otherwise alter TI’s applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2026, Texas Instruments Incorporated

Last updated 10/2025