

SN74CB3Q3244 8 位 FET 总线开关, 2.5V/3.3V 低压高带宽总线开关

1 特性

- 高带宽数据路径 (高达 500MHz)
- 可耐受 5V 电压并支持器件加电或断电的 I/O
- 在运行范围内具有平缓的低通态电阻 (r_{on}) 特性
- 支持在数据 I/O 端口进行轨到轨开关
 - 3.3V V_{CC} 时, 开关范围为 0 至 5V
 - 2.5V V_{CC} 时, 开关范围为 0 至 3.3V
- 具有接近零传播延迟的双向数据流
- 低输入和输出电容可更大程度减小负载和信号失真
- 快速开关频率
- 数据与控制输入提供下冲钳位二极管
- 低功耗
- V_{CC} 工作范围为 2.3V 至 3.6V
- 数据 I/O 支持 0 至 5V 信号电平 (0.8V、1.2V、1.5V、1.8V、2.5V、3.3V、5V)
- 控制输入可由 TTL 或 5V/3.3V CMOS 输出驱动
- I_{off} 支持局部断电模式运行
- 闩锁性能超过 100mA, 符合 JESD 78 II 类规范的要求
- ESD 性能测试符合 JESD 22 标准
 - 2000V 人体放电模型 (A114B , II 类)
 - 1000V 充电器件模型 (C101)
- 支持数字和模拟应用: 差分信号接口、存储器交错、总线隔离、低失真信号门控

2 说明

SN74CB3Q3244 是一款高带宽 FET 总线开关, 此开关利用一个电荷泵来提升通道晶体管的栅极电压, 从而提供一个平缓的低通态电阻 (r_{on})。平缓的低通态电阻可实现超小的传播延迟, 并且支持在数据输入/输出 (I/O) 端口上进行轨到轨开关。该器件还具有低的数据 I/O 电容, 以最大限度地减少数据总线上的容性负载和信号失真。SN74CB3Q3244 专为支持高带宽应用而设计, 提供优化的接口解决方案, 非常适合宽带通信、网络和数据密集型计算系统。

SN74CB3Q3244 配置为两个具有独立输出使能 ($\overline{OE}$ 、 $2\overline{OE}$) 输入的 4 位总线开关。该器件可以用作两个 4 位总线开关或一个 8 位总线开关。当 $\overline{OE}$ 为低电平时, 相关 4 位总线开关导通, 并且 A 端口被连接至 B 端口, 从而实现两个端口之间的双向数据流。当 $\overline{OE}$ 为高电平时, 相关 4 位总线开关关闭, 并且在 A 与 B 端口之间存在高阻抗状态。

该器件专用于使用 I_{off} 的局部断电应用。 I_{off} 电路可防止在断电时电流回流对器件造成损坏。该器件可在关断时提供隔离。

为了确保上电或下电期间的高阻抗状态, $\overline{OE}$ 必须通过一个上拉电阻器连接至 V_{CC} ; 该电阻器的最小阻值由驱动器的电流灌入能力来决定。


封装信息

器件型号	封装 ⁽¹⁾	封装尺寸 ⁽²⁾
SN74CB3Q3244	DBQ (SSOP , 20)	8.65mm × 6mm
	DGV (TVSOP , 20)	5mm × 6.4mm
	RGY (VQFN , 20)	4.5mm × 3.5mm
	PW (TSSOP , 20)	6.5mm × 6.4mm
	DB (SSOP , 20)	7.2mm × 7.8mm
	DW (SOIC , 20)	12.8mm × 10.3mm


(1) 有关更多信息, 请参阅节 8。

(2) 封装尺寸 (长 × 宽) 为标称值, 并包括引脚 (如适用)。



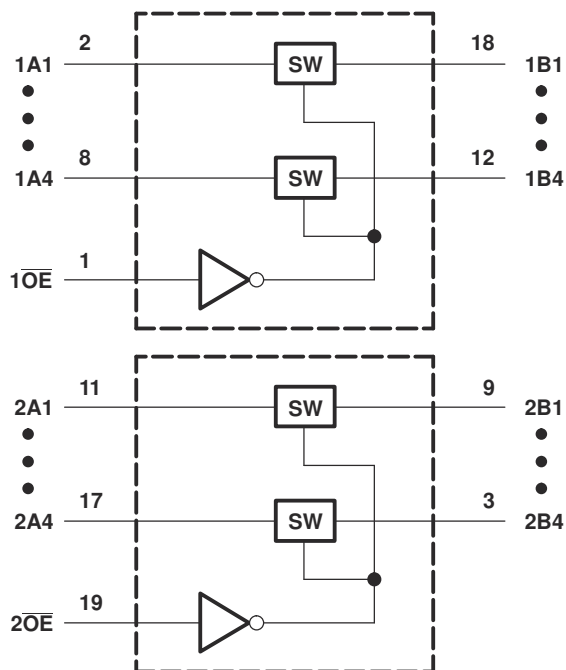

逻辑图 (正逻辑)

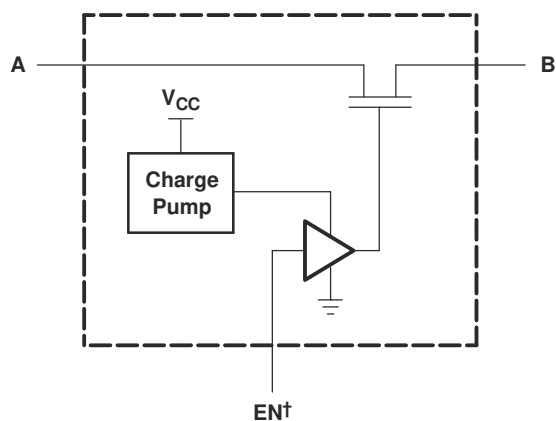

† EN is the internal enable signal applied to the switch.


每个 FET 开关 (SW) 的简化版原理图

内容

1 特性	1	4.7 典型特性	8
2 说明	1	5 参数测量信息	9
3 引脚配置和功能	4	6 器件和文档支持	10
4 规格	5	6.1 接收文档更新通知.....	10
4.1 绝对最大额定值.....	5	6.2 支持资源.....	10
4.2 ESD 等级.....	5	6.3 商标.....	10
4.3 建议运行条件.....	6	6.4 静电放电警告.....	10
4.4 热性能信息.....	6	6.5 术语表.....	10
4.5 电气特性.....	7	7 修订历史记录	10
4.6 开关特性.....	7	8 机械、封装和可订购信息	11

3 引脚配置和功能

DB, DBQ, DGV, DW, OR PW PACKAGE
(TOP VIEW)

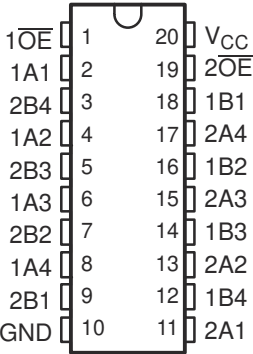

RGY PACKAGE
(TOP VIEW)

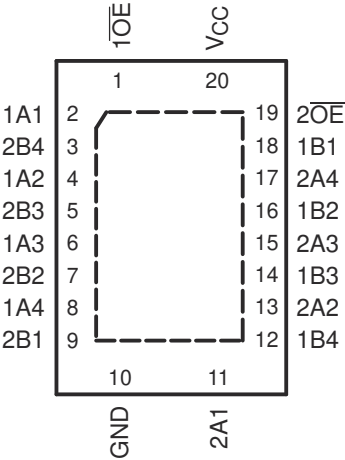


表 3-1. 端子分配

	1	2	3	4
A	1A1	1 OE	V _{CC}	2 OE
B	1A2	2A4	2B4	1B1
C	1A3	2B3	2A3	1B2
D	1A4	2A2	2B2	1B3
E	GND	2B1	2A1	1B4

表 3-2. 引脚功能

输入 OE	输入/输出 A ⁽¹⁾	功能
L	B	端口 A = 端口 B
H	Z	断开

(1) 信号类型：I = 输入，O = 输出，I/O = 输入或输出。

4 规格

4.1 绝对最大额定值

在自然通风条件下的工作温度范围内测得（除非另有说明）⁽¹⁾

		最小值	最大值	单位
V _{CC}	电源电压范围	-0.5	4.6	V
V _{IN}	控制输入电压范围 (2) (3)	-0.5	7	V
V _{IO}	开关 I/O 电压范围 (2) (3) (4)	-0.5	7	V
I _{IK}	控制输入钳位电流	V _{IN} < 0		
I _{IOK}	I/O 端口钳位电流	V _{IO} < 0		-50
I _{I/O}	导通状态开关电流 (5)			±64
I _O	持续输出电流 V _{CC} 或 GND 终端			±100
T _{stg}	贮存温度范围	-65	150	°C

- (1) 超出“最大绝对额定值”下列出的值可能会对器件造成永久损坏。这些仅为在额定值下的工作情况，对于额定值下或者在超出“推荐的操作条件”下的任何其它情况下的器件功能性操作，在此并未说明。长时间处于绝对最大额定条件下可能会影响器件的可靠性。
- (2) 除非另有说明，否则所有电压均以地为基准。
- (3) 如果遵守输入和输出钳位电流额定值，则可能会超过输入和输出电压额定值。
- (4) V_I 和 V_O 用于表示 $V_{I/O}$ 的特定条件。
- (5) I_I 和 I_O 用于表示 $I_{I/O}$ 的特定条件。

4.2 ESD 等级

		值	单位
$V_{(ESD)}$	静电放电	人体放电模型 (HBM)，符合 ANSI/ESDA/JEDEC JS-001 ⁽¹⁾	V
		充电器件模型 (CDM)，符合 JEDEC 规范 JESD22C101 ⁽²⁾	

- (1) JEDEC 文档 JEP155 指出：500V HBM 时能够在标准 ESD 控制流程下安全生产。
- (2) JEDEC 文档 JEP157 指出：250V CDM 时能够在标准 ESD 控制流程下安全生产。

4.3 建议运行条件

请参阅 ⁽¹⁾

			最小值	最大值	单位
V _{CC}	电源电压		2.3	3.6	V
V _{IH}	高电平控制输入电压	V _{CC} = 2.3V 至 2.7V	1.7	5.5	V
		V _{CC} = 2.7V 至 3.6V	2	5.5	
V _{IL}	低电平控制输入电压	V _{CC} = 2.3V 至 2.7V	0	0.7	V
		V _{CC} = 2.7V 至 3.6V	0	0.8	
V _{I/O}	输入/输出电压数据		0	5.5	V
T _A	自然通风条件下的工作温度		-40	85	°C

(1) 器件所有的未使用控制输入必须保持在 V_{CC} 或 GND 以确保器件正常运行。请参阅 [慢速或浮点 CMOS 输入影响应用说明](#)。

4.4 热性能信息

热指标 ⁽¹⁾		SN74CB3Q3244						单位
		DBQ (SSOP)	DB (SSOP)	DW (SOIC)	DGV (TVSOP)	PW (TSSOP)	RGY (VQFN)	
		20 引脚	20 引脚	20 引脚	20 引脚	20 引脚	20 引脚	
R _{θJA}	结至环境热阻	106.4	70	58	92	114.3	72.3	°C/W

(1) 有关新旧热指标的更多信息，请参阅 [半导体和 IC 封装热指标](#) 应用手册。

4.5 电气特性

在自然通风条件下的建议运行温度范围内测得 (除非另有说明)

参数		测试条件		最小值	典型值 (1)	最大值	单位
V_{IK}		$V_{CC} = 3.6V$,	$I_I = -18mA$			-1.8	V
I_{IN}	控制输入	$V_{CC} = 3.6V$,	$V_{IN} = 0$ 至 $5.5V$			± 1	μA
I_{OZ} (2)		$V_{CC} = 3.6V$,	$V_O = 0$ 至 $5.5V$ 、 $V_I = 0$ 、 开关关断、 $V_{IN} = V_{CC}$ 或 GND ,			± 1	μA
I_{off}		$V_{CC} = 0$,	$V_O = 0$ 至 $5.5V$, $V_I = 0$			1	μA
I_{CC}		$V_{CC} = 3.6V$,	$I_{I/O} = 0$ 、 开关导通或关断、 $V_{IN} = V_{CC}$ 或 GND		0.7	2	mA
ΔI_{CC} (3)	控制输入	$V_{CC} = 3.6V$,	一个输入为 $3V$, 其他输入电压为 V_{CC} 或 GND			30	μA
I_{CCD} (4)	每个控制输入	$V_{CC} = 3.6V$,	A 和 B 端口开路 , 以 50% 占空比控制输入开关		0.3	0.45	mA/ MHz
C_{in}	控制输入	$V_{CC} = 3.3V$,	$V_{IN} = 5.5V$ 、 $3.3V$ 或 0		2.5	3.5	pF
$C_{io(OFF)}$		$V_{CC} = 3.3V$,	开关关断、 $V_{IN} = V_{CC}$ 或 GND 、 $V_{I/O} = 5.5V$ 、 $3.3V$ 或 0		3.5	5	pF
$C_{io(ON)}$		$V_{CC} = 3.3V$,	开关导通、 $V_{IN} = V_{CC}$ 或 GND 、 $V_{I/O} = 5.5V$ 、 $3.3V$ 或 0		9	11	pF
r_{on} (5)		$V_{CC} = 2.3V$, $V_{CC} = 2.5V$ 时的典型值	$V_I = 0$, $I_O = 30mA$		4	8	Ω
			$V_I = 1.7V$, $I_O = -15mA$		5	9	
		$V_{CC} = 3V$	$V_I = 0$, $I_O = 30mA$		4	6	
			$V_I = 2.4V$, $I_O = -15mA$		5	8	

- (1) 所有典型值均在 $V_{CC} = 3.3V$ (除非另外注明) 、 $T_A = 25^\circ C$ 时测得。
(2) 对于 I/O 端口, 参数 I_{OZ} 包括输入漏电流。
(3) 这是每个输入在指定 TTL 电压电平而不是 V_{CC} 或 GND 时电源电流的增加情况。
(4) 此参数指定与单个控制输入的工作频率相关的动态电源电流 (请参阅图 4-2)。
(5) 在通过开关的指示电流下, 由 A 和 B 端子之间的压降测量。通态电阻由两个 (A 或 B) 端子的较低电压决定。



4.6 开关特性

在自然通风条件下的建议工作温度范围内测得 (除非另有说明) (请参阅 节 5)


参数	从 (输入)	至 (输出)	$V_{CC} = 2.5V$ $\pm 0.2V$		$V_{CC} = 3.3V$ $\pm 0.3V$		单位
			最小值	最大值	最小值	最大值	
f_{OE} (1)	OE	A 或 B		10		20	MHz
t_{pd} (2)	A 或 B	B 或 A		0.12		2	ns
t_{en}	OE	A 或 B	2.8	7.1	2.5	5.9	ns
t_{dis}	OE	A 或 B	1	7.4	1.5	6.8	ns

- (1) 控制输入的最大开关频率 ($V_O > V_{CC}$ 、 $V_I = 5V$ 、 $R_L \geq 1M\Omega$ 、 $C_L = 0$)
(2) 由所需电压源 (零输出阻抗) 驱动时, 传播延迟是使用此开关通态电阻典型值和额定负载电容计算得出的 RC 时间常数。


4.7 典型特性

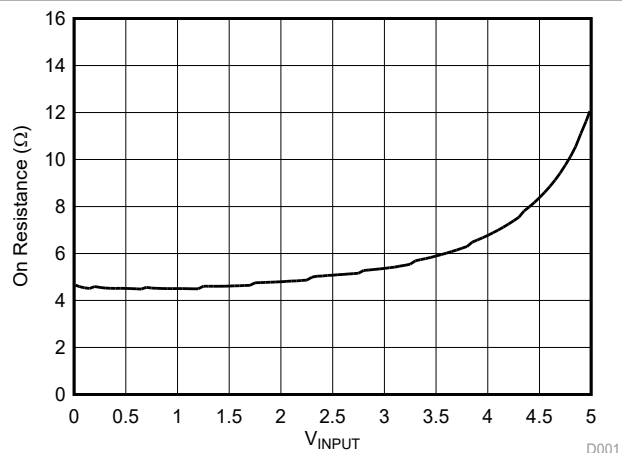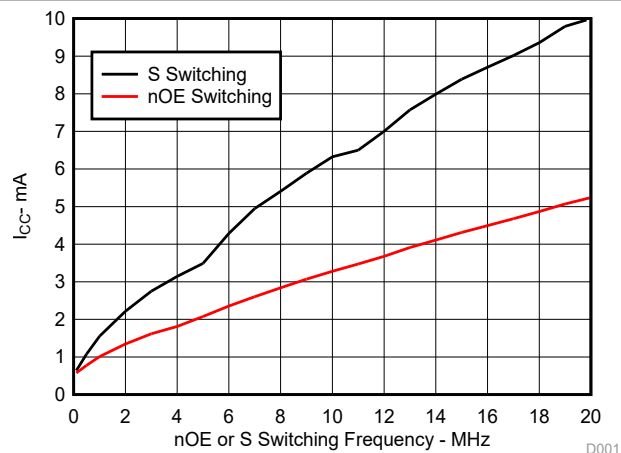图 4-1. Log r_{on} 与 V_I 间的关系, $V_{CC} = 3.3V$ 且 $I_O = -15mA$ 图 4-2. 典型 I_{CC} 与 $\overline{OE}$ 开关频率间的关系, $V_{CC} = 3.3V$

5 参数测量信息

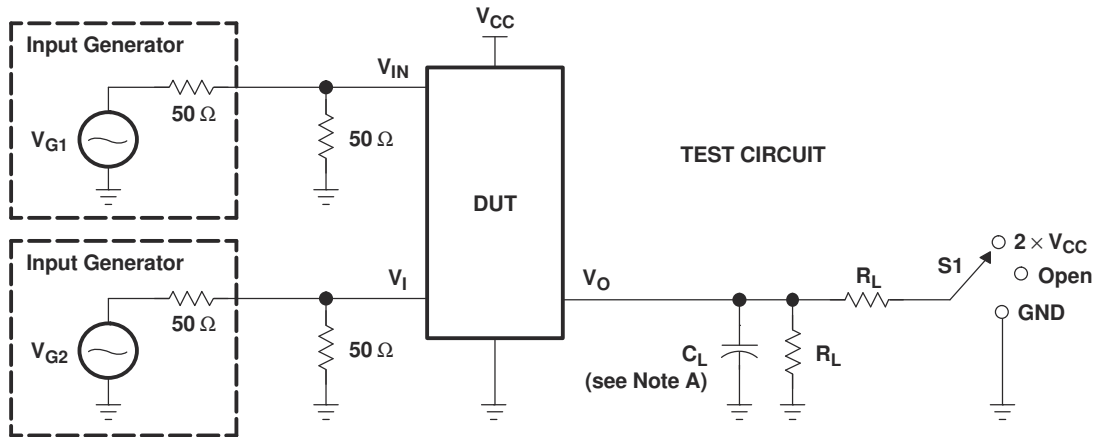

TEST	V _{CC}	S1	R _L	V _I	C _L	V _Δ
t _{pd(s)}	2.5 V ± 0.2 V 3.3 V ± 0.3 V	Open Open	500 Ω 500 Ω	V _{CC} or GND V _{CC} or GND	30 pF 50 pF	
t _{PLZ} /t _{PZL}	2.5 V ± 0.2 V 3.3 V ± 0.3 V	2 × V _{CC} 2 × V _{CC}	500 Ω 500 Ω	GND GND	30 pF 50 pF	0.15 V 0.3 V
t _{PHZ} /t _{PZH}	2.5 V ± 0.2 V 3.3 V ± 0.3 V	GND GND	500 Ω 500 Ω	V _{CC} V _{CC}	30 pF 50 pF	0.15 V 0.3 V

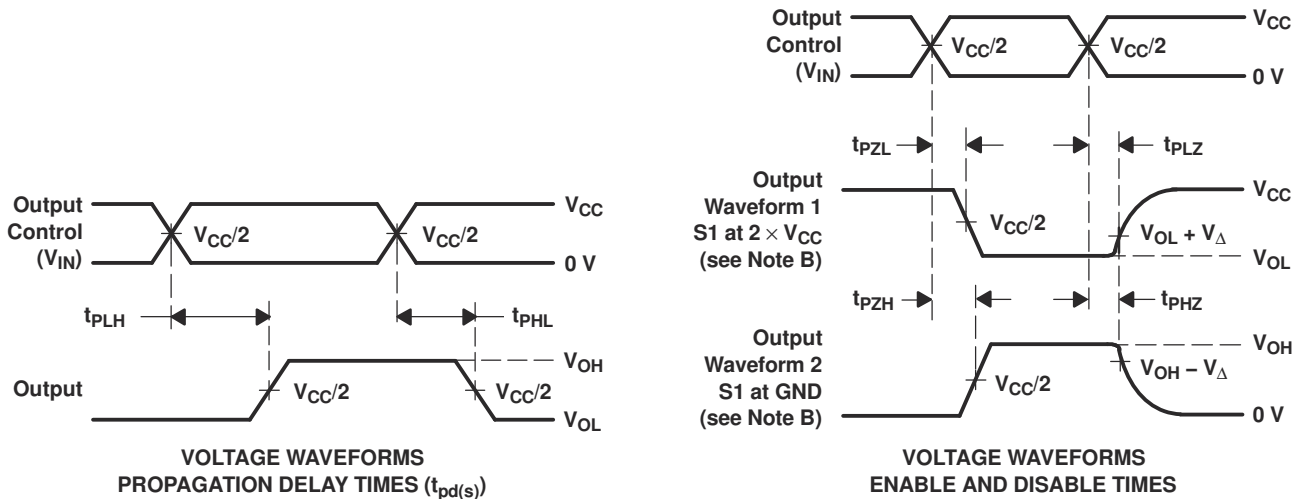

- NOTES: A. C_L includes probe and jig capacitance.
 B. Waveform 1 is for an output with internal conditions such that the output is low, except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high, except when disabled by the output control.
 C. All input pulses are supplied by generators having the following characteristics: PRR ≤ 10 MHz, Z_O = 50 Ω, t_r ≤ 2.5 ns, t_f ≤ 2.5 ns.
 D. The outputs are measured one at a time, with one transition per measurement.
 E. t_{PLZ} and t_{PHZ} are the same as t_{dis}.
 F. t_{PZL} and t_{PZH} are the same as t_{en}.
 G. t_{PLH} and t_{PHL} are the same as t_{pd(s)}. The t_{pd} propagation delay is the calculated RC time constant of the typical ON-state resistance of the switch and the specified load capacitance, when driven by an ideal voltage source (zero output impedance).
 H. All parameters and waveforms are not applicable to all devices.

图 5-1. 测试电路和电压波形

6 器件和文档支持

TI 提供广泛的开发工具。下面列出了用于评估器件性能、生成代码和开发解决方案的工具和软件。

6.1 接收文档更新通知

要接收文档更新通知，请导航至 ti.com 上的器件产品文件夹。点击 [通知](#) 进行注册，即可每周接收产品信息更改摘要。有关更改的详细信息，请查看任何已修订文档中包含的修订历史记录。

6.2 支持资源

[TI E2E™ 中文支持论坛](#) 是工程师的重要参考资料，可直接从专家处获得快速、经过验证的解答和设计帮助。搜索现有解答或提出自己的问题，获得所需的快速设计帮助。

链接的内容由各个贡献者“按原样”提供。这些内容并不构成 TI 技术规范，并且不一定反映 TI 的观点；请参阅 TI 的 [使用条款](#)。

6.3 商标

TI E2E™ is a trademark of Texas Instruments.

所有商标均为其各自所有者的财产。

6.4 静电放电警告



静电放电 (ESD) 会损坏这个集成电路。德州仪器 (TI) 建议通过适当的预防措施处理所有集成电路。如果不遵守正确的处理和安装程序，可能会损坏集成电路。

ESD 的损坏小至导致微小的性能降级，大至整个器件故障。精密的集成电路可能更容易受到损坏，这是因为非常细微的参数更改都可能会导致器件与其发布的规格不相符。

6.5 术语表

[TI 术语表](#) 本术语表列出并解释了术语、首字母缩略词和定义。

7 修订历史记录

注：以前版本的页码可能与当前版本的页码不同

Changes from Revision B (December 2004) to Revision C (August 2026)	Page
• 更新了整个文档中的表格、图和交叉参考的编号格式.....	1
• 从文档中删除了 订购信息 表.....	1
• 从文档中删除了 GQN 包.....	4
• 添加了 ESD 等级表.....	5
• 添加了 热性能信息 表并将 $R_{\theta JA}$ 移至表中.....	6
• 将 电气特性 表中每个输入控制的典型 I_{CCD} 值从 0.14 更改为 0.3.....	7
• 将 电气特性 表中每个输入控制的最大 I_{CCD} 值从 0.15 更改为 0.45.....	7
• 更新了在 开关特性 表中最大 t_{dis} 的 V_{CC} 值.....	7
• 向 典型特性 部分添加了最新典型曲线数据.....	8

8 机械、封装和可订购信息

以下页面包含机械、封装和可订购信息。这些信息是指定器件可用的最新数据。数据如有变更，恕不另行通知，且不会对此文档进行修订。有关此数据表的浏览器版本，请查阅左侧的导航栏。

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package Pins	Package qty Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
SN74CB3Q3244DBQR	Active	Production	SSOP (DBQ) 20	2500 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 85	CB3Q3244
SN74CB3Q3244DBQR.A	Active	Production	SSOP (DBQ) 20	2500 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 85	CB3Q3244
SN74CB3Q3244DBQR.B	Active	Production	SSOP (DBQ) 20	2500 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 85	CB3Q3244
SN74CB3Q3244DBQRG4	Active	Production	SSOP (DBQ) 20	2500 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 85	CB3Q3244
SN74CB3Q3244DBQRG4.A	Active	Production	SSOP (DBQ) 20	2500 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 85	CB3Q3244
SN74CB3Q3244DBQRG4.B	Active	Production	SSOP (DBQ) 20	2500 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 85	CB3Q3244
SN74CB3Q3244DGVR	Active	Production	TVSOP (DGV) 20	2000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	BU244
SN74CB3Q3244DGVR.B	Active	Production	TVSOP (DGV) 20	2000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	BU244
SN74CB3Q3244PW	Obsolete	Production	TSSOP (PW) 20	-	-	Call TI	Call TI	-40 to 85	BU244
SN74CB3Q3244PWR	Active	Production	TSSOP (PW) 20	2000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	BU244
SN74CB3Q3244PWR.A	Active	Production	TSSOP (PW) 20	2000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	BU244
SN74CB3Q3244PWR.B	Active	Production	TSSOP (PW) 20	2000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	BU244
SN74CB3Q3244PWRG4	Active	Production	TSSOP (PW) 20	2000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	BU244
SN74CB3Q3244PWRG4.A	Active	Production	TSSOP (PW) 20	2000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	BU244
SN74CB3Q3244PWRG4.B	Active	Production	TSSOP (PW) 20	2000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	BU244
SN74CB3Q3244RGYR	Active	Production	VQFN (RGY) 20	3000 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 85	BU244
SN74CB3Q3244RGYR.A	Active	Production	VQFN (RGY) 20	3000 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 85	BU244
SN74CB3Q3244RGYR.B	Active	Production	VQFN (RGY) 20	3000 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 85	BU244
SN74CB3Q3244RGYRG4	Active	Production	VQFN (RGY) 20	3000 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 85	BU244
SN74CB3Q3244RGYRG4.A	Active	Production	VQFN (RGY) 20	3000 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 85	BU244
SN74CB3Q3244RGYRG4.B	Active	Production	VQFN (RGY) 20	3000 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 85	BU244

⁽¹⁾ **Status:** For more details on status, see our [product life cycle](#).

⁽²⁾ **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

(4) **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

(5) **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

(6) **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION



*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
SN74CB3Q3244DBQR	SSOP	DBQ	20	2500	330.0	16.4	6.5	9.0	2.1	8.0	16.0	Q1
SN74CB3Q3244DBQRG4	SSOP	DBQ	20	2500	330.0	16.4	6.5	9.0	2.1	8.0	16.0	Q1
SN74CB3Q3244DGVR	TVSOP	DGV	20	2000	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1
SN74CB3Q3244PWR	TSSOP	PW	20	2000	330.0	16.4	6.95	7.0	1.4	8.0	16.0	Q1
SN74CB3Q3244PWRG4	TSSOP	PW	20	2000	330.0	16.4	6.95	7.0	1.4	8.0	16.0	Q1
SN74CB3Q3244RGYR	VQFN	RGY	20	3000	330.0	12.4	3.71	4.71	1.1	8.0	12.0	Q1
SN74CB3Q3244RGYRG4	VQFN	RGY	20	3000	330.0	12.4	3.71	4.71	1.1	8.0	12.0	Q1

TAPE AND REEL BOX DIMENSIONS




*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
SN74CB3Q3244DBQR	SSOP	DBQ	20	2500	353.0	353.0	32.0
SN74CB3Q3244DBQRG4	SSOP	DBQ	20	2500	353.0	353.0	32.0
SN74CB3Q3244DGVR	TVSOP	DGV	20	2000	353.0	353.0	32.0
SN74CB3Q3244PWR	TSSOP	PW	20	2000	353.0	353.0	32.0
SN74CB3Q3244PWRG4	TSSOP	PW	20	2000	353.0	353.0	32.0
SN74CB3Q3244RGYR	VQFN	RGY	20	3000	353.0	353.0	32.0
SN74CB3Q3244RGYRG4	VQFN	RGY	20	3000	353.0	353.0	32.0

DBQ (R-PDSO-G20)

PLASTIC SMALL-OUTLINE PACKAGE

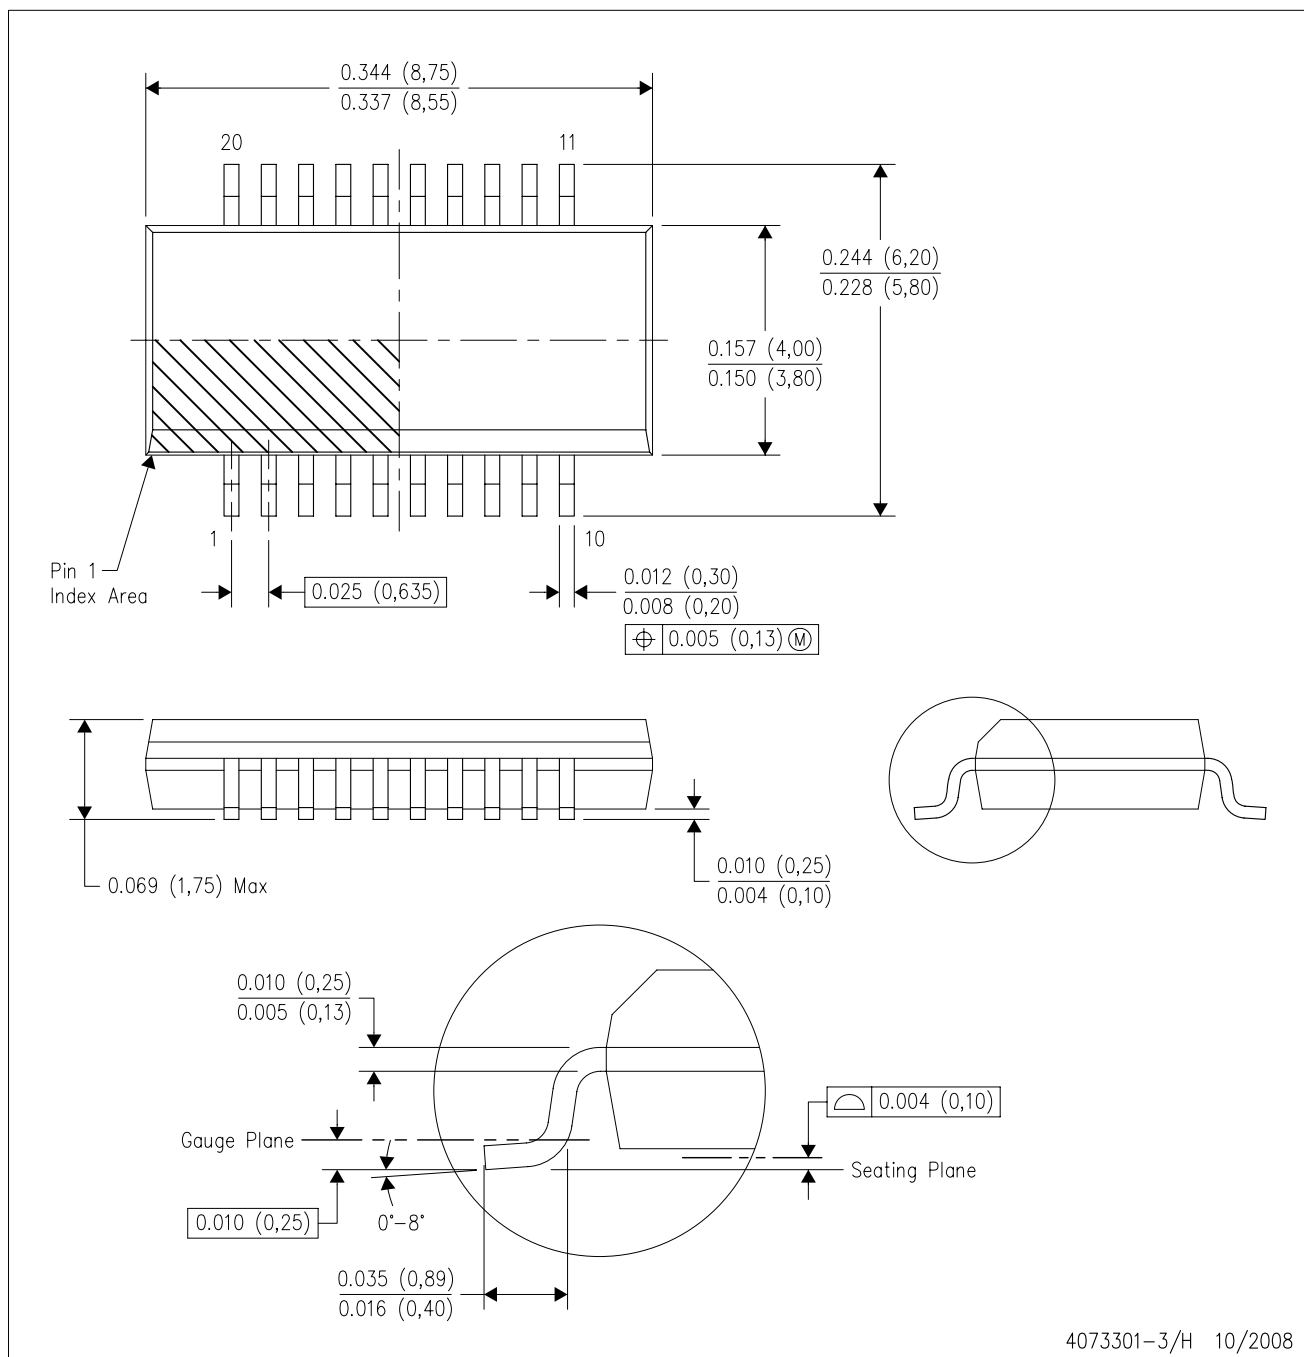

4073301-3/H 10/2008

- NOTES:
- All linear dimensions are in inches (millimeters).
 - This drawing is subject to change without notice.
 - Body dimensions do not include mold flash or protrusion not to exceed 0.006 (0,15) per side.
 - Falls within JEDEC MO-137 variation AD.

DGV (R-PDSO-G**)

PLASTIC SMALL-OUTLINE

24 PINS SHOWN



- NOTES: A. All linear dimensions are in millimeters.
 B. This drawing is subject to change without notice.
 C. Body dimensions do not include mold flash or protrusion, not to exceed 0,15 per side.
 D. Falls within JEDEC: 24/48 Pins – MO-153
 14/16/20/56 Pins – MO-194

GENERIC PACKAGE VIEW


RGY 20

VQFN - 1 mm max height



3.5 x 4.5, 0.5 mm pitch

PLASTIC QUAD FGLATPACK - NO LEAD

This image is a representation of the package family, actual package may vary.
Refer to the product data sheet for package details.

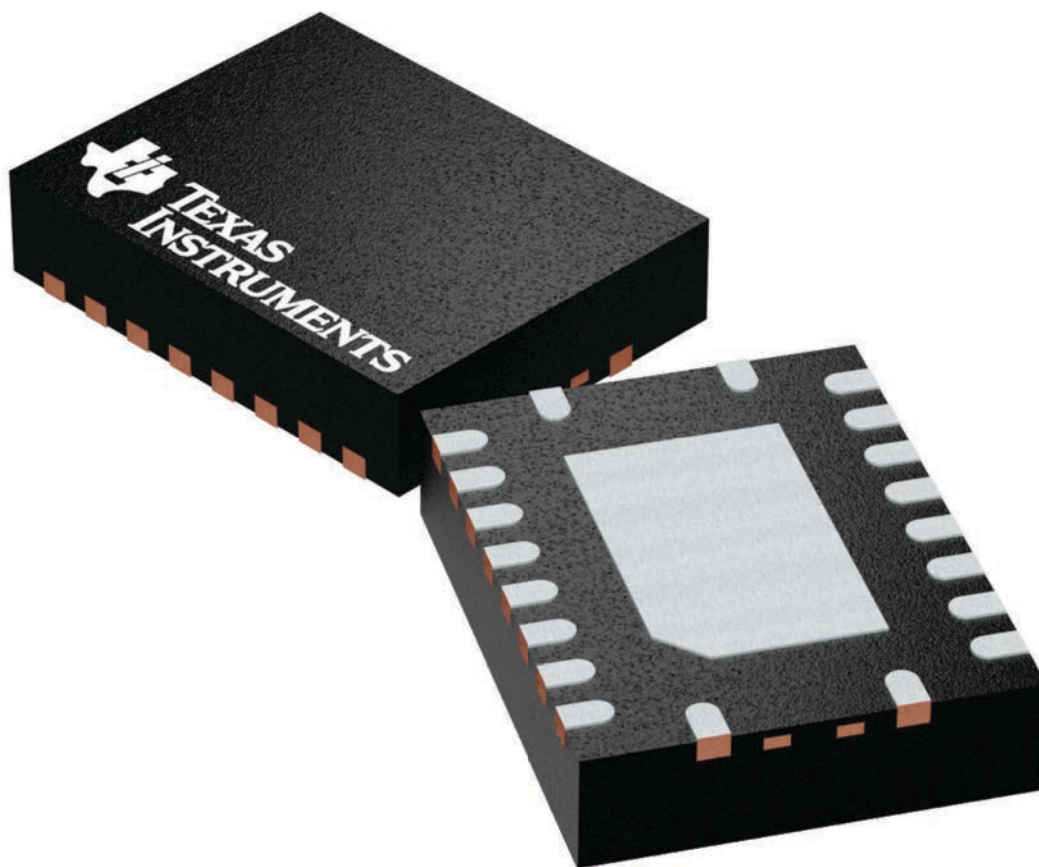

4225264/A

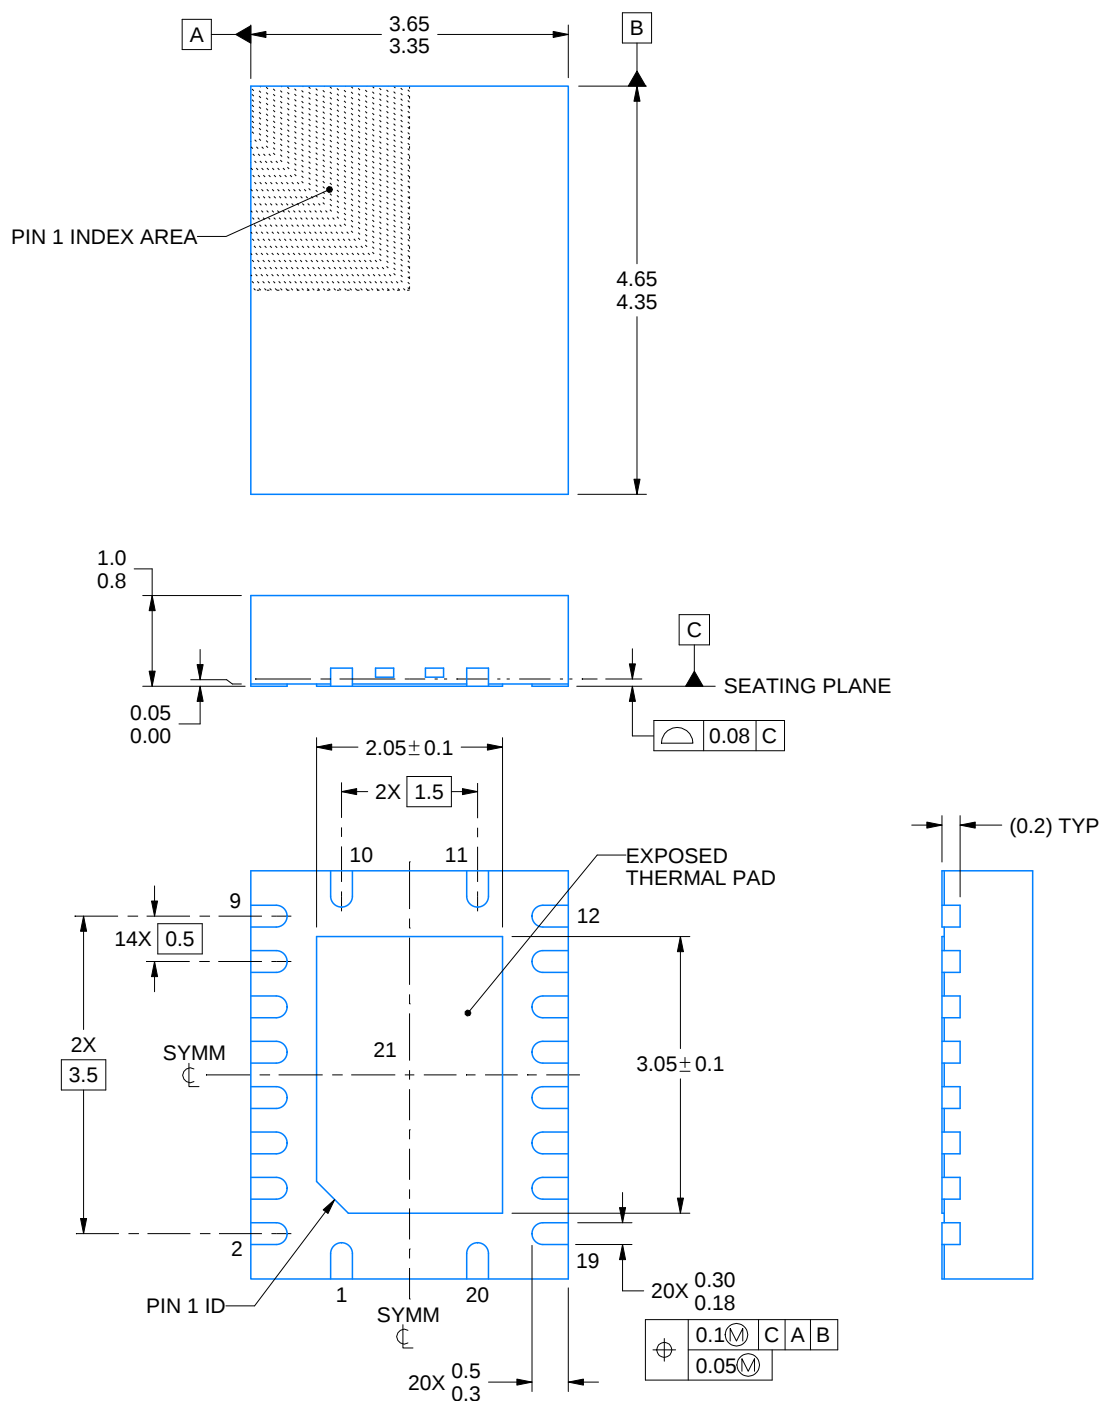

4225320/A 09/2019


NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. The package thermal pad must be soldered to the printed circuit board for thermal and mechanical performance.


RGY0020A

VQFN - 1 mm max height

PLASTIC QUAD FLATPACK - NO LEAD

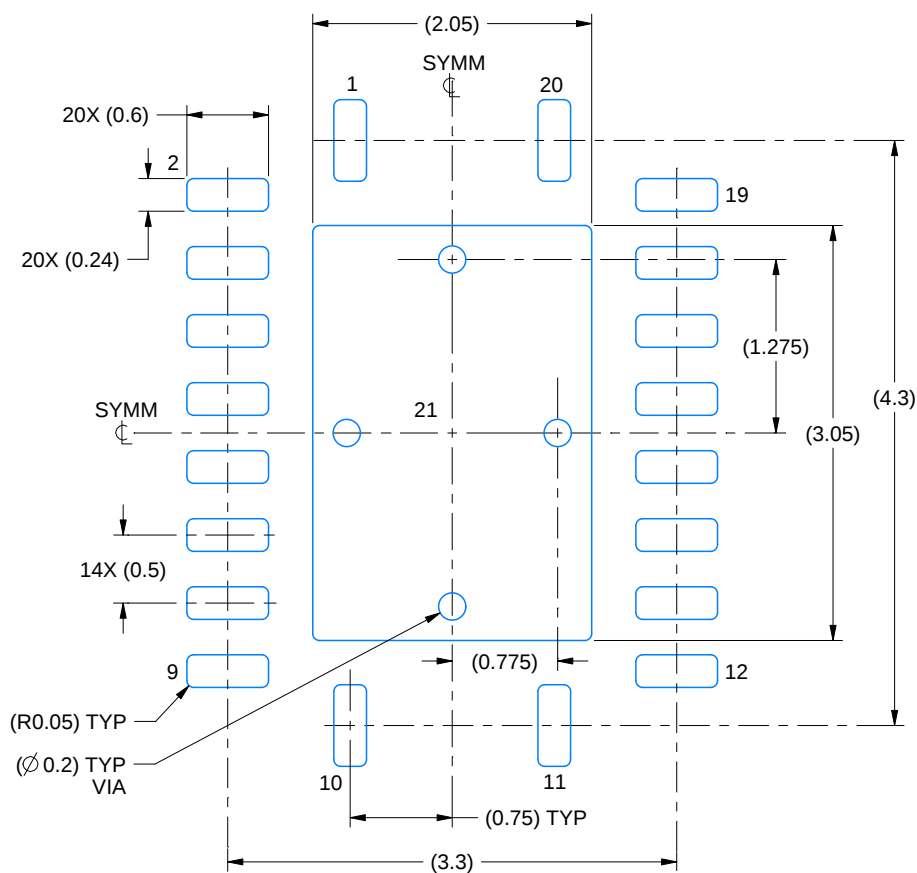

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE:18X

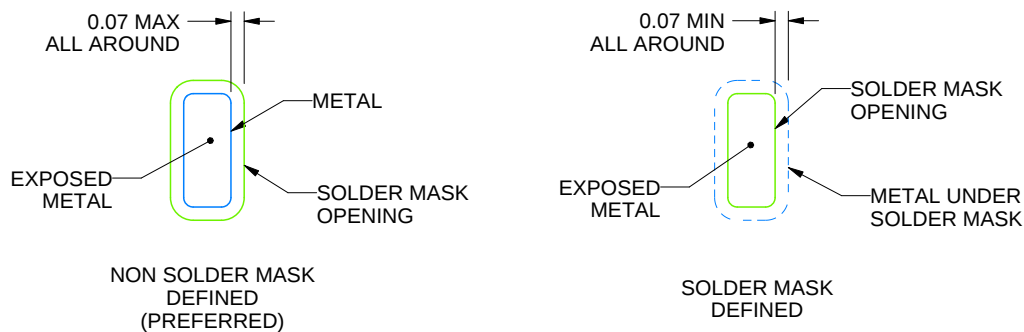

SOLDER MASK DETAILS

4225320/A 09/2019

NOTES: (continued)


4. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 (www.ti.com/lit/sluea271).
5. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.

EXAMPLE STENCIL DESIGN

RGY0020A

VQFN - 1 mm max height

PLASTIC QUAD FLATPACK - NO LEAD

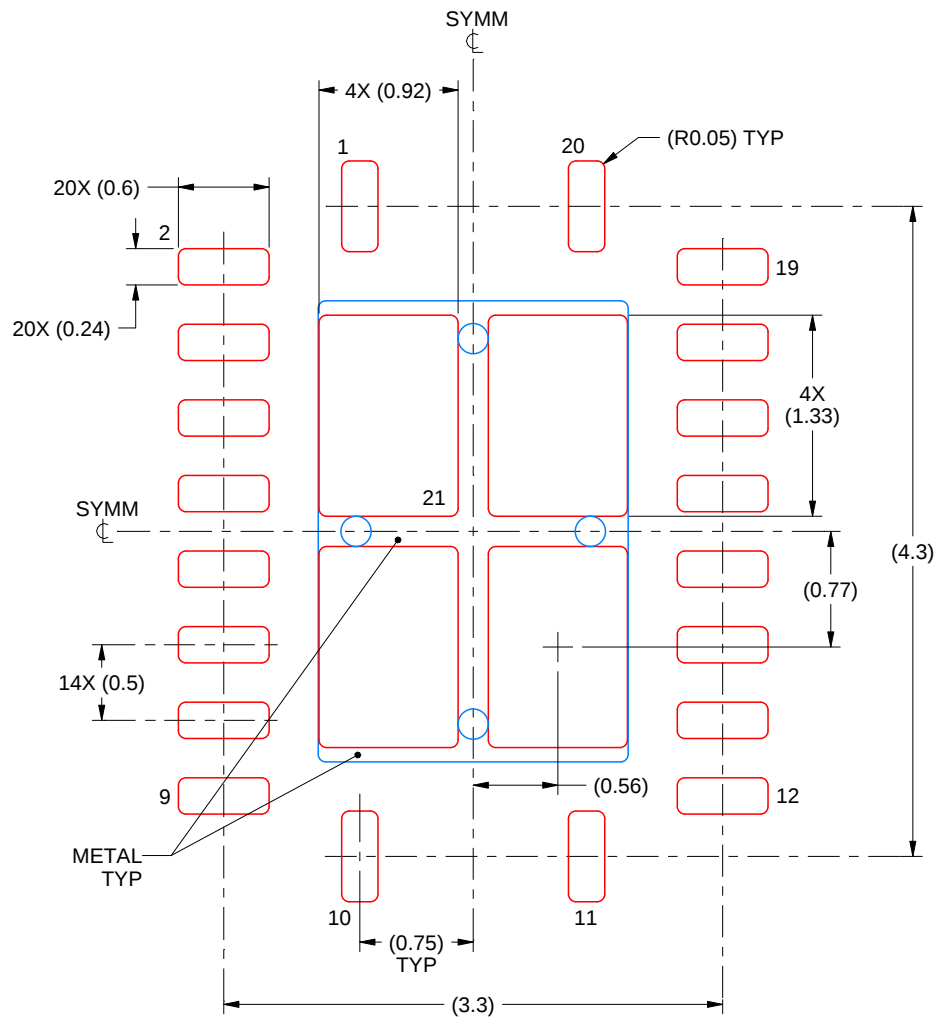

SOLDER PASTE EXAMPLE
 BASED ON 0.125 mm THICK STENCIL

EXPOSED PAD 21
 78% PRINTED SOLDER COVERAGE BY AREA UNDER PACKAGE
 SCALE:20X

4225320/A 09/2019

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.



4220206/A 02/2017

NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
5. Reference JEDEC registration MO-153.

EXAMPLE BOARD LAYOUT


PW0020A

TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE



LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE: 10X

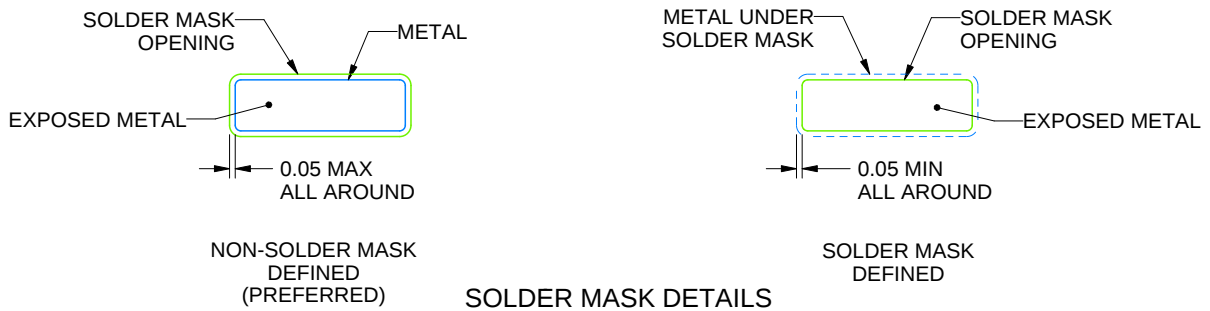

4220206/A 02/2017

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

EXAMPLE STENCIL DESIGN

PW0020A

TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE



SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL
SCALE: 10X

4220206/A 02/2017

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

重要通知和免责声明

TI“按原样”提供技术和可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证没有瑕疵且不做任何明示或暗示的担保，包括但不限于对适销性、与某特定用途的适用性或不侵犯任何第三方知识产权的暗示担保。

这些资源可供使用 TI 产品进行设计的熟练开发人员使用。您将自行承担以下全部责任：(1) 针对您的应用选择合适的 TI 产品，(2) 设计、验证并测试您的应用，(3) 确保您的应用满足相应标准以及任何其他安全、安保法规或其他要求。

这些资源如有变更，恕不另行通知。TI 授权您仅可将这些资源用于研发本资源所述的 TI 产品的相关应用。严禁以其他方式对这些资源进行复制或展示。您无权使用任何其他 TI 知识产权或任何第三方知识产权。对于因您对这些资源的使用而对 TI 及其代表造成的任何索赔、损害、成本、损失和债务，您将全额赔偿，TI 对此概不负责。

TI 提供的产品受 [TI 销售条款](#)、[TI 通用质量指南](#) 或 [ti.com](#) 上其他适用条款或 TI 产品随附的其他适用条款的约束。TI 提供这些资源并不会扩展或以其他方式更改 TI 针对 TI 产品发布的适用的担保或担保免责声明。除非德州仪器 (TI) 明确将某产品指定为定制产品或客户特定产品，否则其产品均为按确定价格收入目录的标准通用器件。

TI 反对并拒绝您可能提出的任何其他或不同的条款。

版权所有 © 2026，德州仪器 (TI) 公司

最后更新日期：2025 年 10 月