

AM62A STARTER KIT EVM

TABLE OF CONTENTS

PAGE	CONTENTS
01	TABLE OF CONTENTS
02	REVISION HISTORY
03	BLOCK DIAGRAM AM62A SKEVM
04	BLOCK DIAGRAM XDS110
05	POWER BLOCK DIAGRAM
06	POWER SEQUENCE
07	I2C TREE
08	GPIO MAPPING TABLE
09	USB TYPE-C POWER
10	PERIPHERAL POWER SUPPLY-1
11	PERIPHERAL POWER SUPPLY-2
12	SOC POWER SUPPLY
13	CURRENT MONITORING DEVICES
14	SOC POWER
15	SOC POWER CAPS AND VSS
16	LPDDR4 INTERFACE
17	M.2 CONNECTOR
18	eMMC FLASH
19	SD CARD INTERFACE
20	OSPI INTERFACE
21	BOARD ID EEPROM & TEMPERATURE SENSORS
22	CPSW RGMII_1 ETHERNET PHY
23	CPSW RGMII_2 ETHERNET CONNECTOR
24	ETHERNET PHY CLOCK BUFFER & LED DRIVER
25	TEST AUTOMATION
26	BOOT MODE BUFFER & SWITCHES
27	XDS110 DEBUGGER
28	JTAG BUFFER
29	JTAG 20 PIN cTI CONNECTOR
30	FT4232 UART TO USB BRIDGE
31	SOC WKUP & GPMC DOMAIN
32	USER EXPANSION CONNECTOR
33	MCU HEADER
34	USB1 TYPE A
35	USB0 TYPE-C DRP & TEST LEDs
36	SoC UART1 FET SWITCH & BUFFER
37	CSI INTERFACE
38	AUDIO CODEC
39	IO EXPANDER
40	HDMI INTERFACE


PAGE	CONTENTS
41	OSCILLATOR
42	RESET
43	CAN FD WKUP SW
44	ACCESSORIES

REV	A
VER	1.0

REVISION HISTORY

VER #	DATE	DESCRIPTION OF CHANGES	AUTHOR	REVIEWED BY	APPROVED BY
0.1	09 AUG 2023	Drafted from "PROC135E3_SCH" document.	Mistral Design Team	Nishant	Ajit MB
0.2	18 AUG 2023	Updated SoC, eMMC & PMIC Part Number	Mistral Design Team	Nishant	Ajit MB
1.0	21 AUG 2023	Baselined and Released	Mistral Design Team	Nishant	Ajit MB

BLOCK DIAGRAM AM62A-SKEVM

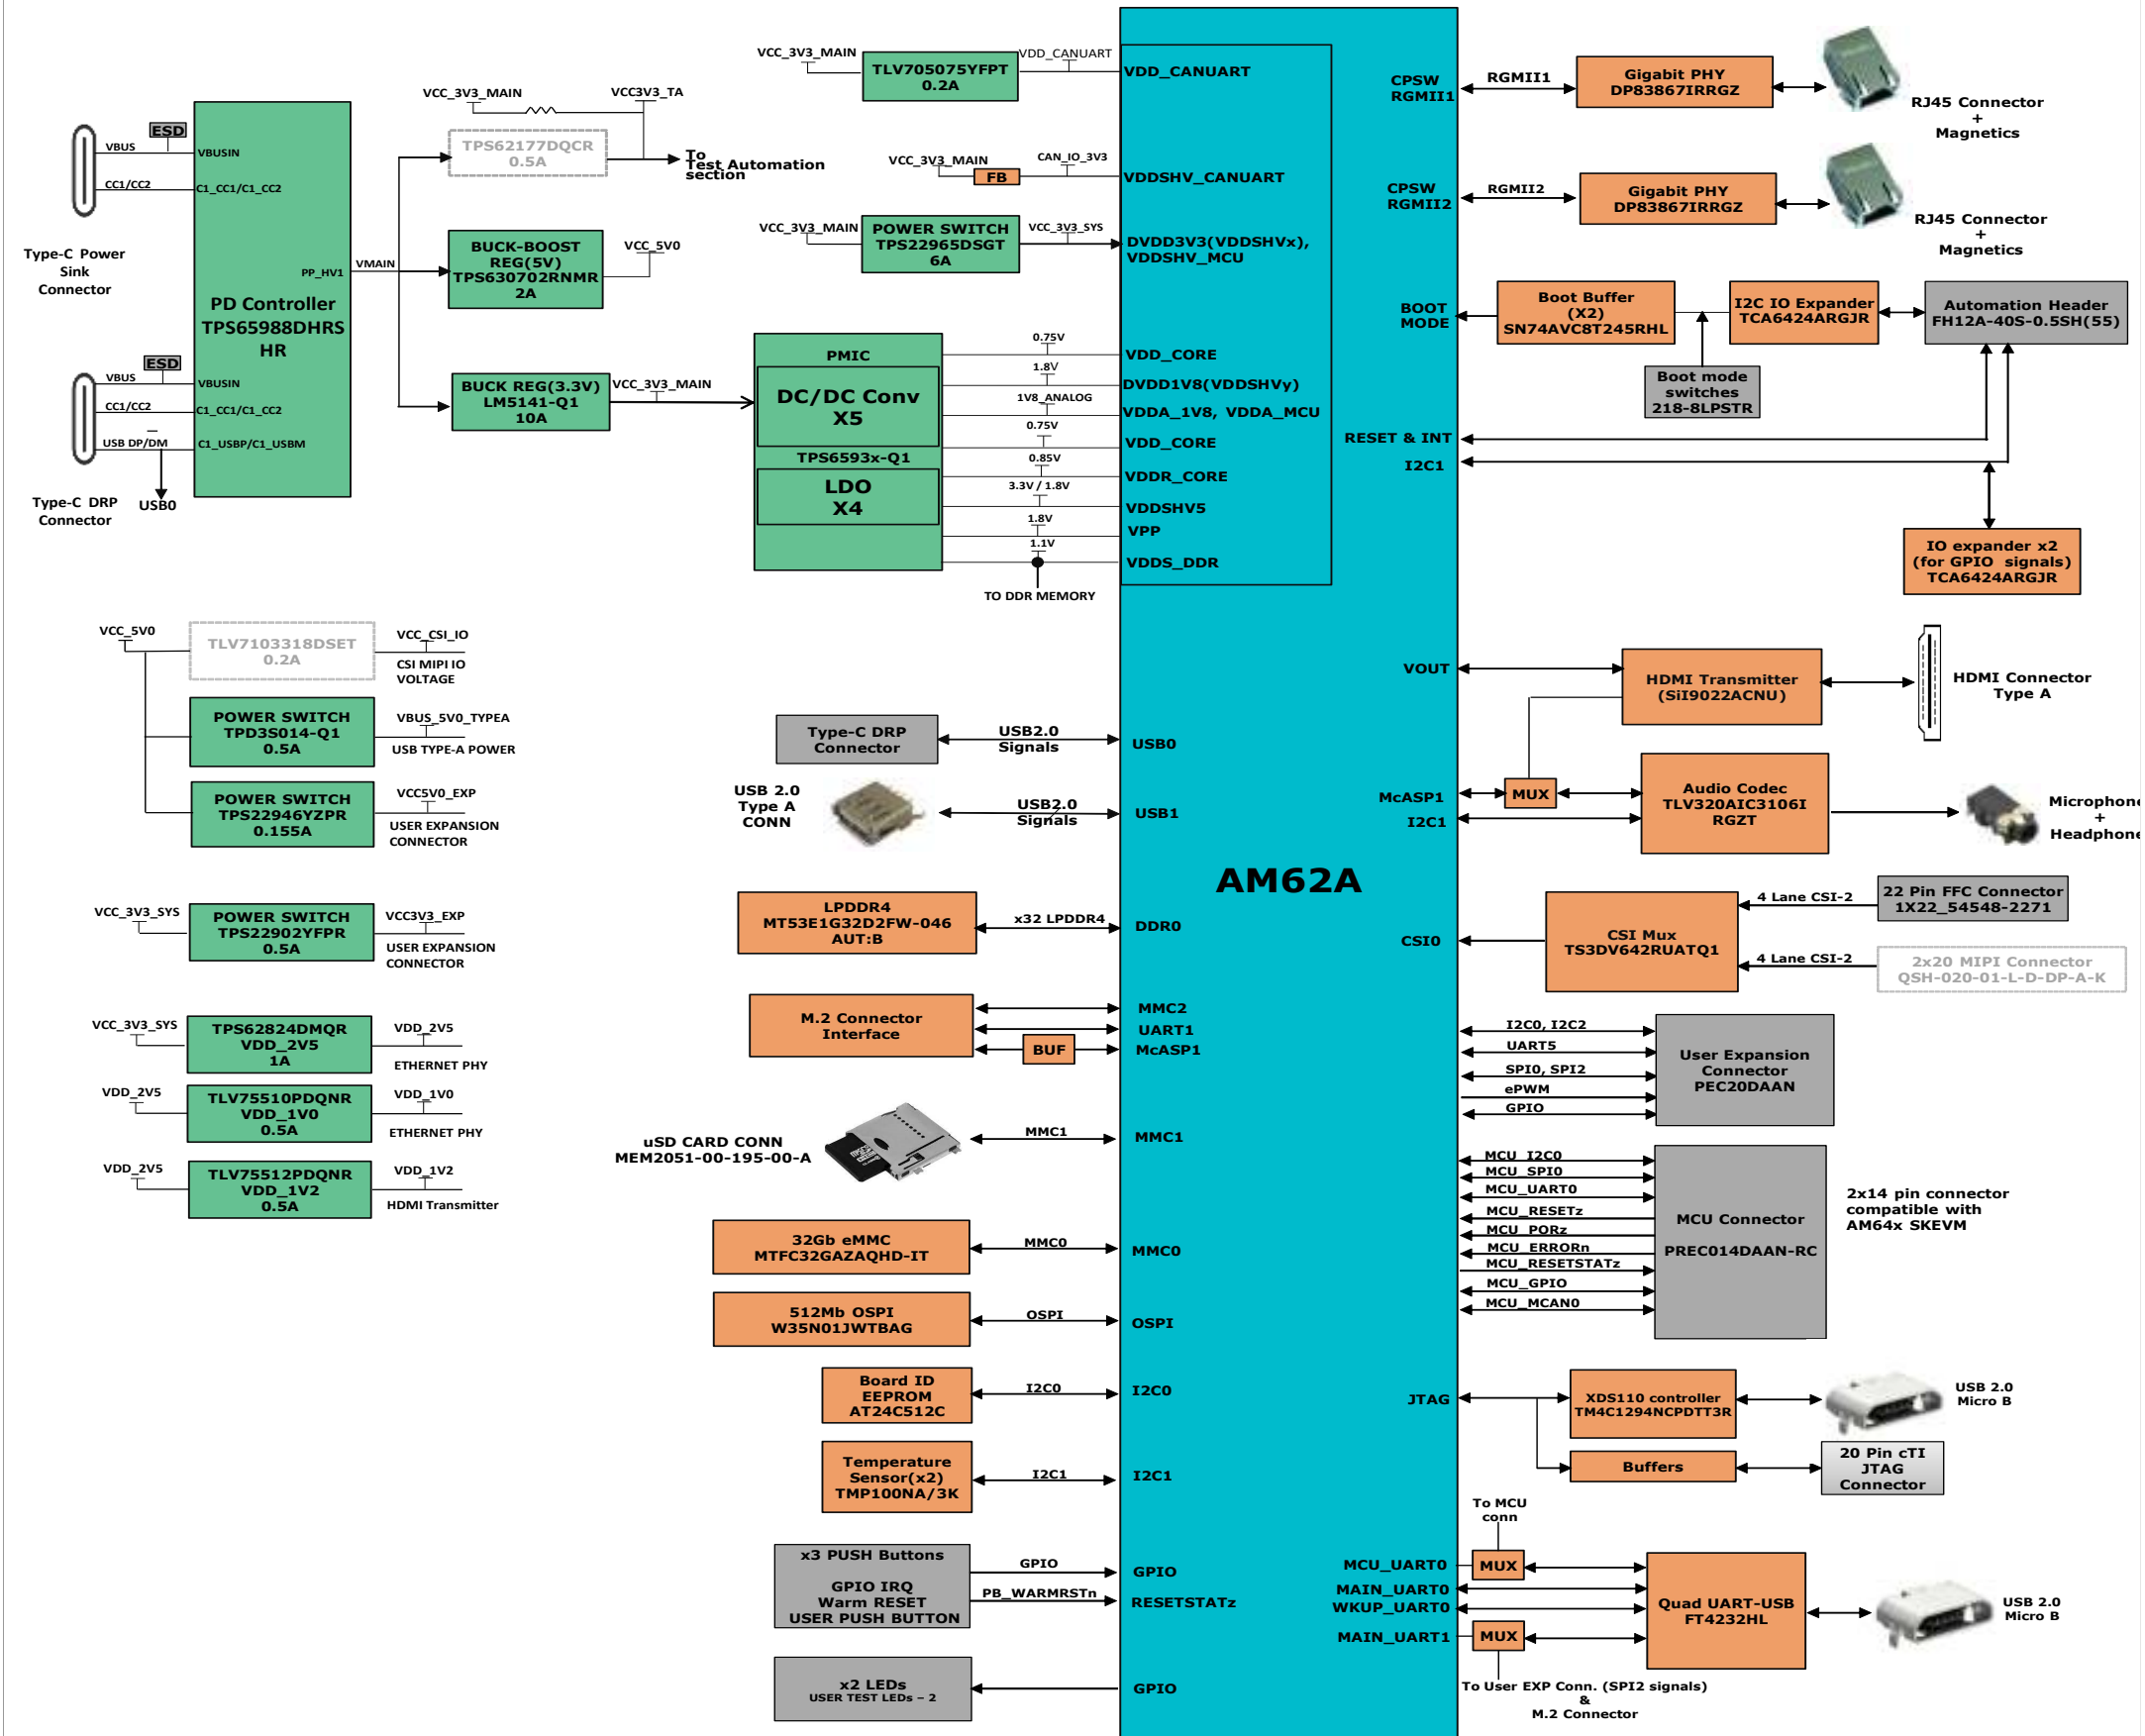


Designed for TI by Mistral Solutions Pvt Ltd




Title BLOCK DIAGRAM AM62A_SKEVM

Size	PROC135A	Rev
C		A
Date:	Wednesday, August 09, 2023	Sheet 3 of 44


BLOCK DIAGRAM_XDS110

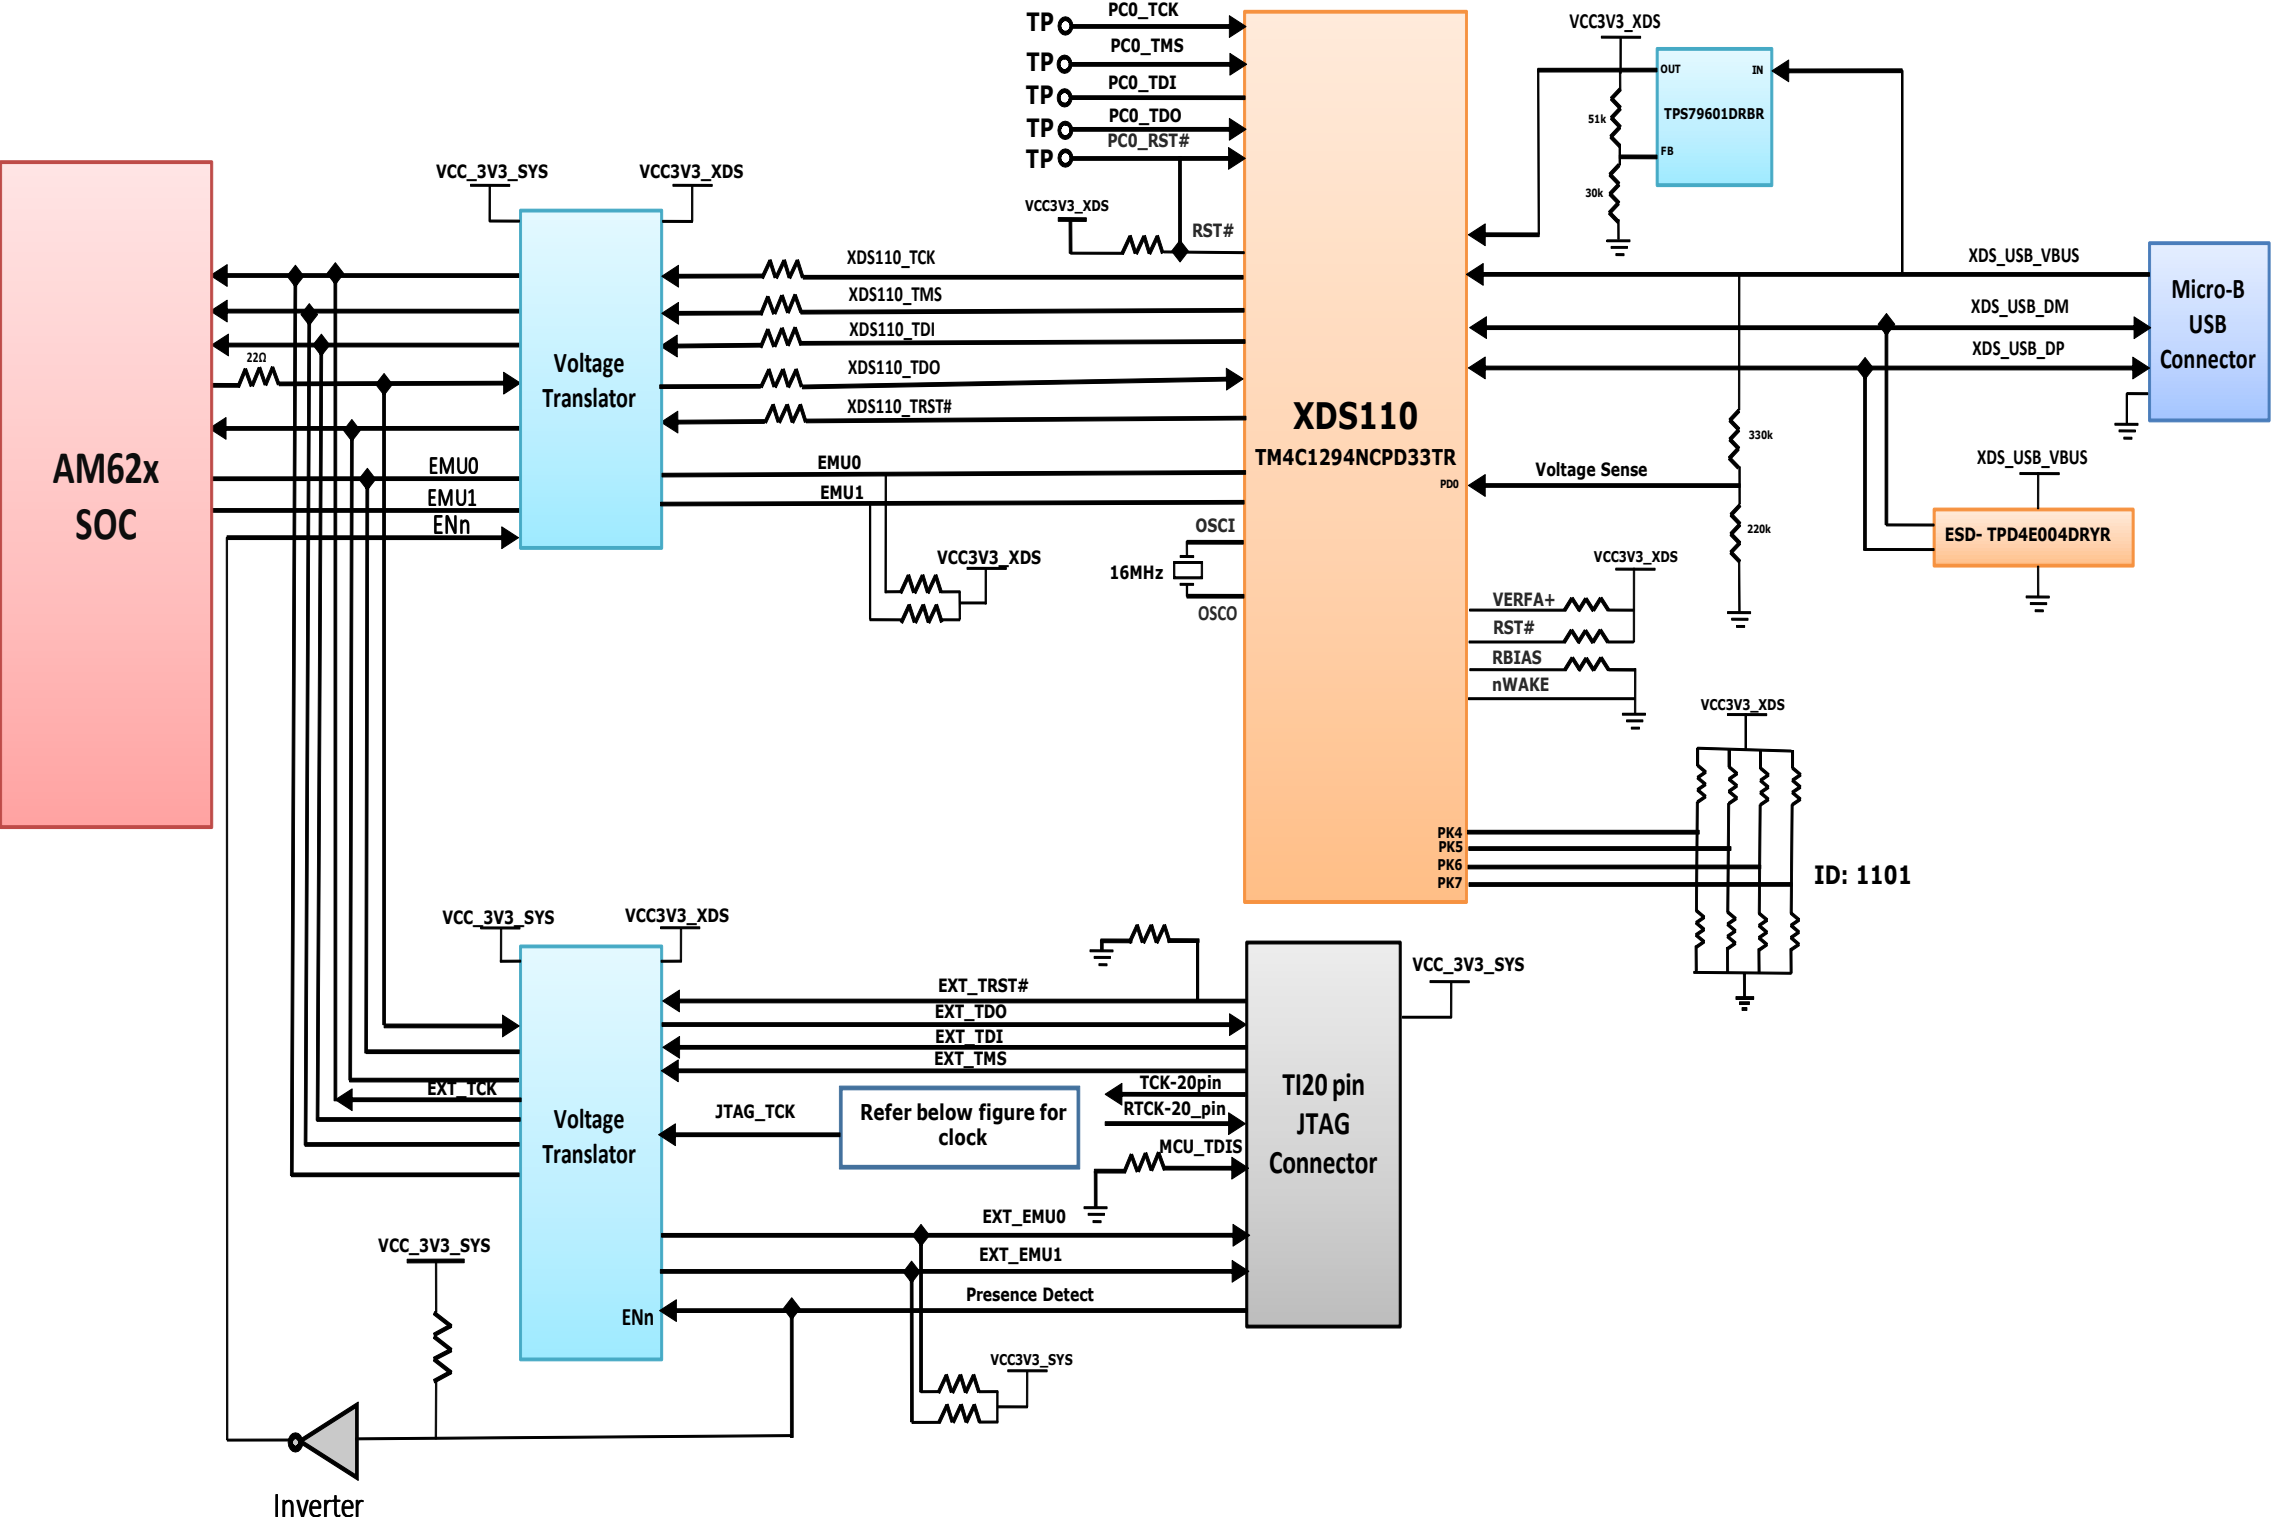

POWER BLOCK DGM

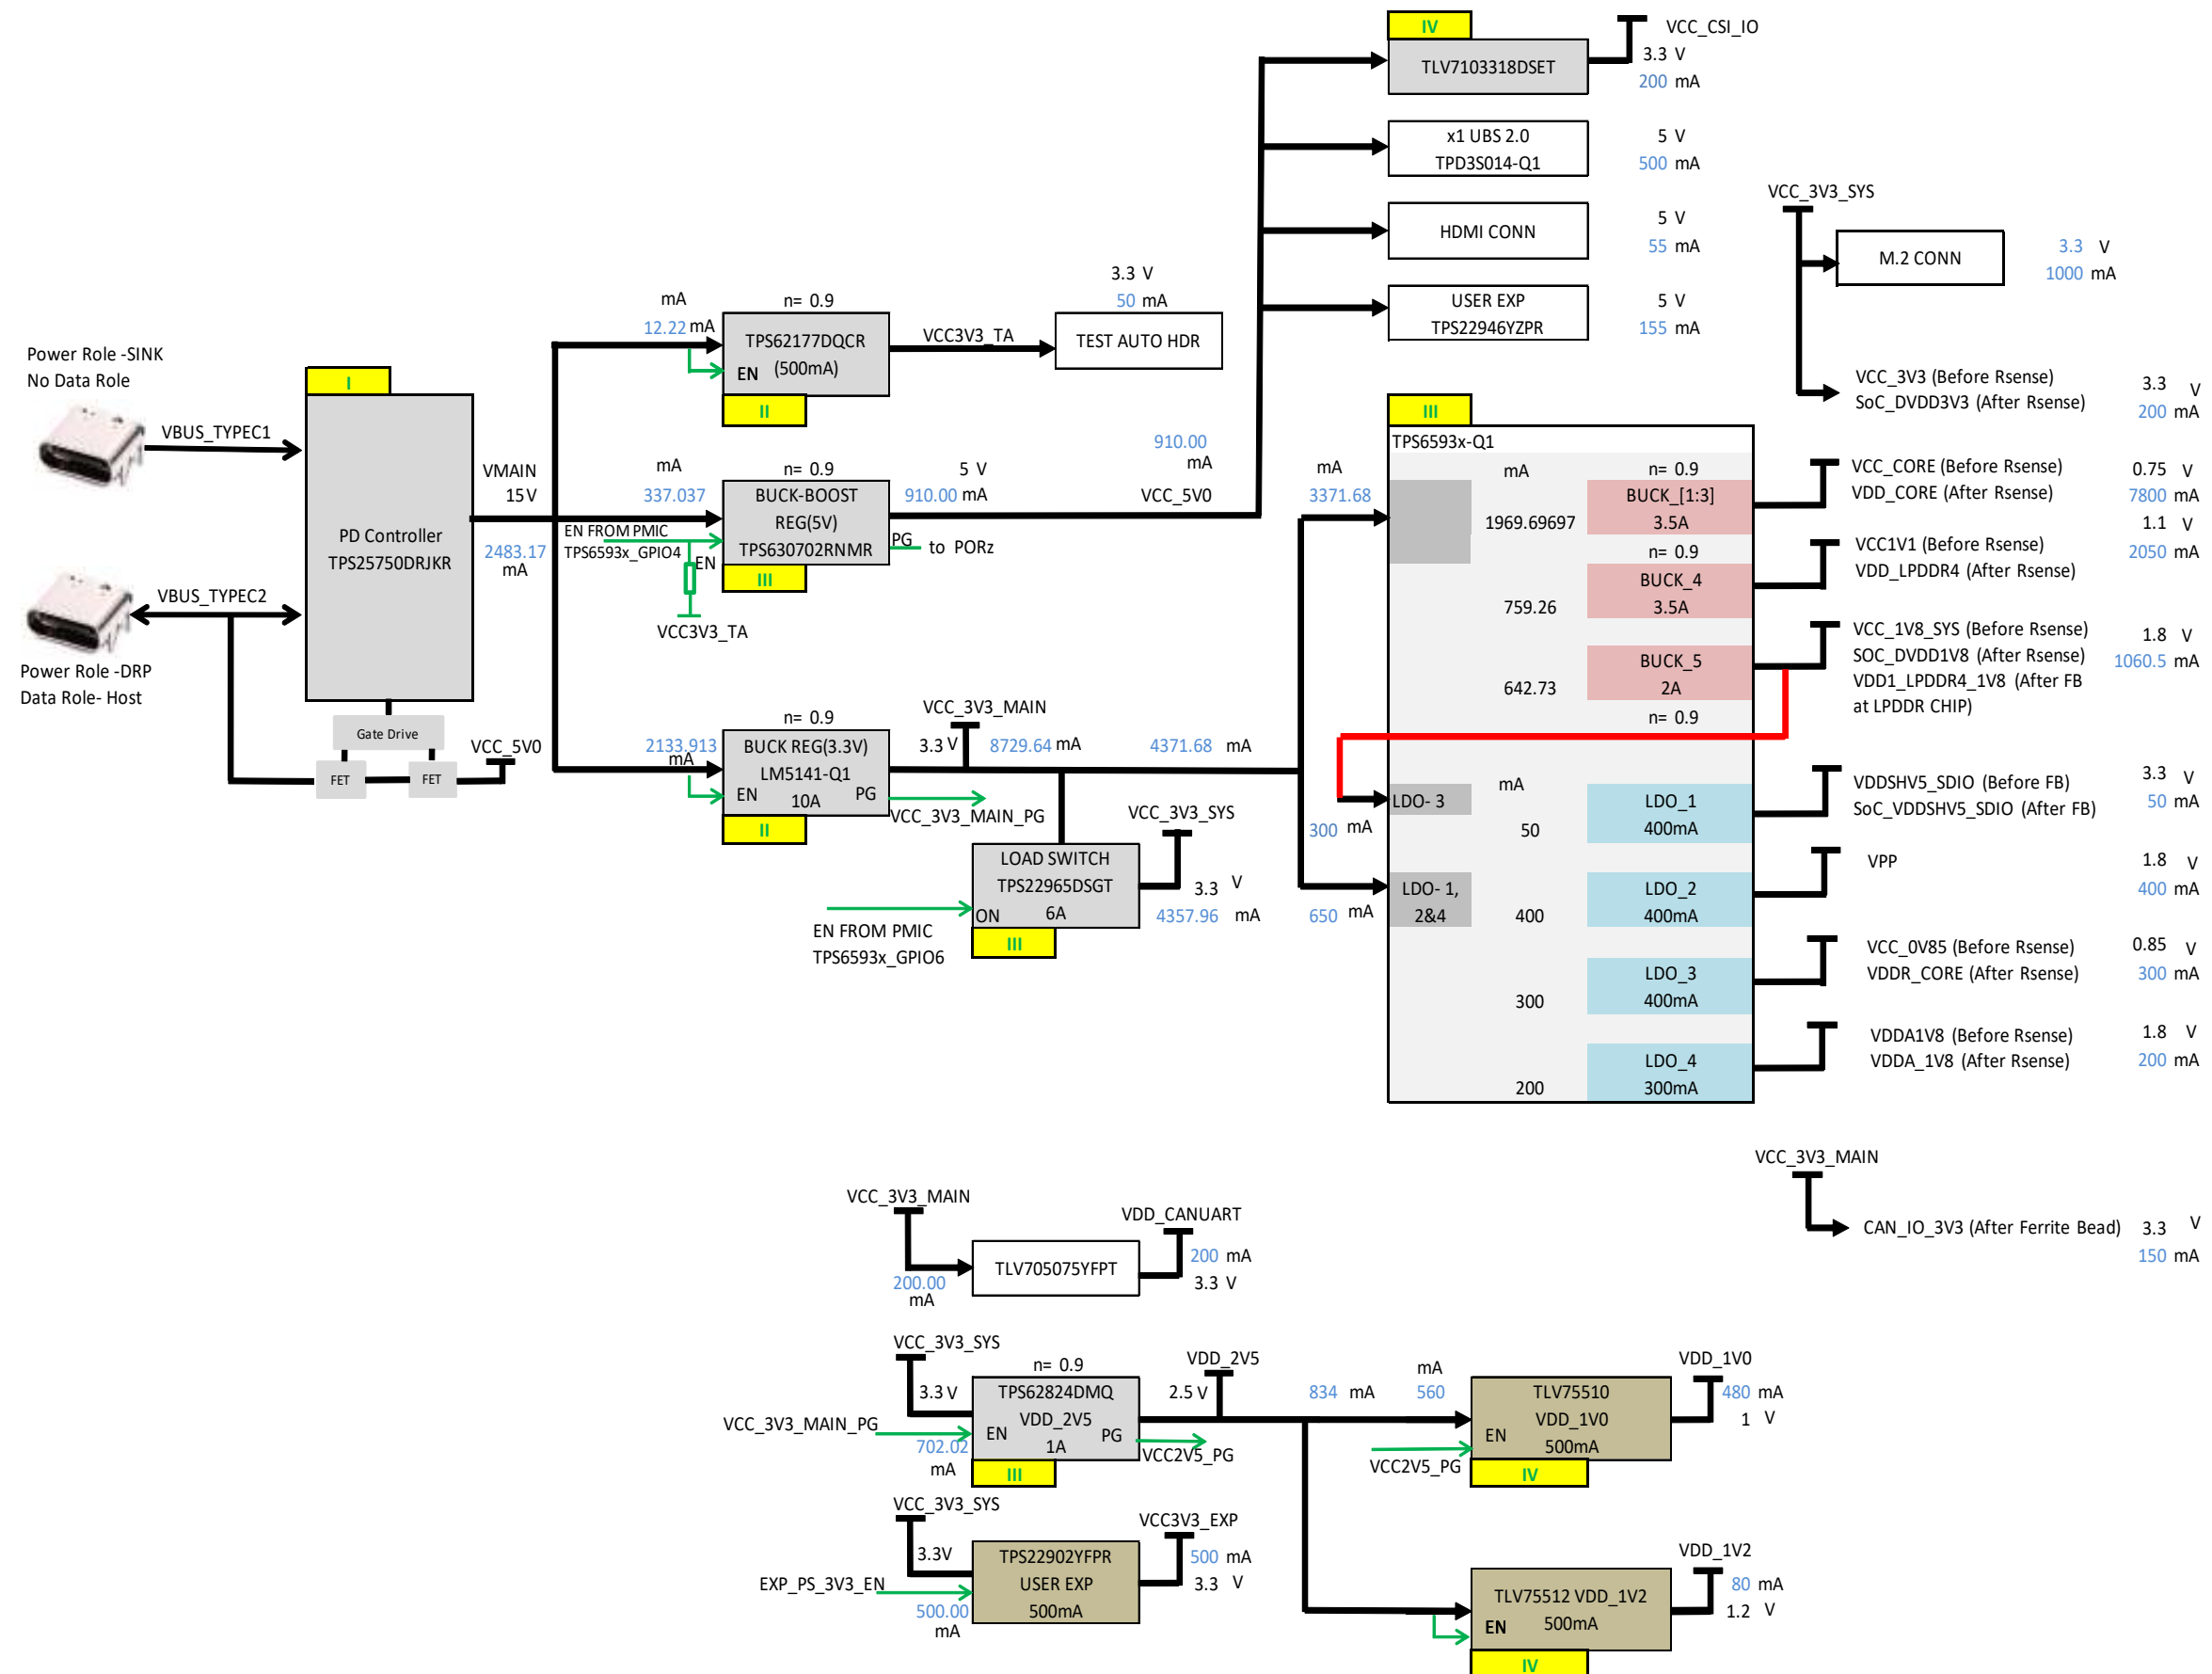

POWER SEQUENCE

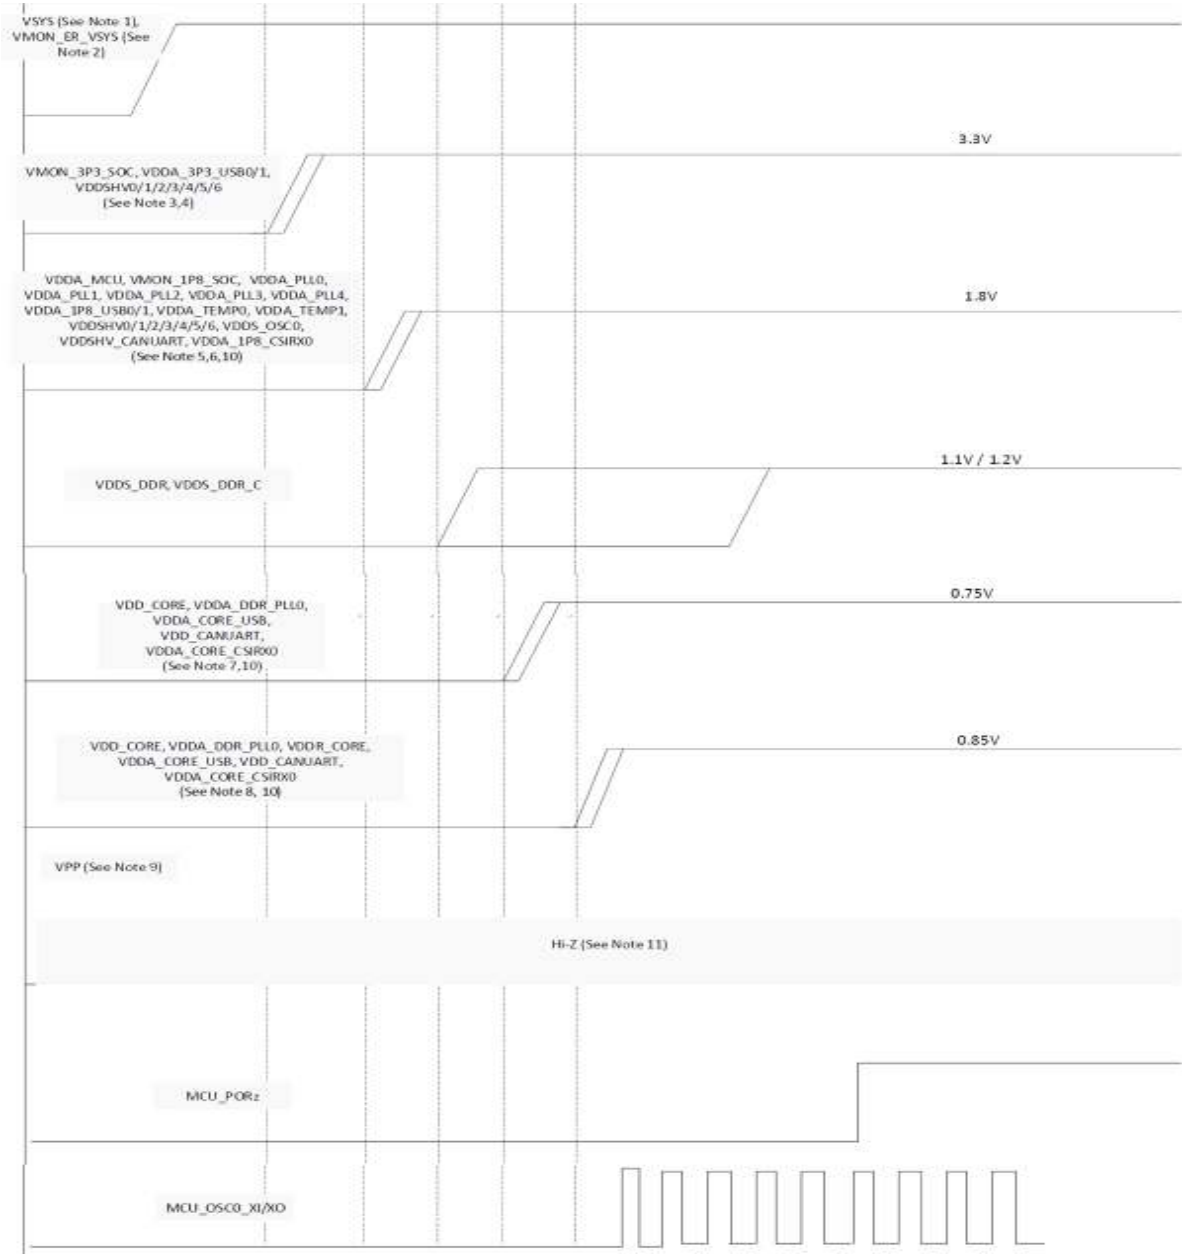

Notes:


1. VSYS represents the name of a supply which sources power to the entire system. This supply is expected to be a pre-regulated supply that sources power management devices which source all other supplies.
2. VMON_ER_VSYS input is used to monitor VSYS via an external resistor divider circuit. For more information, see Section 7.3.4, System Power Supply Monitor Design Guidelines.
3. VDDSHV_MCU and VDDSHVx [x=0-6] are dual voltage IO supplies which can be operated at 1.8V or 3.3V depending on the application requirements. When any of the VDDSHV_MCU or VDDSHVx [x=0-6] IO supplies are operating at 3.3V, they shall be ramped up with other 3.3V supplies during the 3.3V ramp period defined by this waveform.
4. The VMON_3P3_SOC input is used to monitor supply voltage and shall be connected to the respective 3.3V supply source.
5. VDDSHV_MCU and VDDSHVx [x=0-6] are dual voltage IO supplies which can be operated at 1.8V or 3.3V depending on the application requirements. When any of the VDDSHV_MCU or VDDSHVx [x=0-6] IO supplies are operating at 1.8V, they shall be ramped up with other 1.8V supplies during the 1.8V ramp period defined by this waveform.
6. The VMON_IP8_SOC input is used to monitor supply voltage and shall be connected to the respective 1.8V supply source.
7. VDD_CORE, VDDA_DDR_PLL0, VDD_CANUART, VDDA_CORE_USB, and VDDA_CORE_CSIRX0 can be operate at 0.75V or 0.85V. When VDD_CORE is operating at 0.75V then VDDA_DDR_PLL0, VDD_CANUART, VDDA_CORE_USB0/1, and VDDA_CORE_CSIRX0 shall also operate 0.75V and shall be ramped up prior to all 0.85V supplies as shown in this waveform.
8. VDD_CORE, VDDA_DDR_PLL0, VDD_CANUART, VDDA_CORE_USB, and VDDA_CORE_CSIRX0 can be operated at 0.75V or 0.85V. When VDD_CORE is operating at 0.85V then VDDA_DDR_PLL0, VDD_CANUART, VDDA_CORE_USB, and VDDA_CORE_CSIRX0 shall also operate at 0.85V and shall be ramped up with other 0.85V supplies during the 0.85V ramp period defined by this waveform.
9. VPP is the 1.8V eFuse programming supply, which shall be left floating (HiZ) or grounded during power-up/down sequences and during normal device operation. This supply shall only be sourced while programming eFuse.
10. VDDA_CORE_CSIRX0 and VDDA_IP8_CSIRX0 are analog supplies that for the CSI DPHY. If CSI is not used then these supplies may be shorted to ground.

Designed for TI by Mistral Solutions Pvt Ltd



Title POWER SEQUENCE		
Size	PROC135A	Rev
C		A
Date:	Wednesday, August 09, 2023	Sheet 6 of 44

I2C TREE

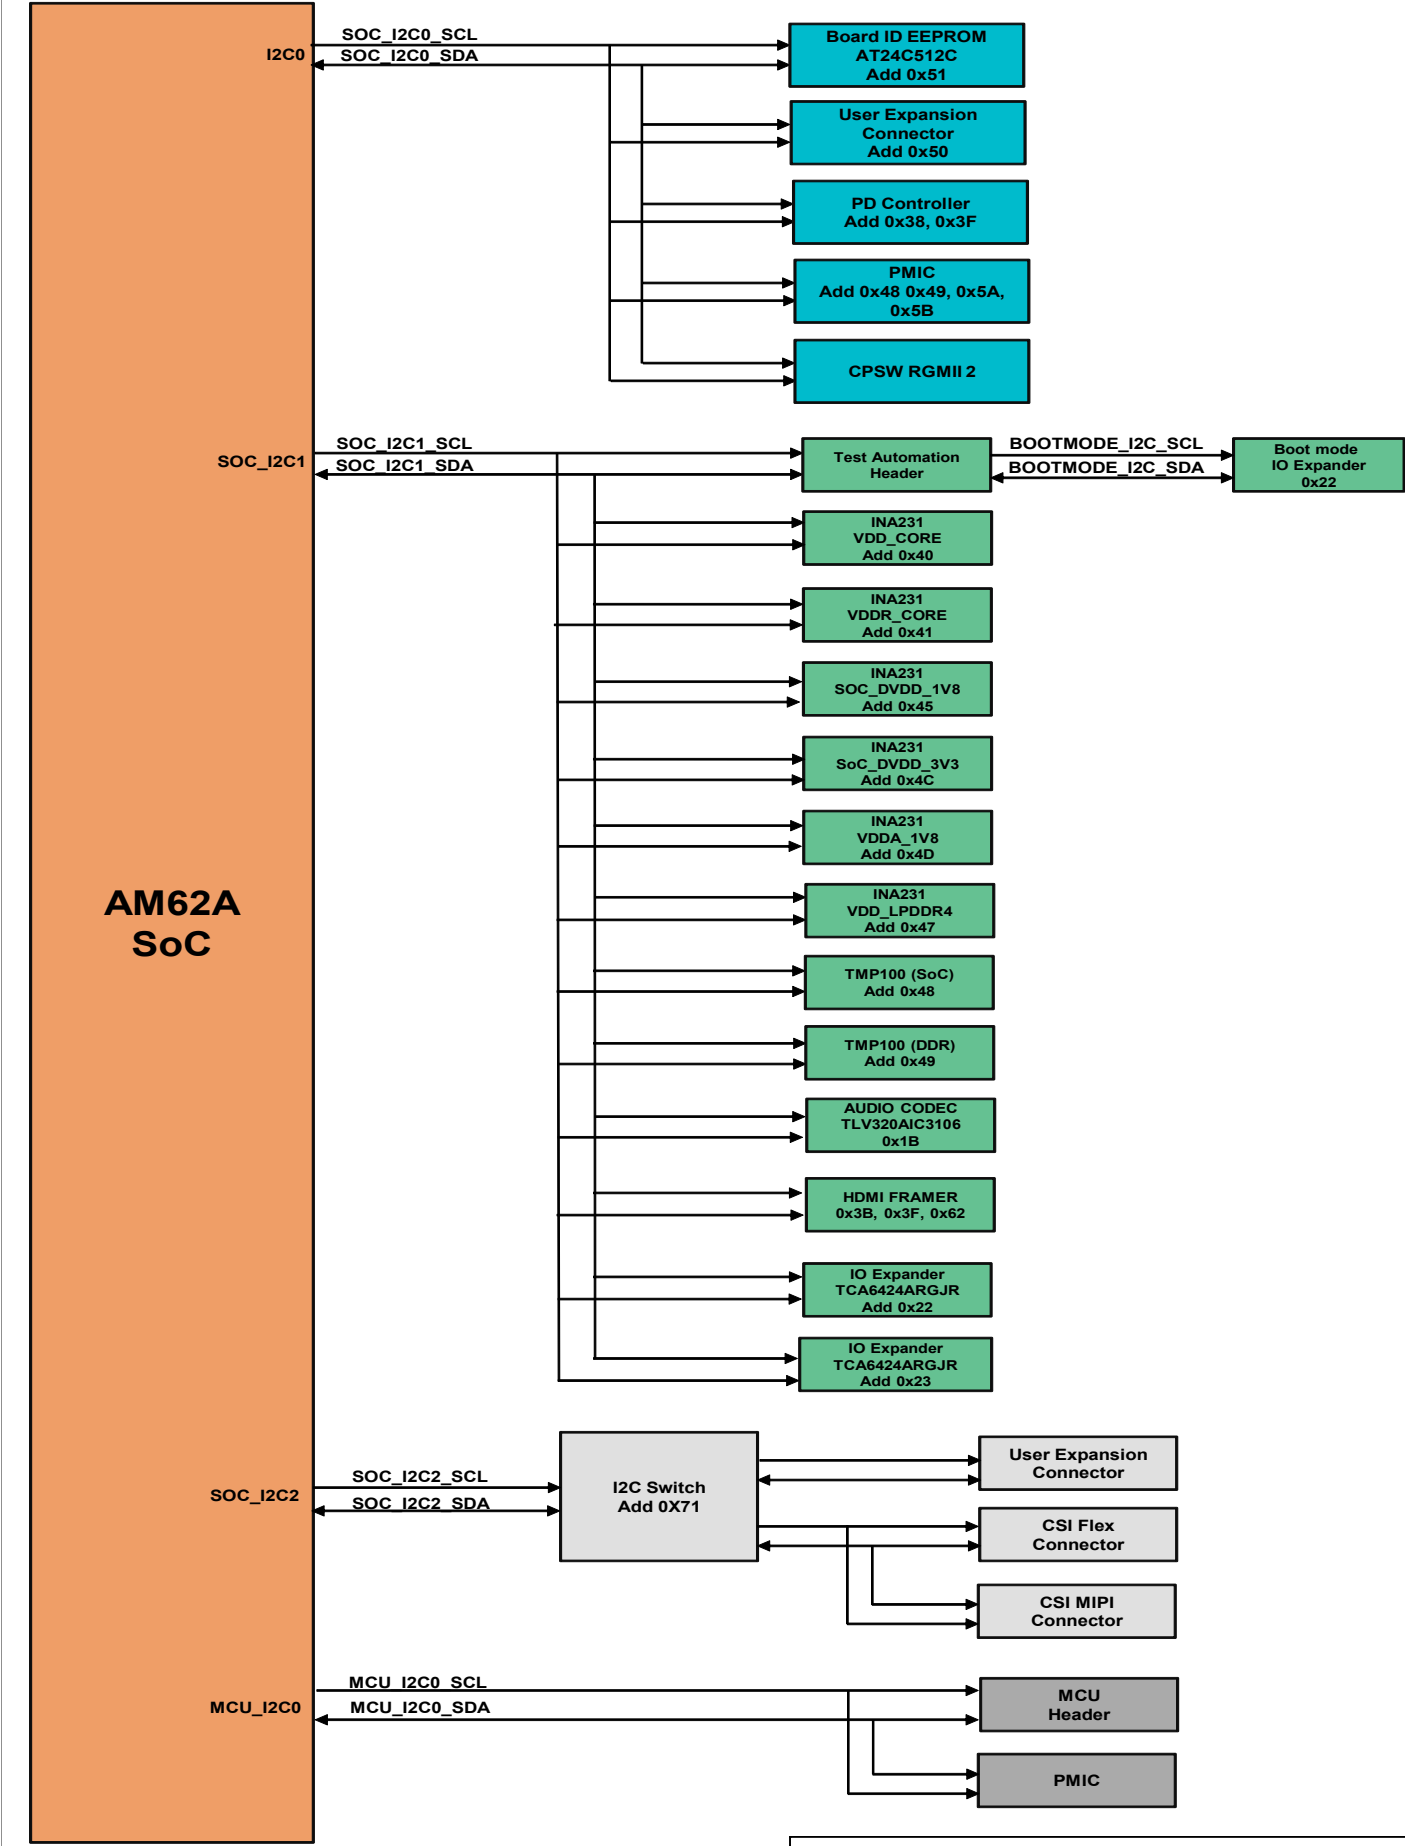

Designed for TI by Mistral Solutions Pvt Ltd



Title I2C TREE		
Size	PROC135A	Rev
C		A
Date:	Wednesday, August 09, 2023	Sheet 7 of 44

GPIO MAPPING TABLE

SL NO.	GPIO DESCRIPTION	GPIO NETNAME	FUNCTIONALITY	GPIO USED	PACKAGE SIGNAL NAME	DIRECTION WITH RESPECT TO CONTROL	DEFAULT STATE	ACTIVE STATE	VOLTAGE DOMAIN ON SOC SIDE	VOLTAGE RAIL CONNECTED ON SKEVM
1	Enable for WLAN Interface	WLAN_EN	ENABLE	GPIO0_71	MMC2_SDCD	OUTPUT	LOW	HIGH	VDDSHV6	SoC_DVDD1V8
2	WLAN Interrupt	WLAN_IRQ	INTERRUPT	GPIO0_72	MMC2_SDWP	INPUT	HIGH	LOW	VDDSHV6	SoC_DVDD1V8
3	Enable for BT Interface	BT_EN_SOC	ENABLE	MCU_GPIO0_0	MCU_SPIO_CS0	OUTPUT	LOW	HIGH	VDDSHV_MCU	SoC_DVDD3V3
4	CPSW Ethernet PHY Interrupt	CPSW_RGMII_INTn	INTERRUPT	GPIO1_31	EXTINTn	INPUT	HIGH	LOW	VDDSHV0	SoC_DVDD3V3
5	OSPI Reset Control GPIO	GPIO_OSPI_RSTn	RESET	GPIO0_12	OSPI0_CSn1	OUTPUT	HIGH	LOW	VDDSHV1	SoC_DVDD1V8
6	MCU Header GPIO0_16	MCU_GPIO0_16	GPIO	MCU_GPIO0_16	MCU_MCAN1_RX	NA	NA	NA	VDDSHV_CANUART	CAN_IO_3V3
7	MCU Header GPIO0_15	MCU_GPIO0_15	GPIO	MCU_GPIO0_15	MCU_MCAN1_TX	NA	NA	NA	VDDSHV_CANUART	CAN_IO_3V3
8	PMIC Interrupt	PMIC_INT_B	INTERRUPT	GPIO0_31	EXTINTn	INPUT	HIGH	LOW	VDDSHV3	SoC_DVDD3V3
9	CAN-FD fast wake up signal from switch	CAN_FD_WKUP_SW_INH	INTERRUPT	MCU_GPIO0_15	MCU_MCAN1_TX	INPUT	HIGH	LOW	VDDSHV_CANUART	CAN_IO_3V3
10	CAN-FD fast wake signal from MCU header	CAN_FD_WKUP_HDR_INH								
11	Interrupt signal from Automotive Ethernet ADD-ON board	CPSW_ETH2_INH								
12	User test LED control signal	SOC_GPIO1_49	GPIO	GPIO1_49	MMC1_SDWP	OUTPUT	LOW	HIGH	VDDSHV0	SoC_DVDD3V3
13	Watchdog trigger input signal for Watchdog Trigger mode	PMIC_WDOG_TRIGG	ENABLE	MCU_GPIO0_19	WKUP_I2CO_SCL	INPUT	LOW	HIGH	VDDSHV_MCU	SoC_DVDD3V3
14	WKUP Signal from RGMII2	CPSW_ETH2_WAKE	INTERRUPT	MCU_GPIO0_20	WKUP_I2CO_SDA	INPUT	LOW	HIGH	VDDSHV_MCU	SoC_DVDD3V3
15	User EXP Conn GPIO	EXP_GPIO1_22	GPIO	GPIO1_22	UART0_CTSn	NA	NA	NA	VDDSHV0	SoC_DVDD3V3
16	IO Expander Interrupt	GPIO1_23_INTn	INTERRUPT	GPIO1_23	UART0_RTSn	INPUT	HIGH	LOW	VDDSHV0	SoC_DVDD3V3
17	User Interrupt									
18	User EXP Conn GPIO	EXP_GPIO0_14_LT	GPIO	GPIO0_14	OSPI0_CSn3	NA	NA	NA	VDDSHV1	SoC_DVDD1V8
19	PMIC Standby Disable	PMIC_LPM_EN0	ENABLE	MCU_GPIO0_22	PMIC_LPM_EN0	OUTPUT	HIGH	LOW	VDDSHV_CANUART	CAN_IO_3V3
20	User EXP Conn GPIO	EXP_EHRPWM1_B	GPIO	GPIO1_10	MCASP0_AXR0	NA	NA	NA	VDDSHV0	SoC_DVDD3V3
IO EXPANDER - 01										
1	Ethernet Daughter Card plug in detect	RGMII2_BRD_CONN_DET	DETECTION	IO EXPANDER-P00		INPUT	HIGH	LOW		VCC_3V3_SYS
2	CPSW Ethernet PHY-1 Reset Control GPIO	GPIO_CPSW1_RST	RESET	IO EXPANDER-P01		OUTPUT	HIGH	LOW		VCC_3V3_SYS
3	M.2 module Bluetooth LDO Enable	BT_EN_SOC	ENABLE	IO EXPANDER-P02		OUTPUT	HIGH	HIGH		VCC_3V3_SYS
4	SD Card Load Switch Enable	MMC1_SD_EN	ENABLE	IO EXPANDER-P03		OUTPUT	HIGH	HIGH		VCC_3V3_SYS
5	SOC eFuse Voltage(VPP=1.8V) Regulator Enable	VPP_EN	ENABLE	IO EXPANDER-P04		OUTPUT	NA	HIGH		VCC_3V3_SYS
6	EXP CONN 3.3V Power Switch Enable	EXP_PS_3V3_EN	ENABLE	IO EXPANDER-P05		OUTPUT	LOW	HIGH		VCC_3V3_SYS
7	EXP CONN 5V Power Switch Enable	EXP_PS_SV0_EN	ENABLE	IO EXPANDER-P06		OUTPUT	LOW	HIGH		VCC_3V3_SYS
8	EXP CONN HAT Board Detection	EXP_HAT_DETECT	DETECTION	IO EXPANDER-P07		INPUT	HIGH	LOW		VCC_3V3_SYS
9	Audio Codec Reset Control GPIO	GPIO_AUD_RSTn	RESET	IO EXPANDER-P10		OUTPUT	HIGH	LOW		VCC_3V3_SYS
10	eMMC Reset control GPIO	GPIO_EMMC_RSTn	RESET	IO EXPANDER-P11		OUTPUT	HIGH	LOW		VCC_3V3_SYS
11	SOC UART1 Mux Select	UART1_FET_BUF_EN	ENABLE	IO EXPANDER-P12		OUTPUT	HIGH	LOW		VCC_3V3_SYS
12	BT UART WKUP Signal	BT_UART_WAKE_SOC_3V3	INTERRUPT	IO EXPANDER-P13		INPUT	HIGH	LOW		VCC_3V3_SYS
13	HDMI Transmitter Reset Control GPIO	GPIO_HDMI_RSTn	RESET	IO EXPANDER-P14		OUTPUT	HIGH	LOW		VCC_3V3_SYS
14	Raspberry Pi Camera CSI0 GPIO1	CSI_GPIO0	INPUT/OUTPUT	IO EXPANDER-P15		NA	NA	NA		VCC_3V3_SYS
15	Raspberry Pi Camera CSI0 GPIO2	CSI_GPIO1	INPUT/OUTPUT	IO EXPANDER-P16		NA	NA	NA		VCC_3V3_SYS
16	WLAN Alert Interrupt	WLAN_ALERTn	INTERRUPT	IO EXPANDER-P17		INPUT	HIGH	LOW		VCC_3V3_SYS
17	HDMI Interrupt	HDMI_INTn	INTERRUPT	IO EXPANDER-P20		INPUT	HIGH	LOW		VCC_3V3_SYS
18	TEST GPIO2 from Test Automation Connector	TEST_GPIO2	GPIO	IO EXPANDER-P21		NA	HIGH	NA		VCC_3V3_SYS
19	MCASP1 Enable and Direction Control	MCASP1_FET_EN	ENABLE	IO EXPANDER-P22		OUTPUT	LOW	LOW		VCC_3V3_SYS
20		MCASP1_BUF_BT_EN	ENABLE	IO EXPANDER-P23		OUTPUT	LOW	HIGH		VCC_3V3_SYS
21		MCASP1_FET_SEL	DIRECTION CONTROL	IO EXPANDER-P24		OUTPUT	HIGH	-		VCC_3V3_SYS
22		UART1_FET_SEL	DIRECTION CONTROL	IO EXPANDER-P25		OUTPUT	HIGH	-		VCC_3V3_SYS
23		PD_I2C_IRQ	INTERRUPT	IO EXPANDER-P26		INPUT	HIGH	LOW		VCC_3V3_SYS
24	User Test LED 2	IO_EXP_TEST_LED	GPIO	IO EXPANDER-P27		OUTPUT	LOW	HIGH		VCC_3V3_SYS
IO EXPANDER – 02										
1	SoC SPI0 MUX Selection	SPIO_FET_SEL	CONTROL	IO EXPANDER-P20		OUTPUT	LOW	-		VCC_3V3_SYS
2	SoC SPI0 MUX Enable	SPIO_FET_OE	ENABLE	IO EXPANDER-P21		OUTPUT	LOW	LOW		VCC_3V3_SYS
3	CPSW Ethernet PHY-2 Reset Control GPIO	GPIO_CPSW2_RST	RESET	IO EXPANDER-P22		OUTPUT	HIGH	LOW		VCC_3V3_SYS
4	CSI flex and mipi MUX Selection	CSI_SEL2	CONTROL	IO EXPANDER-P23		OUTPUT	HIGH	-		VCC_3V3_SYS
5	CSI MUX Enable	CSI_EN	ENABLE	IO EXPANDER-P24		OUTPUT	HIGH	HIGH		VCC_3V3_SYS
6	Auto PHY mode config	AUTO_100M_1000M_CONFIG	CONTROL	IO EXPANDER-P25		OUTPUT	NA	NA		VCC_3V3_SYS
7	CSI I/O Voltage Select(VCC_CSI_IO)	CSI_VLDO_SEL	CONTROL	IO EXPANDER-P26		OUTPUT	LOW	-		VCC_3V3_SYS
8	WLAN Reset control GPIO	SOC_WLAN_SDIO_RST	RESET	IO EXPANDER-P27		OUTPUT	HIGH	LOW		VCC_3V3_SYS
9	Wilink Enable	WL_LT_EN	ENABLE	IO EXPANDER-P10		OUTPUT	HIGH	HIGH		VCC_3V3_SYS
10	CSI Reset Control GPIO	CSI_RSTz	RESET	IO EXPANDER-P11		OUTPUT	LOW	LOW		VCC_3V3_SYS






Designed for TI by Mistral Solutions Pvt Ltd




Title GPIO MAPPING TABLE

Size	PROC135A	Rev
C		A
Date:	Wednesday, August 09, 2023	Sheet 8 of 44

USB TYPE-C POWER

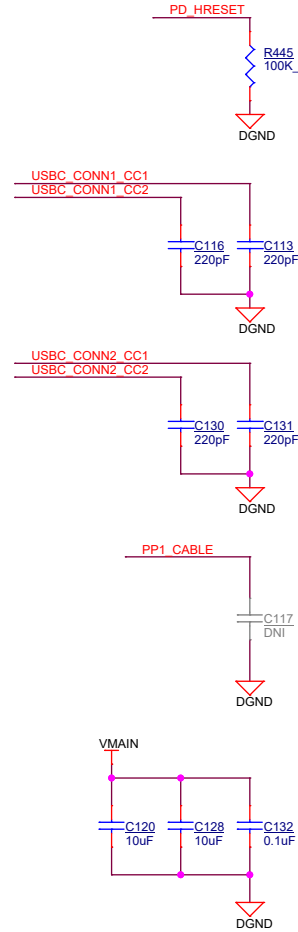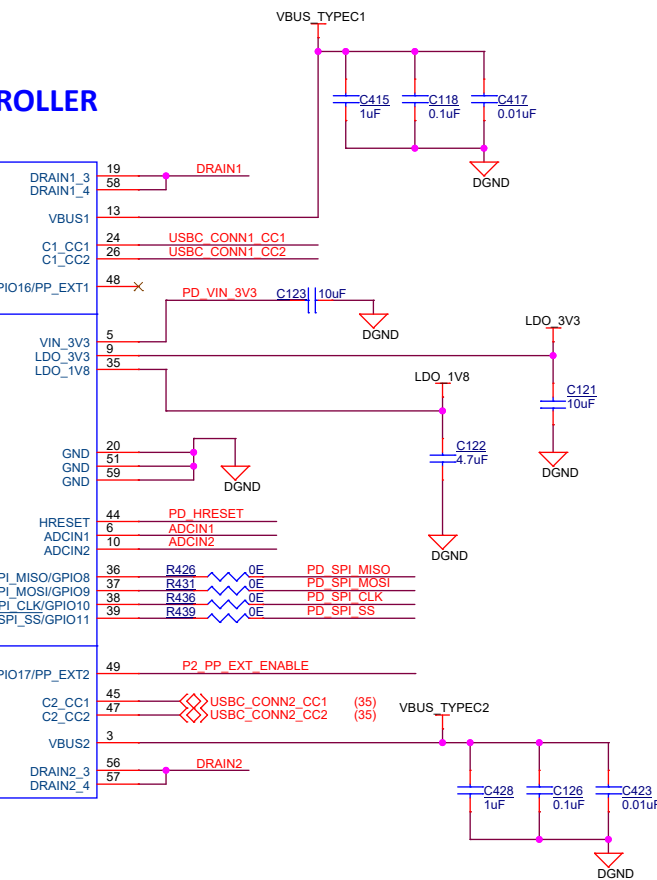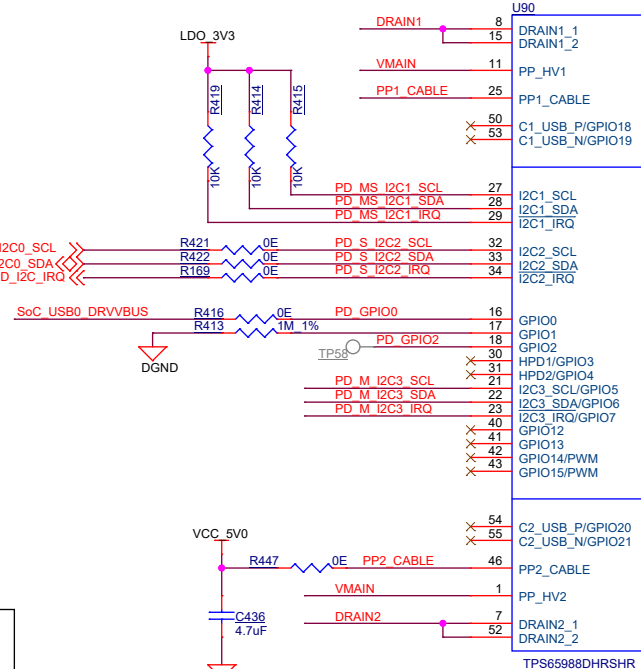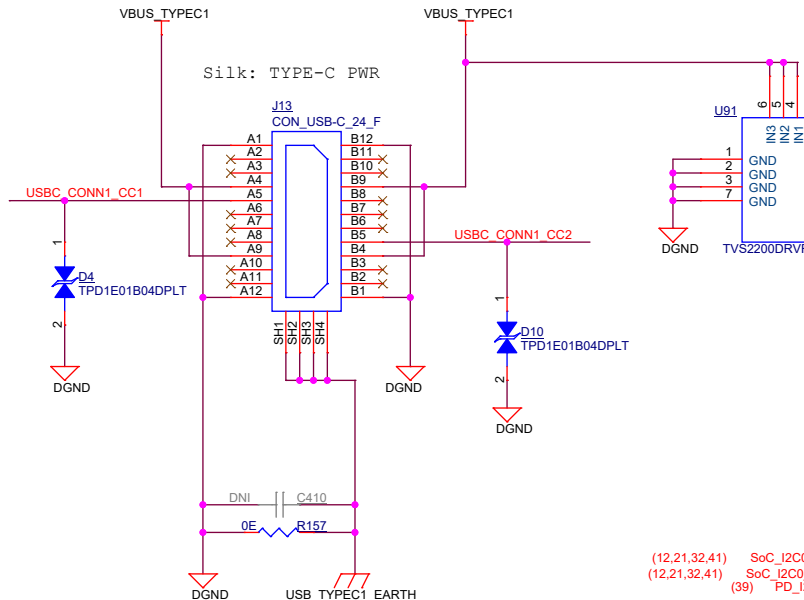


POWER INDICATION LED: VBUS_TYPEC

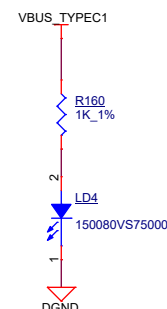


I2C Slave Address	Port1	Port2
I2C2(Default)	0x38	0x3F
I2C1	0x20	0x24


BP_NoWait
Safe Configuration

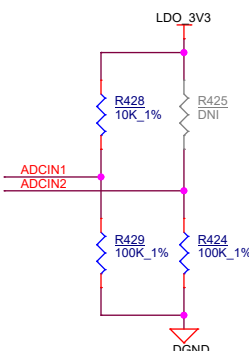

SPI EEPROM & PROGRAMMING HEADER

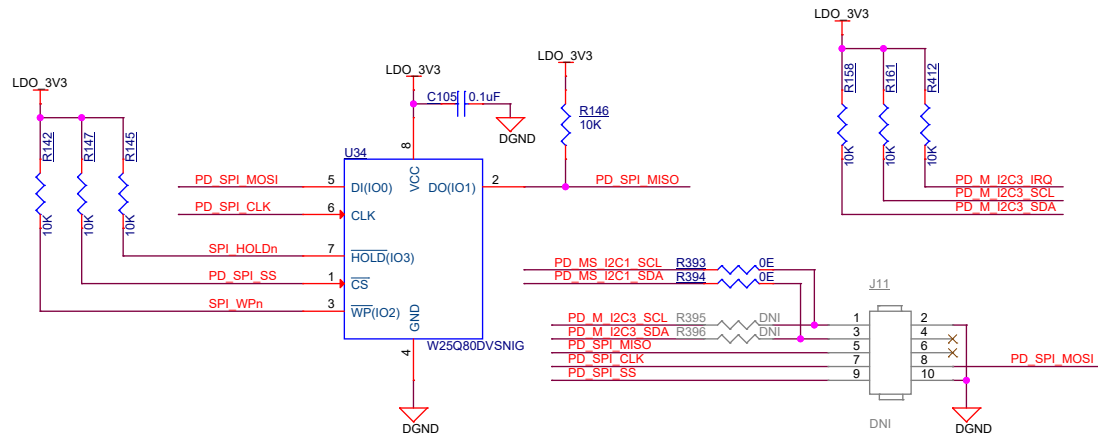

EXTERNAL POWER PATH FOR SOURCING, 5V/0.5A

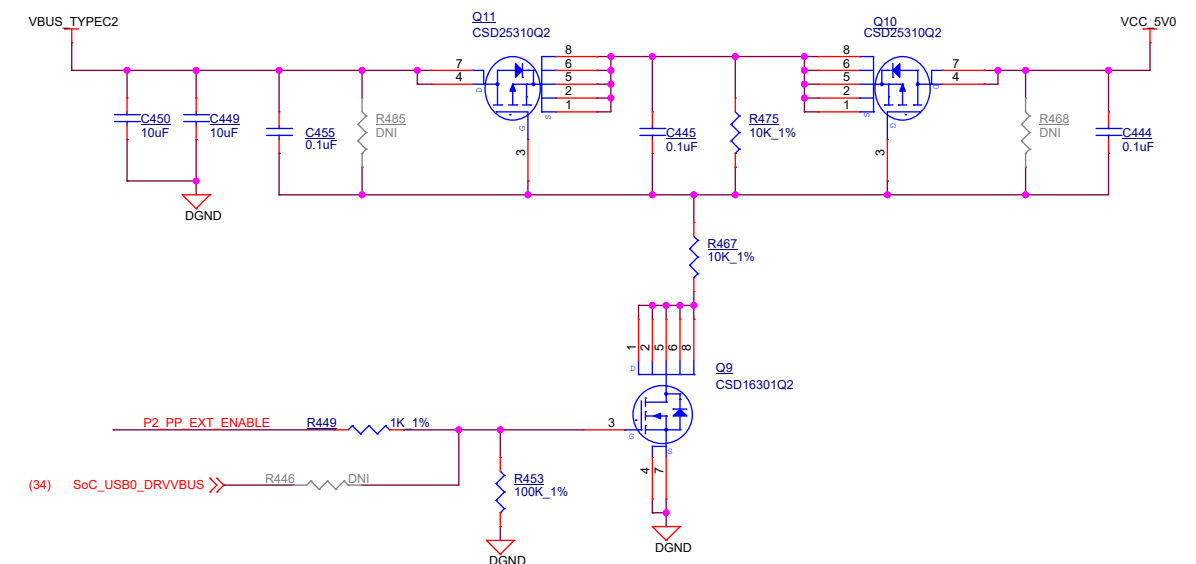

Designed for TI by Mistral Solutions Pvt Ltd



Title	USB TYPE-A
-------	------------

Size	BBOC125
------	---------

Date: Wednesday, August 09, 2023


Sheet 9 of 44

Re

4


PERIPHERAL POWER SUPPLY-1

VinMin = 4.5V
VinMax = 15V
Vout = 5V @ 2A

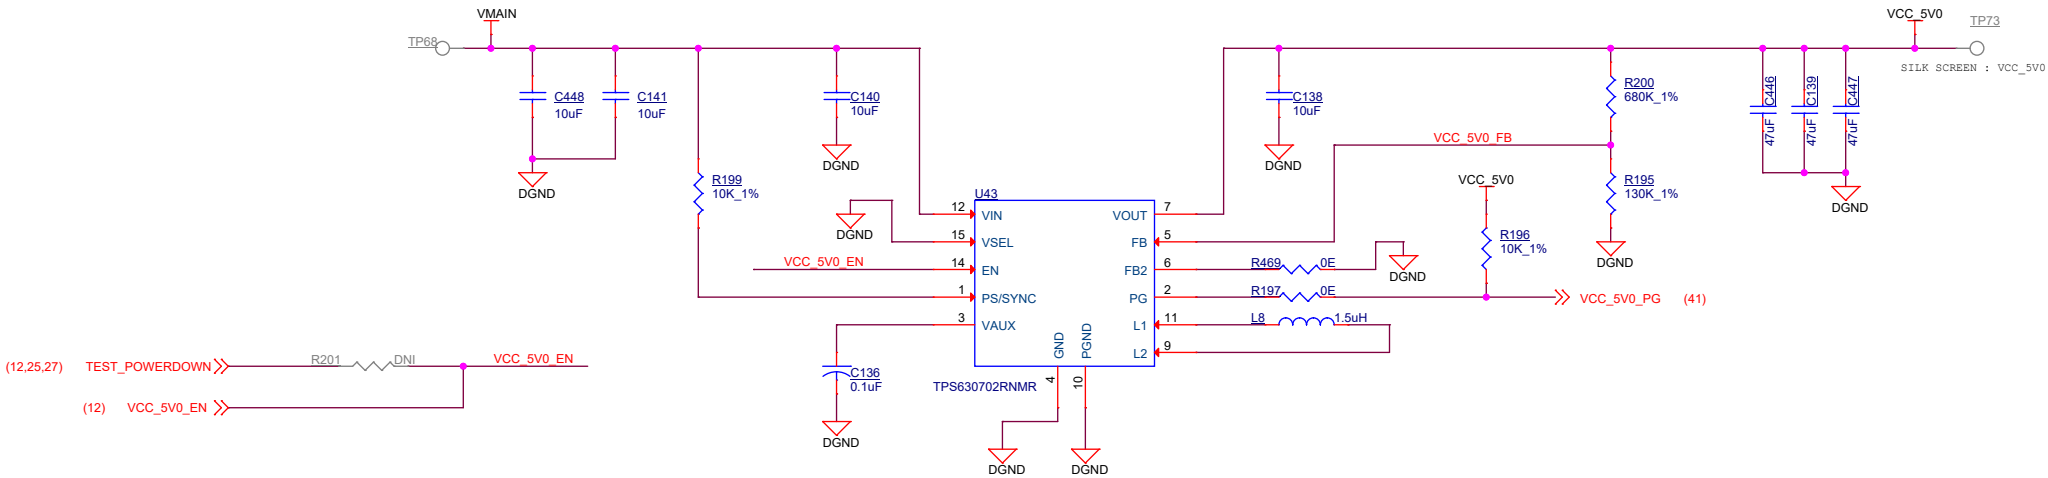


2.5V, 1.0AMPS SUPPLY

ETHERNET PHY

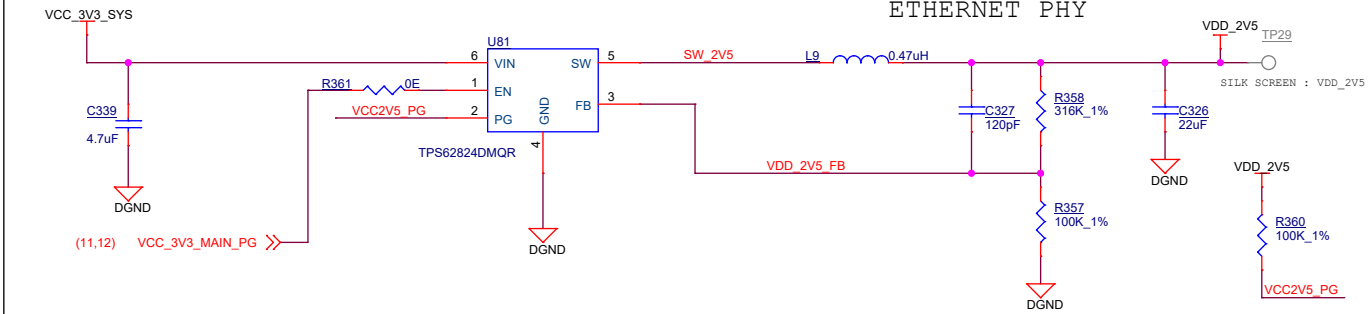


1.0V, 0.5AMPS SUPPLY

ETHERNET PHY

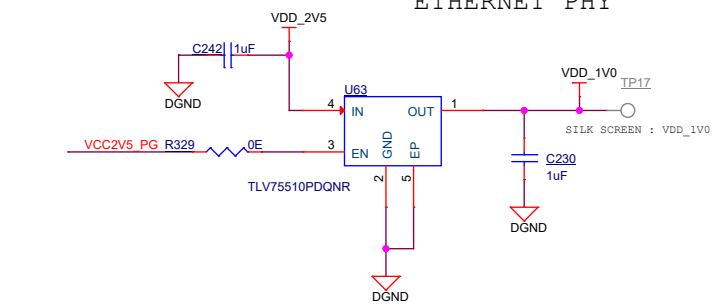

1.2V, 0.5AMPS SUPPLY

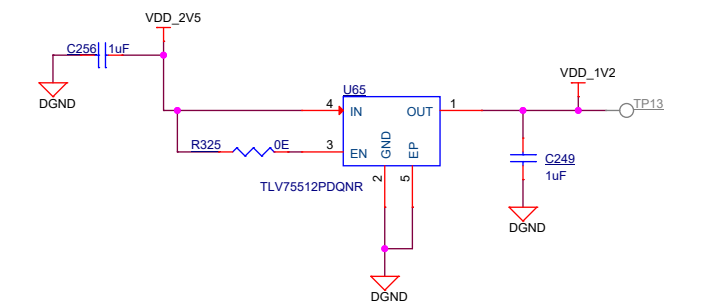

Designed for TI by Mistral Solutions Pvt Ltd



Title PERIPHERAL POWER SUPPLY -1

Size C

Date: Wednesday, August 09, 2023


Sheet 10 of 44

Rev A

PERIPHERAL POWER SUPPLY-2


3.3V, 10.0 AMPS SUPPLY

VinMin = 4.5V
VinMax = 15V
Vout = 3.3V @ 10A

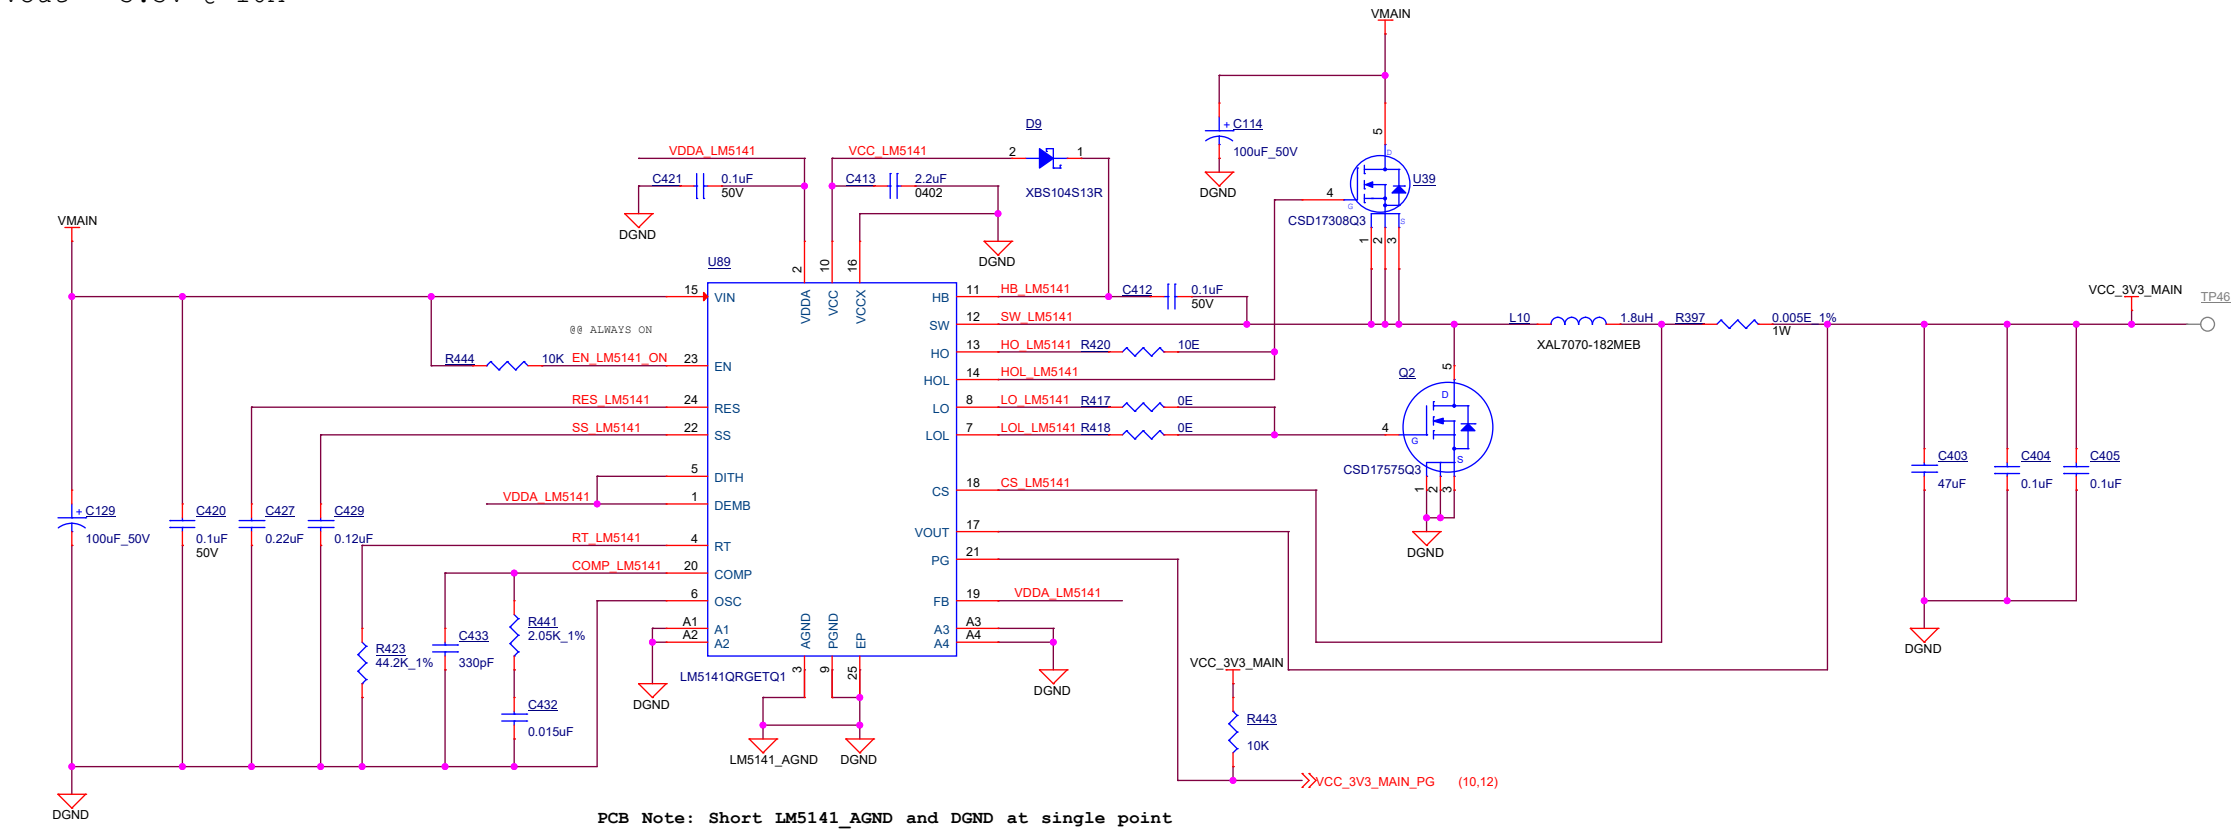

(33) ETH_CAN_INH_PREREG >> DNI R81 EN_LM5141_ON

GND TEST POINTS

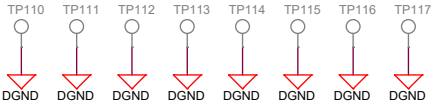

Designed for TI by Mistral Solutions Pvt Ltd



Title PERIPHERAL POWER SUPPLY-2

Size PROC135A





Rev

A







Date: Wednesday, August 09, 2023

Sheet 11 of 44

PMIC Config option

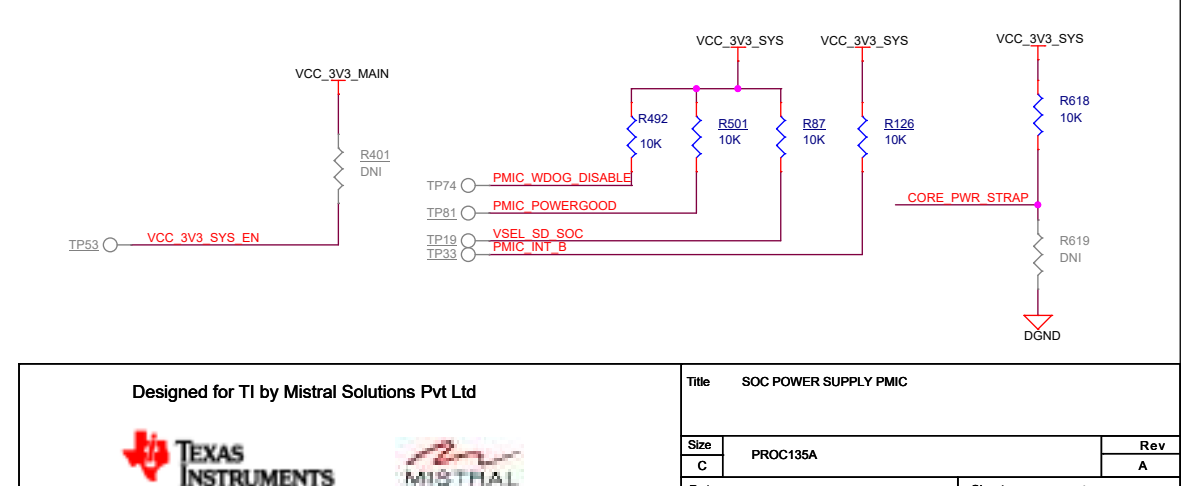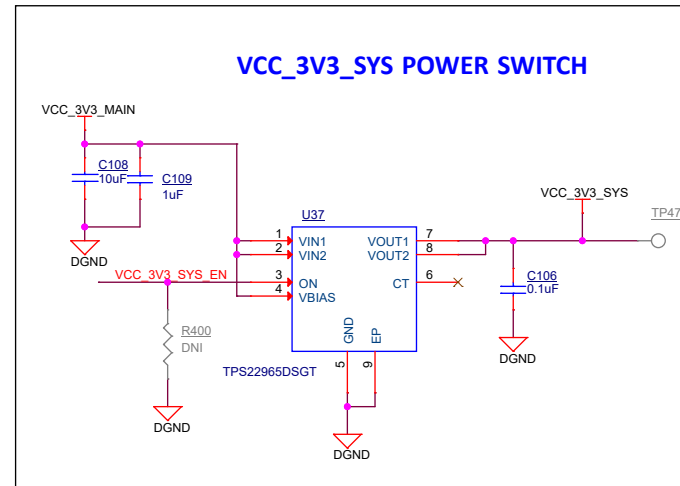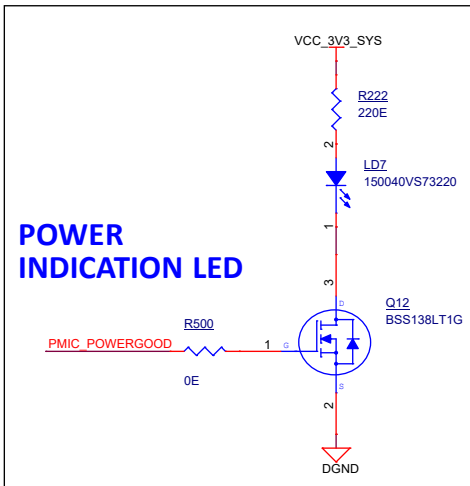
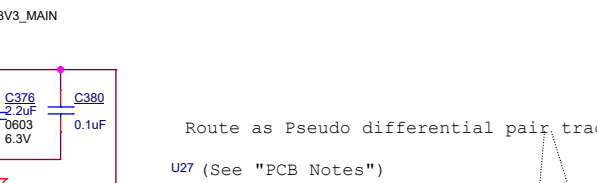


CURRENT MONITORING DEVICES

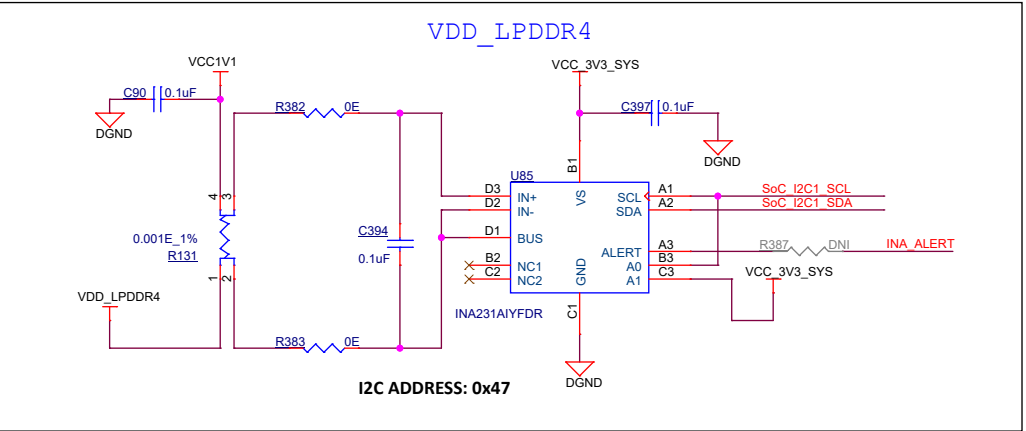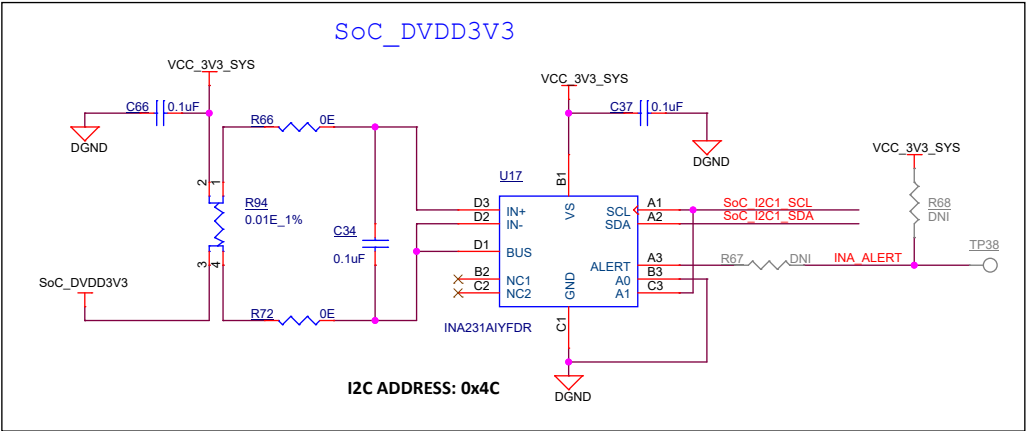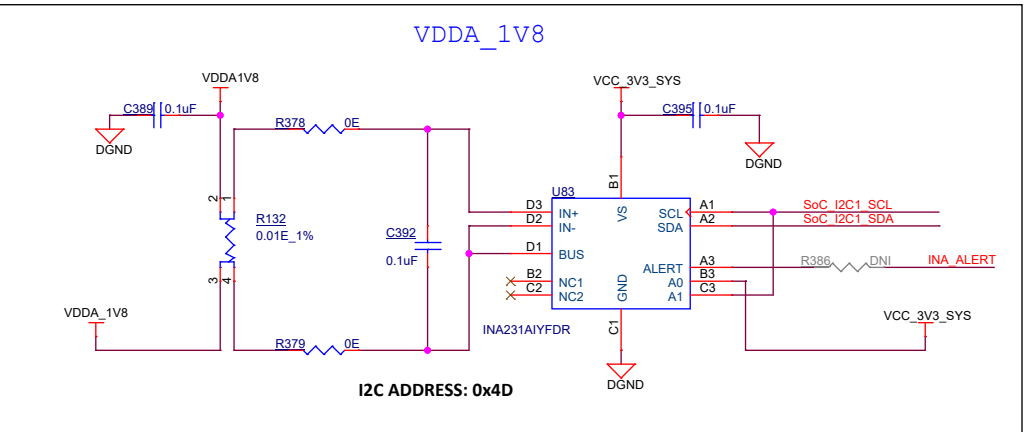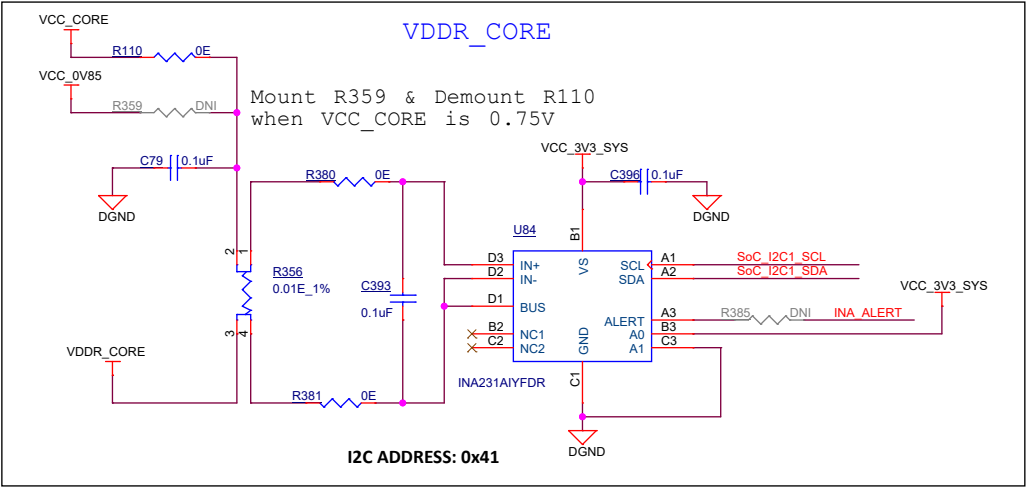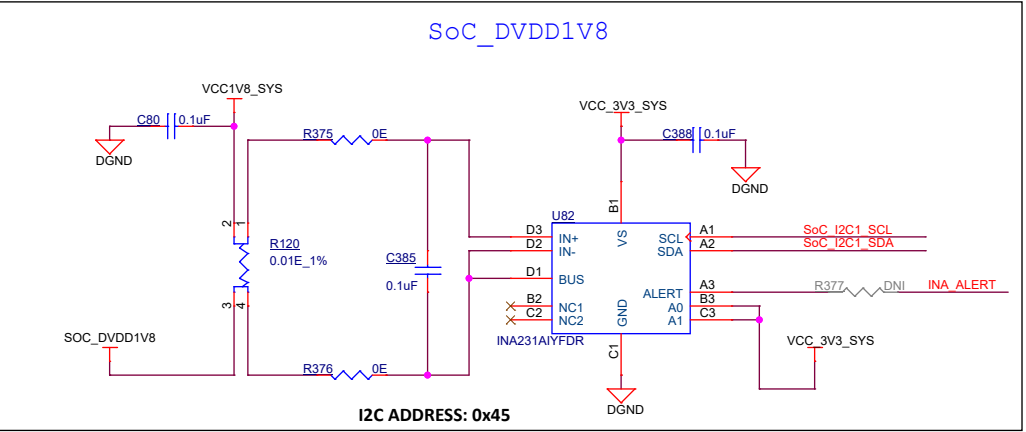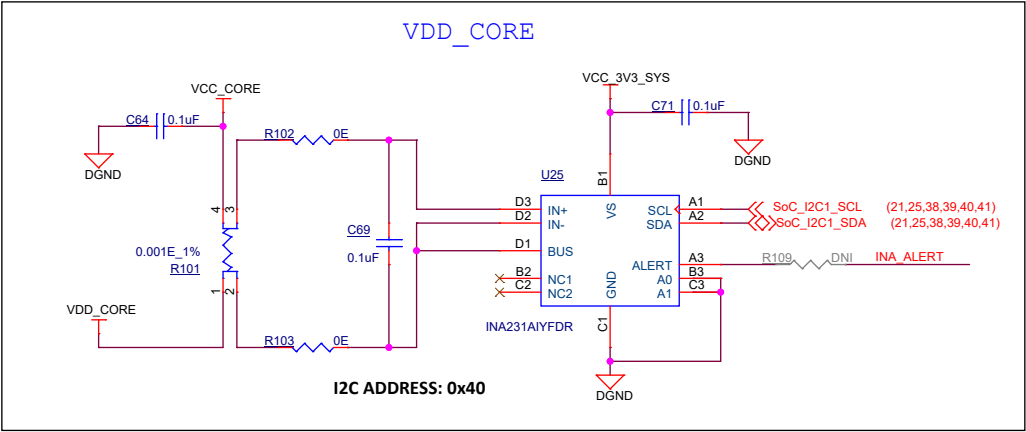











INA I2C SLAVE ADDRESS		
POWER SOURCE	SUPPLY NET	SLAVE ADDRESS (IN HEX)
VCC_CORE	VDD_CORE	40
VCC_0V85	VDDR_CORE	41
VCC_3V3_SYS	SoC_DVDD3V3	4C
VCC_1V8	SoC_DVDD1V8	45
VDDA1V8	VDDA_1V8	4D
VCC1V1	VDD_LPDDR4	47

SOC POWER

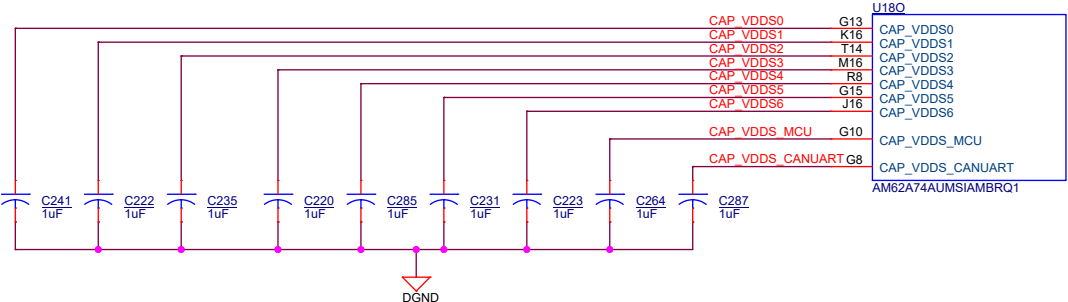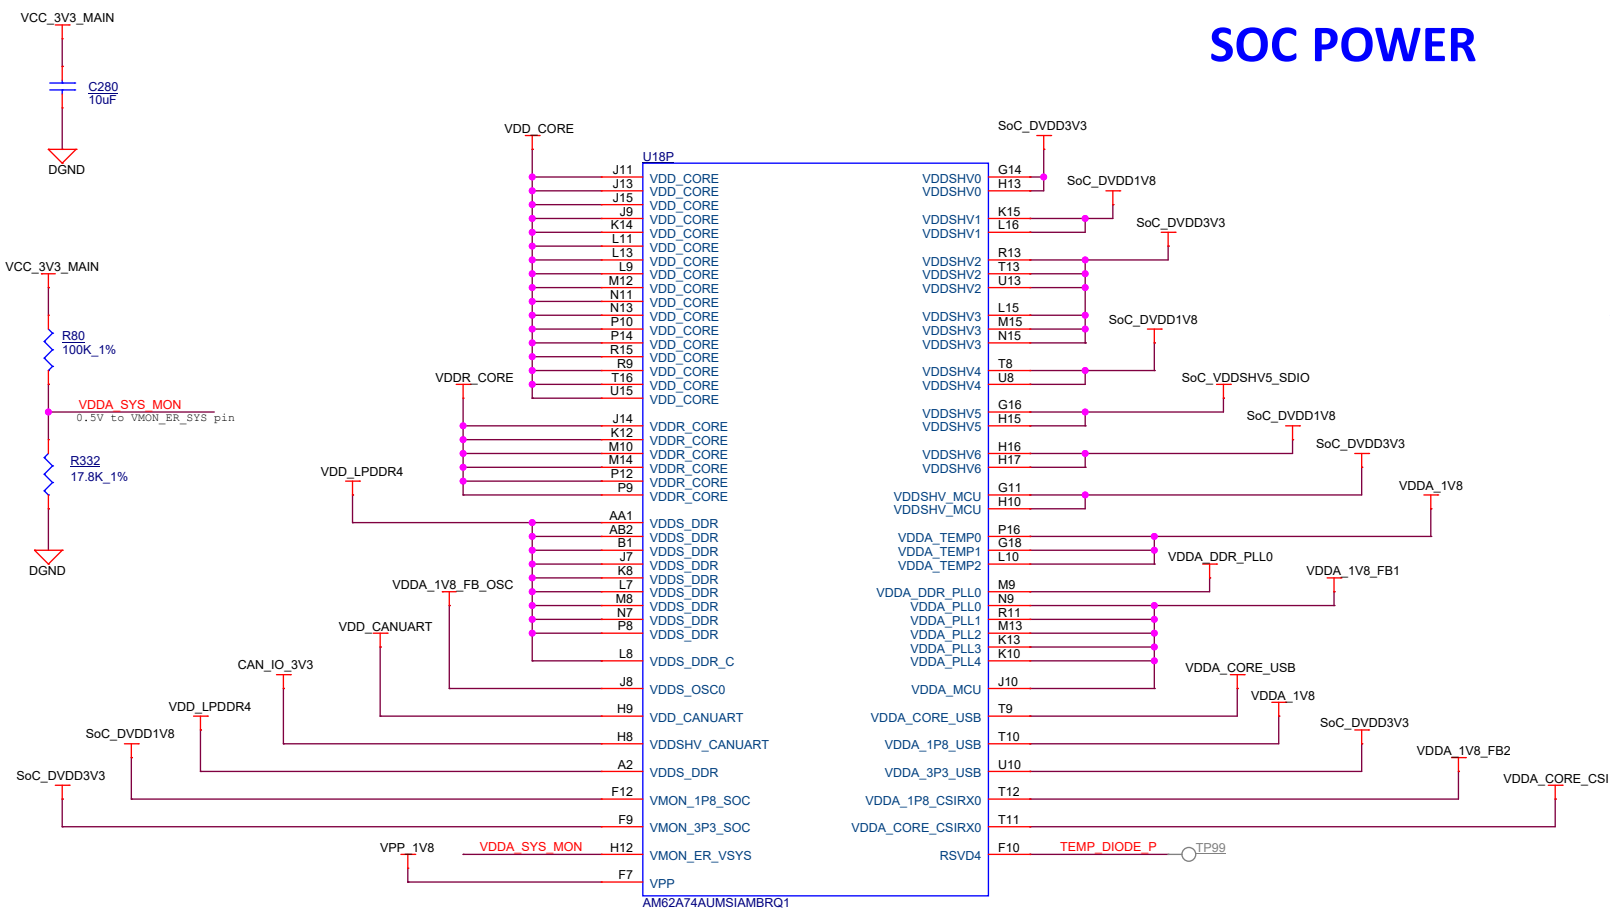

U180	CAP_VDDS0	G13
	CAP_VDDS1	K16
	CAP_VDDS2	T14
	CAP_VDDS3	M16
	CAP_VDDS4	R8
	CAP_VDDS5	G15
	CAP_VDDS6	J16
	CAP_VDDS_MCU	G10
	CAP_VDDS_CANUART	G8

CORE SUPPLY

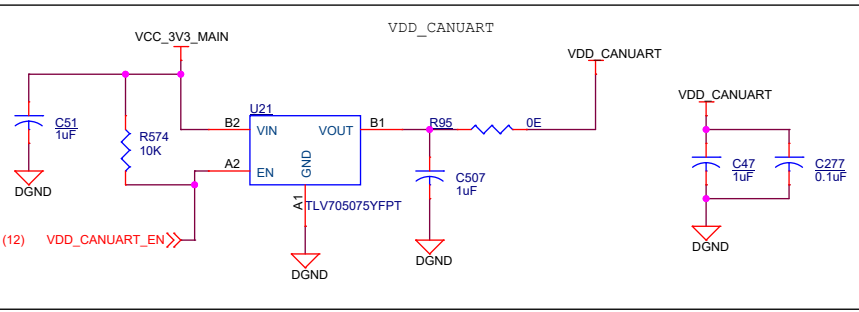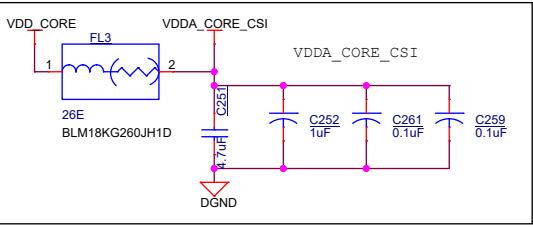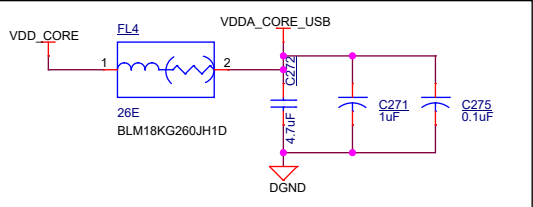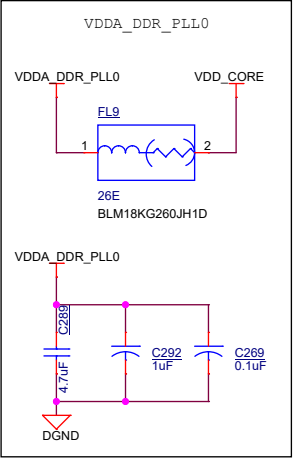
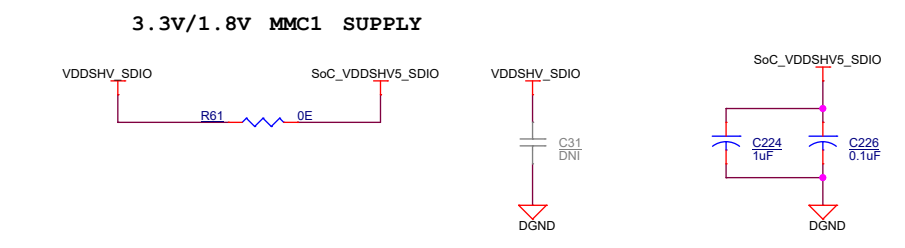
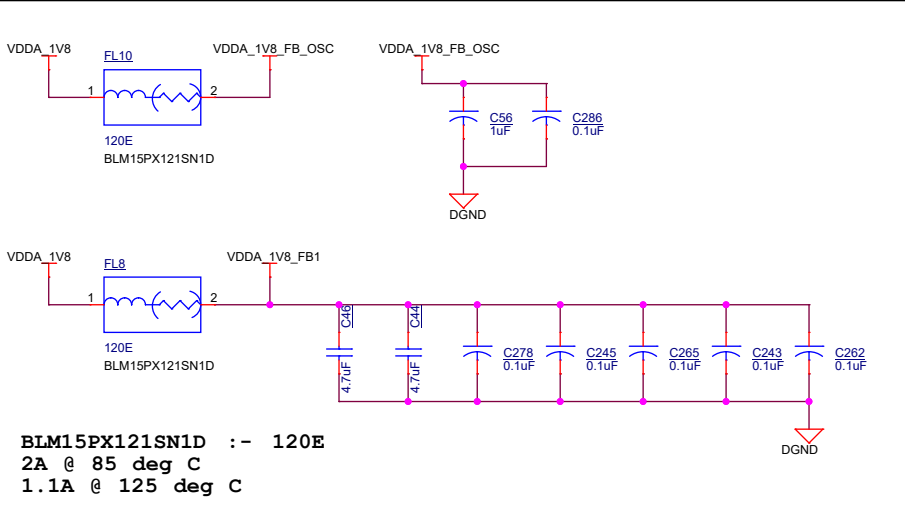
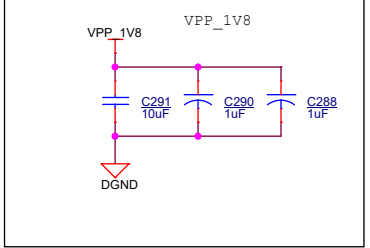

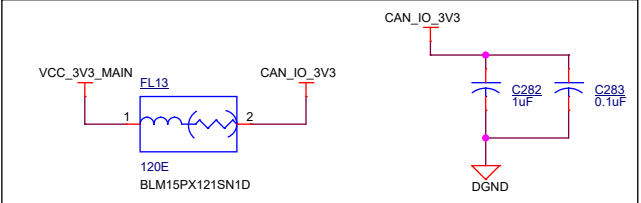
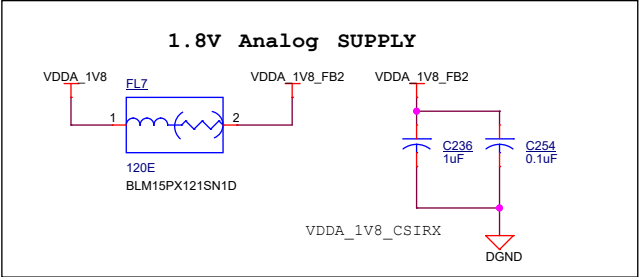


Designed for TI by Mistral Solutions Pvt Ltd




Title SOC POWER		
Size	PROC135A	Rev
C		A
Date:	Wednesday, August 09, 2023	Sheet 14 of 44

SOC POWER DECAPS

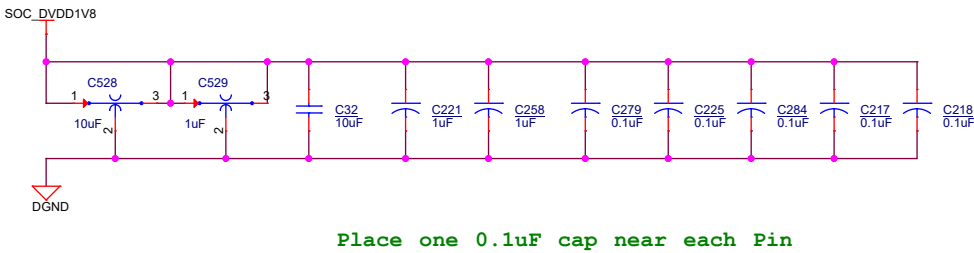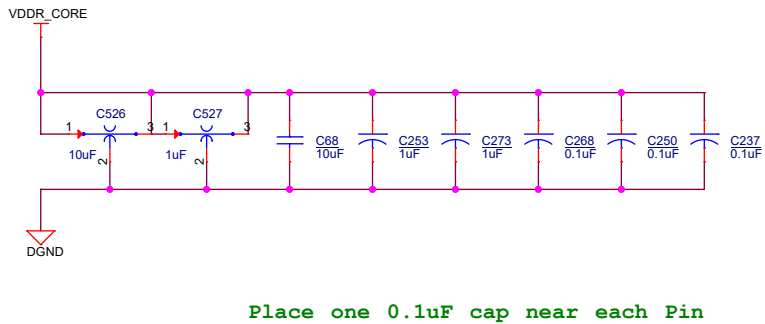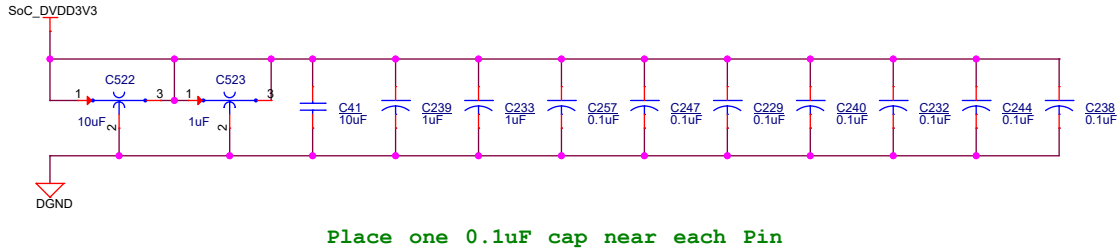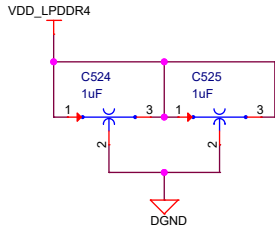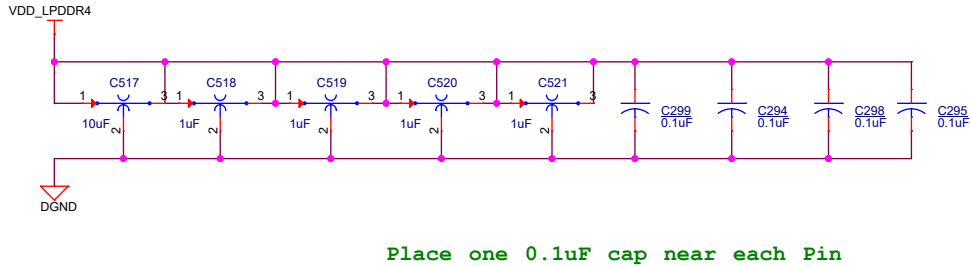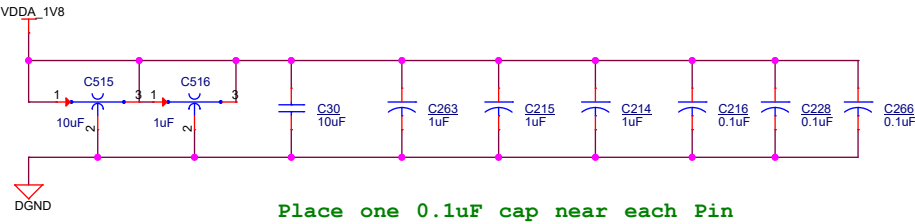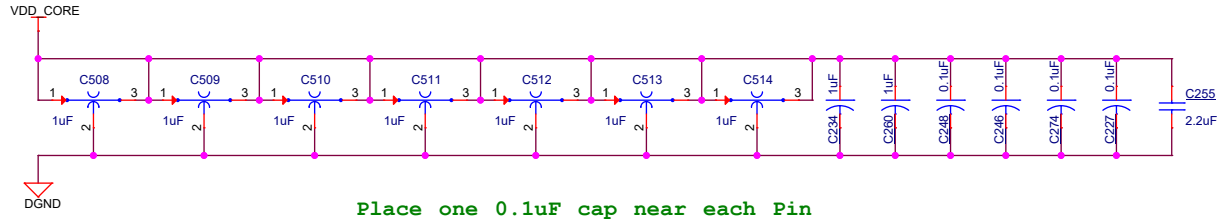

SOC VSS

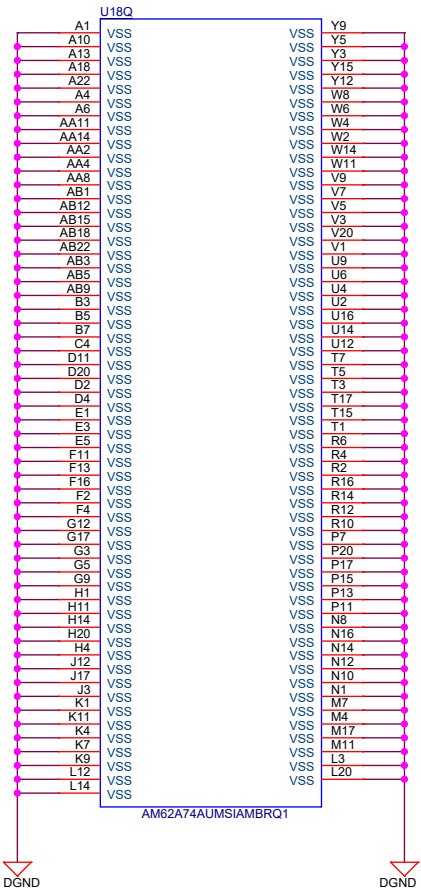

Designed for TI by Mistral Solutions Pvt Ltd




Title SOC POWER CAPS & SOC VSS


Size	Rev
C	PROC135A
Date:	Wednesday, August 09, 2023

Sheet 15 of 44


SOC LPDDR4 INTERFACE

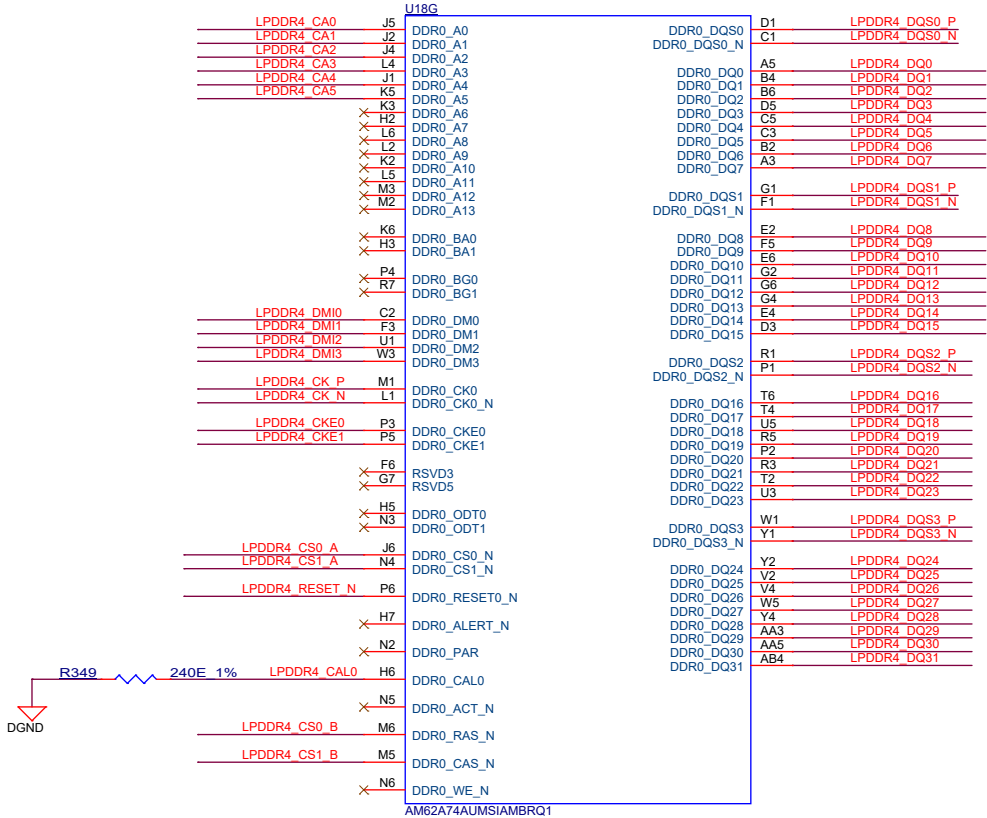

LPDDR4 POWER DECAPS

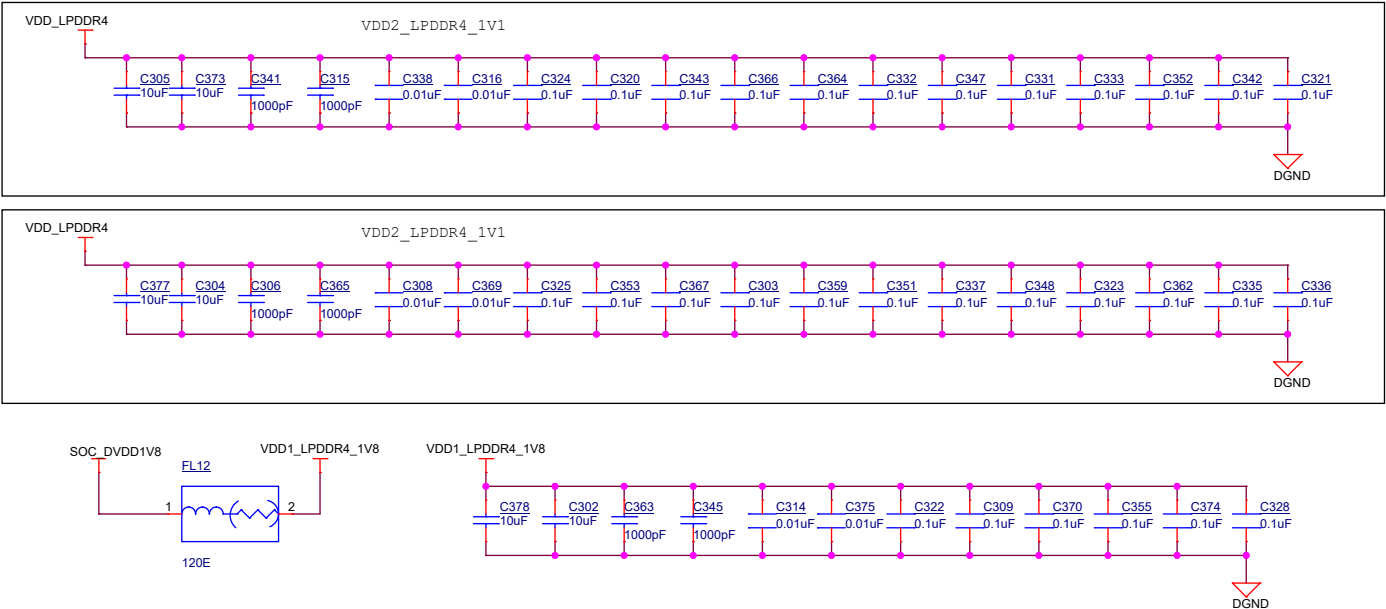

LPDDR4 DEVICE

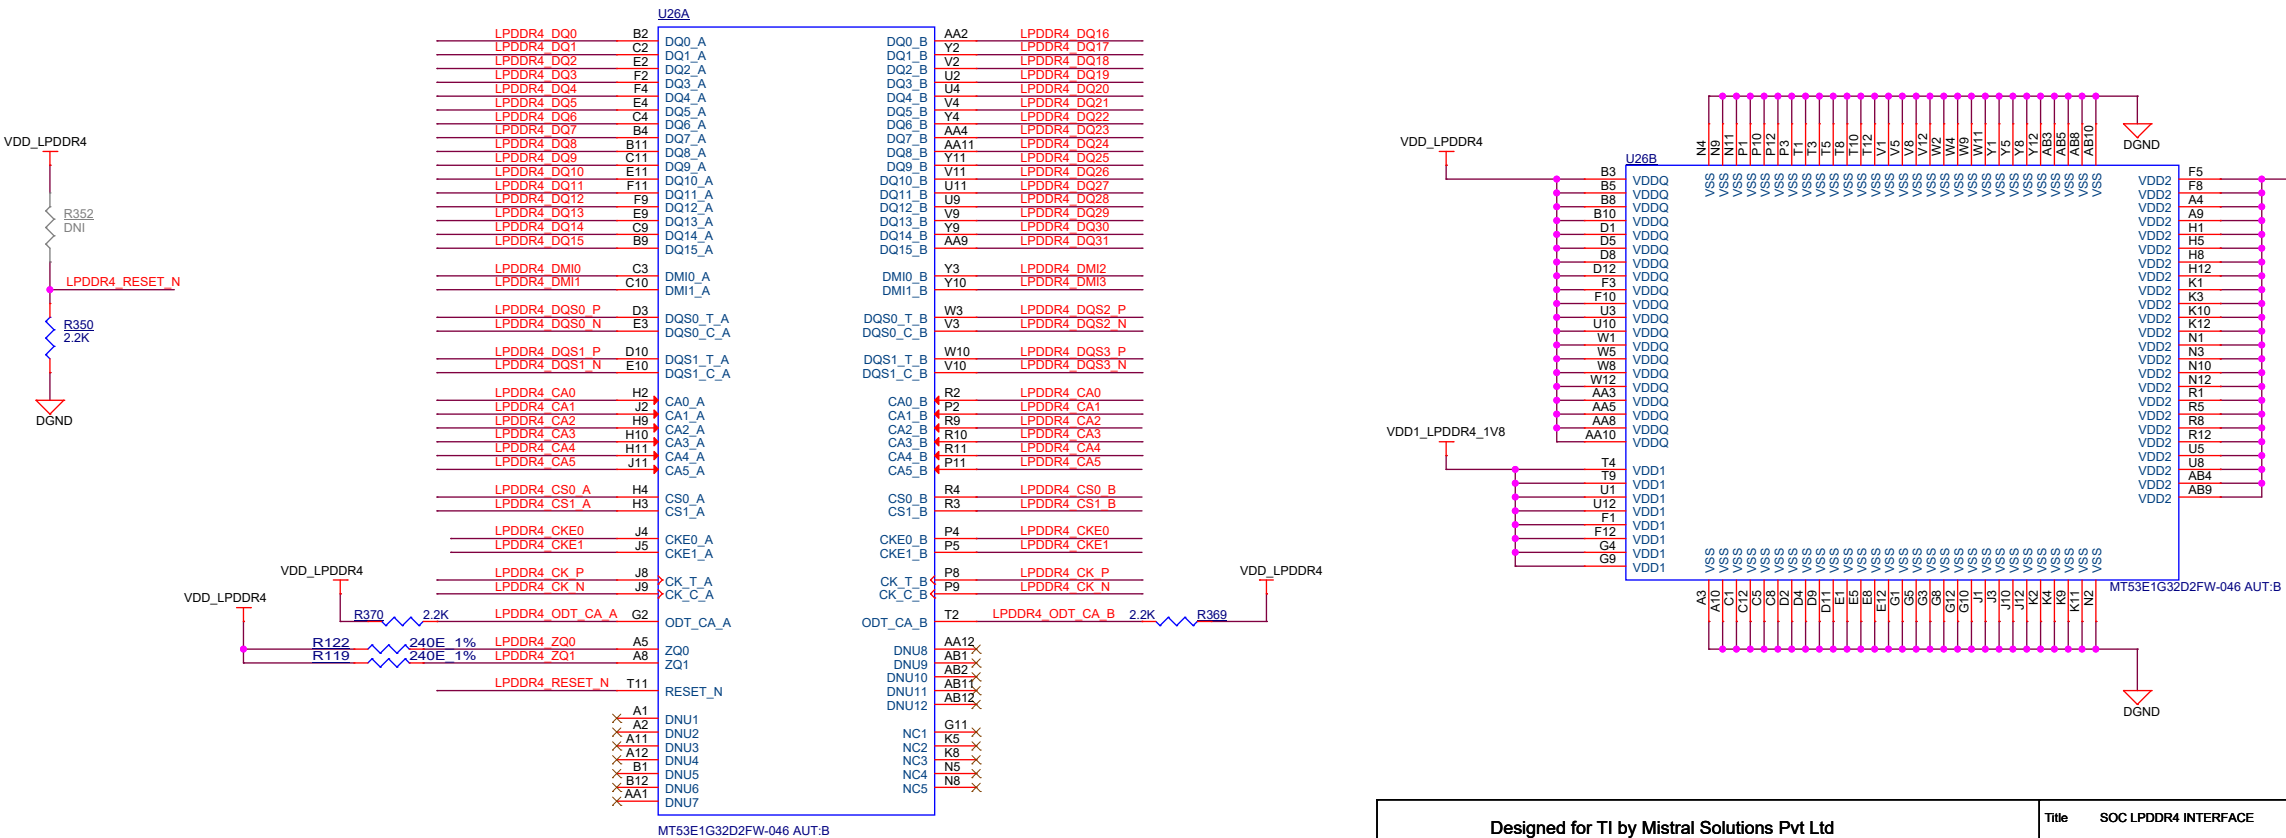

Designed for TI by Mistral Solutions Pvt Ltd

Title **SOC LPDDR4 INTERFACE**


Size	PROC135A
C	

Date: Wednesday, August 09, 2023	Sheet 16 of 44
----------------------------------	----------------




1




M.2 INTERFACE - SDIO

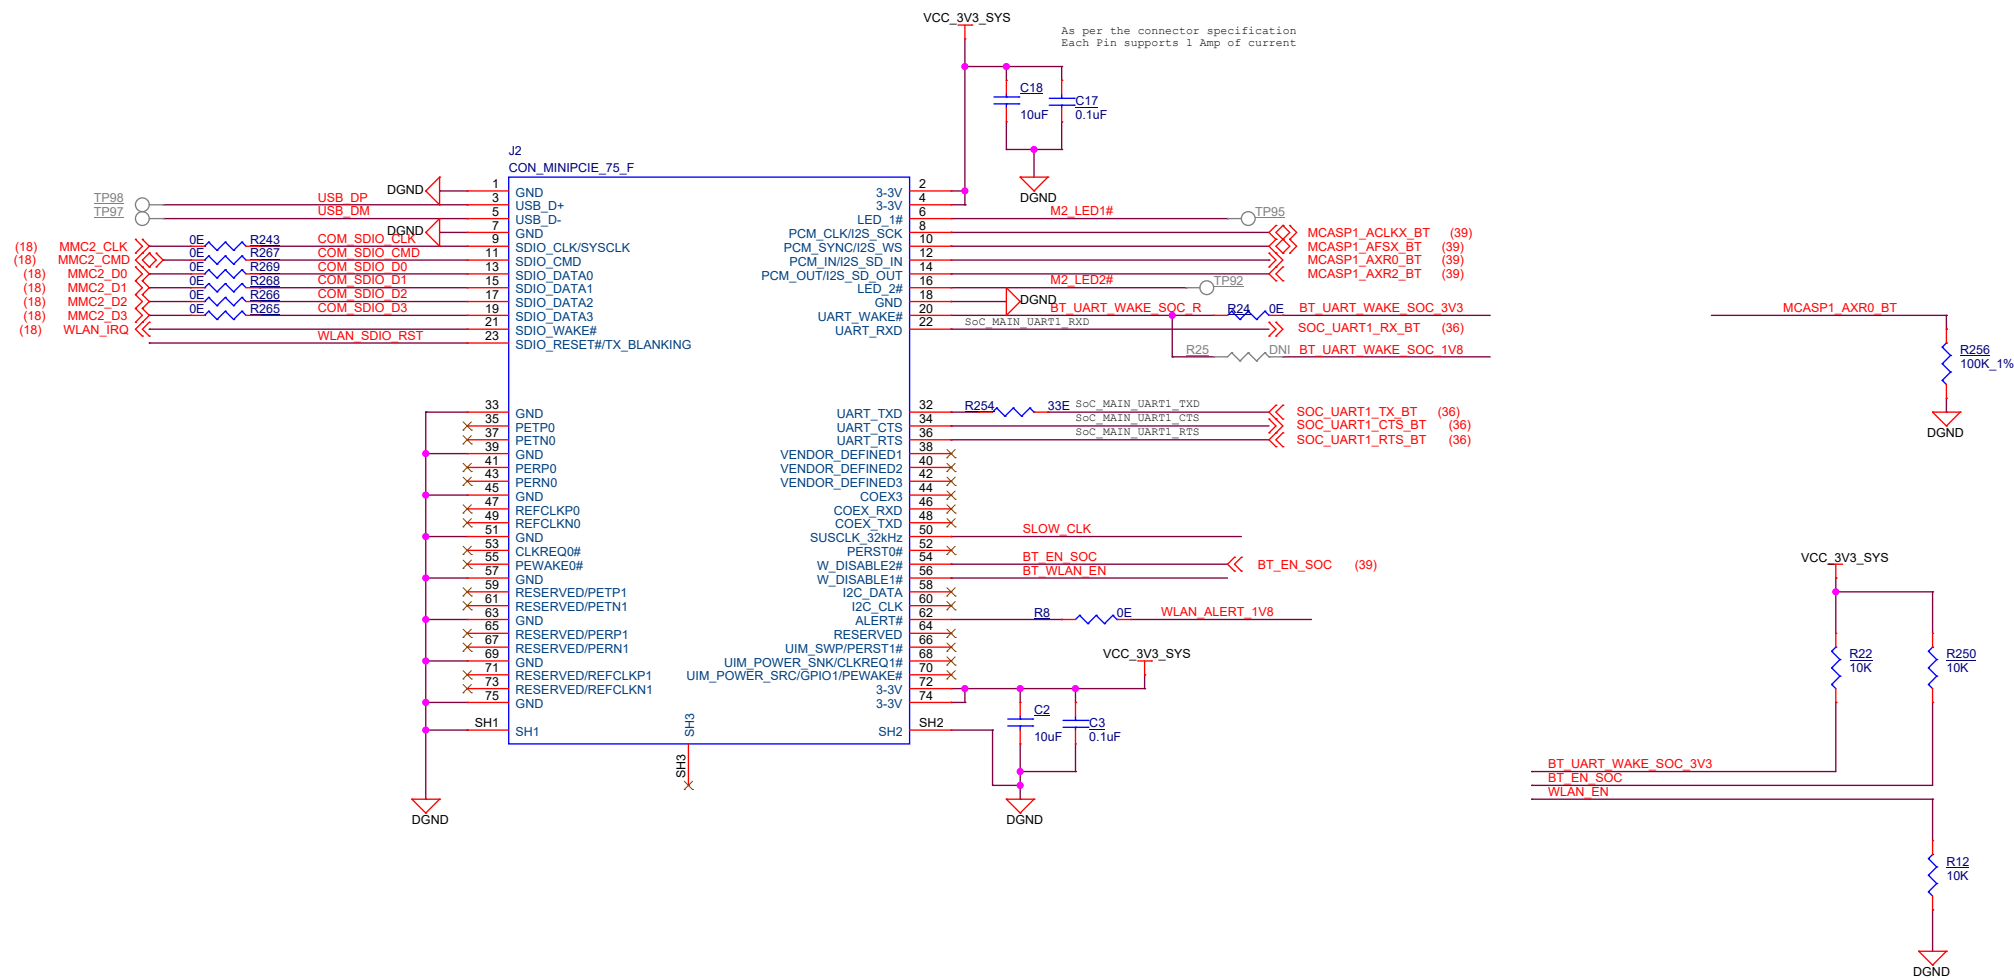

M.2 LEVEL TRANSLATOR

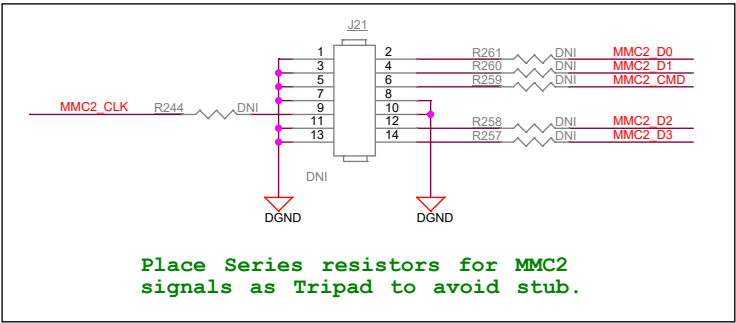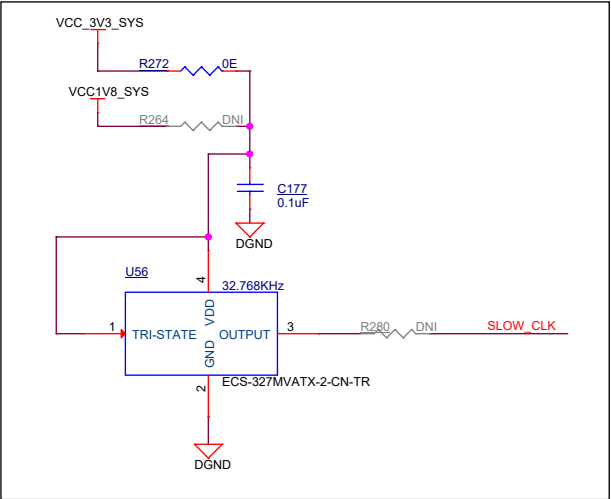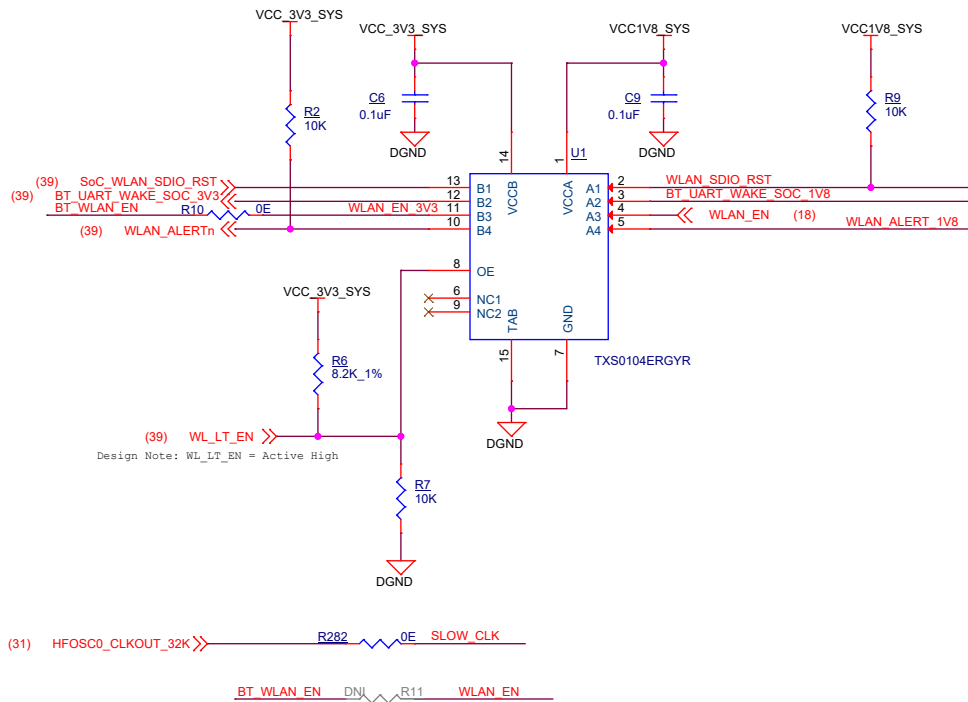

Place Series resistors for MMC2 signals as Tripad to avoid stub.

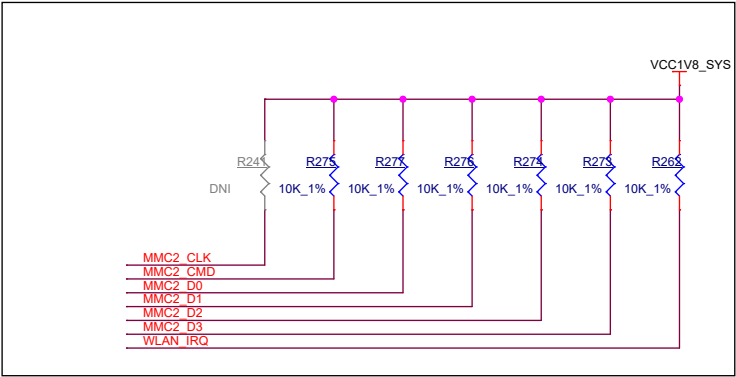


Designed for TI by Mistral Solutions Pvt Ltd




Title			M.2 CONNECTOR I/F
Size	PROC135A		Rev
C			A
Date:	Wednesday, August 09, 2023	Sheet	17 of 44


SOC - MMC Interface

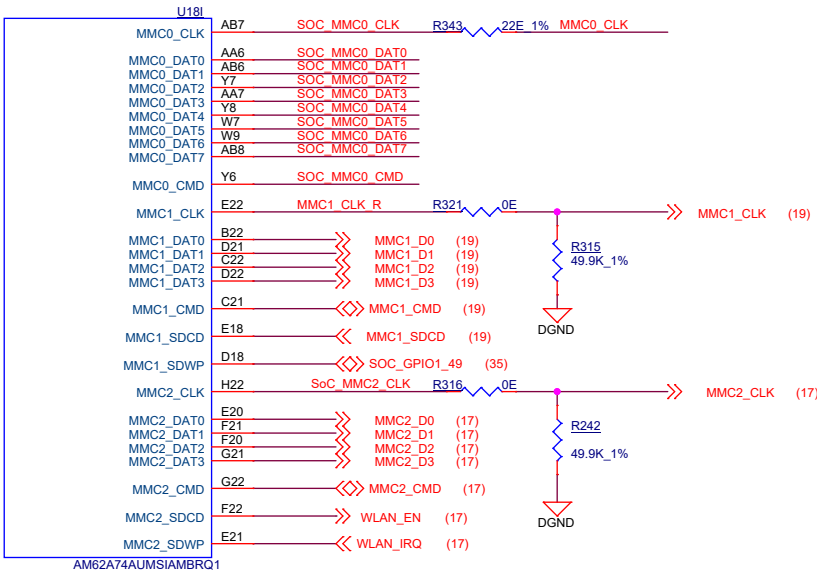

eMMC FLASH

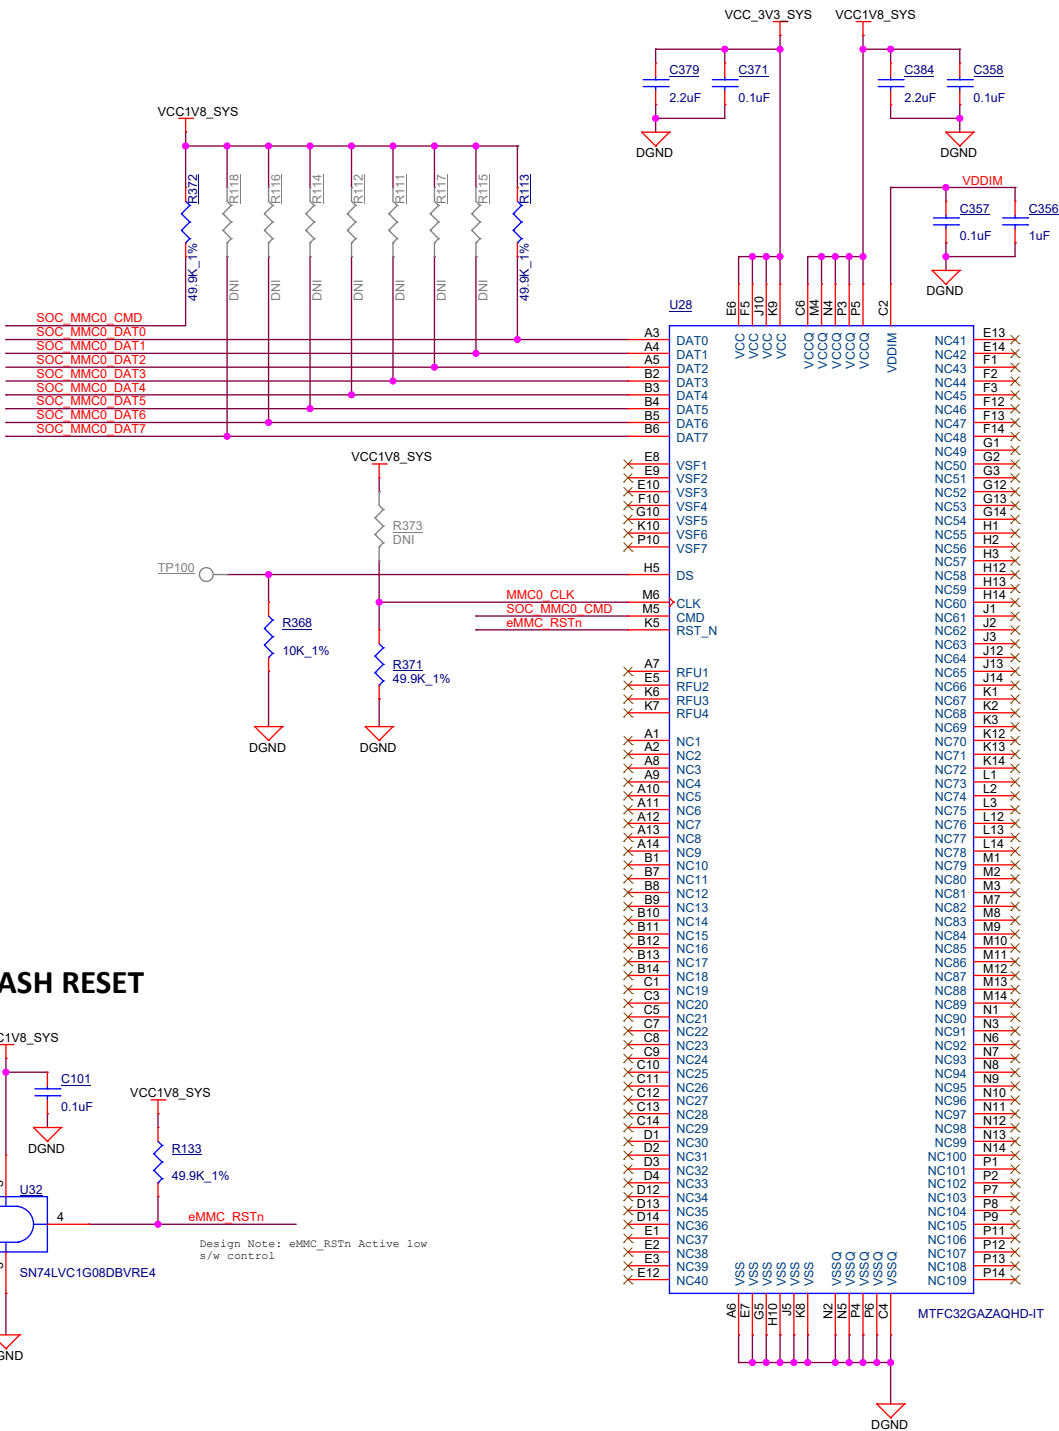

eMMC FLASH RESET

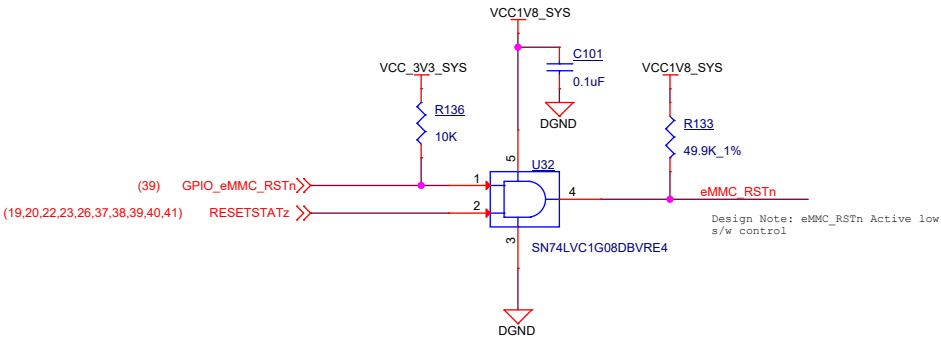

Designed for TI by Mistral Solutions Pvt Ltd



Title eMMC FLASH INTERFACE

Size PROC135A

C


Date: Wednesday, August 09, 2023

Sheet 18 of 44

Rev



A

SD CARD INTERFACE



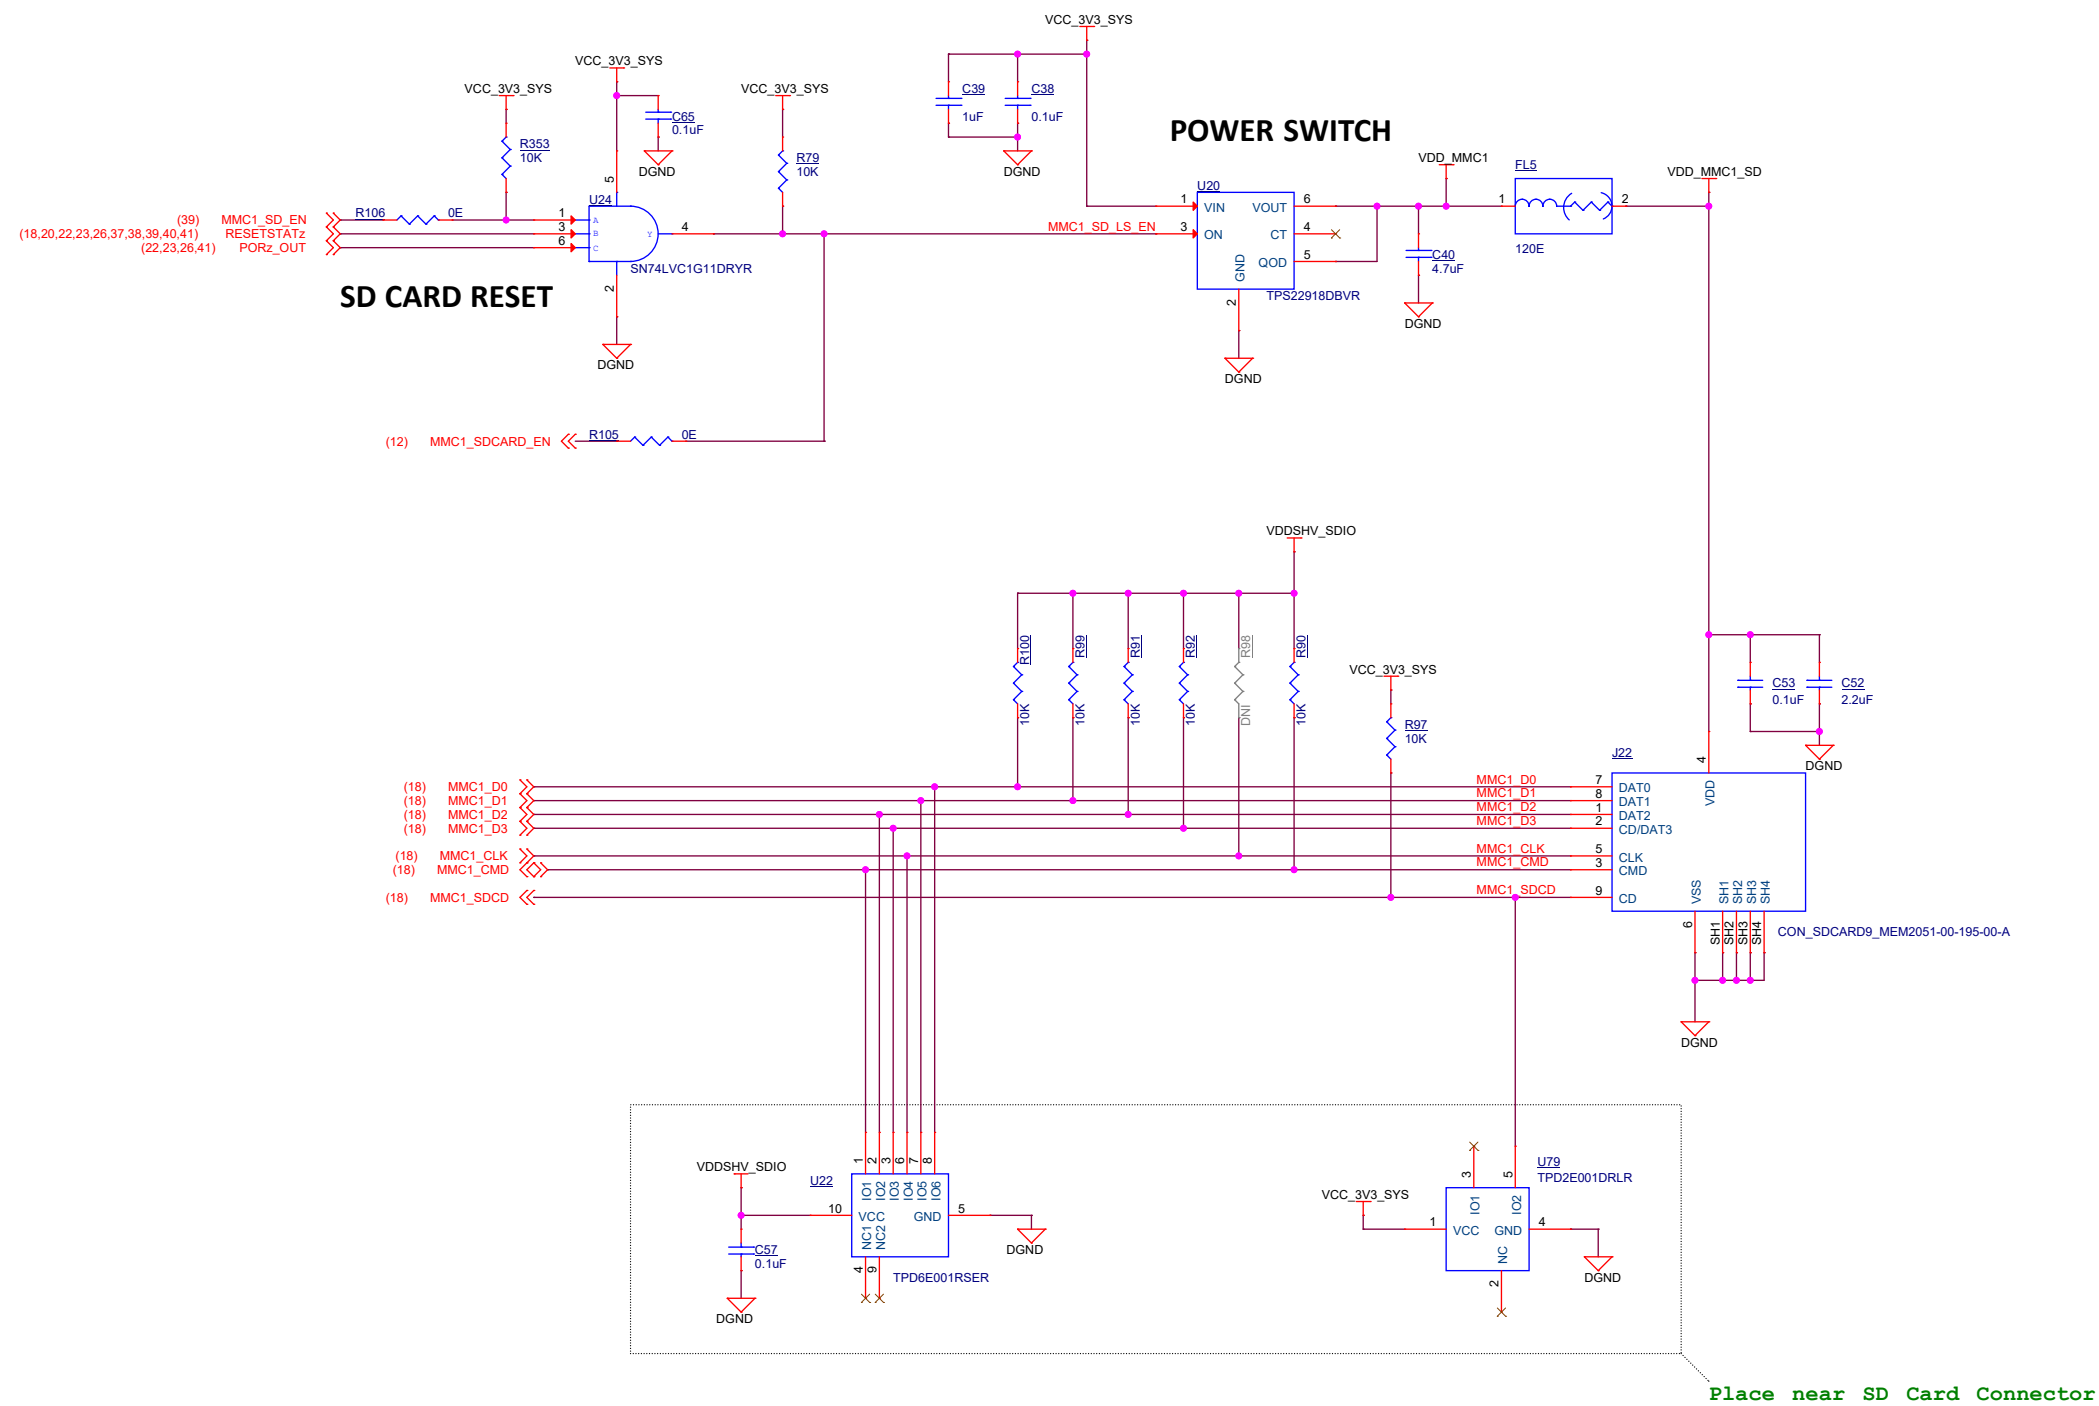


OSPI FLASH


SOC OSPI INTERFACE

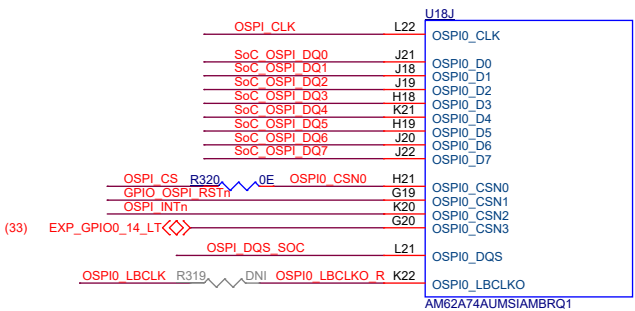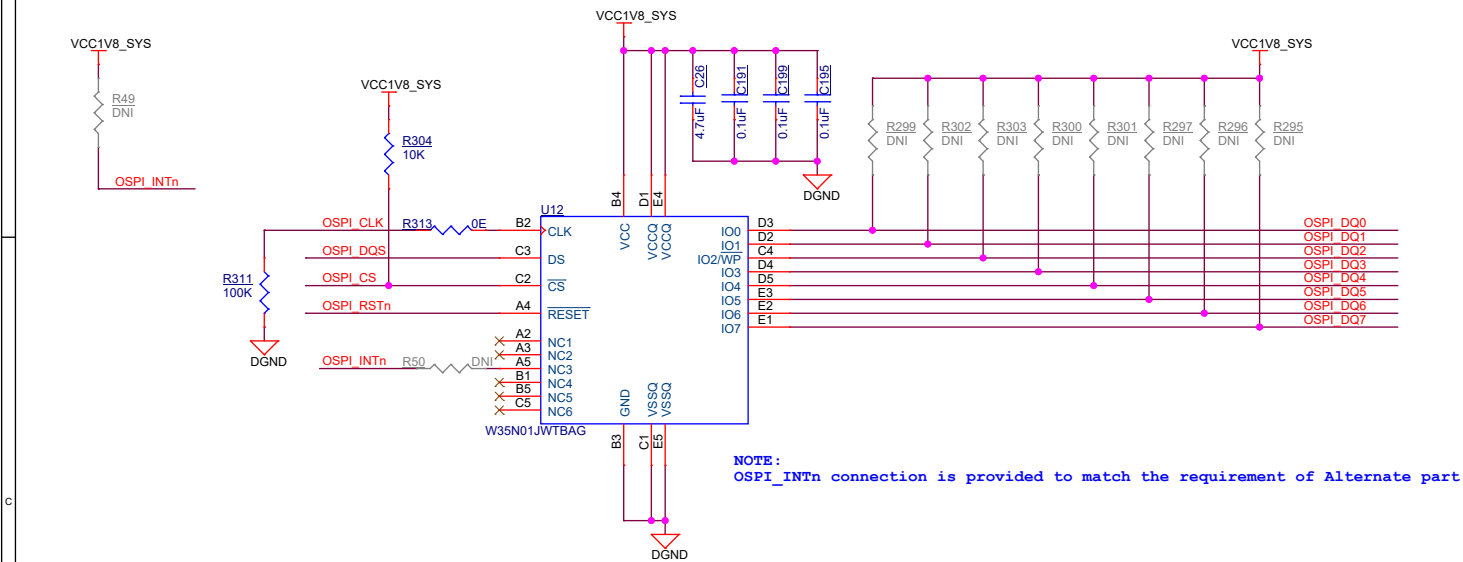



OSPI FLASH RESET

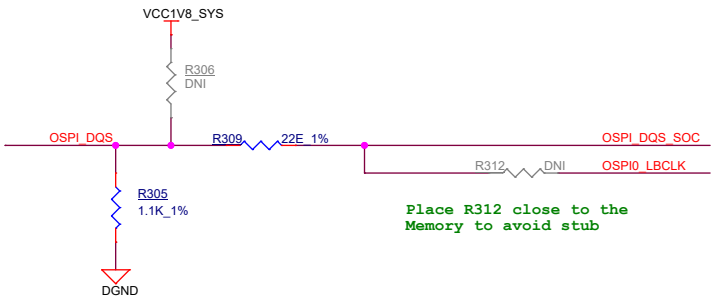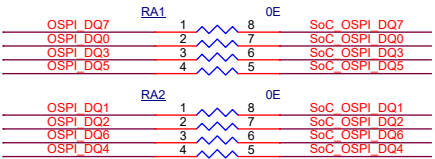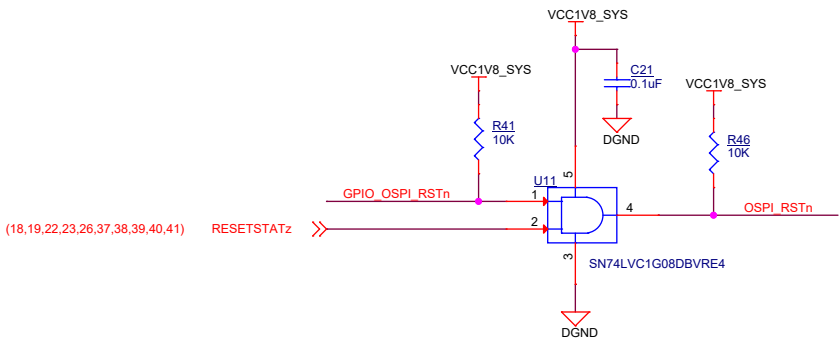

BOARD ID EEPROM

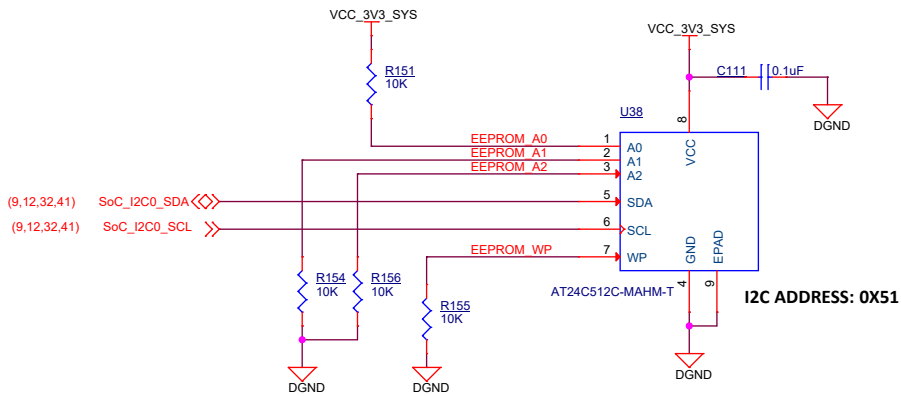

TEMPERATURE SENSORS

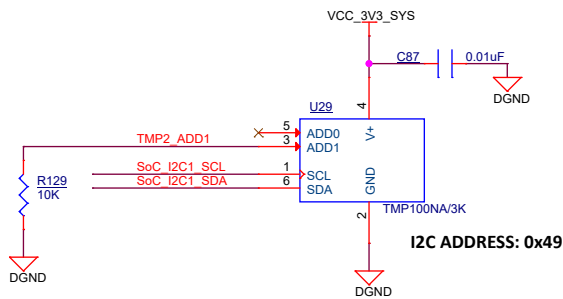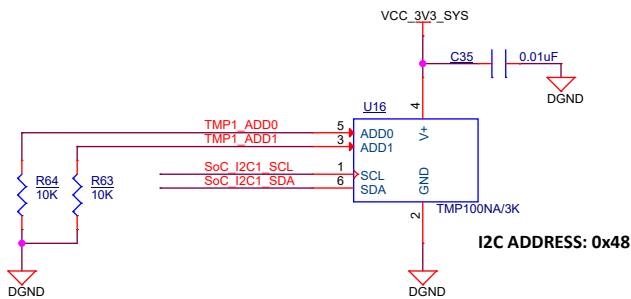

CAD NOTE: PLACE TEMP SENSOR U16 CLOSE TO SoC

CAD NOTE: PLACE TEMP SENSOR U29 CLOSE TO DDR4


(13,25,38,39,40,41) SoC_I2C1_SCL >> TP49
(13,25,38,39,40,41) SoC_I2C1_SDA >> TP50
Silk: SOC_I2C1

Designed for TI by Mistral Solutions Pvt Ltd



Title BOARD ID EEPROM & TEMPERATURE SENSORS		
Size	PROC135A	Rev
C		A
Date:	Wednesday, August 09, 2023	Sheet 21 of 44

CPSW RGMII 1 - PHY

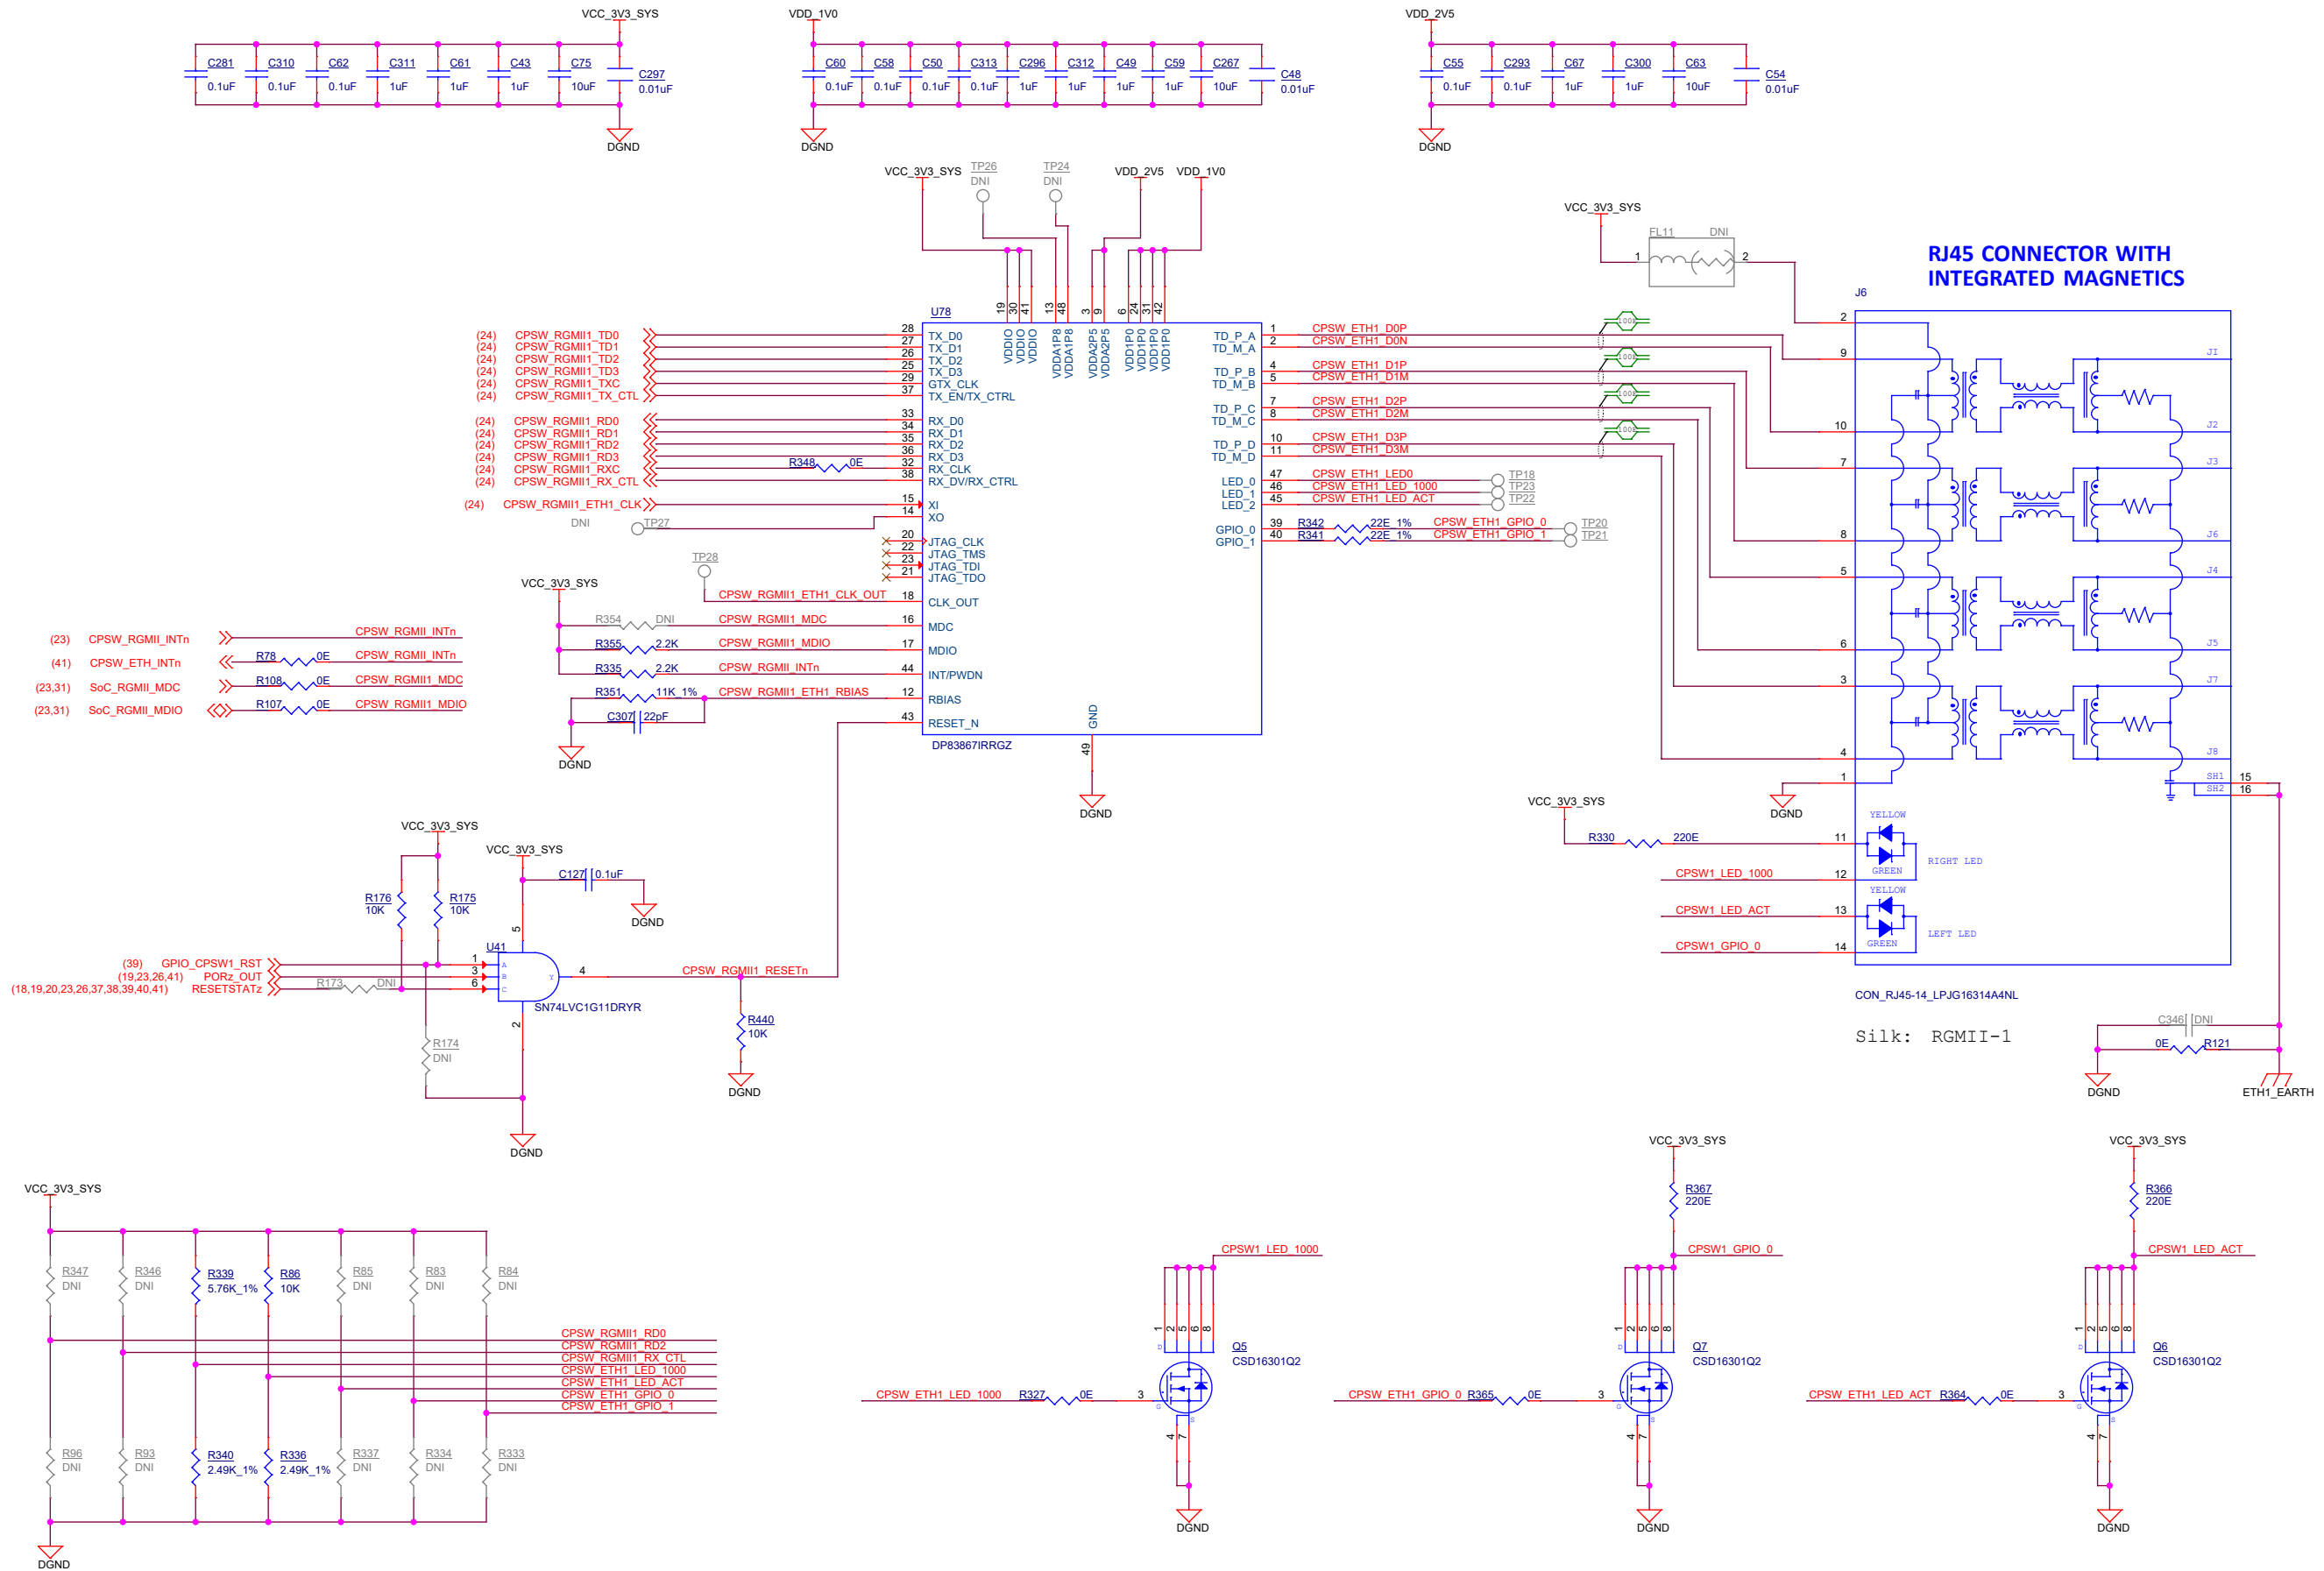

PHY ADDRESS = 00000
Auto-negotiation Enabled
10/100/1000 advertised, Auto-MDI-X
Tx Clock Skew = 0ns
Rx Clock Skew = 2ns

Designed for TI by Mistral Solutions Pvt Ltd



Title CPSW RGMII_1 ETHERNET PHY


Size C
C PROC135A

Rev A

Date: Wednesday, August 09, 2023

Sheet 22 of 44

CPSW RGMII 2 - PHY

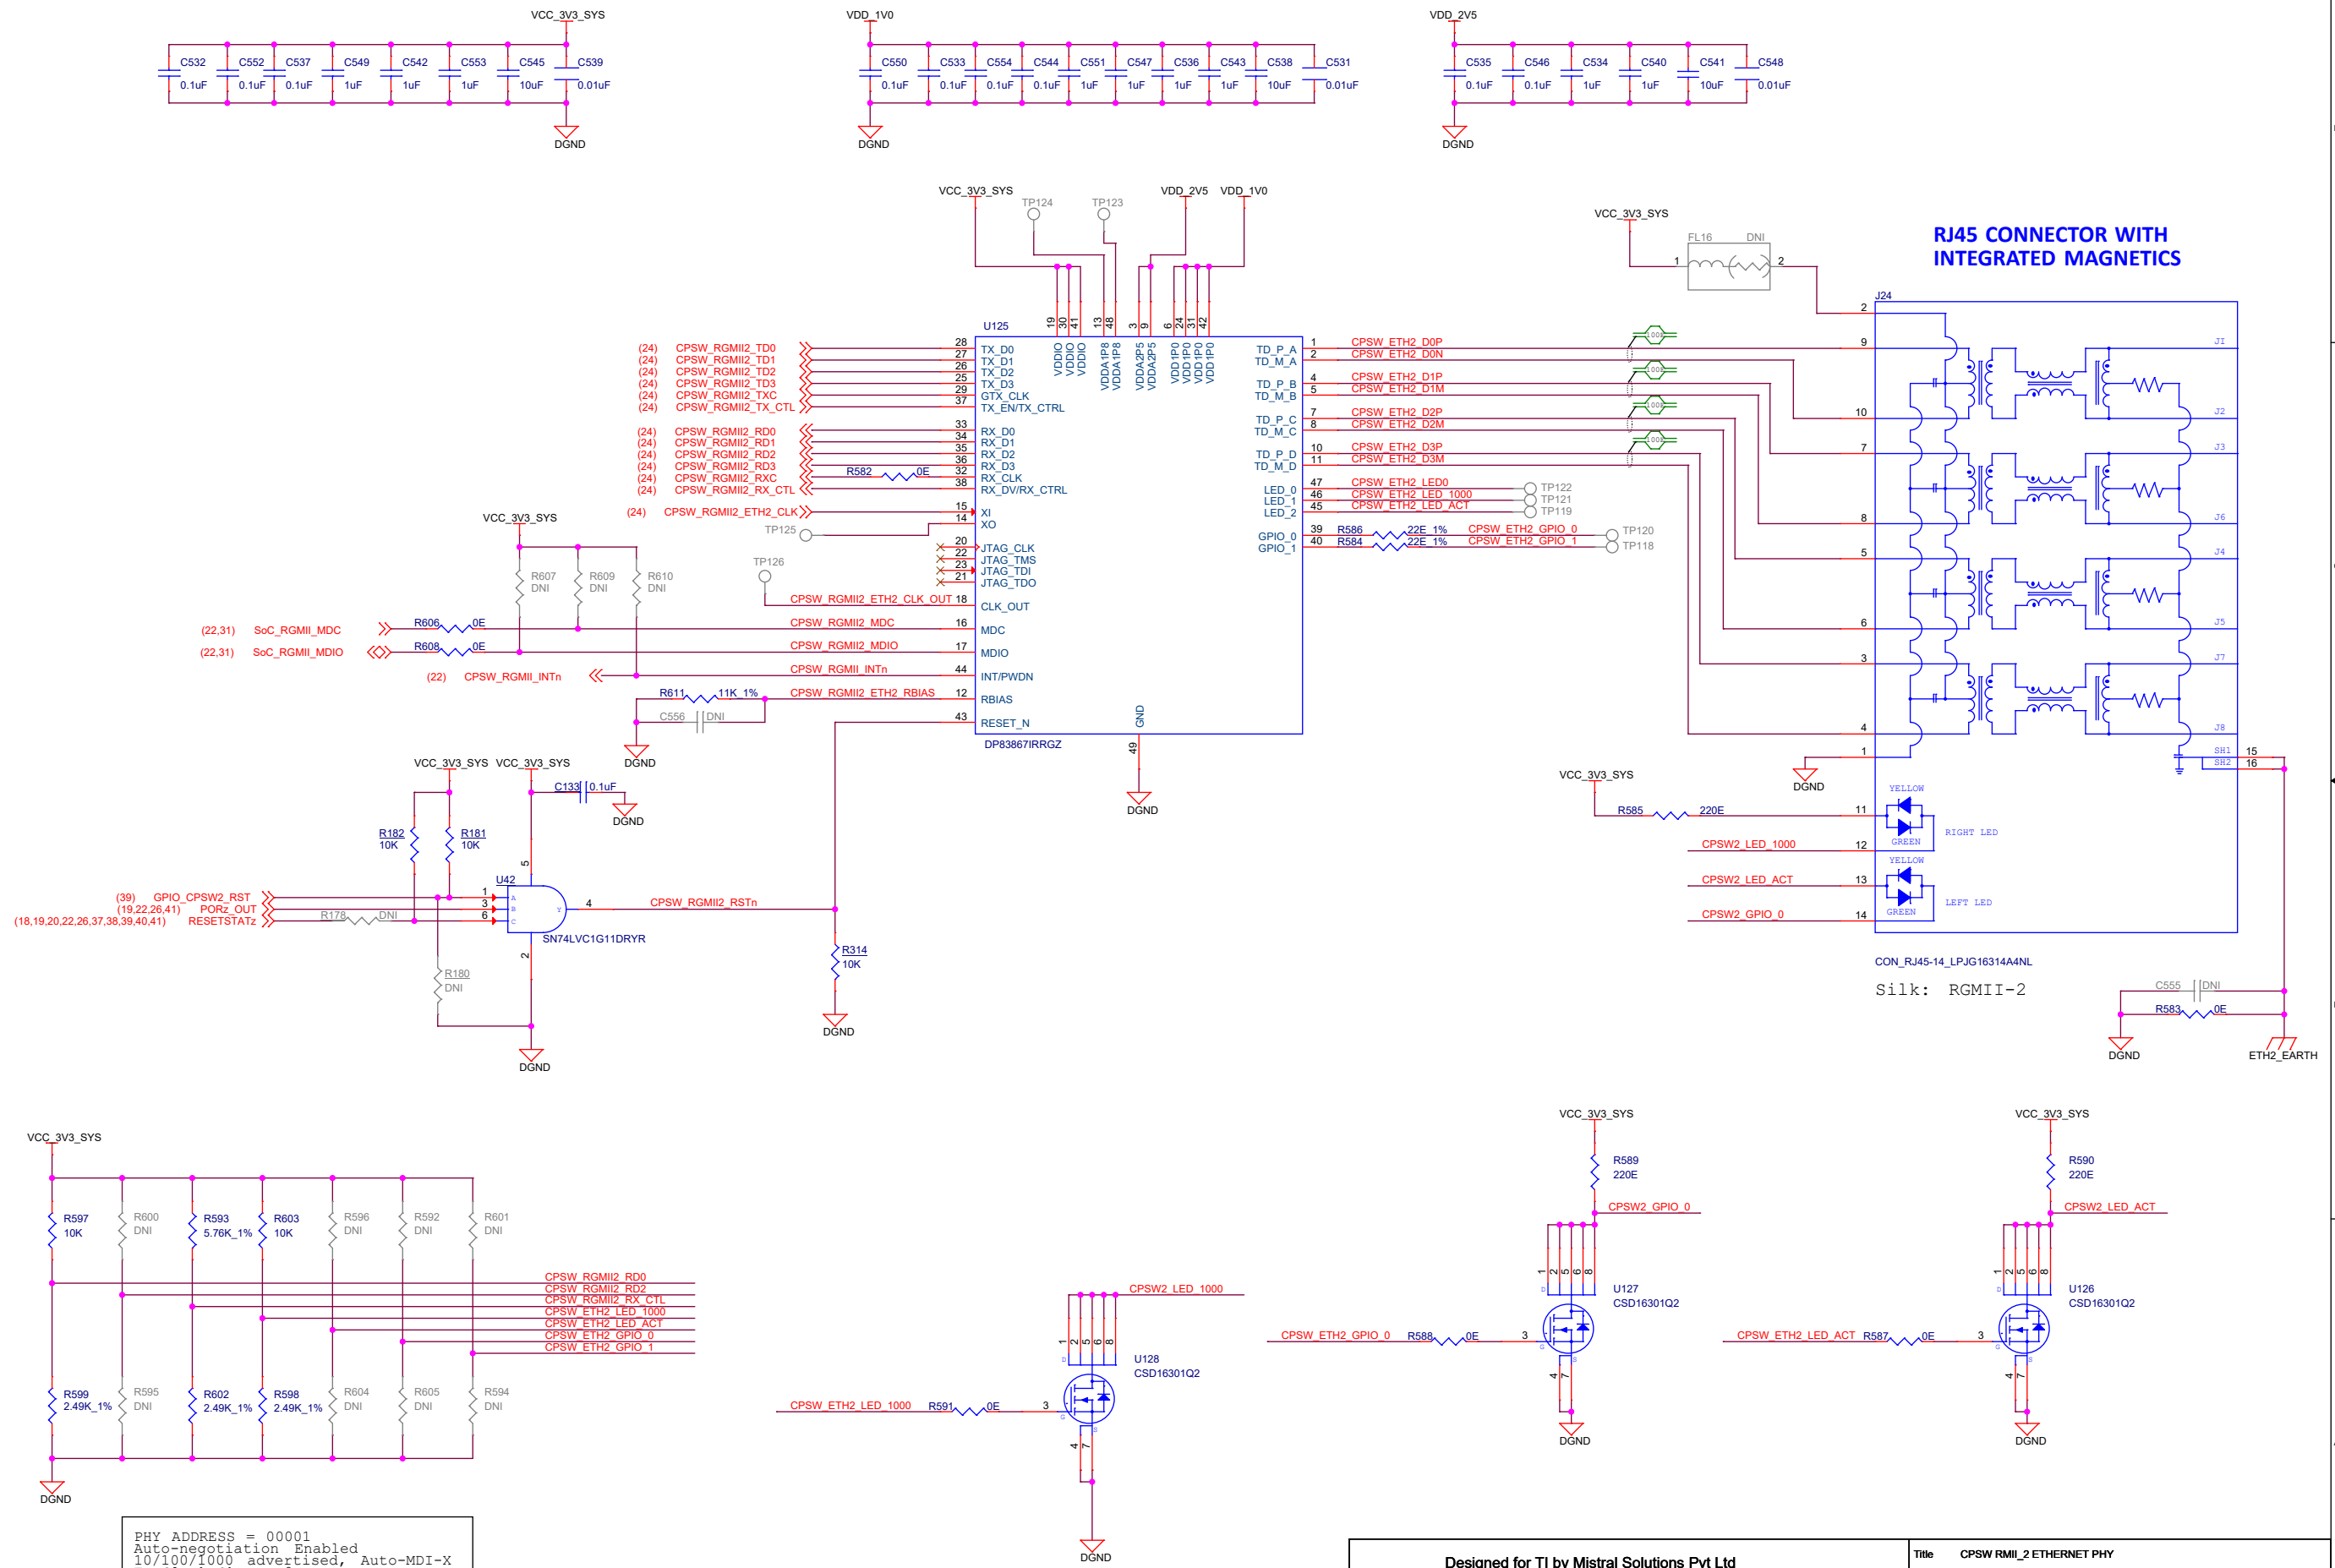


PHY ADDRESS = 00001
Auto-negotiation Enabled
10/100/1000 advertised, Auto-MDI-X
Tx Clock Skew = 0ns
Rx Clock Skew = 2ns


Designed for TI by Mistral Solutions Pvt Ltd



Title CPSW RMII_2 ETHERNET PHY		
Size	PROC135A	Rev
C		A
Date:	Wednesday, August 09, 2023	Sheet 23 of 44

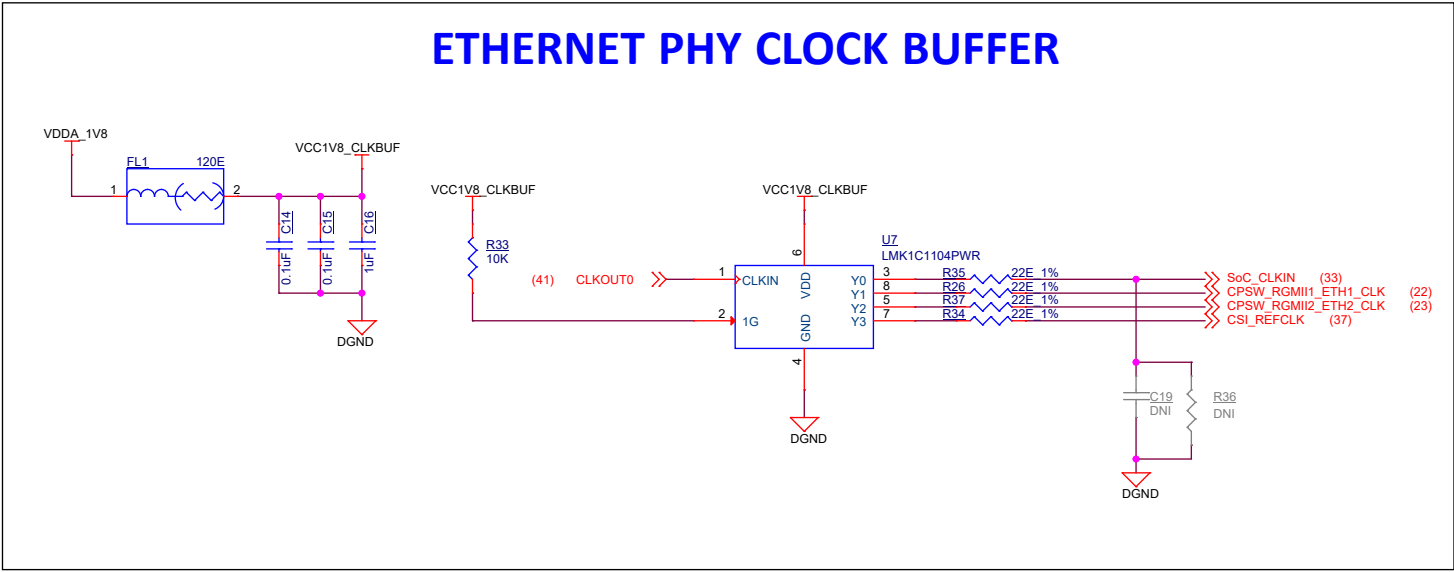


I2C BUS BUFFER

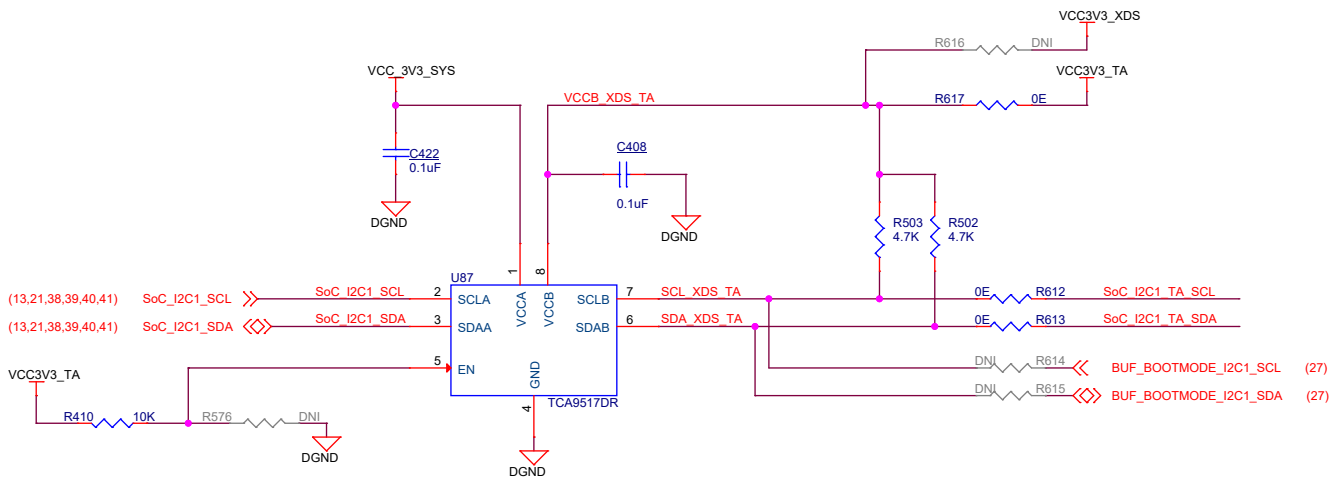

XDS110 Configuration
Mount : R614, R615, R616
Demount: R612, R613, R617

40-PIN TEST AUTOMATION HEADER

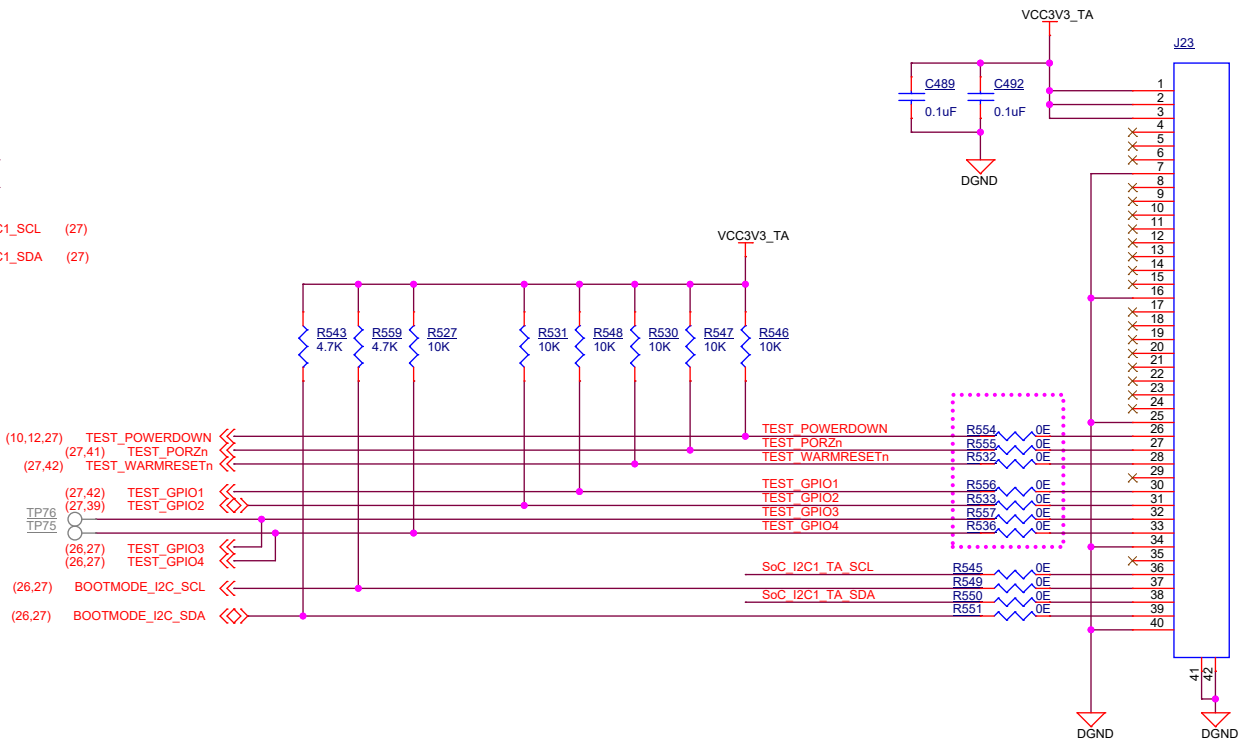


CON_FLEX_40X1_FH12A-40S-0.5SH

Silk: AUTOMATION HDR

TEST AUTOMATION BOARD POWER

VinMin = 4.75V
VinMax = 24V
Vout = 3.3V @ 0.5A

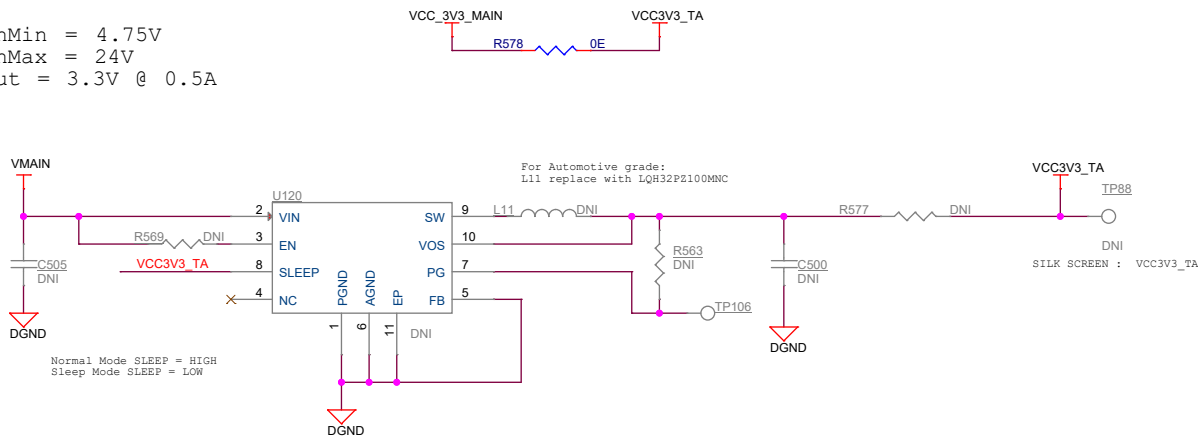

TEST AUTOMATION GPIO MAPPING

SIGNAL NAME	DESCRIPTION	Direction WRT CTRL	Internal/ External PU/PD states
TEST_POWERDOWN	Used to Power down the EVM	OUTPUT	External Pullup
TEST_PORZn	Used to Reset the SoC PORz	OUTPUT	External Pullup
TEST_WARMRESETh	Used to Reset the SoC Warmreset	OUTPUT	External Pullup
TEST_GPIO1	Used to Generate the interrupt on SOC_GPIO1_23 Pin	OUTPUT	External Pullup
TEST_GPIO2	Connected to IO Expander to Communicate with SOC	OUTPUT	External Pullup
TEST_GPIO3	Used to Enable the BOOTMODE Buffer	OUTPUT	External Pullup
TEST_GPIO4	Used to Reset the Bootmode I2C IO Expander	OUTPUT	External Pullup

Designed for TI by Mistral Solutions Pvt Ltd



Title TEST AUTOMATION

Size PROC135A


Rev

A


Date: Wednesday, August 09, 2023

Sheet 25 of 44


BOOTMODE IO EXPANDER

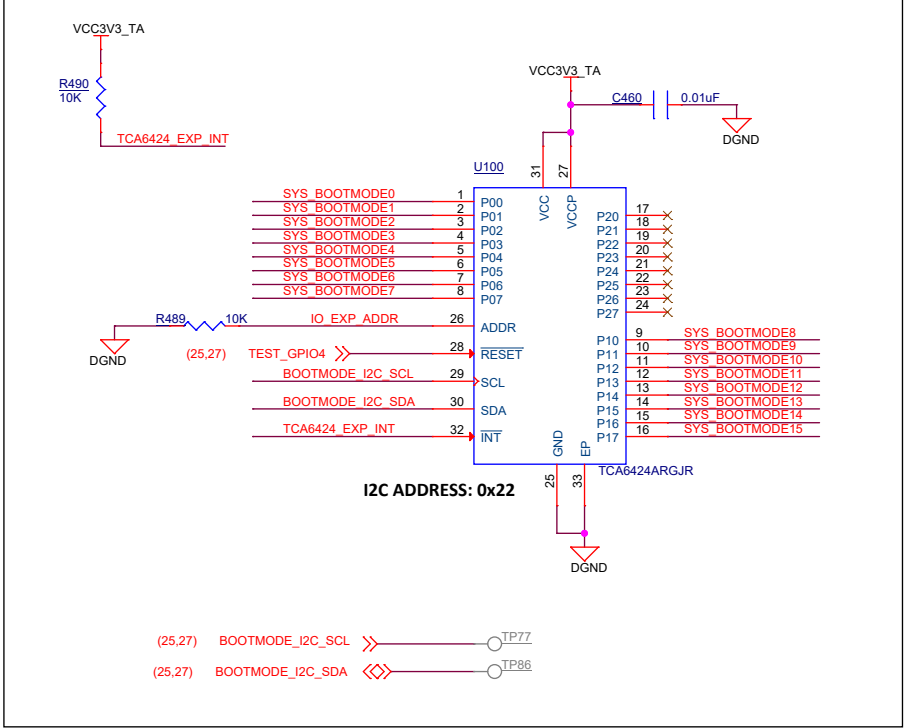

BOOT MODE BUFFERS

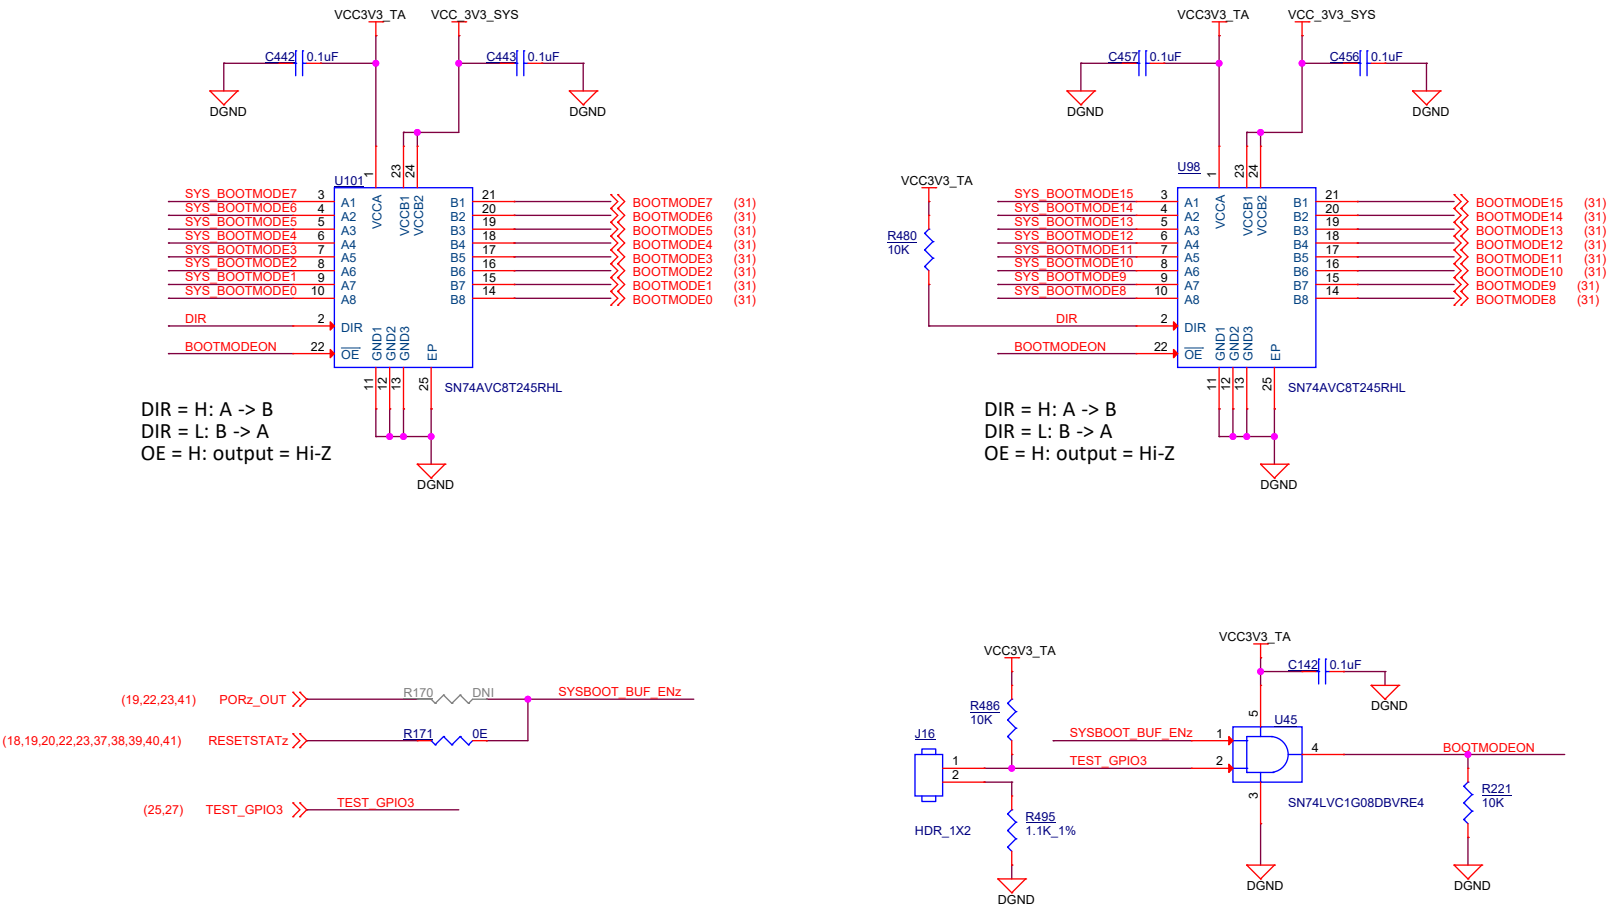

BOOT MODE SWITCHES

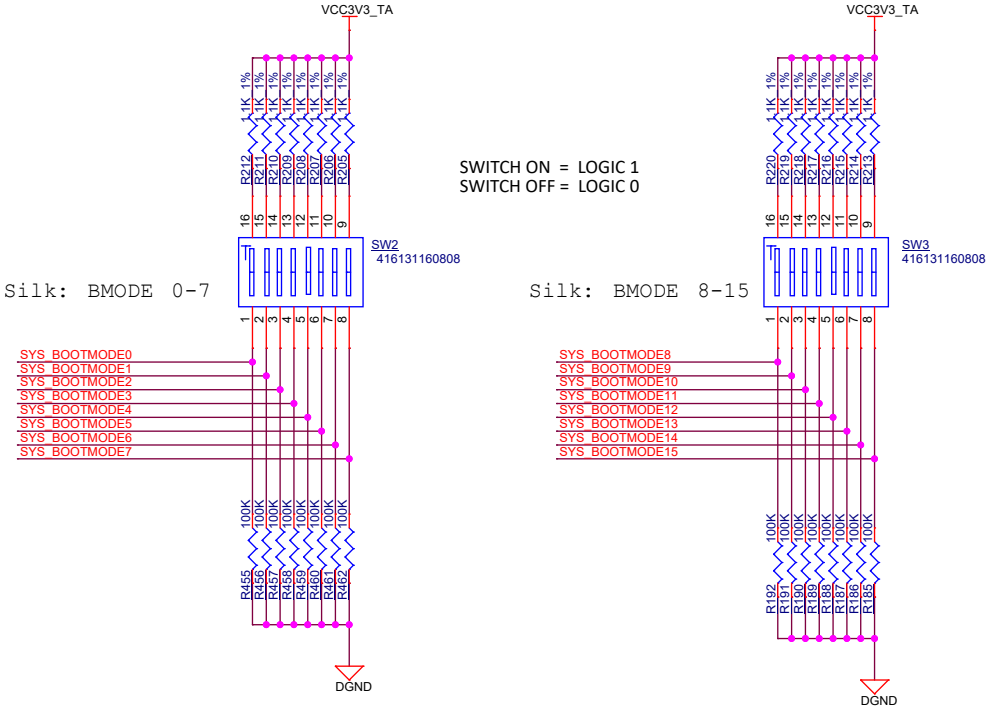

BOOT MODES SUPPORTED


1. OSPI
2. MMC1 - SD CARD
3. UART
4. eMMC
5. ETHERNET
6. USB0 DFW
7. USB0 MS

Designed for TI by Mistral Solutions Pvt Ltd





Title			Rev	
BOOT MODE BUFFER & SWITCHES			A	
Size	PROC135A			
C				
Date:	Wednesday, August 09, 2023	Sheet	26	of 44




XDS110 DEBUGGER

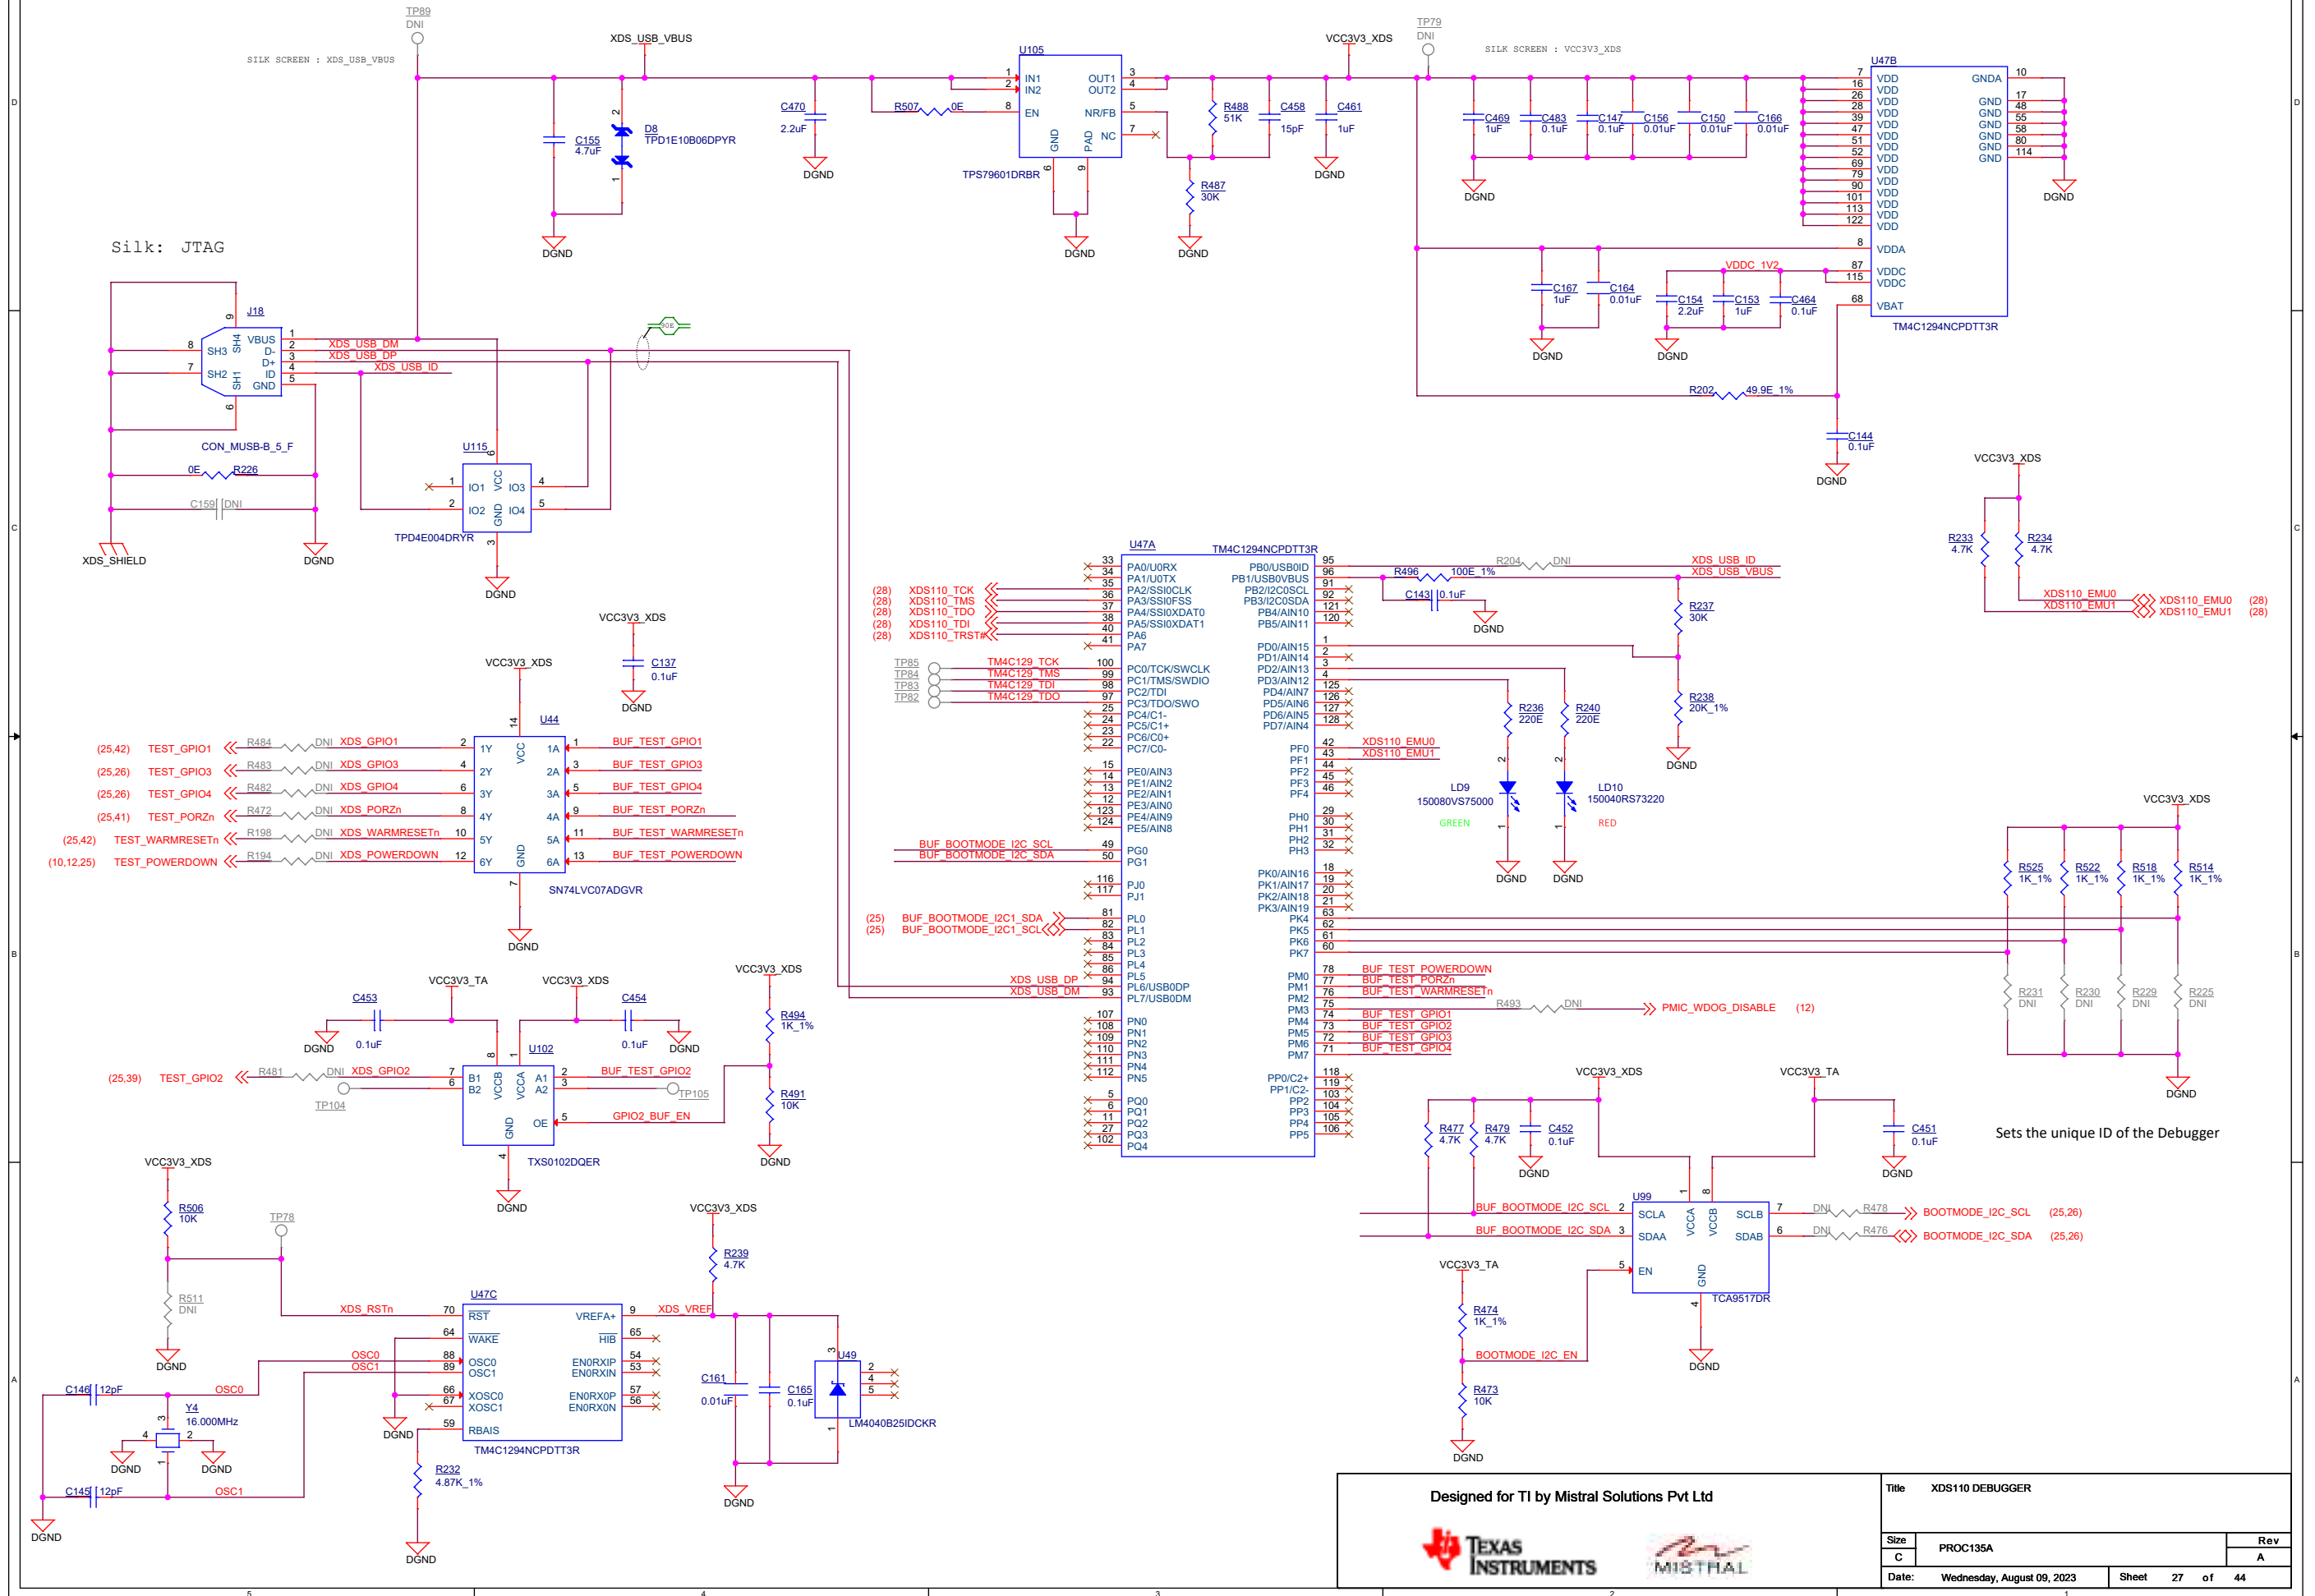

JTAG SOC SECTION

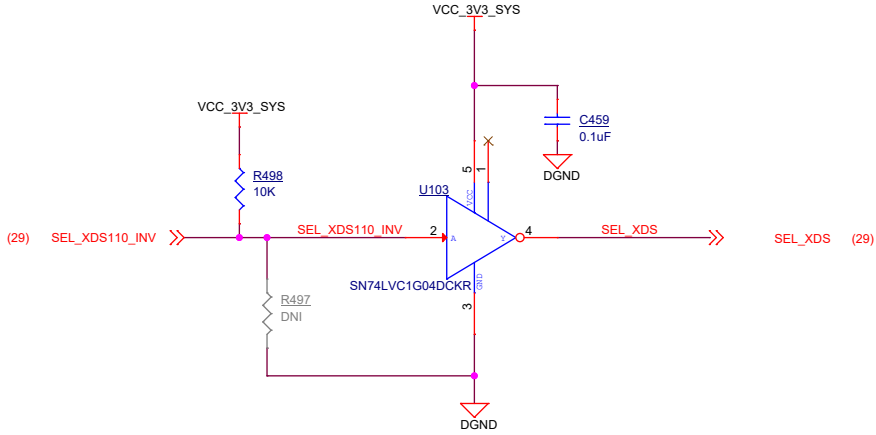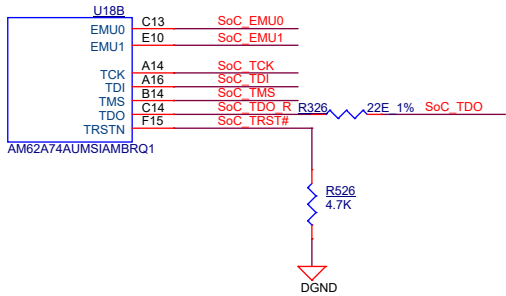

BUFFER XDS110

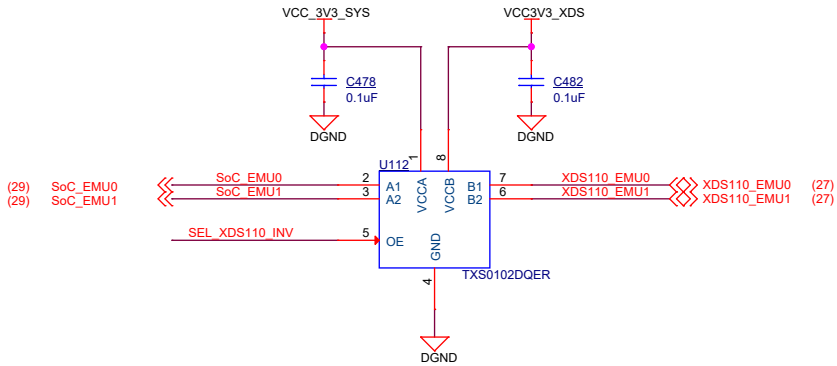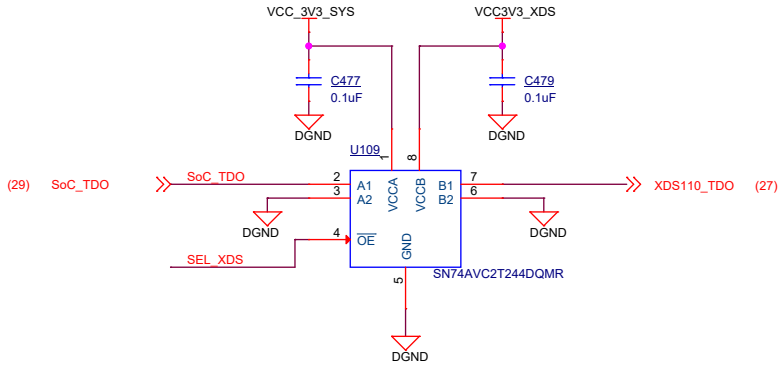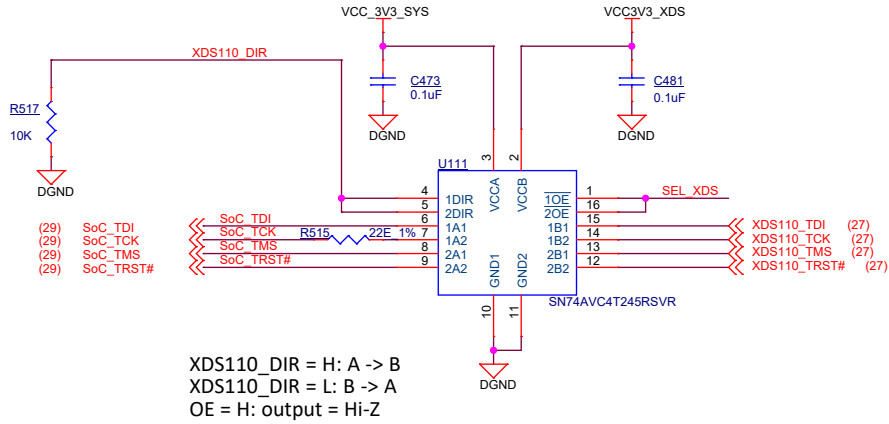

Designed for TI by Mistral Solutions Pvt Ltd



Title JTAG BUFFER

Size PROC135A


Rev

A

Date: Wednesday, August 09, 2023


Sheet 28 of 44

cTI20 JTAG BUFFERS

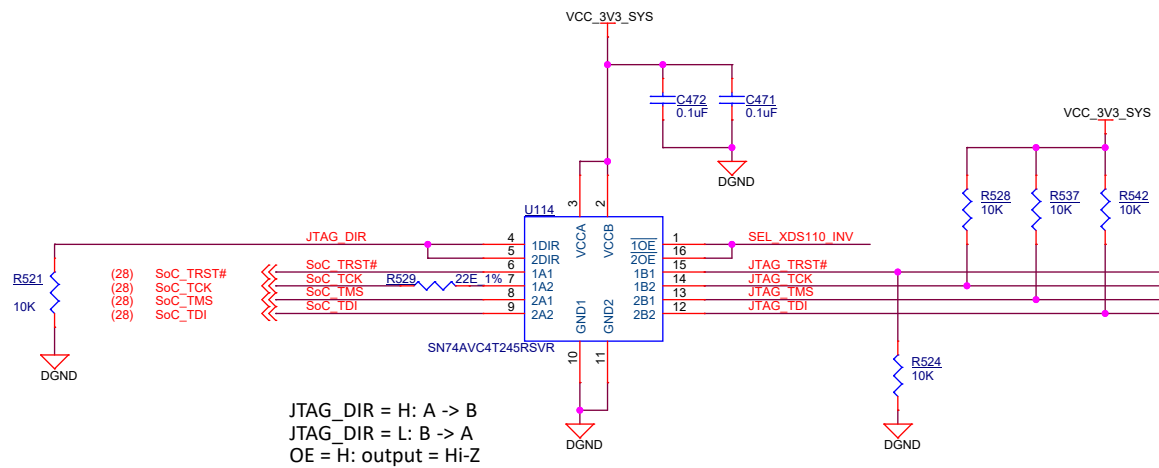


JTAG_DIR = H: A -> B
JTAG_DIR = L: B -> A
OE = H: output = Hi-Z


CAD NOTE: Buffers U114 and U122 need to be placed closer to the cTI-20pin connector J19 to reduce Stub length of the JTAG signals.

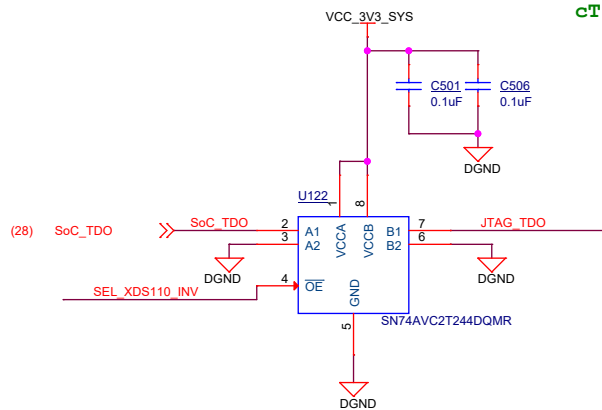


JTAG CLOCK BUFFER

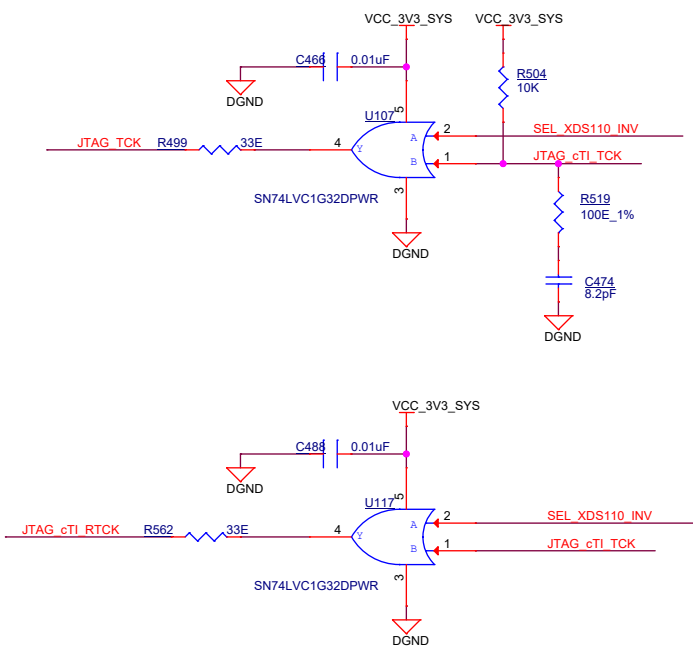

JTAG 20 PIN cTI CONNECTOR

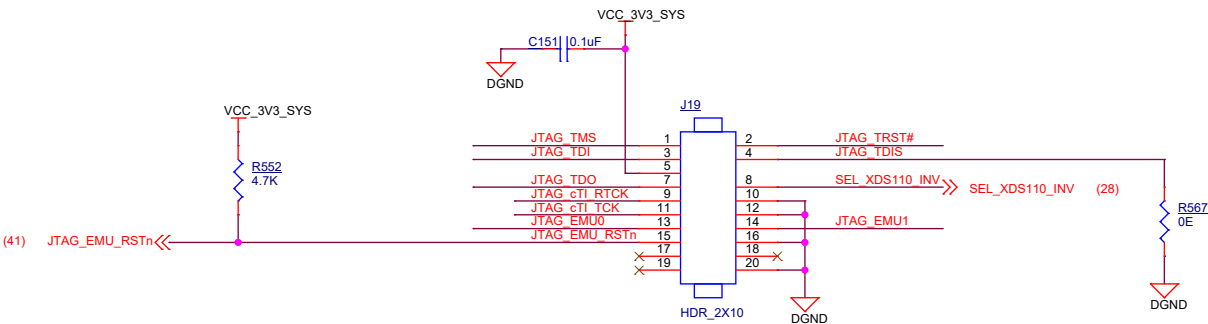

Silk: cTI

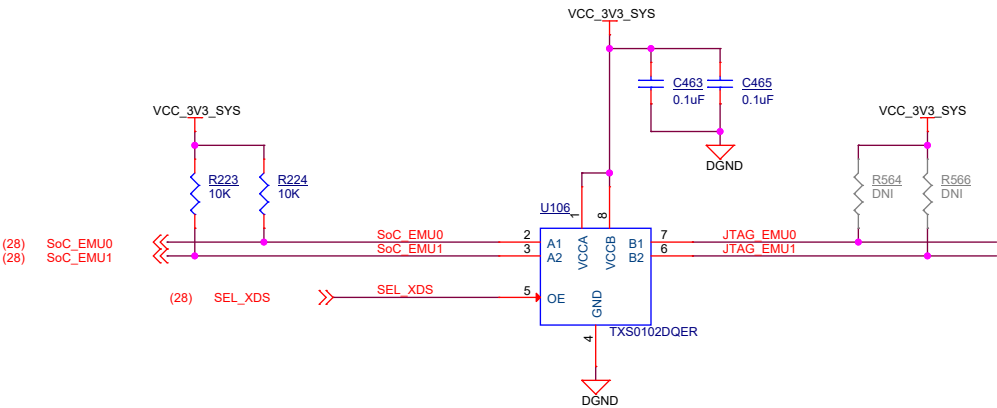

Designed for TI by Mistral Solutions Pvt Ltd



Title JTAG 20 PIN cTI CONNECTOR








Size C

Date: Wednesday, August 09, 2023


Sheet 29 of 44

Rev A



FT4232 UART

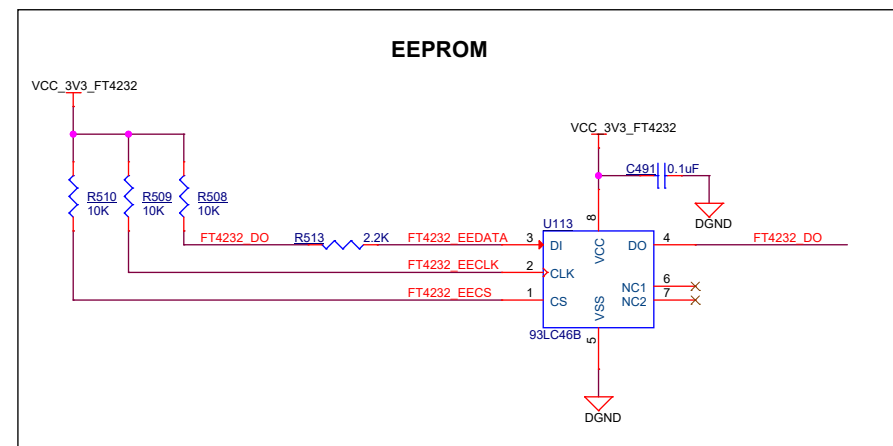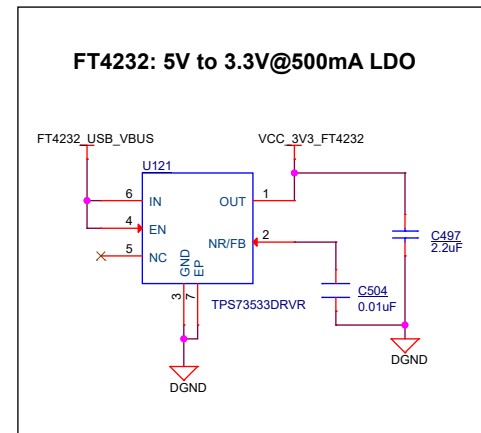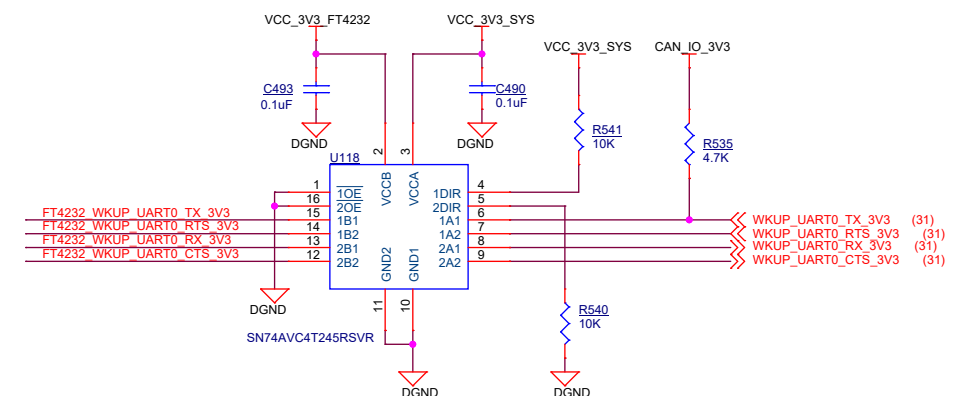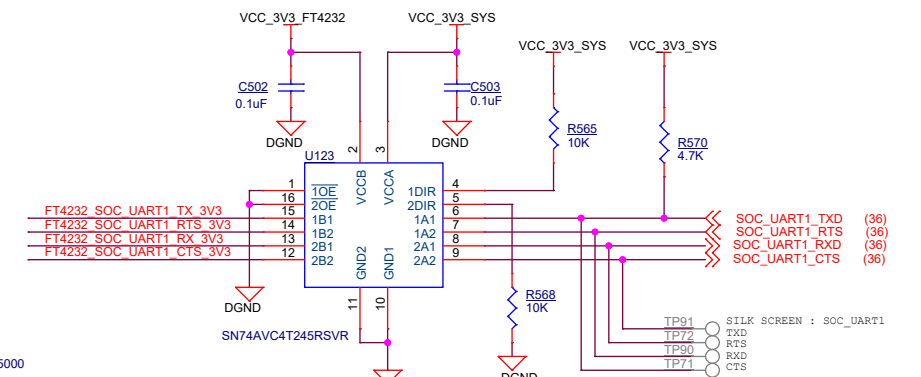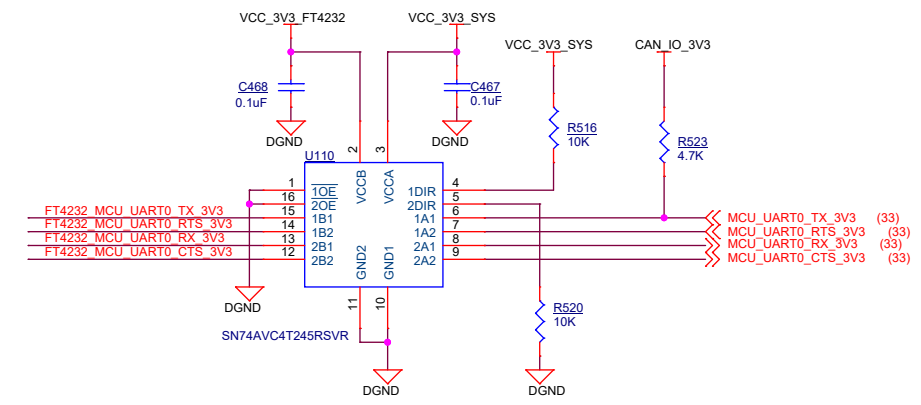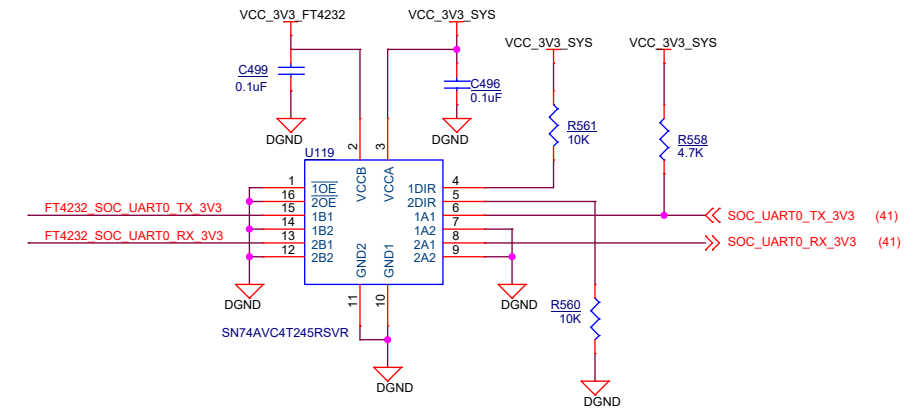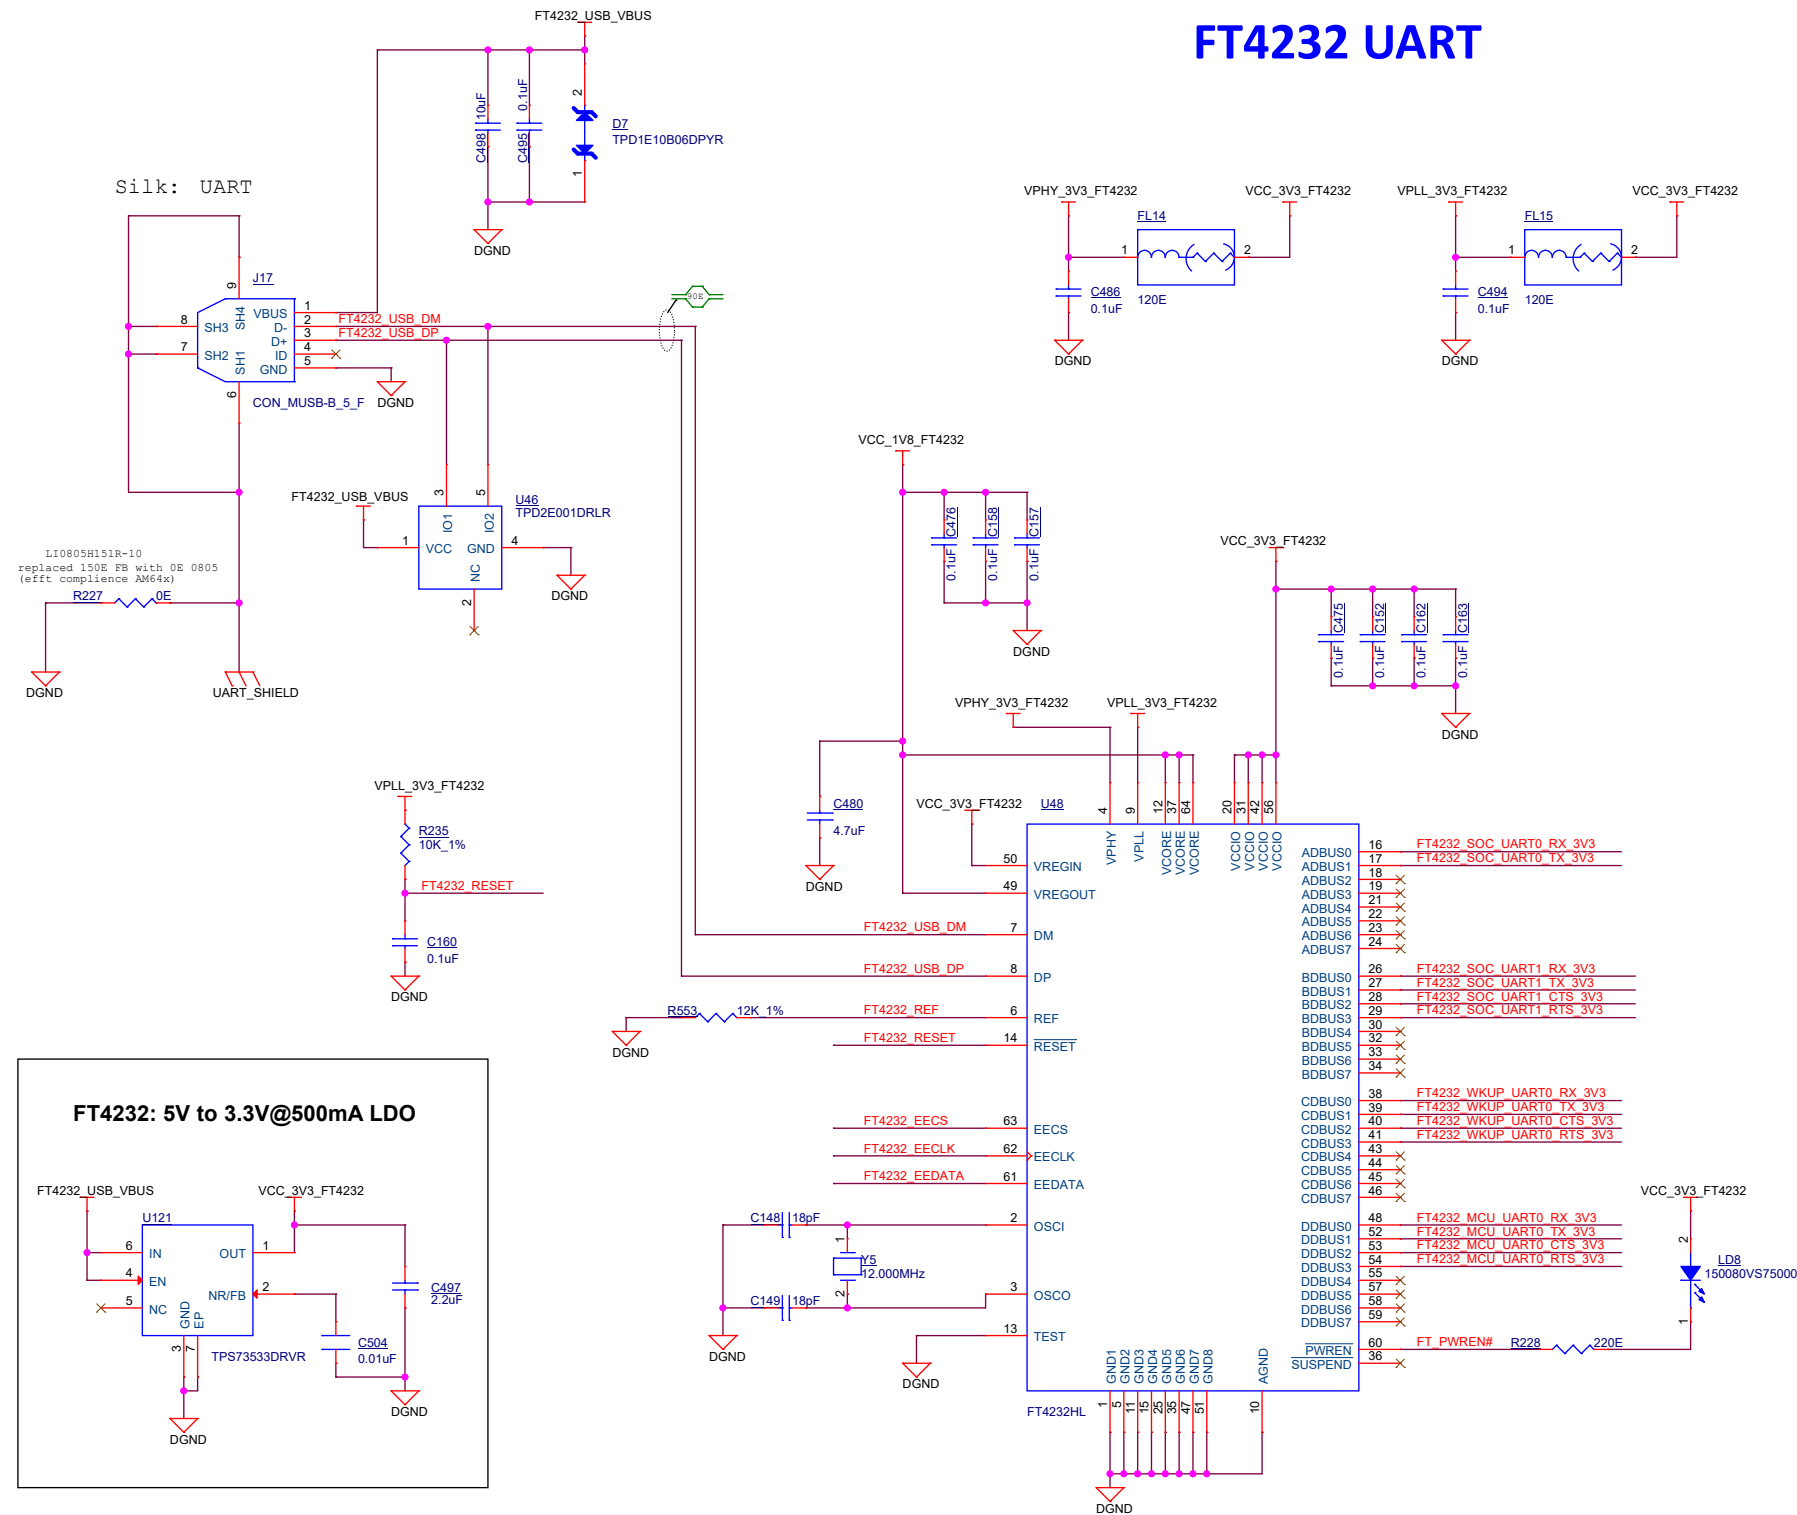


SOC WKUP DOMAIN

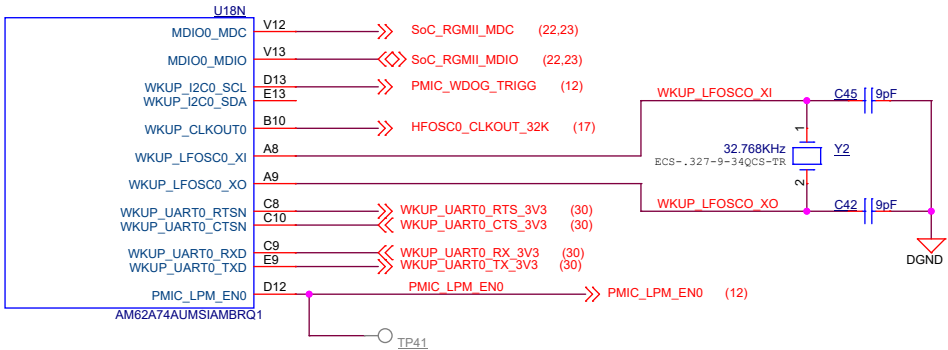

SOC GPMC

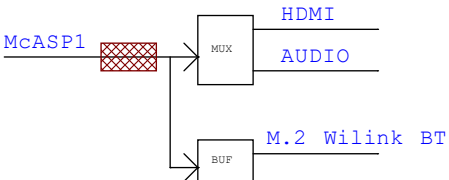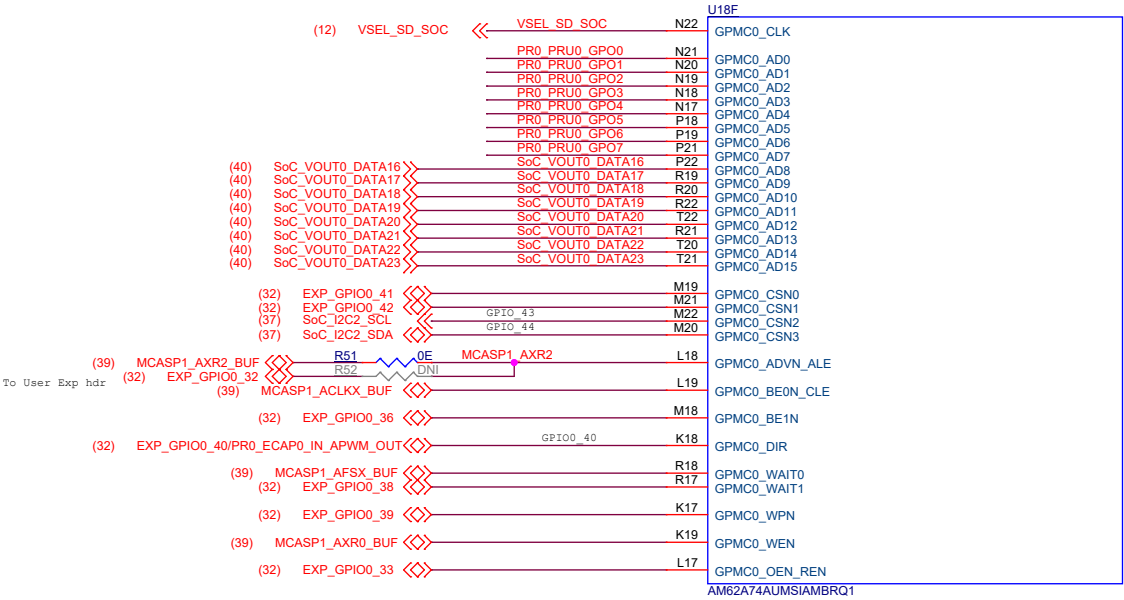

BOOTMODE PINS

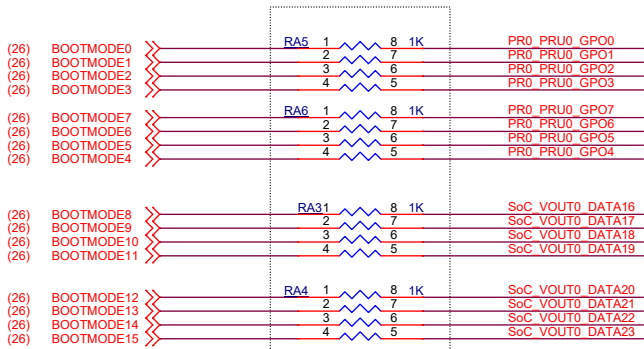

NOTE: 1K Resistors are used to isolate the BOOTMODE control logic after the value is latched

Designed for TI by Mistral Solutions Pvt Ltd



Title SOC WKUP & GPMC



Size PROC135A

Date: Wednesday, August 09, 2023


Sheet 31 of 44

Rev A


USER EXPANSION CONNECTOR

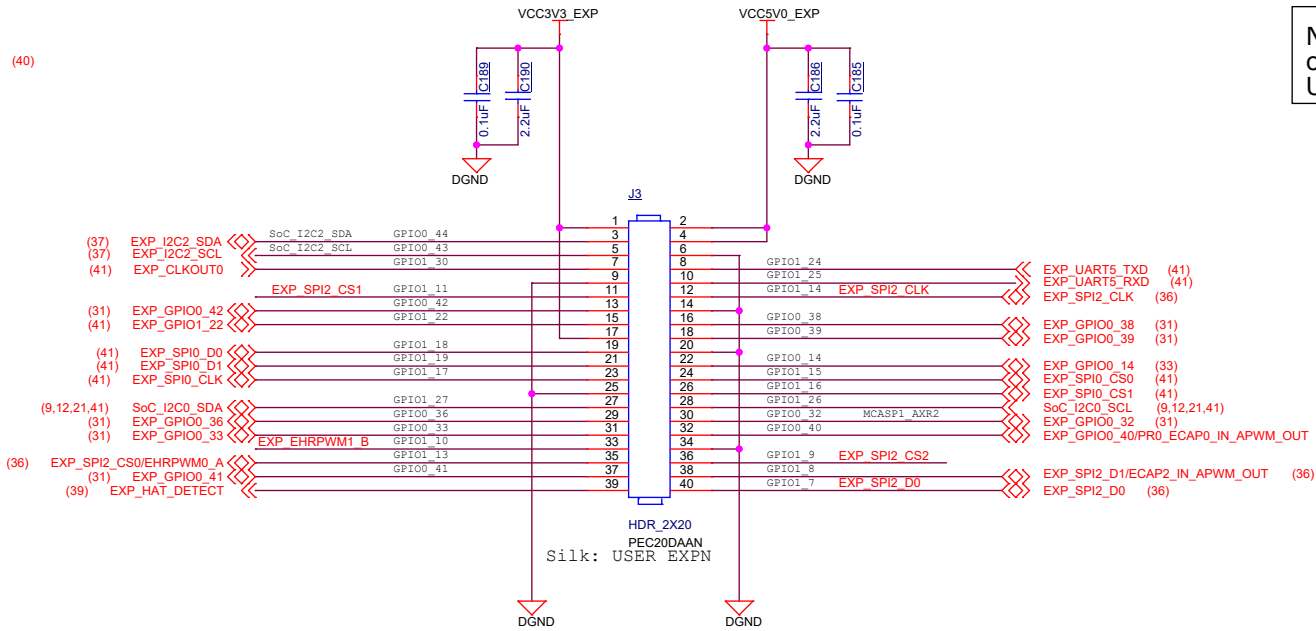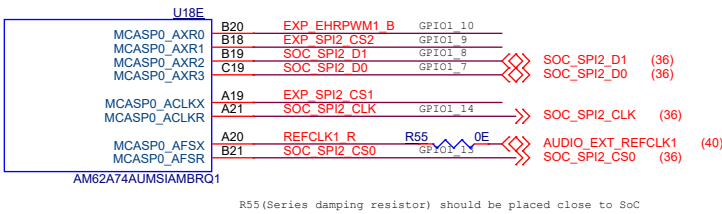

Note: Expansion boards should take care of the null modem connectivity for the UART signals (cross-over of Rx and Tx)

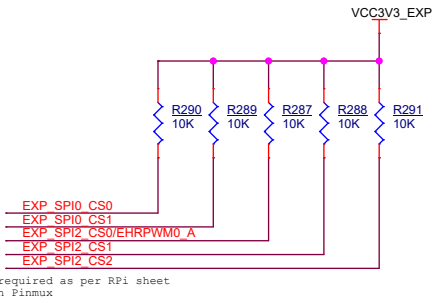

POWER SWITCHES FOR USER EXPANSION CONNECTOR

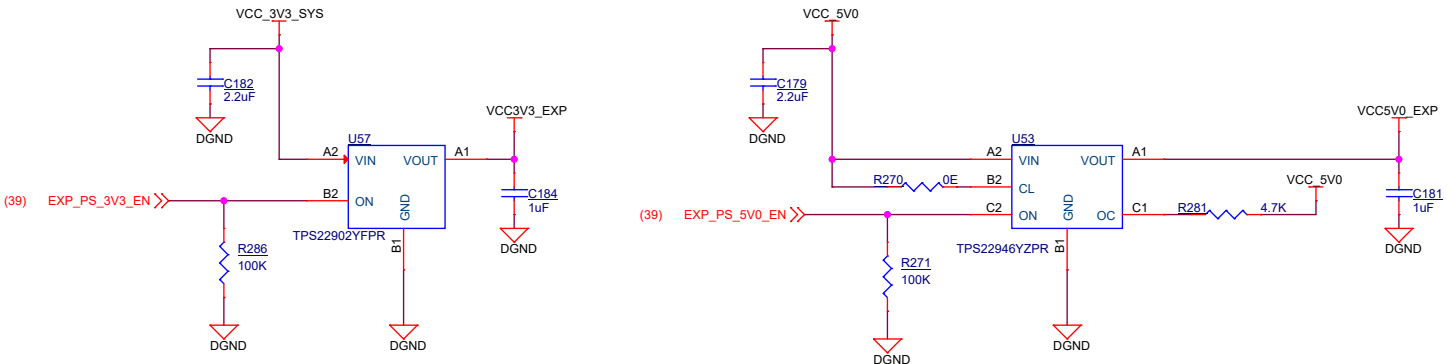

NOTE:

AM62A Starter Kit shall not be powered through the 5V0 or 3V3 pins on the 40-pin User Expansion Connector.

User Expansion Connector I/O are not fail-safe and shall not be driven when AM62A Starter Kit is not powered.

5V supply of User Expansion Connector is limited to sourcing 155mA max.

3V3 supply of User Expansion Connector is limited to sourcing 500mA max.

Designed for TI by Mistral Solutions Pvt Ltd



Title USER EXPANSION CONNECTOR



Size C

Date: Wednesday, August 09, 2023


Sheet 32 of 44

Rev A

SOC - MCU DOMAIN

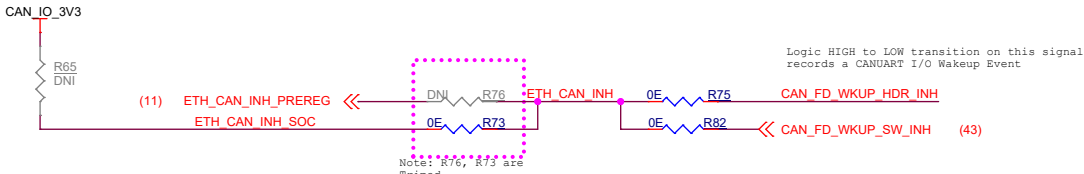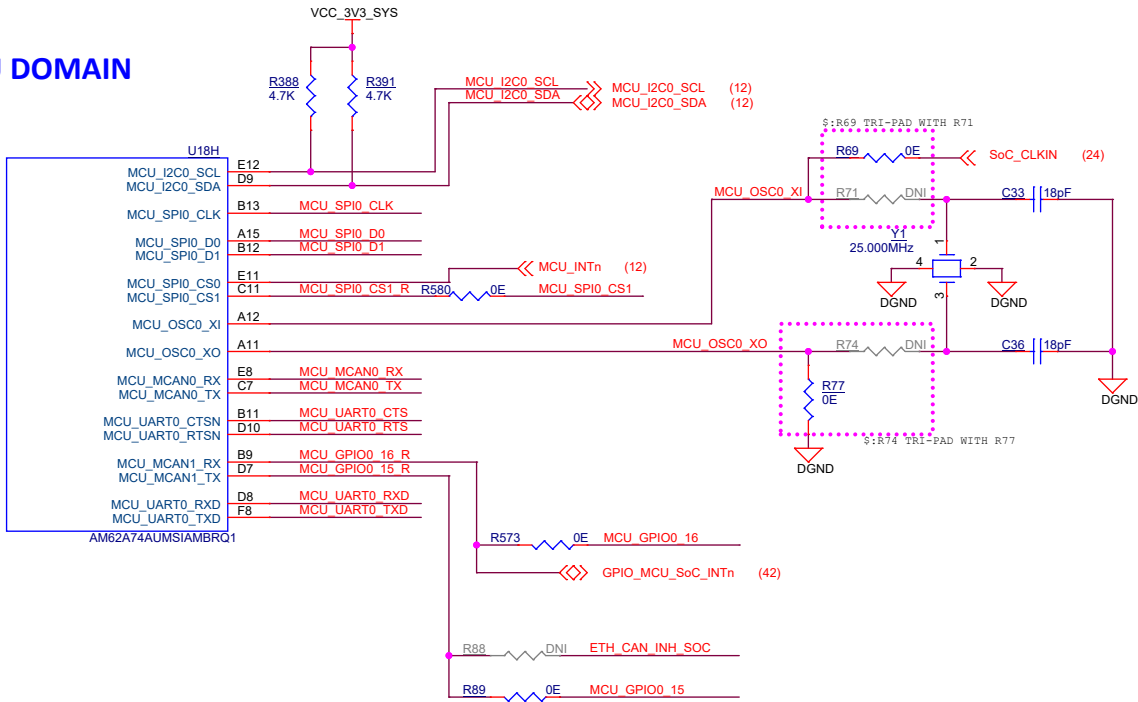


MCU_UART0 MUX

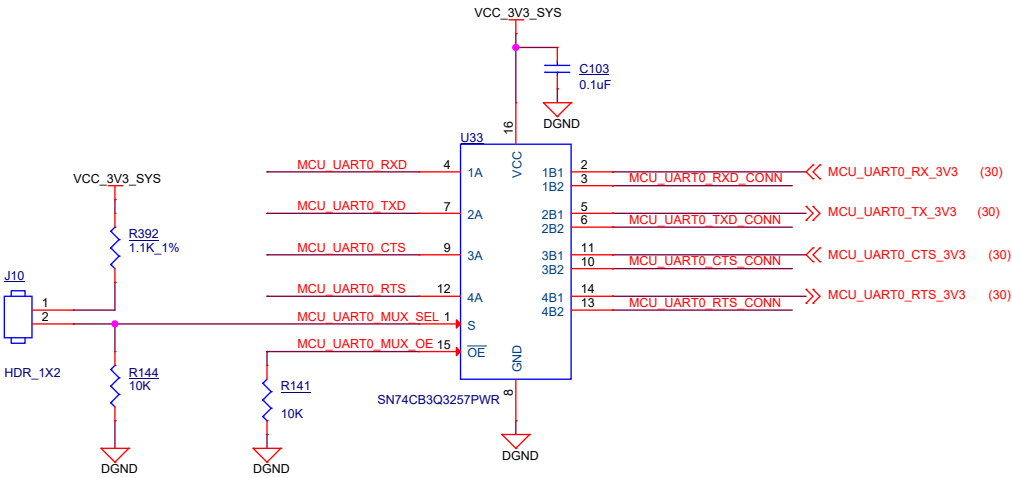

OEn	SEL	INPUT/OUTPUT	
		An	An
L	L (DEFAULT)	An=nB1	SOC - FT4232
L	H	An=nB2	SOC - MCU HEADER

MCU HEADER

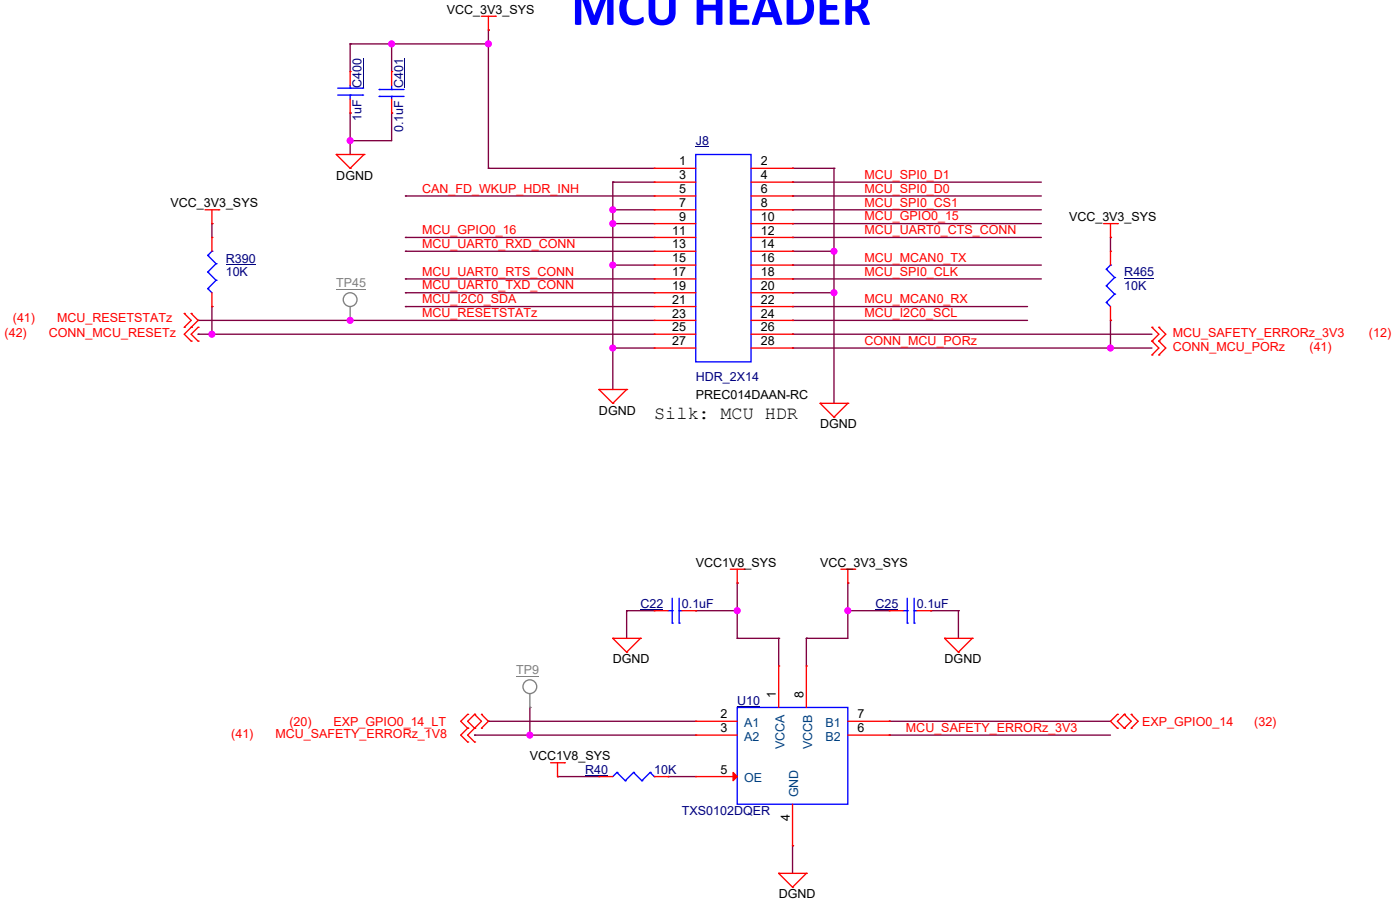


Designed for TI by Mistral Solutions Pvt Ltd




Title			MCU HEADER	
Size	PROC135A			Rev
C				A
Date:	Wednesday, August 09, 2023	Sheet	33 of 44	


USB1 TYPE-A

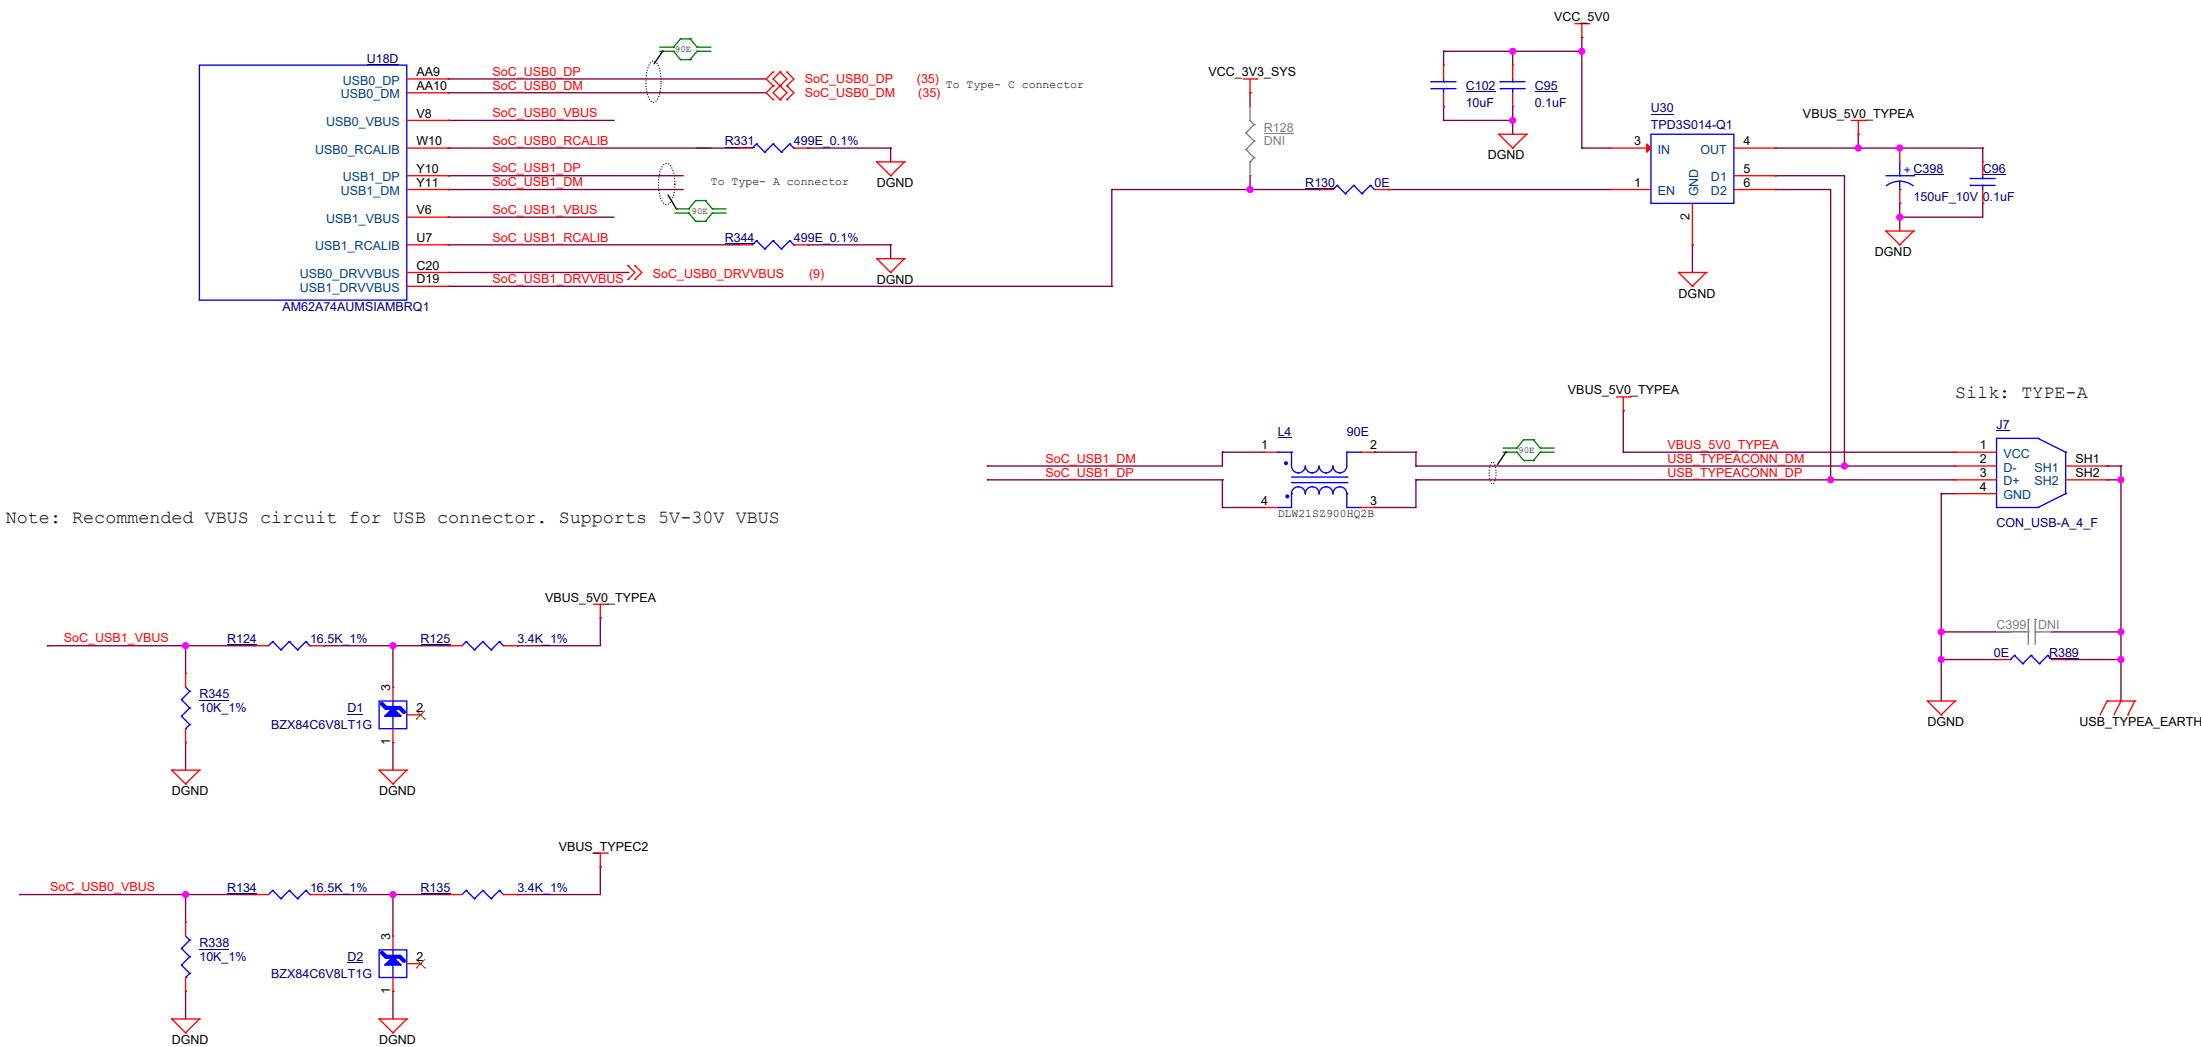


USB0 TYPE-C DRP

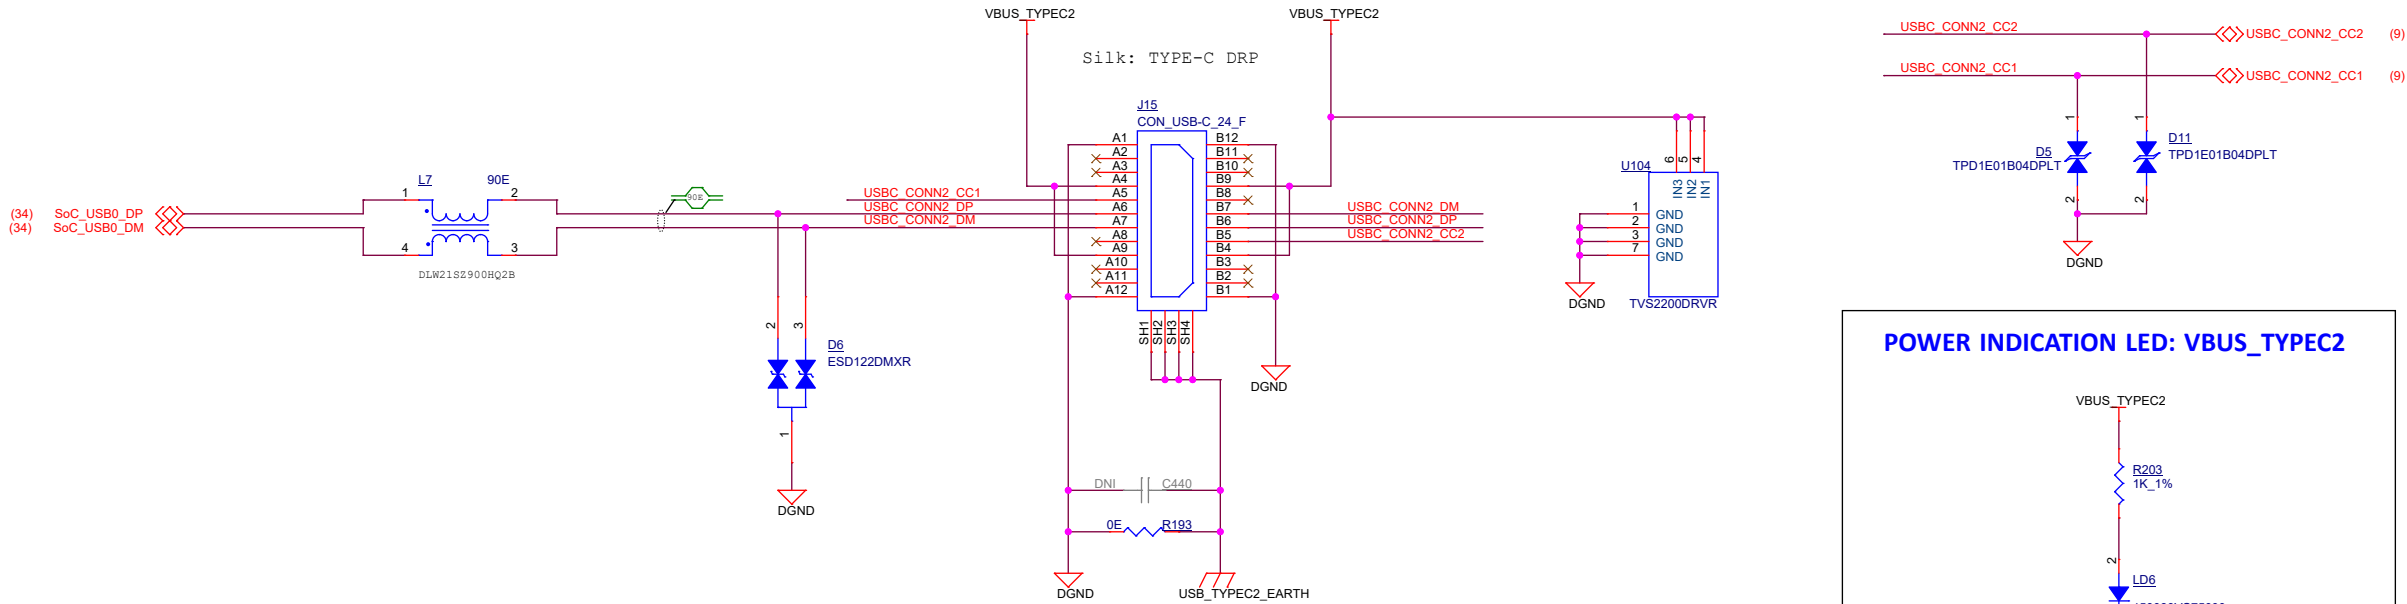


POWER INDICATION LED: VBUS_TYPEC2

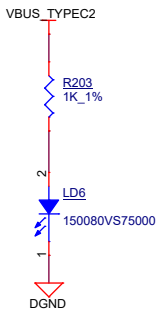

POWER RAIL LEDS

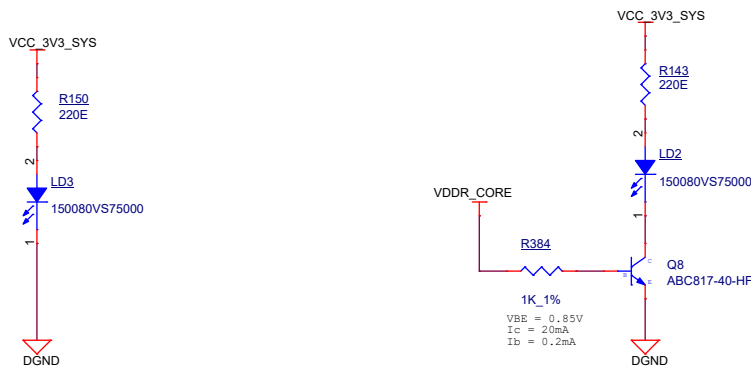

USER TEST LEDS

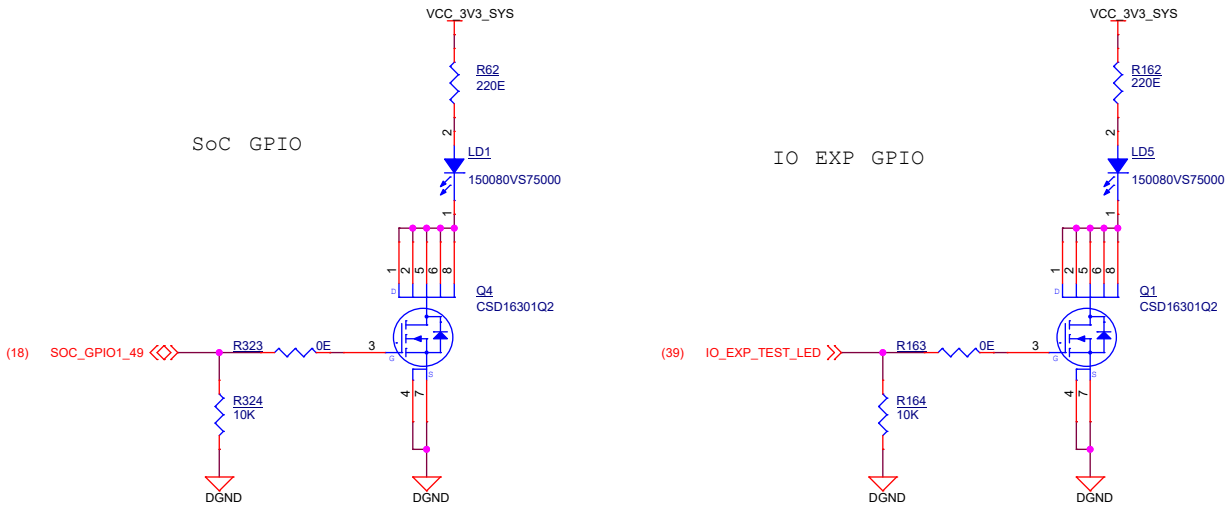

Designed for TI by Mistral Solutions Pvt Ltd



Title USB0 TYPE-C DRP & USER TEST LED

Size PROC135A


Rev

A

Date: Wednesday, August 09, 2023

Sheet 35 of 44

SoC UART1 FET SWITCH & BUFFER

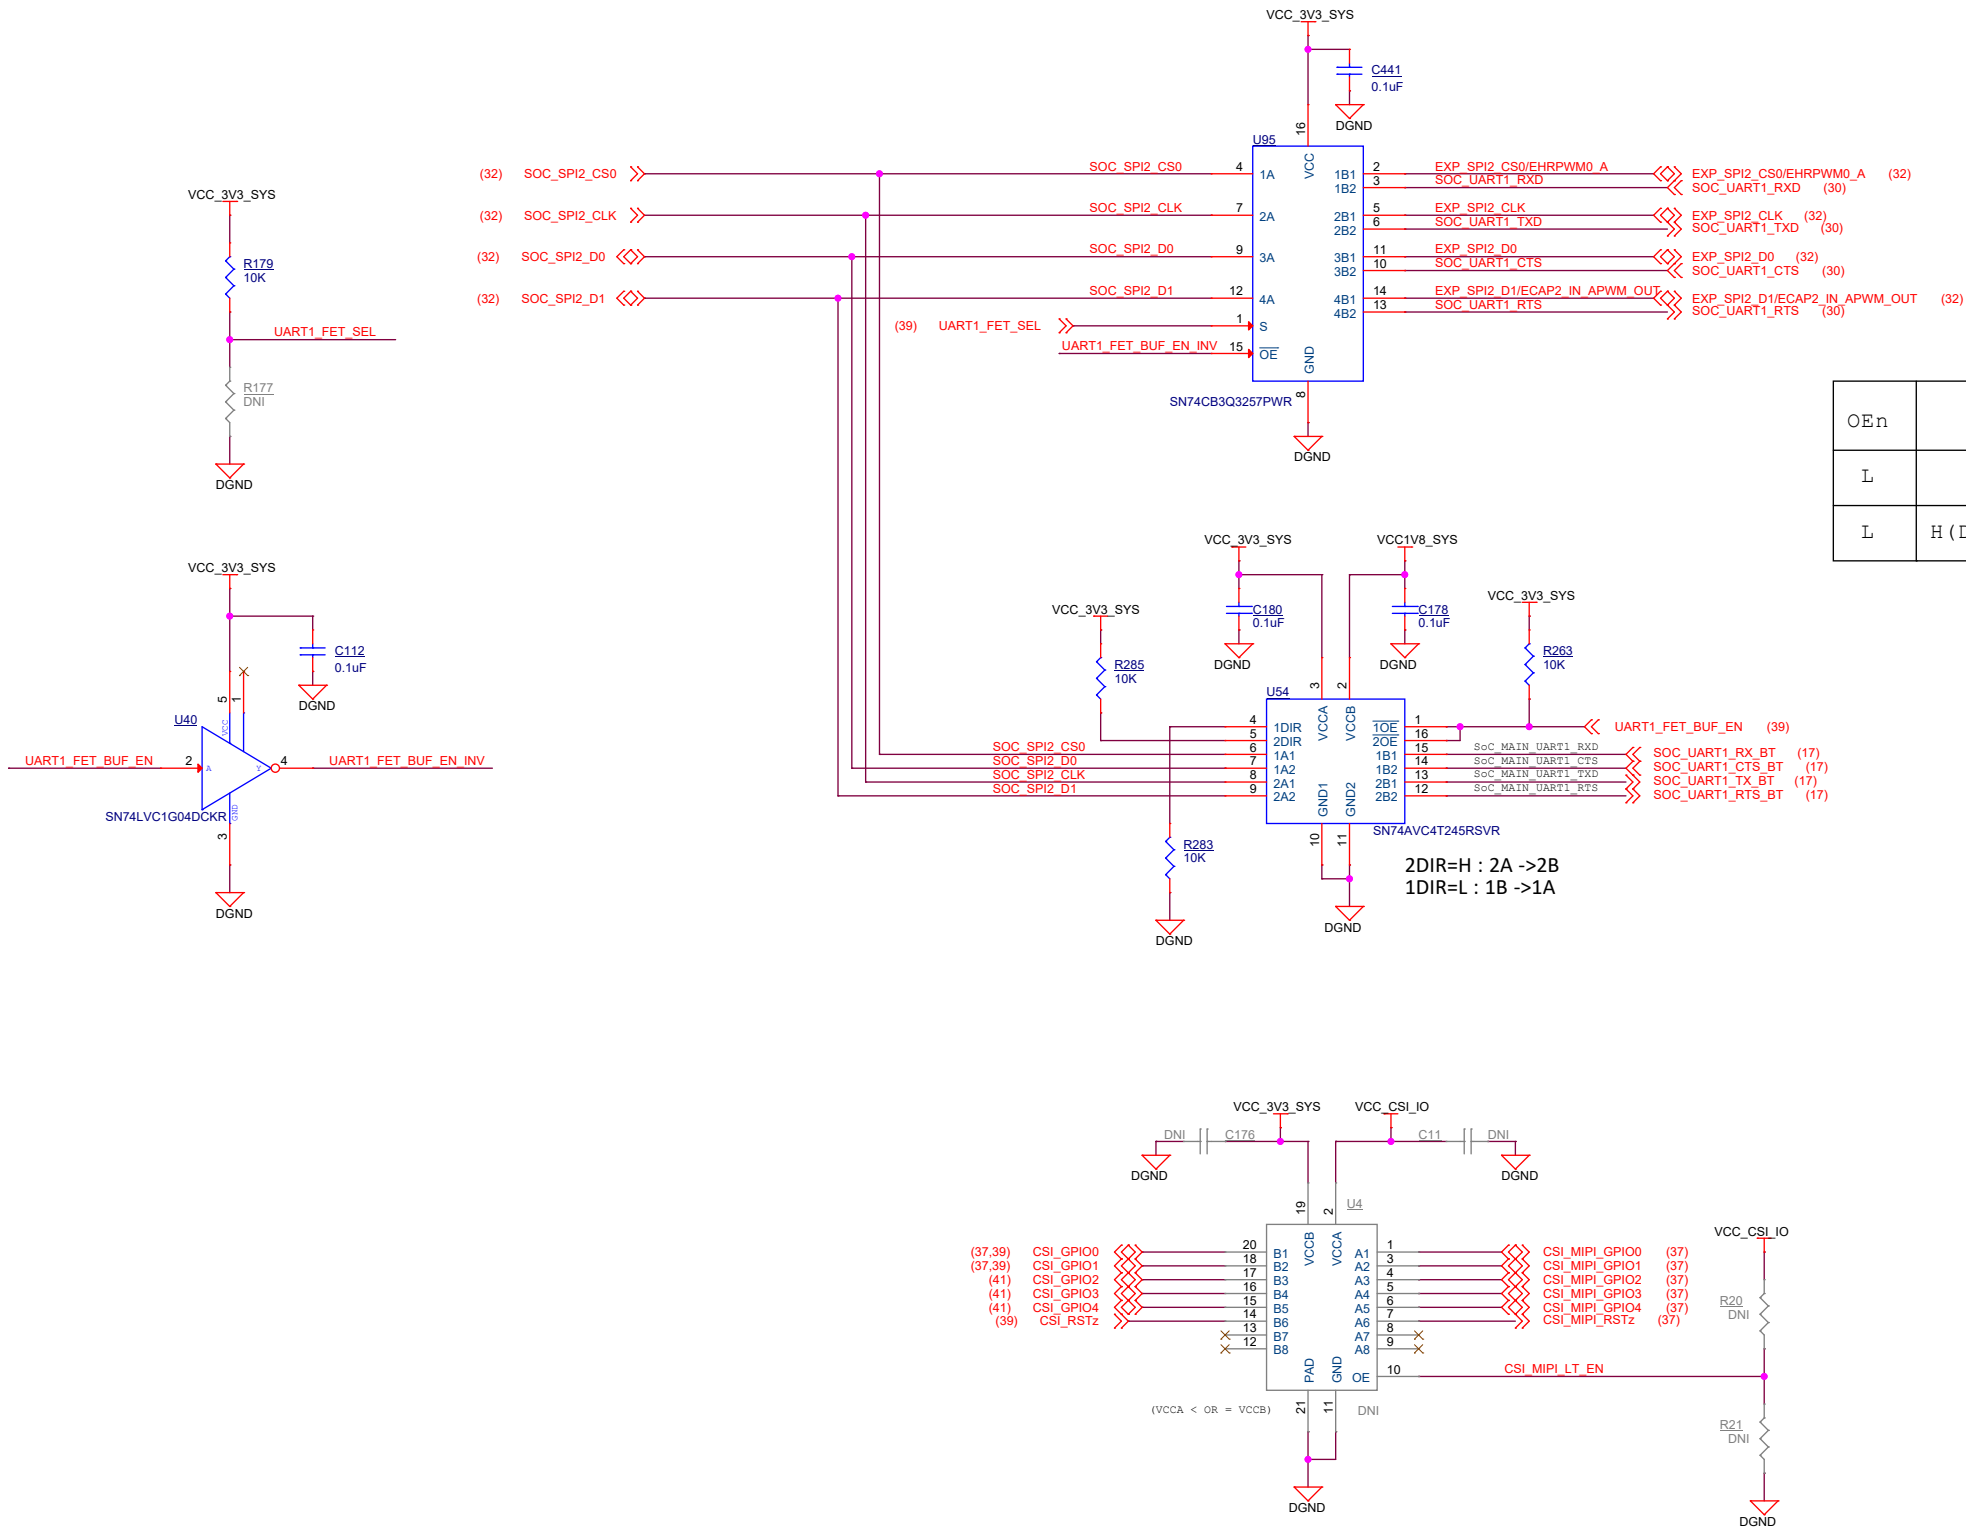

Designed for TI by Mistral Solutions Pvt Ltd



Title SoC UART1 FET SWITCH & BUFFER




Size
C PROC135A

Rev
A

Date: Wednesday, August 09, 2023






Sheet 36 of 44

CSI INTERFACE

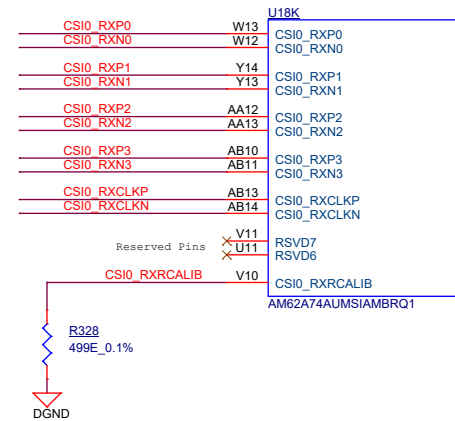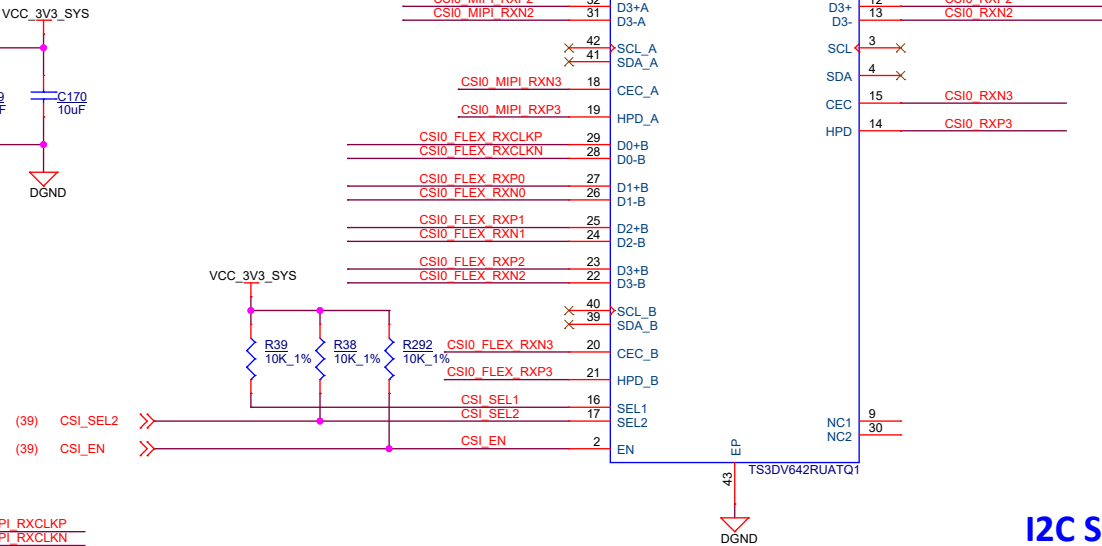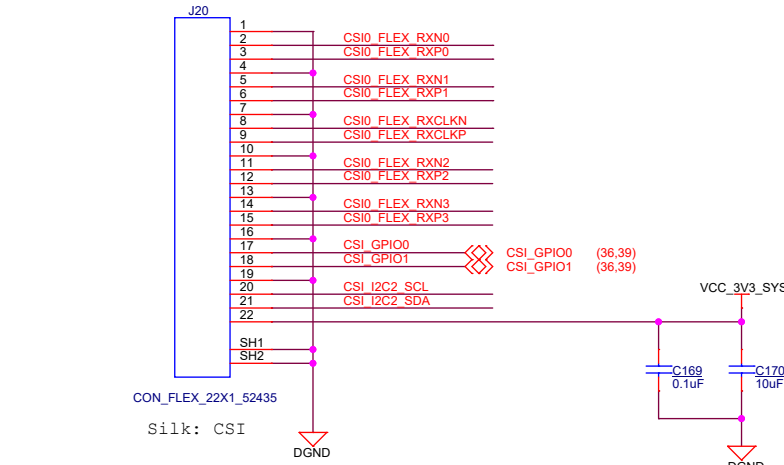

CSI - 1:2 MUX : Truth Table

MUX_SEL_2	FUNCTION
LOW	INPUT<--A port [CSI2 Connector]
HIGH	INPUT<--B port [Flex Camera Connector] (default)

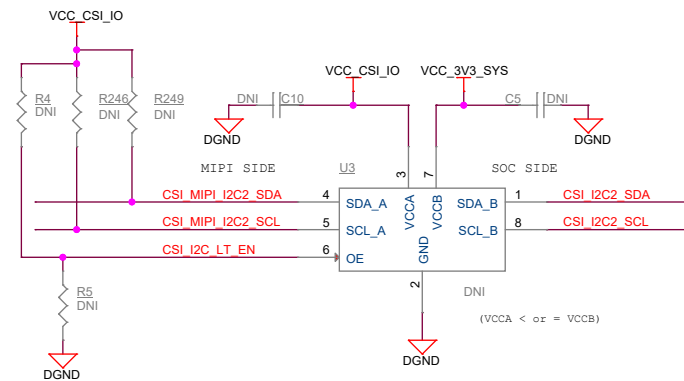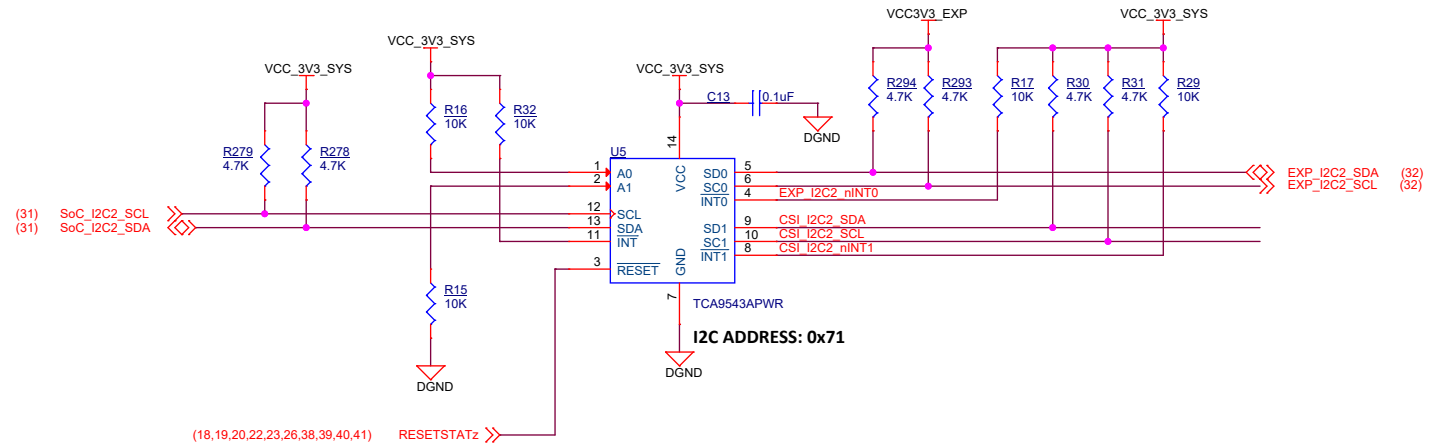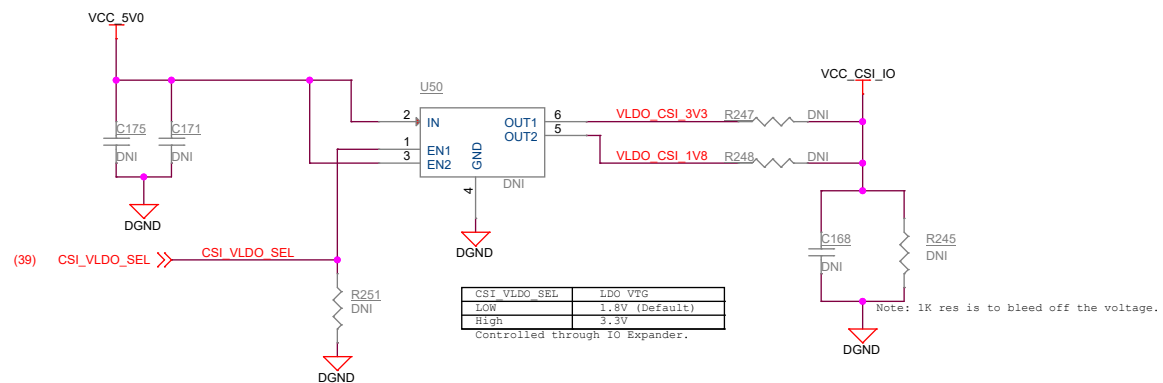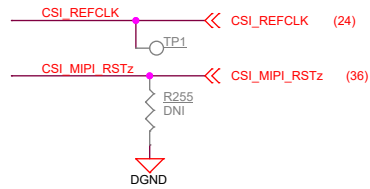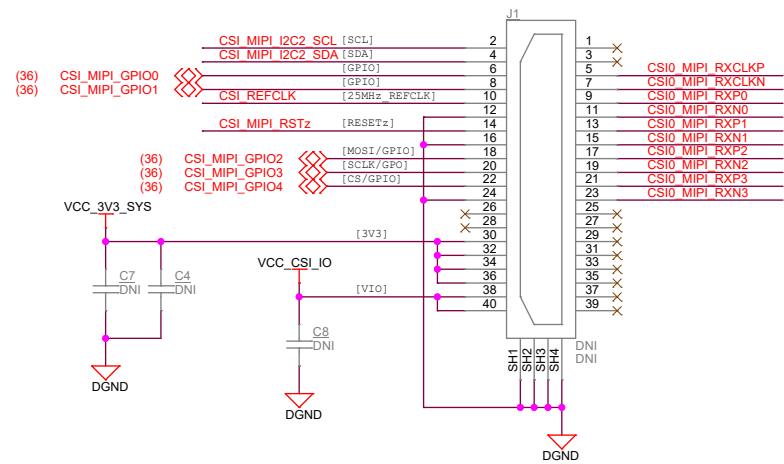

Designed for TI by Mistral Solutions Pvt Ltd



Title	CSI INTERFACE
-------	---------------


Size	PROC135A
2	

Date: Wednesday, August 09, 2023


Sheet 37 of 44

Rev


AUDIO CODEC

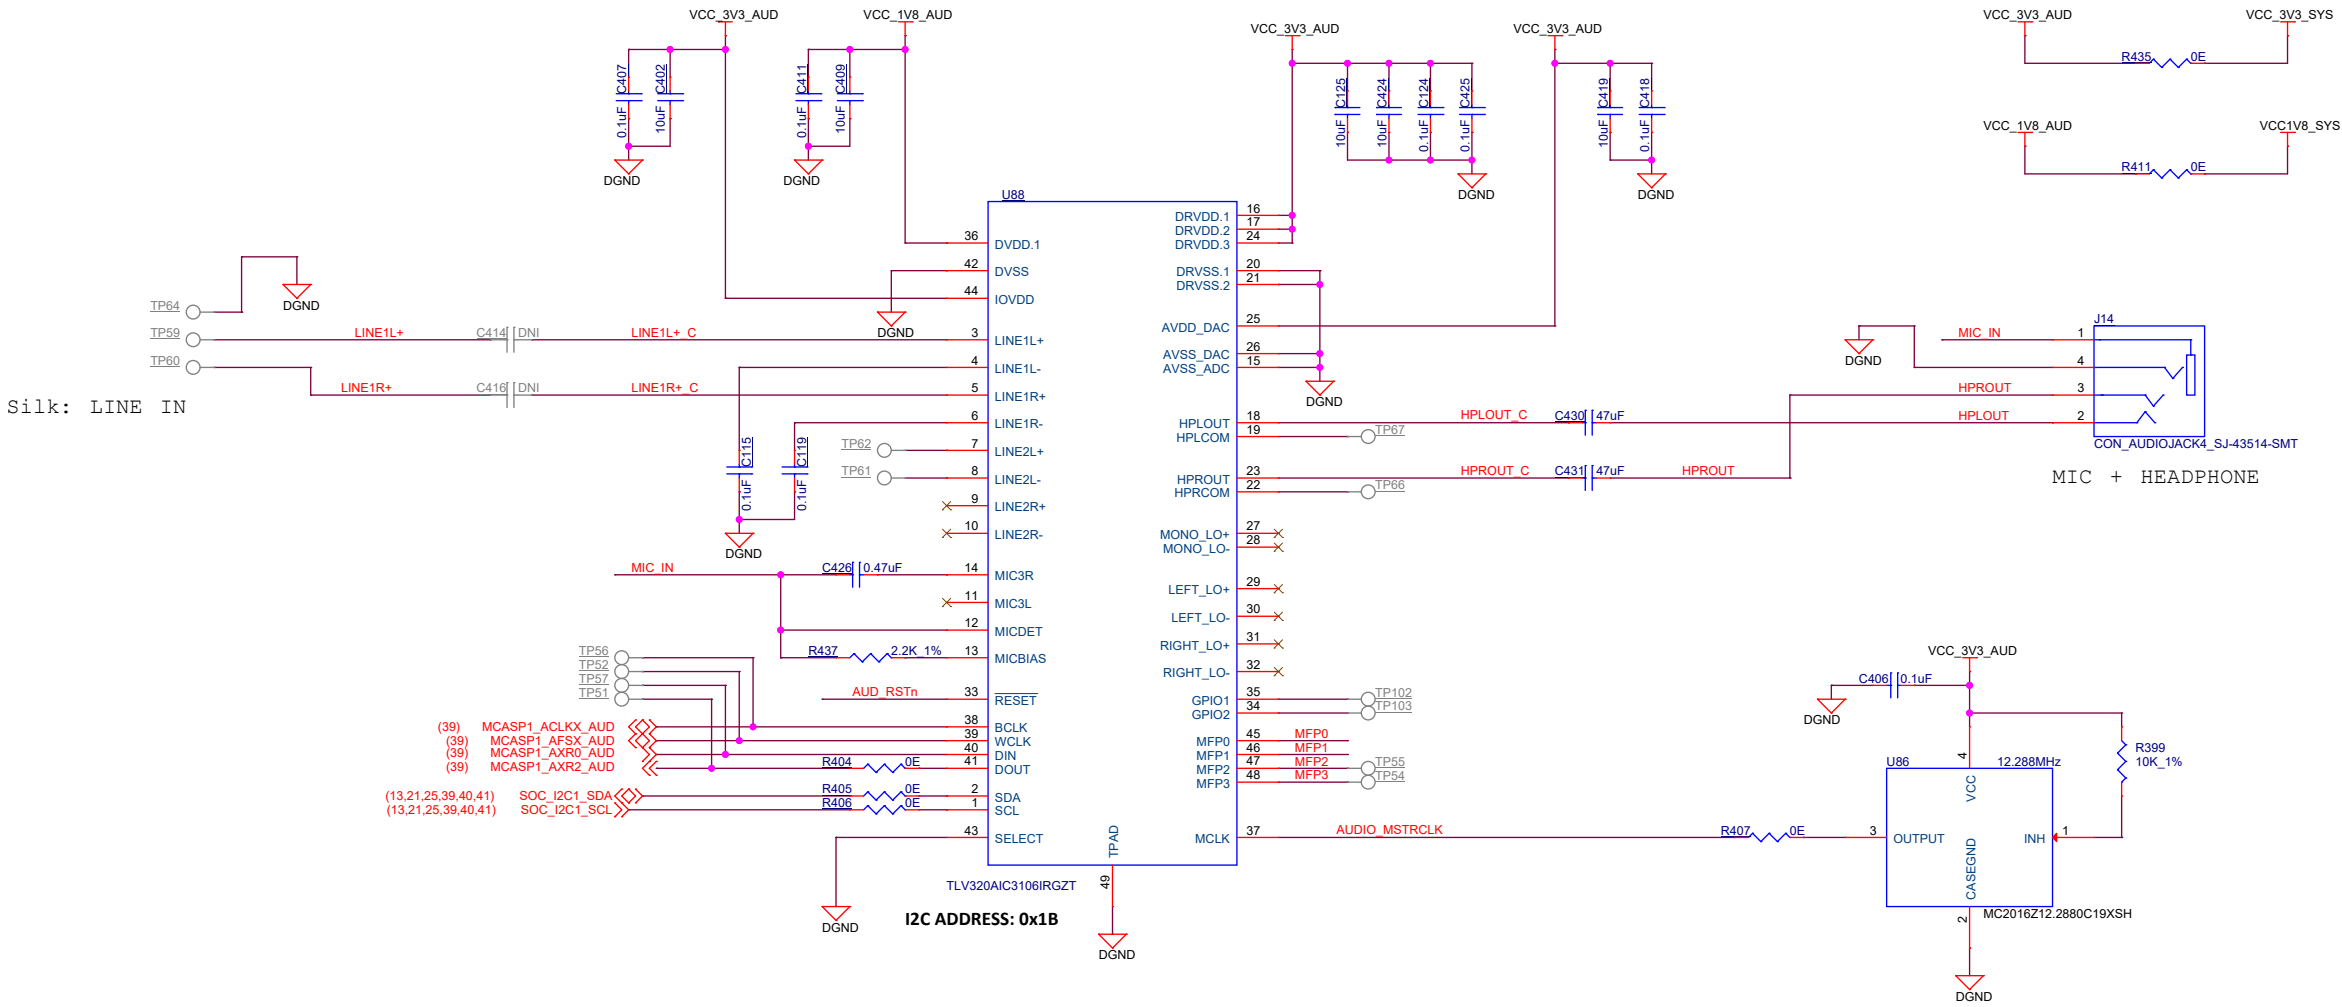

AUDIO CODEC RESET

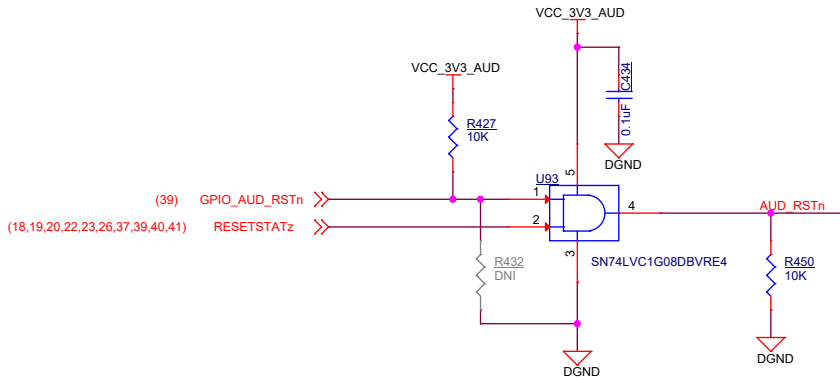

CODEC I2C ADDRESS SELECTION

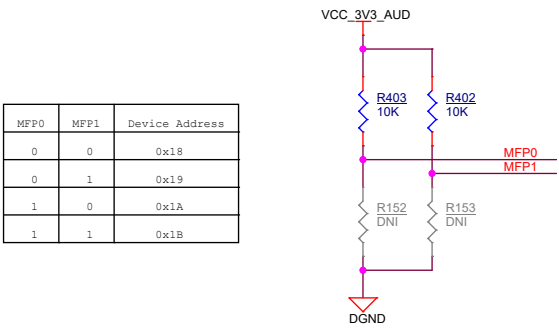

Designed for TI by Mistral Solutions Pvt Ltd



Title AUDIO CODEC



Size PROC135A

Date: Wednesday, August 09, 2023


Sheet 38 of 44

Rev A

IO EXPANDER

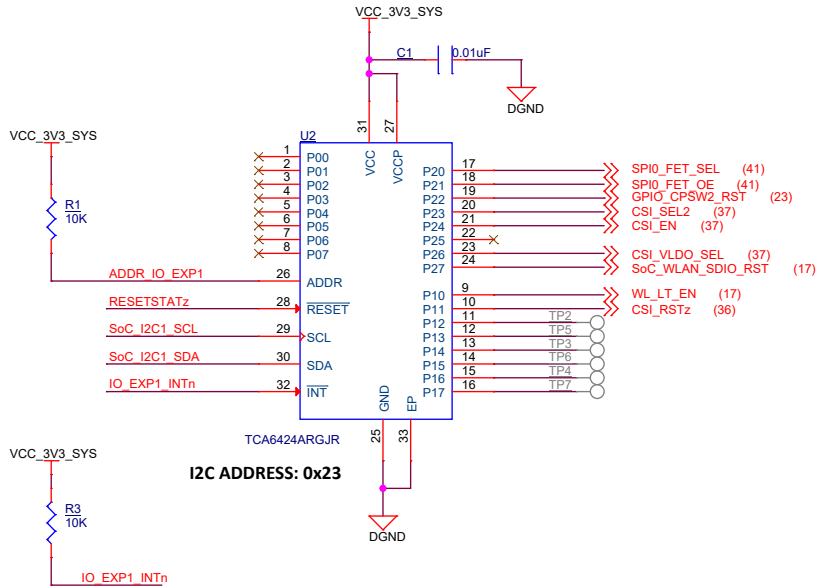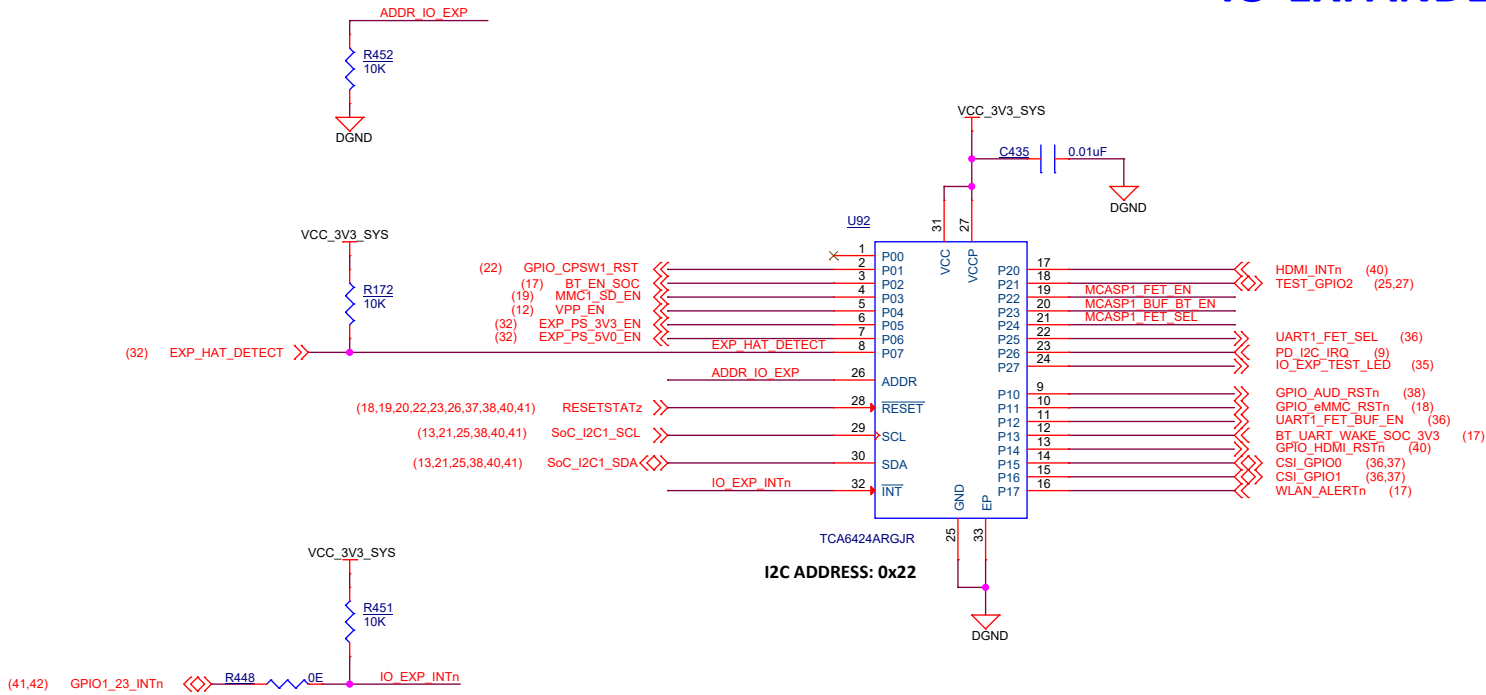


McASP1 FET SWITCH & BUFFER

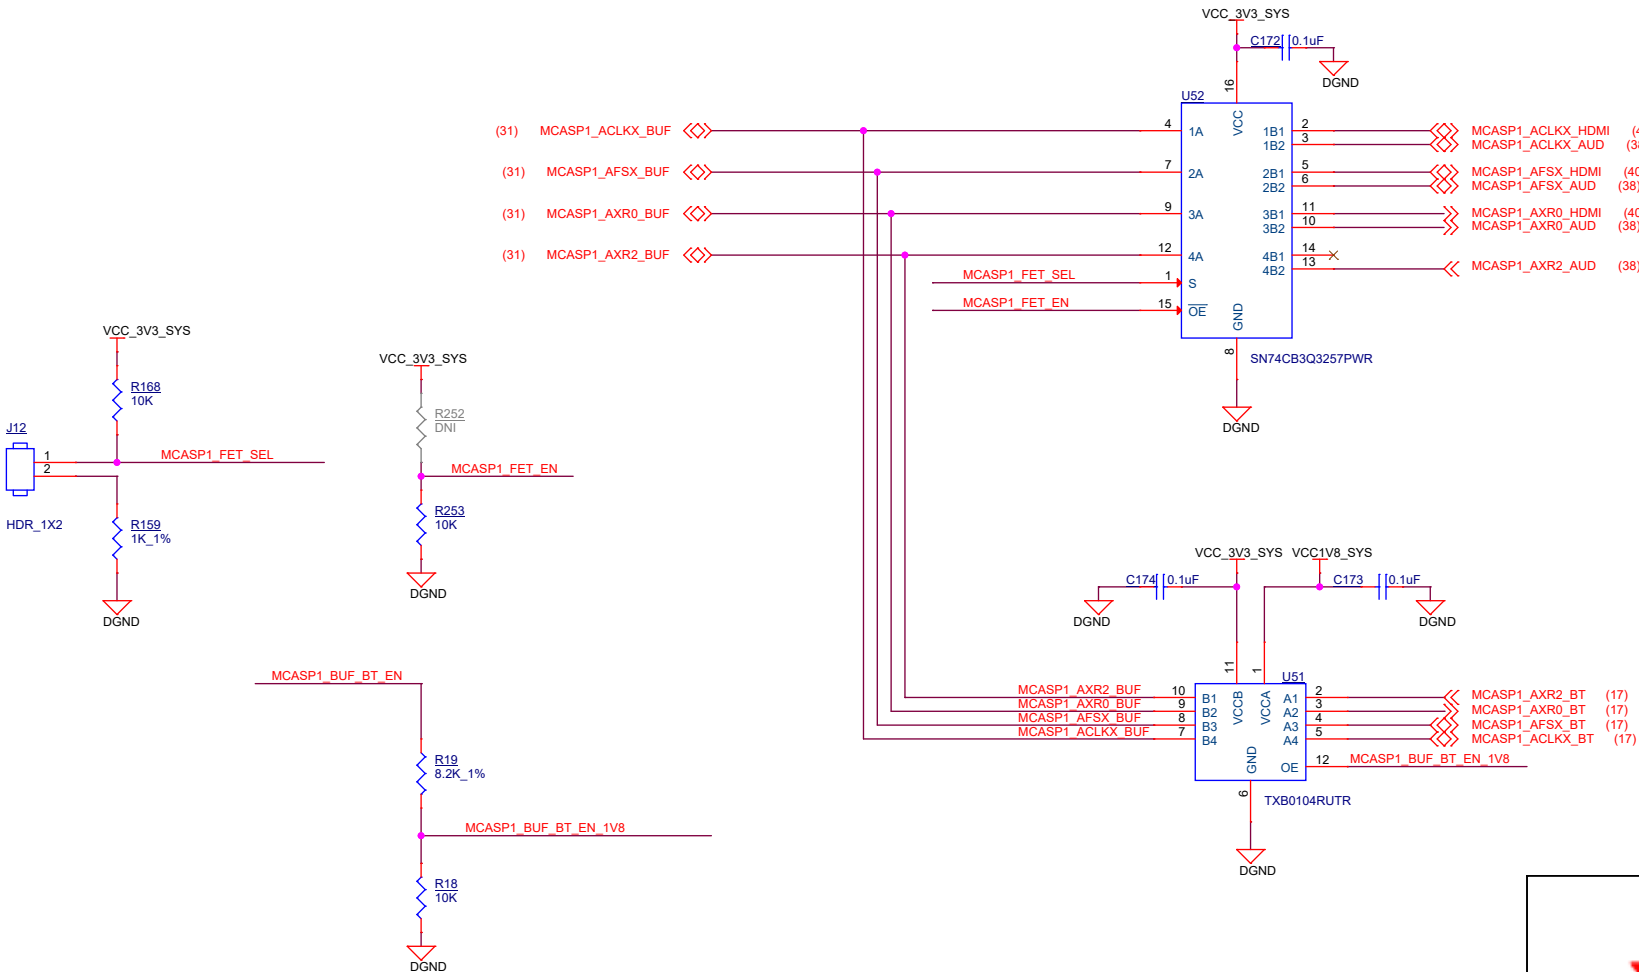


OEn	SEL	INPUT/OUTPUT An	
L	H (DEFAULT)	An=nB2	MCASP1 - CODEC
L	L	An=nB1	MCASP1 - HDMI

HDMI INTERFACE

U18M	U22	SoC_VOUT0_DATA0
VOUT0_DATA0	U21	SoC_VOUT0_DATA1
VOUT0_DATA1	U20	SoC_VOUT0_DATA2
VOUT0_DATA2	U19	SoC_VOUT0_DATA3
VOUT0_DATA3	U18	SoC_VOUT0_DATA4
VOUT0_DATA4	U17	SoC_VOUT0_DATA5
VOUT0_DATA5	U16	SoC_VOUT0_DATA6
VOUT0_DATA6	U15	SoC_VOUT0_DATA7
VOUT0_DATA7	U14	SoC_VOUT0_DATA8
VOUT0_DATA8	U13	SoC_VOUT0_DATA9
VOUT0_DATA9	U12	SoC_VOUT0_DATA10
VOUT0_DATA10	U11	SoC_VOUT0_DATA11
VOUT0_DATA11	U10	SoC_VOUT0_DATA12
VOUT0_DATA12	U9	SoC_VOUT0_DATA13
VOUT0_DATA13	U8	SoC_VOUT0_DATA14
VOUT0_DATA14	U7	SoC_VOUT0_DATA15
VOUT0_DATA15	AA22	SoC_VOUT0_PCLK
VOUT0_PCLK	U17	SoC_VOUT0_DE
VOUT0_DE	V17	SoC_VOUT0_VSYNC
VOUT0_VSYNC	T18	SoC_VOUT0_HSYNC
VOUT0_HSYNC		

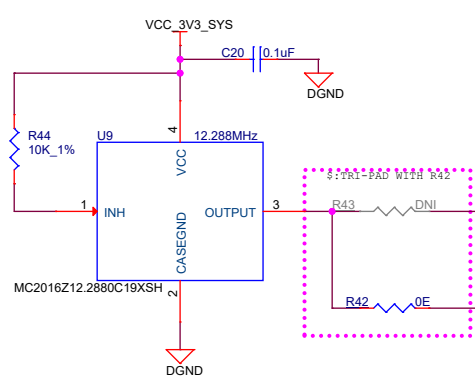


HDMI RESET

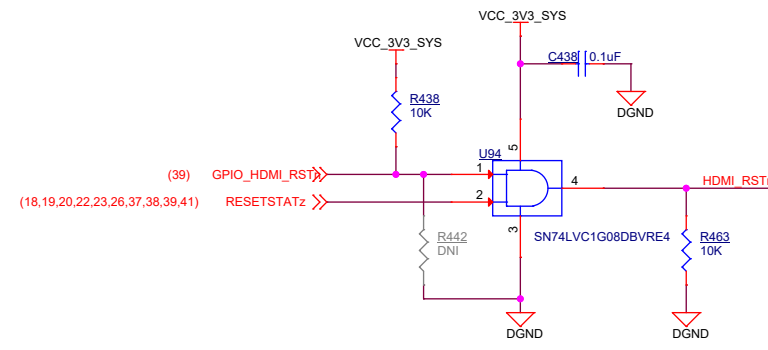


I2C ADDRESS: 0x3B, 0x3F, 0x62

HDMI ESD DEVICE

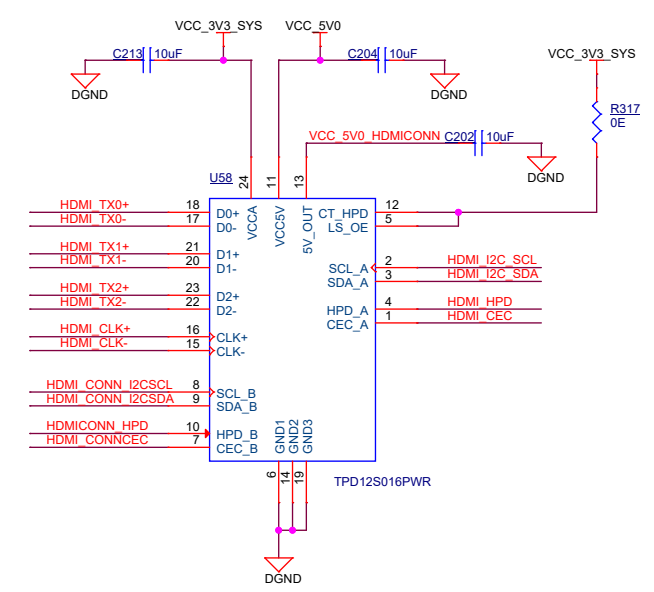

NOTE:
TPD12S016PWR has integrated pullup or pulldown resistors on the I2C and HPD lines hence no external pullup or pulldown required.






HDMI CONNECTOR

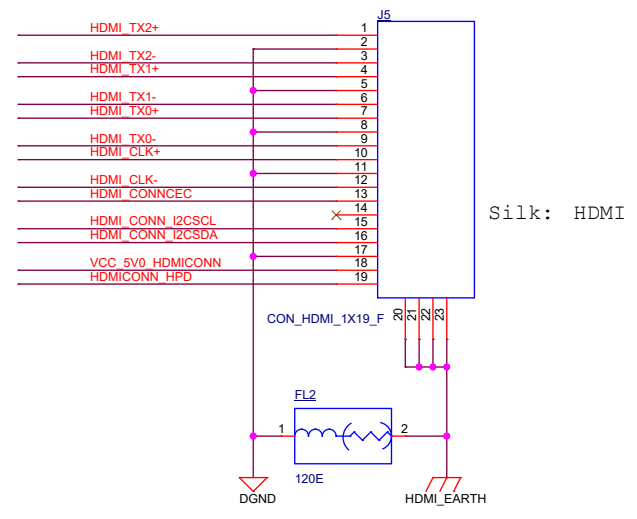

Designed for TI by Mistral Solutions Pvt Ltd





Title		HDMI INTERFACE	
Size	PROC135A	Rev	A
Date:	Wednesday, August 09, 2023	Sheet	40 of 44

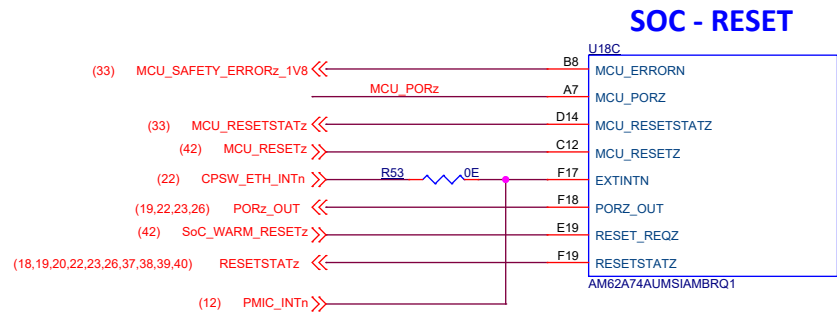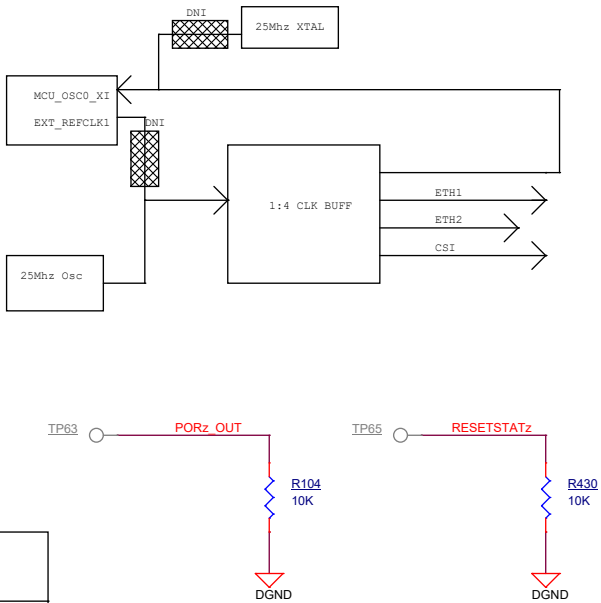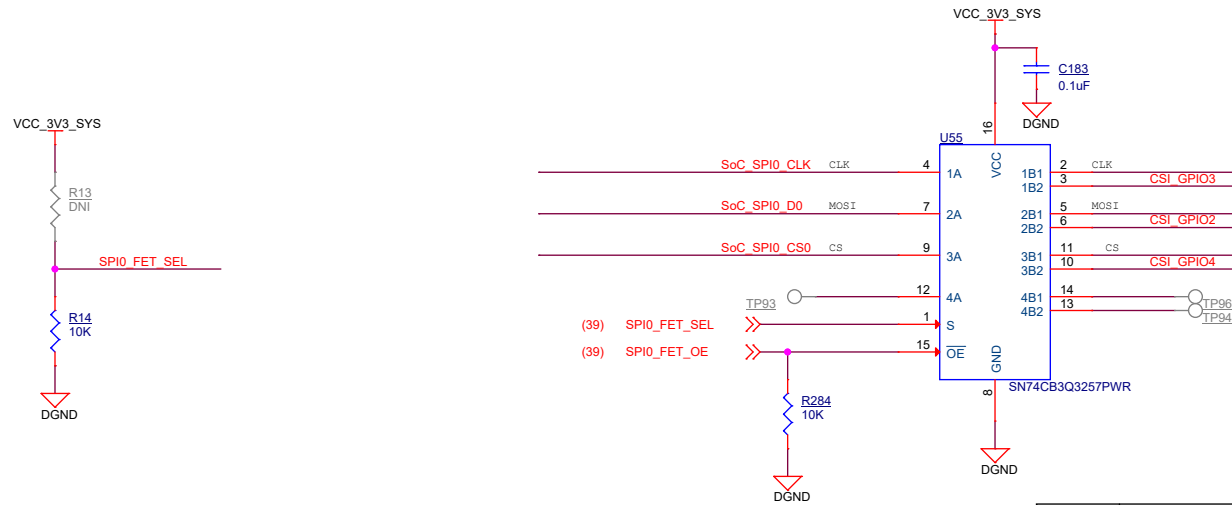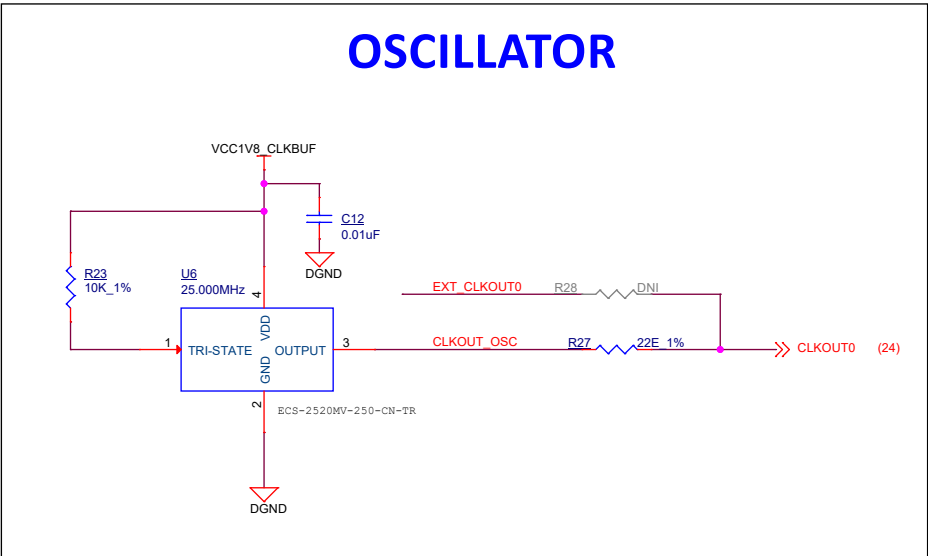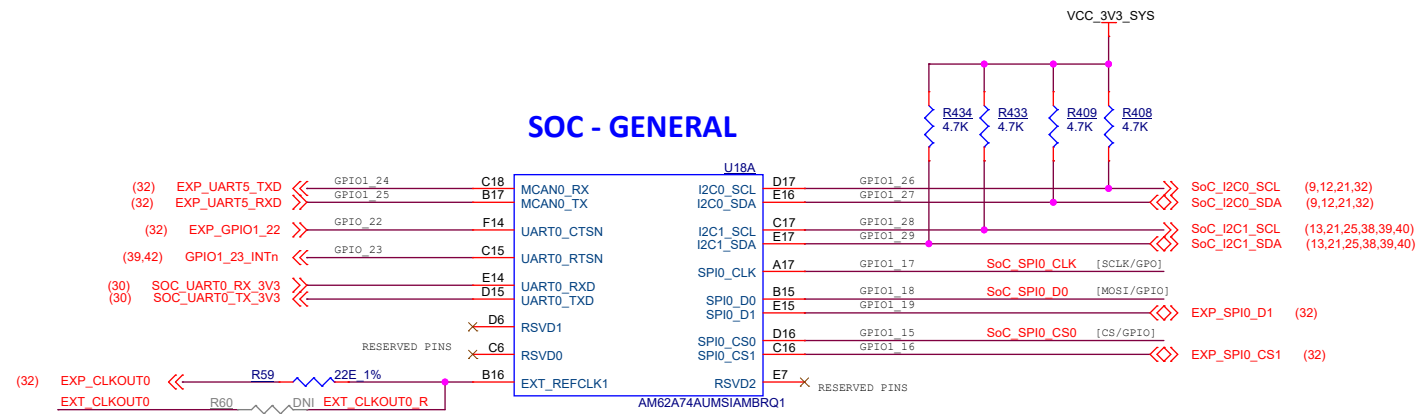

OEn	SEL	INPUT/OUTPUT An	
L	L (DEFAULT)	An=nB1	EXP HDR
L	H	An=nB2	MIPI CSI

Pull-down resistor on PORz_OUT is provided to keep the signal low until the processor is released from reset during the power-up sequence

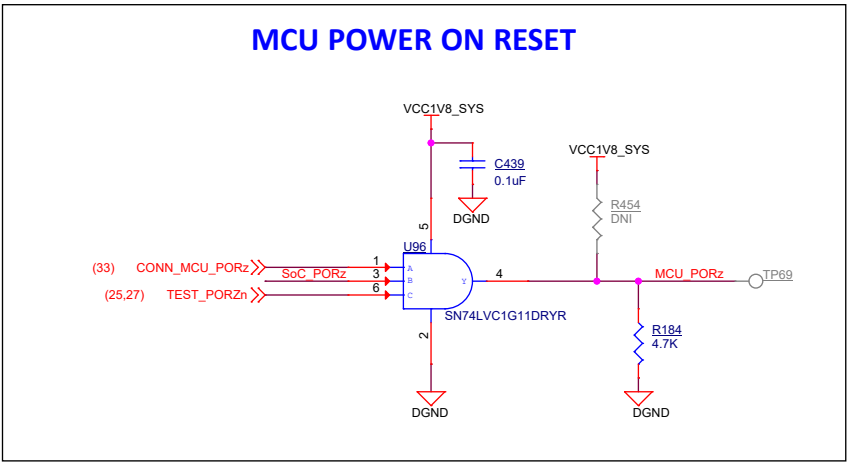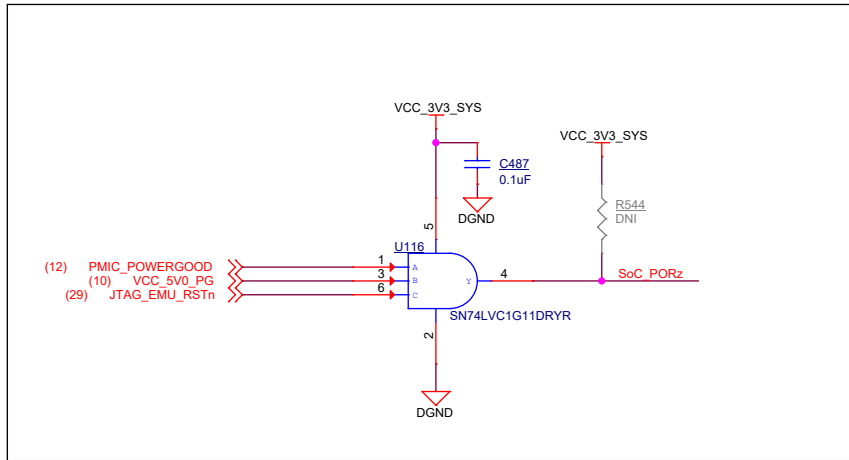


Designed for TI by Mistral Solutions Pvt Ltd




Title		OSCILLATOR	
Size	PROC135A	Rev	
C		A	
Date:	Wednesday, August 09, 2023	Sheet	41 of 44

RESET


MCU WARM RESET

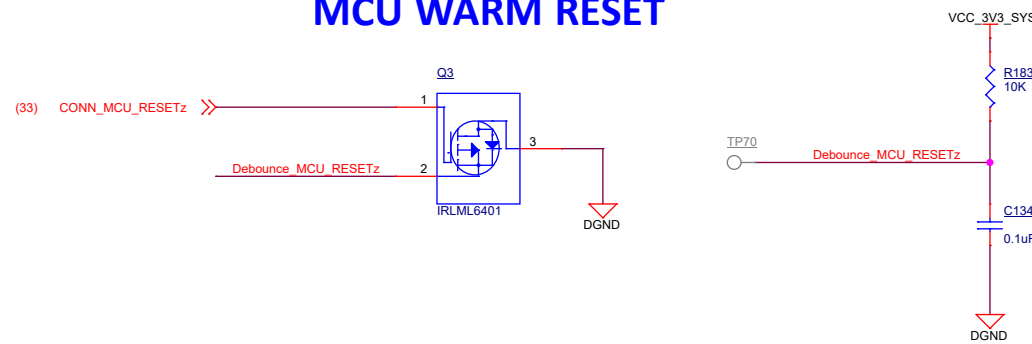




DEBOUNCE CIRCUIT

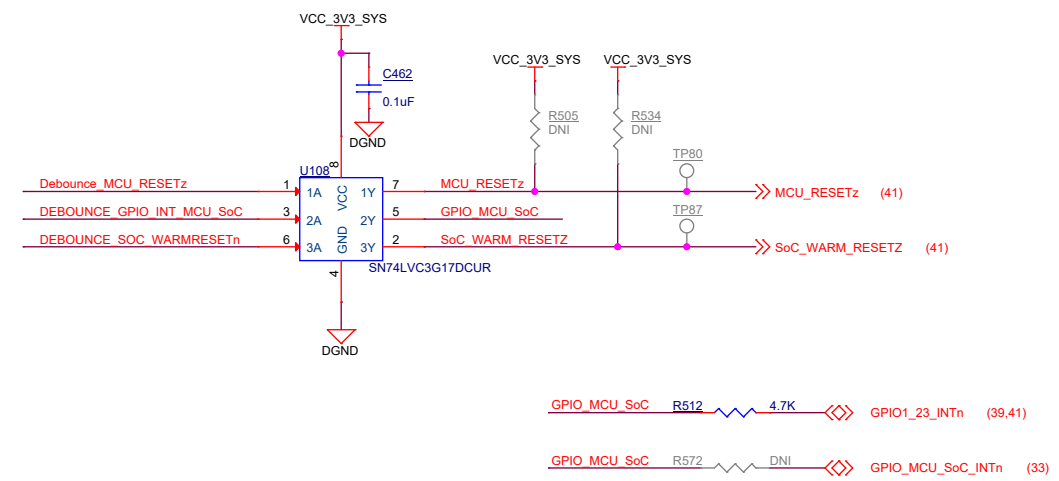

SOC WARM RESET

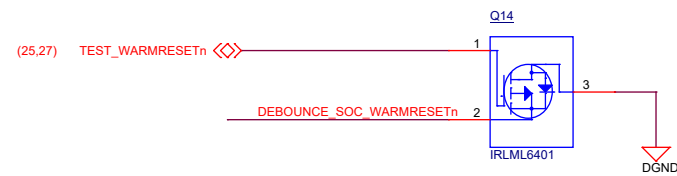

USER INTERRUPT

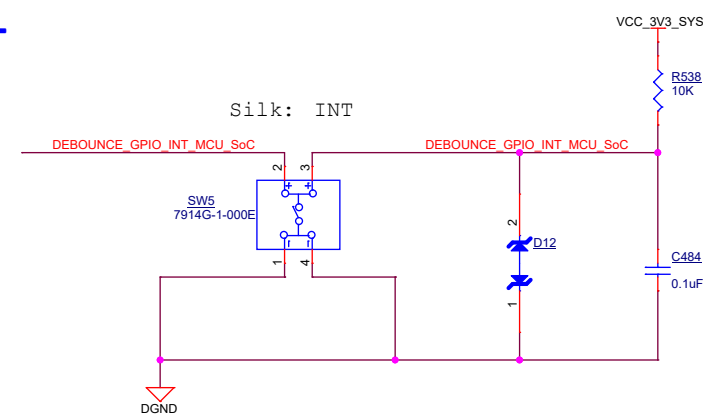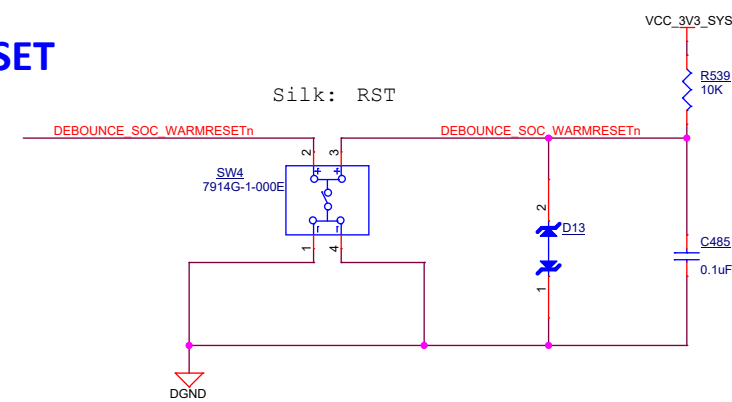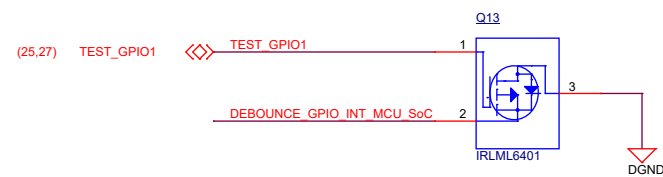

Designed for TI by Mistral Solutions Pvt Ltd



Title	RESET
-------	-------

Size	PROC135A
C	

Rev
A

Date: Wednesday, August 09, 2023



Sheet 42 of 44

CAN-FD FAST WAKE UP SW

The image displays two circuit diagrams for a CAN-FD fast wake-up switch (SW).

Left Diagram: This circuit uses a mechanical switch, SW1 (7914G-1-000E), controlled by the signal DEBOUNCE_CAN_FD_WKUP. The switch is connected to the CAN_IO_3V3 supply through a 10K resistor (R149) and a 0.1uF capacitor (C110). The switch is also connected to ground (DGND) through a 10K resistor (R149). The signal line is labeled "Silk: RST".

Right Diagram: This circuit uses a MOSFET switch, U35 (SN74LVCM317DCUR), controlled by the signal DEBOUNCE_CAN_FD_WKUP. The MOSFET is connected to the CAN_IO_3V3 supply through a 10K resistor (R149) and a 0.1uF capacitor (C104). The MOSFET is also connected to ground (DGND) through a 10K resistor (R149). The signal line is labeled "CAN_FD_WKUP_SW_INH (33)".

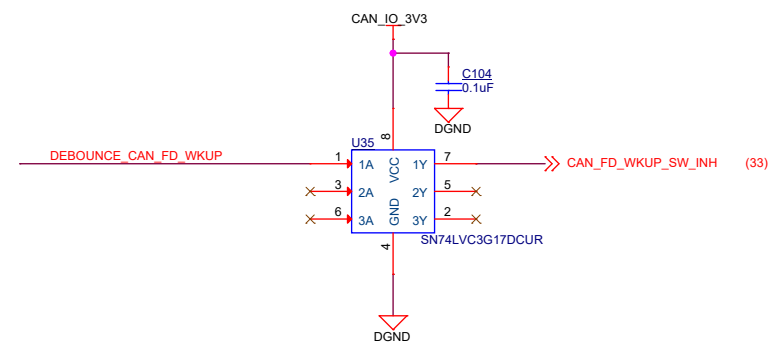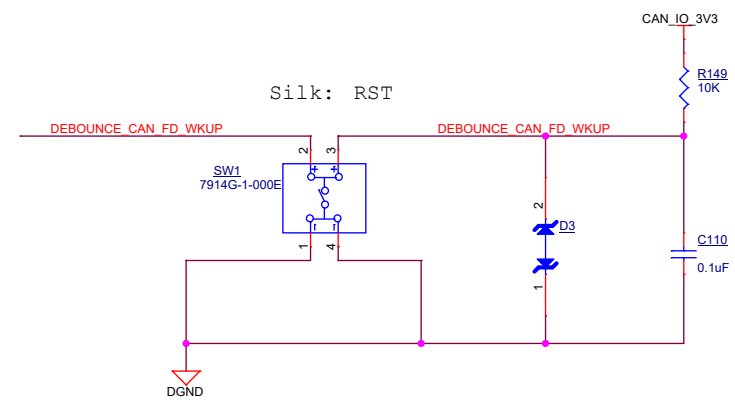

HARDWARE SCHEMATICS

ASSEMBLY NOTES

- 1. All MSL components should be baked as per JEDEC standard.
- 2. PCB should be baked at 120 degree for 8 hours.
- 3. Board assembly must comply with workmanship standards. IPC-A-610 Class 2, unless otherwise specified.
- 4. These assemblies are ESD sensitive, ESD precautions shall be observed.
- 5. These assemblies must be clean and free from flux and all contaminants. Use of no clean flux is not acceptable.
- 6. Provide serial numbers to the assembled boards for identification.
- 7. The assembled board are wrapped in ESD Covers(individual) and packed securely before shipment.


BARE PCB



AM62A SOCKET




LOGOs



JUMPERS



FIDUCIALS



LABELS


Board Serial No.



Assembly Revision



SCREW & WASHER FOR PCIe M.2



Designed for TI by Mistral Solutions Pvt Ltd



Title HARDWARE SCHEMATICS

Size	PROC135A	Rev
C		A

Date:	Wednesday, August 09, 2023	Sheet	44	of	44
-------	----------------------------	-------	----	----	----