

HVD24xxV 具有灵活的 I/O 电源和 IEC ESD 保护功能的 $\pm 70V$ 故障保护、3V 至 5.5V RS-485 收发器

1 特性

- 符合或超出 TIA/EIA-485A 和 TIA/EIA-422B 标准的要求
- 3V 至 5.5V RS-485 电源电压
- 差分输出超过 2.1V，在 5V 电源下与 PROFIBUS 兼容
- 用于逻辑信号接口的 1.65V 至 5.5V 电源
- SLR 引脚可选数据速率：
 - THVD2410V、THVD2412V：250kbps 和 1Mbps
 - THVD2450V、THVD2452V：20Mbps 和 50Mbps
- 总线 I/O 保护
 - $\pm 70V$ 直流总线故障
 - $\pm 16kV$ HBM ESD
 - 半双工器件： $\pm 15kV$ IEC 61000-4-2 接触放电和气隙放电
 - 全双工器件： $\pm 8kV$ IEC 61000-4-2 接触放电和气隙放电
 - $\pm 4kV$ IEC 61000-4-4 快速瞬态突发
- 提供两种速度等级的半双工和全双工器件
- 更宽的环境温度范围： $-40^{\circ}C$ 至 $125^{\circ}C$
- 扩展的运行共模电压范围： $\pm 25V$
- 增强型接收器迟滞，可获得抗噪能力
- 低功耗
 - 低待机电源电流： $< 5\mu A$
 - 运行期间静态电流： $< 5.3mA$
- 适用于热插拔功能的无干扰上电/断电
- 开路、短路和空闲总线失效防护
- 热关断
- 1/8 单位负载（多达 256 个总线节点）（在 $-7V$ 至 $12V$ 的共模范围内）
- 小型 3mm x 3mm VSON 封装（可节省布板空间）或 14-SOIC 封装（可方便插接）

2 应用

- 电机驱动器
- 工厂自动化和控制
- HVAC 系统
- 楼宇自动化
- 电网基础设施
- 电表
- 过程分析
- 视频监控

3 说明

THVD24xxV 是具有 $\pm 70V$ 故障保护功能的半双工和全双工 RS-422/RS-485 收发器，对逻辑信号接口使用 1.65V 至 5.5V 电源，对总线侧使用 3V 至 5.5V 电源。这些器件具有压摆率选择功能，因此可在两种最大速度（根据 SLR 引脚设置）下使用。

这些器件具有集成式 IEC ESD 保护，无需外部系统级保护组件。在更长的电缆敷设长度和/或存在大接地环路电压的情况下，更宽的 $\pm 25V$ 输入共模范围可实现可靠的数据通信。增强型 250mV 接收器迟滞可提供高噪声抑制。此外，当输入同时开路或短路时，接收器失效防护功能可确保逻辑高电平。

封装信息


器件型号	封装 ⁽¹⁾	封装尺寸 ⁽²⁾
THVD2450V THVD2410V	VSON (10)	3mm x 3mm
THVD2412V THVD2452V	SOIC (14)	8.65mm x 3.91mm

(1) 有关更多信息，请参阅节 11。

(2) 封装尺寸（长 × 宽）为标称值，并包括引脚（如适用）。

表 3-1. 器件信息

器件型号	双工	最大数据速率
THVD2410V	半双工	SLR = 高电平，250kbps
THVD2412V	全双工	SLR = 低电平，1Mbps
THVD2450V	半双工	SLR = 高电平，20Mbps
THVD2452V	全双工	SLR = 低电平，50Mbps

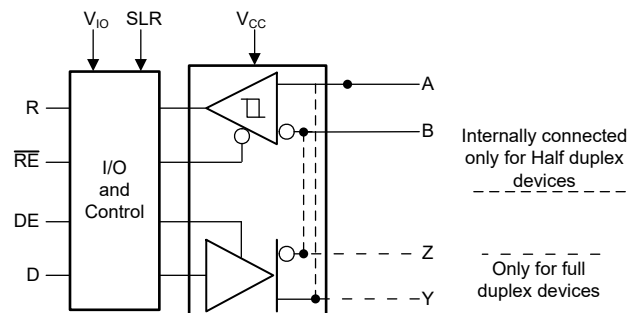

简化原理图



Table of Contents

1 特性	1	7.1 Overview.....	19
2 应用	1	7.2 Functional Block Diagrams.....	19
3 说明	1	7.3 Feature Description.....	19
4 Pin Configuration and Functions	3	7.4 Device Functional Modes.....	20
5 Specifications	5	8 Application and Implementation	22
5.1 Absolute Maximum Ratings.....	5	8.1 Application Information.....	22
5.2 ESD Ratings	5	8.2 Typical Application.....	22
5.3 ESD Ratings [IEC].....	5	8.3 Power Supply Recommendations.....	28
5.4 Recommended Operating Conditions.....	6	8.4 Layout.....	28
5.5 Thermal Information.....	6	9 Device and Documentation Support	29
5.6 Power Dissipation.....	7	9.1 Device Support.....	29
5.7 Electrical Characteristics.....	8	9.2 接收文档更新通知.....	29
5.8 Switching Characteristics_250 kbps.....	10	9.3 支持资源.....	29
5.9 Switching Characteristics_1 Mbps.....	11	9.4 商标.....	29
5.10 Switching Characteristics_20 Mbps.....	12	9.5 静电放电警告.....	29
5.11 Switching Characteristics_50 Mbps.....	13	9.6 术语表.....	29
5.12 Typical Characteristics.....	14	10 Revision History	29
6 Parameter Measurement Information	17	11 Mechanical, Packaging, and Orderable Information	29
7 Detailed Description	19		

4 Pin Configuration and Functions

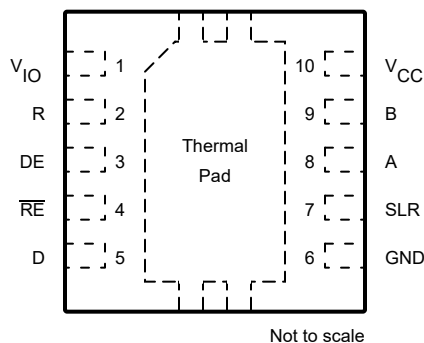
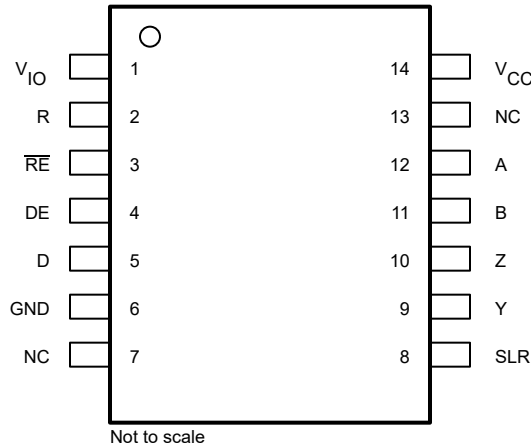


图 4-1. THVD2410V, THVD2450V
10-Pin DRC Package (VSON)
Top View

表 4-1. Pin Functions

NO.	NAME	TYPE	DESCRIPTION
1	V _{IO}	Logic Supply	Supply for logic I/O signals (R, RE, D, DE, and SLR)
2	R	Digital Output	Receive data output
3	DE	Digital Input	Driver enable input; integrated pull-down
4	RE	Digital Input	Receiver enable input; integrated pull-up
5	D	Digital Input	Transmission data input; integrated pull-up
6	GND	Reference Potential	Local device ground
7	SLR	Digital Input	Slew rate select. For THVD2410V: Low = 1 Mbps, High = 250 kbps. Defaults to 1 Mbps if SLR is left floating. For THVD2450V: Low = 50 Mbps, High = 20 Mbps. Defaults to 50 Mbps if left floating.
8	A	Bus I/O	RS 485 bus I/O, A
9	B	Bus I/O	RS 485 bus I/O, B
10	V _{CC}	Bus Supply	Bus supply
	Thermal Pad	--	Connect to GND for optimal thermal performance



**图 4-2. THVD2412V, THVD2452V
14-Pin SOIC Package (D)
Top View**

表 4-2. Pin functions

NO.	NAME	TYPE	DESCRIPTION
1	V _{IO}	Logic supply	1.65 V to 5.5 V supply for logic I/O signals (R, RE, D, DE and SLR)
2	R	Digital output	Receive data output
3	RE	Digital input	Receiver enable input; integrated pull-up
4	DE	Digital input	Driver enable input; integrated pull-down
5	D	Digital input	Transmission data input; integrated pull-up
6	GND	Reference potential	Local device ground
7	NC	No connect	Not connected internally
8	SLR	Digital input	Slew rate select. For THVD2412V: Low = 1 Mbps, High = 250 kbps. Defaults to 1 Mbps if SLR is left floating. For THVD2452V: Low = 50 Mbps, High = 20 Mbps. Defaults to 50 Mbps if left floating.
9	Y	Bus output	RS 485 driver non-inverting output
10	Z	Bus output	RS 485 driver inverting output
11	B	Bus input	RS 485 receiver inverting input
12	A	Bus input	RS 485 receiver non-inverting input
13	NC	No connect	Not connected internally
14	V _{CC}	Bus supply	3 V to 5.5 V bus supply

5 Specifications

5.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted) ⁽¹⁾⁽²⁾

		MIN	MAX	UNIT
Logic supply voltage	V_{IO}	- 0.5	$V_{CC} + 0.2$	V
Bus supply voltage	V_{CC}	- 0.5	6.5	V
Bus voltage	Range at any bus pin as differential or common-mode with respect to GND	- 70	70	V
Input voltage	Range at any logic pin (D, DE, SLR or $\overline{RE}$)	- 0.3	$V_{IO} + 0.2$	V
Receiver output current	I_O	- 24	24	mA
Storage temperature	T_{slg}	- 65	170	°C

- Operation outside the Absolute Maximum Ratings may cause permanent device damage. Absolute Maximum Ratings do not imply functional operation of the device at these or any other conditions beyond those listed under Recommended Operating Conditions. If used outside the Recommended Operating Conditions but within the Absolute Maximum Ratings, the device may not be fully functional, and this may affect device reliability, functionality, performance, and shorten the device lifetime.
- All voltage values, except differential I/O bus voltages, are with respect to ground terminal.

5.2 ESD Ratings

				VALUE	UNIT
V _(ESD)	Electrostatic discharge	Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001 ⁽¹⁾	Bus terminals and GND	±16,000	V
			All pins except bus terminals and GND	±4,000	V
		Charged-device model (CDM), per JEDEC specification JESD22-C101 ⁽²⁾		±1,500	V

- JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
- JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

5.3 ESD Ratings [IEC]

				VALUE	UNIT
$V_{(ESD)}$	Electrostatic discharge, Half duplex devices THVD2410V/2450V ⁽¹⁾	Contact discharge, per IEC 61000-4-2	Bus terminals and GND	±15,000	V
		Air-gap discharge, per IEC 61000-4-2	Bus terminals and GND	±15,000	
$V_{(ESD)}$	Electrostatic discharge, Full duplex devices THVD2412V/2452V	Contact discharge, per IEC 61000-4-2	Bus terminals and GND	±8,000	V
		Air-gap discharge, per IEC 61000-4-2	Bus terminals and GND	±8,000	
$V_{(EFT)}$	Electrical fast transient	Per IEC 61000-4-4	Bus terminals	±4,000	V

- For optimised IEC ESD performance, it is recommended to have series resistor ($\geq 50 \Omega$) on all logic inputs to minimize transient currents going into or out of the logic pins.

5.4 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

		MIN	NOM	MAX	UNIT
V _{CC}	Supply voltage	3		5.5	V
V _{IO}	I/O supply voltage	1.65		V _{CC}	V
V _I	Input voltage at any bus terminal (separately or common mode) ⁽¹⁾	- 25		25	V
V _{IH}	High-level input voltage (driver, driver enable, receiver enable and slew rate select inputs)	0.7*V _{IO}		V _{IO}	V
V _{IL}	Low-level input voltage (driver, driver enable, receiver enable and slew rate select inputs)	0		0.3*V _{IO}	V
V _{ID}	Differential input voltage bus pins	- 25		25	V
I _O	Output current, driver	- 60		60	mA
I _{OR}	Output current, receiver	V _{IO} = 1.8 V or 2.5 V		4	mA
I _{OR}	Output current, receiver	V _{IO} = 3.3 V or 5 V		8	mA
R _L	Differential load resistance	54	60		Ω
1/t _{UI}	Signaling rate	THVD2410V, THVD2412V with SLR = V _{IO}		250	kbps
		THVD2410V, THVD2412V with SLR = GND or floating		1	Mbps
		THVD2450V, THVD2452V with SLR = V _{IO}		20	Mbps
		THVD2450V, THVD2452V with SLR = GND or floating		50	Mbps
T _A	Operating ambient temperature	-40		125	°C
T _J	Junction temperature	-40		150	°C

(1) The algebraic convention, in which the least positive (most negative) limit is designated as minimum is used in this data sheet.

5.5 Thermal Information

THERMAL METRIC ⁽¹⁾		THVD2410V THVD2450V	THVD2412V THVD2452V	UNIT
		DRC (VSON)	D (SOIC)	
		10 PINS	14 PINS	
R _{θJA}	Junction-to-ambient thermal resistance	46.7	87.5	°C/W
R _{θJC(top)}	Junction-to-case (top) thermal resistance	47.7	41.8	°C/W
R _{θJB}	Junction-to-board thermal resistance	19.1	43.7	°C/W
ψ _{JT}	Junction-to-top characterization parameter	0.7	8.1	°C/W
ψ _{JB}	Junction-to-board characterization parameter	19.1	43.3	°C/W
R _{θJC(bot)}	Junction-to-case (bottom) thermal resistance	4.6	N/A	°C/W

(1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.

5.6 Power Dissipation

PARAMETER		TEST CONDITIONS			VALUE	UNIT
P _D	Driver and receiver enabled, loopback for full duplex devices (A connected to Y, B connected to Z) V _{CC} = 5.5 V, T _A = 125 °C, square wave at 50% duty cycle	Unterminated R _L = 300 Ω, C _L = 50 pF (driver)	THVD2410V, THVD2412V	250 kbps	160	mW
			THVD2410V, THVD2412V	1Mbps	250	
			THVD2450V, THVD2452V	20Mbps	310	
			THVD2450V, THVD2452V	50 Mbps	630	
		RS-422 load R _L = 100 Ω, C _L = 50 pF (driver)	THVD2410V, THVD2412V	250 kbps	170	mW
			THVD2410V, THVD2412V	1Mbps	250	
			THVD2450V, THVD2452V	20Mbps	290	
			THVD2450V, THVD2452V	50 Mbps	570	
		RS-485 load R _L = 54 Ω, C _L = 50 pF (driver)	THVD2410V, THVD2412V	250 kbps	220	mW
			THVD2410V, THVD2412V	1Mbps	280	
			THVD2450V, THVD2452V	20Mbps	325	
			THVD2450V, THVD2452V	50 Mbps	560	

5.7 Electrical Characteristics

over operating free-air temperature range (unless otherwise noted). All typical values are at 25°C and supply voltage of $V_{CC} = 5\text{ V}$, $V_{IO} = 3.3\text{ V}$, unless otherwise noted. ⁽¹⁾

PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
Driver							
V _{OD}	Driver differential output voltage magnitude	R _L = 60 Ω , - 25 V ≤ V _{test} ≤ 25 V (See 图 6-1)		1.5	3.3		V
		R _L = 60 Ω , - 25 V ≤ V _{test} ≤ 25 V, 4.5 V ≤ V _{CC} ≤ 5.5 V (See 图 6-1)		2.1	3.3		V
		R _L = 100 Ω (See 图 6-2)		2	4		V
		R _L = 54 Ω (See 图 6-2)		1.5	3.5		V
Δ V _{OD}	Change in differential output voltage	R _L = 54 Ω or 100 Ω (See 图 6-2)		- 50		50	mV
V _{OC}	Common-mode output voltage	R _L = 54 Ω or 100 Ω (See 图 6-2)		1	V _{CC} /2	3	V
Δ V _{OC(SS)}	Change in steady-state common-mode output voltage	R _L = 54 Ω or 100 Ω (See 图 6-2)		- 50		50	mV
I _{OS}	Short-circuit output current	DE = V _{IO} , -70 V ≤ (V _A or V _B) ≤ 70 V, or A shorted to B (A,B are driver terminals for half duplex, Y/Z are for full duplex)		- 250		250	mA
Receiver							
I _I	Bus input current	DE = 0 V, V _{CC} and V _{IO} = 0 V or 5.5 V	V _I = 12 V		90	125	μ A
			V _I = 25 V		200	250	μ A
			V _I = - 7 V	- 100	- 80		μ A
			V _I = - 25 V	- 350	- 220		μ A
V _{TH+}	Positive-going input threshold voltage ⁽²⁾	Over common-mode range of ± 25 V	THVD2410V, THVD2450V	40	125	200	mV
V _{TH-}	Negative-going input threshold voltage ⁽²⁾	Over common-mode range of ± 25 V	THVD2410V, THVD2450V	- 200	- 125	-40	mV
V _{TH+}	Positive-going input threshold voltage ⁽²⁾	Over common-mode range of ± 25 V	THVD2412V, THVD2452V	20	125	200	mV
V _{TH-}	Negative-going input threshold voltage ⁽²⁾	Over common-mode range of ± 25 V	THVD2412V, THVD2452V	- 200	- 125	-20	mV
V _{HYS}	Input hysteresis	Over common-mode range of ± 25 V			250		mV
V _{TH_FSH}	Input fail-safe threshold	Over common-mode range of ± 25 V	THVD2410V, THVD2450V	- 40		40	mV
V _{TH_FSH}	Input fail-safe threshold	Over common-mode range of ± 25 V	THVD2412V, THVD2452V	- 20		20	mV
C _{A,B}	Input differential capacitance	Measured between A and B, f = 1 MHz			50		pF
V _{OH}	Output high voltage	I _{OH} = - 8 mA, V _{IO} = 3 to 3.6 V or 4.5 V to 5.5 V		V _{IO} - 0.4	V _{IO} - 0.2		V
V _{OL}	Output low voltage	I _{OL} = 8 mA, V _{IO} = 3 to 3.6 V or 4.5 V to 5.5 V			0.2	0.4	V
V _{OH}	Output high voltage	I _{OH} = - 4 mA, V _{IO} = 1.65 to 1.95 V or 2.25 V to 2.75 V		V _{IO} - 0.4	V _{IO} - 0.2		V
V _{OL}	Output low voltage	I _{OL} = 4 mA, V _{IO} = 1.65 to 1.95 V or 2.25 V to 2.75 V			0.2	0.4	V
I _{OZ}	Output high-impedance current, R pin	V _O = 0 V or V _{IO} , RE = V _{IO}		- 1		1	μA
Logic							
I _{IN}	Input current (DE , SLR)	1.65 V ≤ V _{IO} ≤ 5.5 V, 0 V ≤ V _{IN} ≤ V _{IO}				5	μA
I _{IN}	Input current (D, RE)	1.65 V ≤ V _{IO} ≤ 5.5 V, 0 V ≤ V _{IN} ≤ V _{IO}		- 5			μA
Thermal Protection							
T _{SHDN}	Thermal shutdown threshold	Temperature rising		150	180		°C
T _{HYS}	Thermal shutdown hysteresis				10		°C
Supply							

5.7 Electrical Characteristics (续)

over operating free-air temperature range (unless otherwise noted). All typical values are at 25°C and supply voltage of $V_{CC} = 5\text{ V}$, $V_{IO} = 3.3\text{ V}$, unless otherwise noted. ⁽¹⁾

PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
UV_{VCC} (rising)	Rising under-voltage threshold on V_{CC}				2.3	2.6	V
UV_{VCC} (falling)	Falling under-voltage threshold on V_{CC}			1.95	2.2		V
$UV_{VCC(hys)}$	Hysteresis on under-voltage of V_{CC}				170		mV
UV_{VIO} (rising)	Rising under-voltage threshold on V_{IO}				1.4	1.6	V
UV_{VIO} (falling)	Falling under-voltage threshold on V_{IO}			1.2	1.3		V
$UV_{VIO(hys)}$	Hysteresis on under-voltage of V_{IO}				120		mV
I_{CC}	Supply current (quiescent), $V_{CC} = 4.5\text{ V}$ to 5.5 V	Driver and receiver enabled	$RE = 0\text{ V}$, $DE = V_{IO}$, No load		3.5	5.3	mA
		Driver enabled, receiver disabled	$RE = V_{IO}$, $DE = V_{IO}$, No load		2.5	4.2	mA
		Driver disabled, receiver enabled	$RE = 0\text{ V}$, $DE = 0\text{ V}$, No load		1.8	2.4	mA
		Driver and receiver disabled	$RE = V_{IO}$, $DE = 0\text{ V}$, D = open, No load		0.1	1.2	μA
I_{CC}	Supply current (quiescent), $V_{CC} = 3\text{ V}$ to 3.6 V	Driver and receiver enabled	$RE = 0\text{ V}$, $DE = V_{IO}$, No load		3	4.1	mA
		Driver enabled, receiver disabled	$RE = V_{IO}$, $DE = V_{IO}$, No load		2	3	mA
		Driver disabled, receiver enabled	$RE = 0\text{ V}$, $DE = 0\text{ V}$, No load		1.6	2.2	mA
		Driver and receiver disabled	$RE = V_{IO}$, $DE = 0\text{ V}$, D = open, No load		0.1	1	μA
I_{IO}	Logic supply current (quiescent), $V_{IO} = 3$ to 3.6 V	Driver disabled, Receiver enabled, SLR = GND	$DE = 0\text{ V}$, $RE = 0\text{ V}$, No load		4.5	8.4	μA
		Driver disabled, Receiver enabled, SLR = V_{IO}	$DE = 0\text{ V}$, $RE = 0\text{ V}$, No load		3.3	8.4	μA
		Driver disabled, Receiver disabled, SLR = GND	$DE = 0\text{ V}$, $RE = V_{IO}$, No load		0.1	1	μA
		Driver disabled, Receiver disabled, SLR = V_{IO}	$DE = 0\text{ V}$, $RE = V_{IO}$, No load		1.8	4	μA

- (1) A, B are driver output and receiver input terminals for Half duplex devices; A/B are Receiver input, Y/Z are driver output terminals for Full duplex devices
(2) Under any specific conditions, V_{TH+} is specified to be at least V_{HYS} higher than V_{TH-} .

5.8 Switching Characteristics_250 kbps

250-kbps (THVD2410V, THVD2412V with SLR = V_{IO}) over recommended operating conditions. All typical values are at 25°C and supply voltage of $V_{CC} = 5\text{ V}$, $V_{IO} = 3.3\text{ V}$, unless otherwise noted. ⁽¹⁾

PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
Driver							
t _r , t _f	Differential output rise/fall time	R _L = 54 Ω , C _L = 50 pF See 图 6-3	V _{CC} = 3 to 3.6 V, Typical at 3.3V	450	560	1200	ns
			V _{CC} = 4.5 to 5.5 V, Typical at 5 V	500	625	1200	ns
t _{PHL} , t _{PLH}	Propagation delay		V _{CC} = 3 to 3.6 V, Typical at 3.3V		500	720	ns
			V _{CC} = 4.5 to 5.5 V, Typical at 5 V		540	770	ns
t _{SK(P)}	Pulse skew, t _{PHL} - t _{PLH}		V _{CC} = 3 to 3.6 V, Typical at 3.3V		10	70	ns
			V _{CC} = 4.5 to 5.5 V, Typical at 5 V		10	70	ns
t _{PHZ} , t _{PLZ}	Disable time	RE = X	See 图 6-4 and 图 6-5		40	75	ns
t _{PZH} , t _{PZL}	Enable time	RE = 0 V			70	280	ns
		RE = V _{IO}			2.5	4.5	μs
t _{SHDN}	Time to shutdown	RE = V _{IO}			50		500
Receiver							
t _r , t _f	Output rise/fall time	C _L = 15 pF	See 图 6-6		7	20	ns
t _{PHL} , t _{PLH}	Propagation delay				800	1270	ns
t _{SK(P)}	Pulse skew, t _{PHL} - t _{PLH}				5	45	ns
t _{PHZ} , t _{PLZ}	Disable time	DE = X			30	40	ns
t _{PZH(1)}	Enable time	V _{IO} = 3 V to 3.6 V; DE = V _{IO}	See 图 6-7		90	120	ns
		V _{IO} = 1.65 V to 1.95 V, DE = V _{IO}			100	130	ns
t _{PZL(1)}		V _{IO} = 3 V to 3.6 V; DE = V _{IO}			900	1320	ns
		V _{IO} = 1.65 V to 1.95 V; DE = V _{IO}			900	1320	ns
t _{PZH(2)} , t _{PZL(2)}	Enable time	DE = 0 V	See 图 6-8		3.3	5.4	μ s
t _{D(OFS)}	Delay to enter fail-safe operation	C _L = 15 pF	See 图 6-9	7	11	18	μ s
t _{D(FSO)}	Delay to exit fail-safe operation			540	800	1260	ns
t _{SHDN}	Time to shutdown	DE = 0 V	See 图 6-8	50		500	ns

- (1) A, B are driver output and receiver input terminals for Half duplex devices; A/B are Receiver input, Y/Z are driver output terminals for Full duplex device

5.9 Switching Characteristics_1 Mbps

1Mbps (THVD2410V, THVD2412V with SLR = 0) over recommended operating conditions. All typical values are at 25°C and supply voltage of $V_{CC} = 5\text{ V}$, $V_{IO} = 3.3\text{ V}$, unless otherwise noted. ⁽¹⁾

PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
Driver							
t_r, t_f	Differential output rise/fall time	$R_L = 54\ \Omega, C_L = 50\text{ pF}$ See 图 6-3	$V_{CC} = 3\text{ to }3.6\text{ V}$, Typical at 3.3 V	125	150	300	ns
			$V_{CC} = 4.5\text{ to }5.5\text{ V}$, Typical at 5 V	130	160	300	ns
t_{PHL}, t_{PLH}	Propagation delay		$V_{CC} = 3\text{ to }3.6\text{ V}$, Typical at 3.3 V		160	240	ns
			$V_{CC} = 4.5\text{ to }5.5\text{ V}$, Typical at 5 V		185	280	ns
$t_{SK(P)}$	Pulse skew, $ t_{PHL} - t_{PLH} $		$V_{CC} = 3\text{ to }3.6\text{ V}$, Typical at 3.3 V		2	20	ns
			$V_{CC} = 4.5\text{ to }5.5\text{ V}$, Typical at 5 V		2	15	ns
t_{PHZ}, t_{PLZ}	Disable time	$RE = X$	See 图 6-4 and 图 6-5		40	95	ns
t_{PZH}, t_{PZL}	Enable time	$RE = 0\text{ V}$			90	275	ns
		$RE = V_{IO}$			3	4.6	μs
t_{SHDN}	Time to shutdown	$RE = V_{IO}$		50		500	ns
Receiver							
t_r, t_f	Output rise/fall time	$C_L = 15\text{ pF}$	See 图 6-6		7	15	ns
t_{PHL}, t_{PLH}	Propagation delay				50	85	ns
$t_{SK(P)}$	Pulse skew, $ t_{PHL} - t_{PLH} $				4	12.5	ns
t_{PHZ}, t_{PLZ}	Disable time	$DE = X$			30	40	ns
$t_{PZH(1)}, t_{PZL(1)}$	Enable time	$V_{IO} = 3\text{ V to }3.6\text{ V}$; $DE = V_{IO}$	See 图 6-7		90	120	ns
		$V_{IO} = 1.65\text{ V to }1.95\text{ V}$; $DE = V_{IO}$			90	130	ns
$t_{PZH(2)}, t_{PZL(2)}$	Enable time	$DE = 0\text{ V}$	See 图 6-8		3	4.5	$\mu\text{ s}$
$t_{D(OFS)}$	Delay to enter fail-safe operation	$C_L = 15\text{ pF}$	See 图 6-9	7	10	18	$\mu\text{ s}$
$t_{D(FSO)}$	Delay to exit fail-safe operation			27	40	60	ns
t_{SHDN}	Time to shutdown	$DE = 0\text{ V}$	See 图 6-8	50		500	ns

(1) A, B are driver output and receiver input terminals for Half duplex devices; A/B are Receiver input, Y/Z are driver output terminals for Full duplex device

5.10 Switching Characteristics_20 Mbps

20-Mbps (THVD2450V, THVD2452V with SLR = V_{IO}) over recommended operating conditions. All typical values are at 25°C and supply voltage of $V_{CC} = 5\text{ V}$, $V_{IO} = 3.3\text{ V}$, unless otherwise noted. (1)

PARAMETER			TEST CONDITIONS		MIN	TYP	MAX	UNIT
Driver								
t _r , t _f	Differential output rise/fall time	R _L = 54 Ω , C _L = 50 pF See 图 6-3	V _{CC} = 3 to 3.6 V, Typical at 3.3 V	4	8	15	ns	
			V _{CC} = 4.5 to 5.5 V, Typical at 5 V	4	7	15	ns	
t _{PHL} , t _{PLH}	Propagation delay		V _{CC} = 3 to 3.6 V, Typical at 3.3 V	6	12	30	ns	
			V _{CC} = 4.5 to 5.5 V, Typical at 5 V	4	9	26	ns	
t _{SK(P)}	Pulse skew, t _{PHL} - t _{PLH}		V _{CC} = 3 to 3.6 V, Typical at 3.3 V		1	3	ns	
			V _{CC} = 4.5 to 5.5 V, Typical at 5 V		1	3	ns	
t _{PHZ} , t _{PLZ}	Disable time	RE = X	See 图 6-4 and 图 6-5		17	35	ns	
t _{PZH} , t _{PZL}	Enable time	RE = 0 V			14	39	ns	
		RE = V _{IO}			3	4.5	μ s	
t _{SHDN}	Time to shutdown	RE = V _{IO}		50		500	ns	
Receiver								
t _r , t _f	Output rise/fall time	C _L = 15 pF	See 图 6-6		1.5	6	ns	
t _{PHL} , t _{PLH}	Propagation delay	V _{IO} = 3 V to 3.6 V		25	33	58	ns	
		V _{IO} = 1.65 V to 1.95 V		25	35	60	ns	
t _{SK(P)}	Pulse skew, t _{PHL} - t _{PLH}	C _L = 15 pF			0.5	5	ns	
t _{PHZ} , t _{PLZ}	Disable time	DE = X		12	25	ns		
t _{PZH(1)} , t _{PZL(1)}	Enable time	DE = V _{IO}	See 图 6-7	50	82	ns		
t _{PZH(2)} , t _{PZL(2)}	Enable time	DE = 0 V	See 图 6-8	2.8	5	μ s		
t _{D(OFS)}	Delay to enter fail-safe operation	C _L = 15 pF	See 图 6-9	7	10	18	μ s	
t _{D(FSO)}	Delay to exit fail-safe operation			19	32	50	ns	
t _{SHDN}	Time to shutdown	DE = 0 V	See 图 6-8	50		500	ns	

- (1) A, B are driver output and receiver input terminals for Half duplex devices; A/B are Receiver input, Y/Z are driver output terminals for Full duplex device

5.11 Switching Characteristics_50 Mbps

50-Mbps (THVD2450V, THVD2452V with SLR = 0) over recommended operating conditions. All typical values are at 25°C and supply voltage of $V_{CC} = 5\text{ V}$, $V_{IO} = 3.3\text{ V}$, unless otherwise noted. (1)

PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
Driver							
t _r , t _f	Differential output rise/fall time	R _L = 54 Ω , C _L = 50 pF See 图 6-3	V _{CC} = 3 to 3.6 V, Typical at 3.3 V	1	5	7	ns
			V _{CC} = 4.5 to 5.5 V, Typical at 5 V	1	5	6	ns
t _{PHL} , t _{PLH}	Propagation delay		V _{IO} = 3 V to 3.6 V, V _{CC} = 3 to 3.6 V, Typical at 3.3 V	5	11	19	ns
			V _{IO} = 1.65 V to 1.95 V, V _{CC} = 3 to 3.6 V, Typical at 3.3 V	7	12	22	ns
			V _{IO} = 3 V to 3.6 V, V _{CC} = 4.5 to 5.5 V, Typical at 5 V	4	8	15	ns
			V _{IO} = 1.65 V to 1.95 V, V _{CC} = 4.5 to 5.5 V, Typical at 5 V	6	10	19	ns
t _{SK(P)}	Pulse skew, t _{PHL} - t _{PLH}		V _{CC} = 3 to 3.6 V, Typical at 3.3 V		1	3	ns
			V _{CC} = 4.5 to 5.5 V, Typical at 5 V		1	3	ns
t _{PHZ} , t _{PLZ}	Disable time	RE = X	See 图 6-4 and 图 6-5		14	30	ns
t _{PZH} , t _{PZL}	Enable time	RE = 0 V ; V _{IO} = 1.65 V to 1.95 V, 2.25 V to 2.75 V			20	35	ns
		RE = 0 V ; V _{IO} = 3 V to V _{CC} V			15	32	ns
		RE = V _{IO}			2.5	4.5	μ s
t _{SHDN}	Time to shutdown	RE = V _{IO}			50		500
Receiver							
t _r , t _f	Output rise/fall time	C _L = 15 pF	See 图 6-6		1.5	6	ns
t _{PHL} , t _{PLH}	Propagation delay		V _{IO} = 3 V to 3.6 V, See 图 6-6	25	33	58	ns
t _{PHL} , t _{PLH}	Propagation delay		V _{IO} = 1.65 V to 1.95 V, See 图 6-6	25	35	60	ns
t _{SK(P)}	Pulse skew, t _{PHL} - t _{PLH}	C _L = 15 pF	See 图 6-6		0.5	5	ns
t _{PHZ} , t _{PLZ}	Disable time	DE = X			12	25	ns
t _{PZH(1)} , t _{PZL(1)}	Enable time	DE = V _{IO}	V _{IO} = 1.65 V to 1.95 V, See 图 6-7		50	82	ns
			V _{IO} = 3 V to 3.6 V, See 图 6-7		50	75	ns
t _{PZH(2)} , t _{PZL(2)}	Enable time	DE = 0 V	See 图 6-8		2.8	5	μ s
t _{D(OFS)}	Delay to enter fail-safe operation	C _L = 15 pF	See 图 6-9	7	10	18	μ s
t _{D(FSO)}	Delay to exit fail-safe operation			19	32	50	ns
t _{SHDN}	Time to shutdown	DE = 0 V	See 图 6-8	50		500	ns

(1) A, B are driver output and receiver input terminals for Half duplex devices; A/B are Receiver input, Y/Z are driver output terminals for Full duplex device

5.12 Typical Characteristics

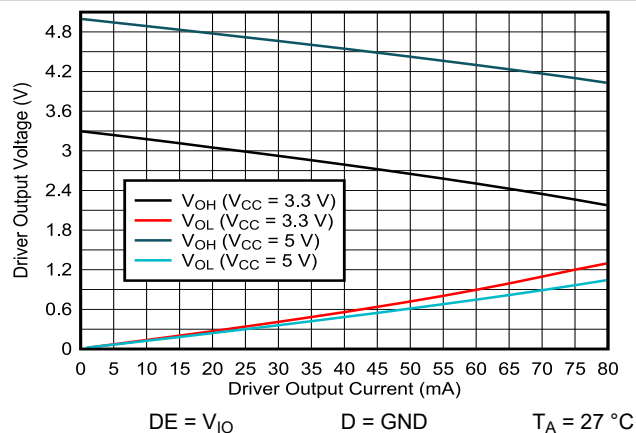


图 5-1. Driver Output Voltage vs Driver Output Current

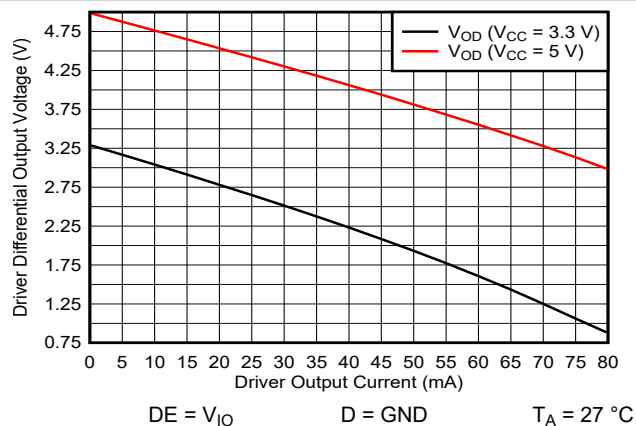


图 5-2. Driver Differential Output voltage vs Driver Output Current

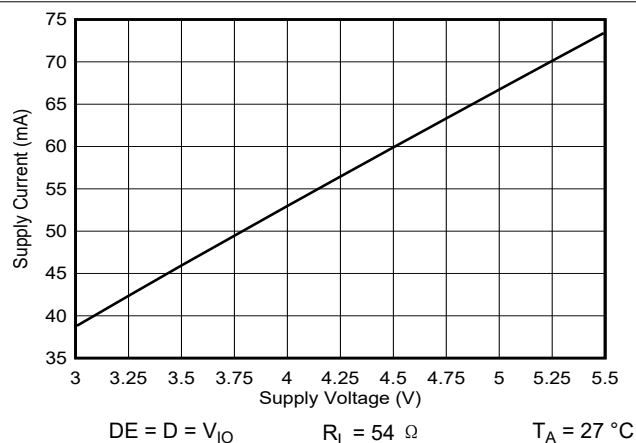


图 5-3. Supply Current vs Supply Voltage

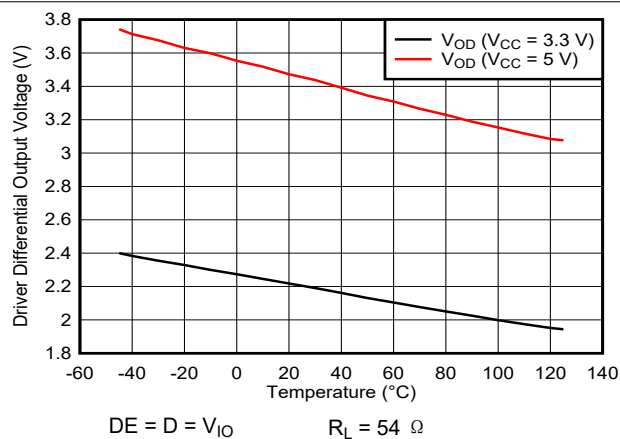


图 5-4. Driver differential output voltage vs Temperature

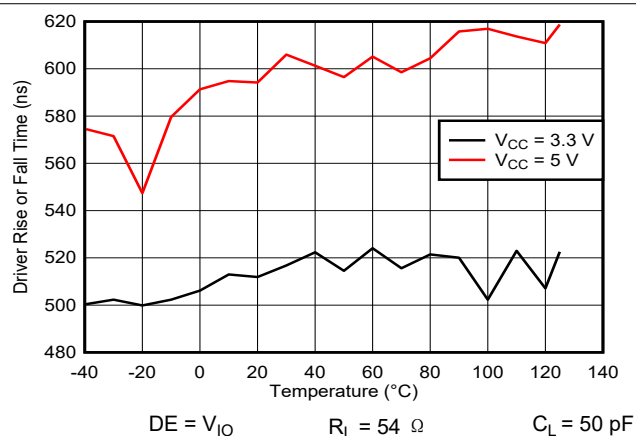


图 5-5. THVD2410V 250kbps Driver rise or fall time vs Temperature

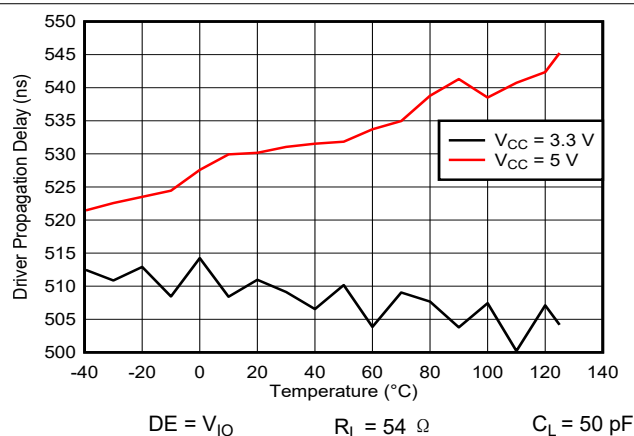


图 5-6. THVD2410V 250kbps Driver propagation delay vs Temperature

5.12 Typical Characteristics (continued)

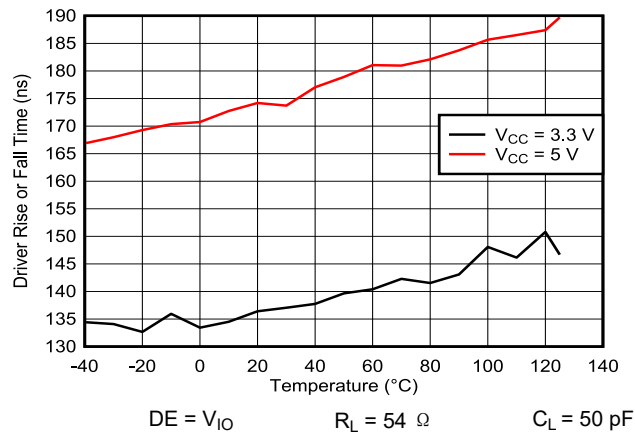


图 5-7. THVD2410V 1Mbps Driver rise or fall time vs Temperature

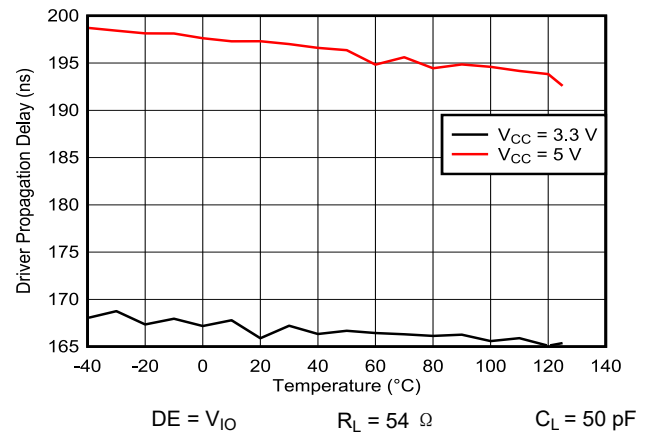


图 5-8. THVD2410V 1Mbps Driver propagation delay vs Temperature

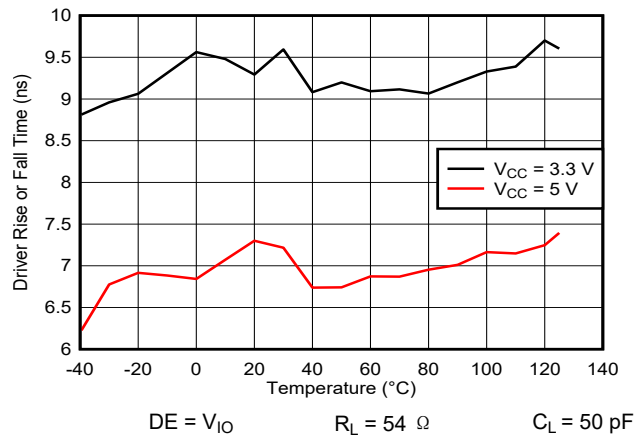


图 5-9. THVD2450V 20Mbps Driver rise or fall time vs Temperature

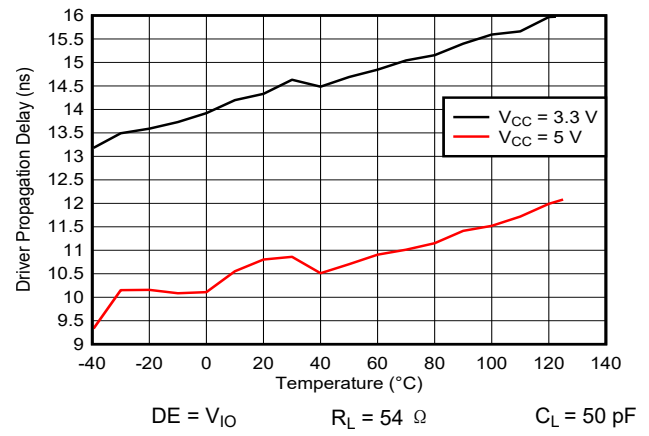


图 5-10. THVD2450V 20Mbps Driver propagation delay vs Temperature

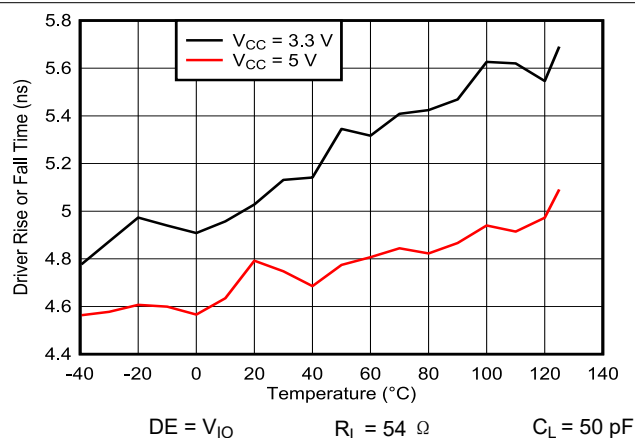


图 5-11. THVD2450V 50Mbps Driver rise or fall time vs Temperature

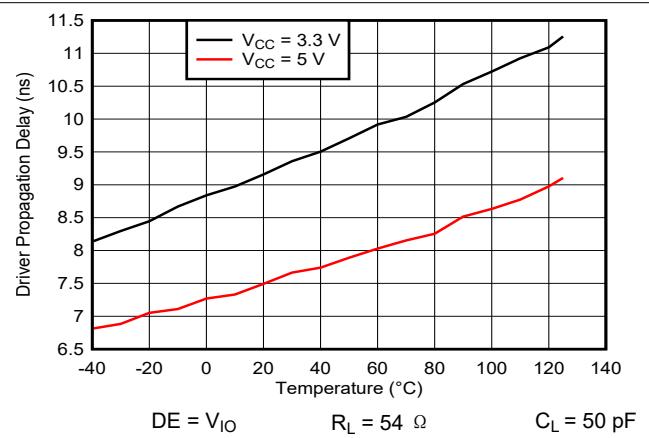


图 5-12. THVD2450V 50Mbps Driver propagation delay vs Temperature

5.12 Typical Characteristics (continued)

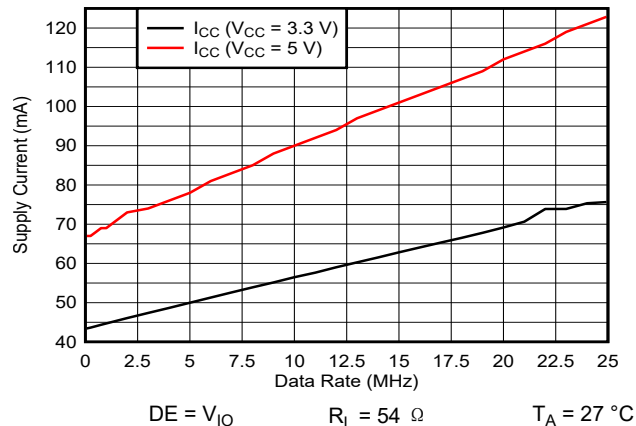


图 5-13. THVD2450V Supply Current vs Signal Rate

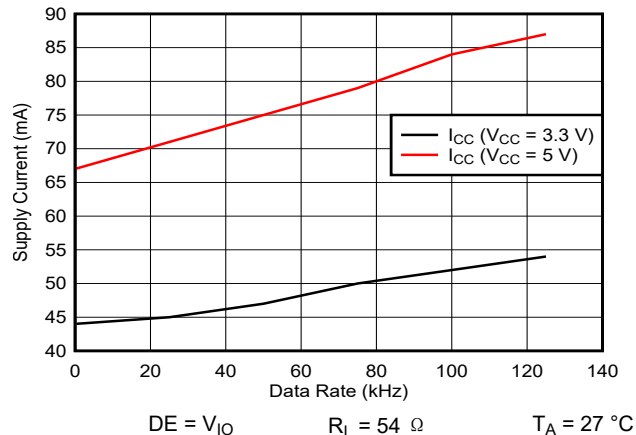


图 5-14. THVD2410V Supply Current vs Signal Rate

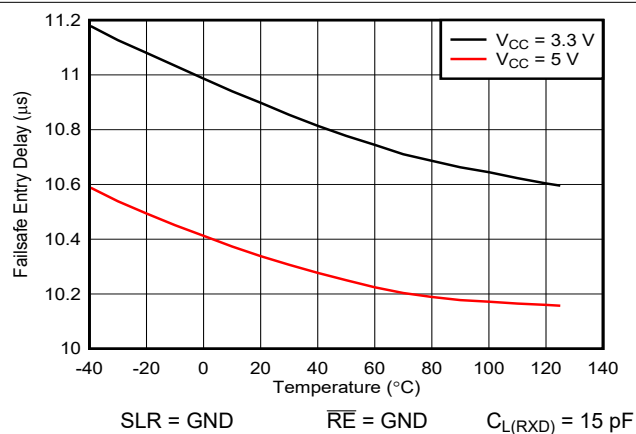


图 5-15. Failsafe entry delay vs Temperature

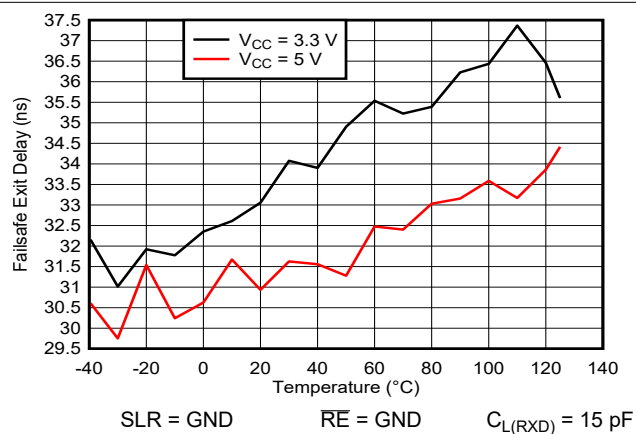


图 5-16. Failsafe exit delay vs Temperature

6 Parameter Measurement Information

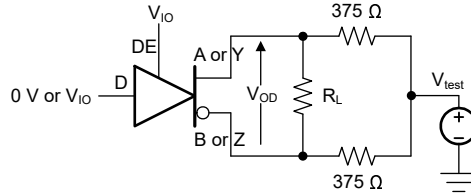


图 6-1. Measurement of Driver Differential Output Voltage With Common-Mode Load

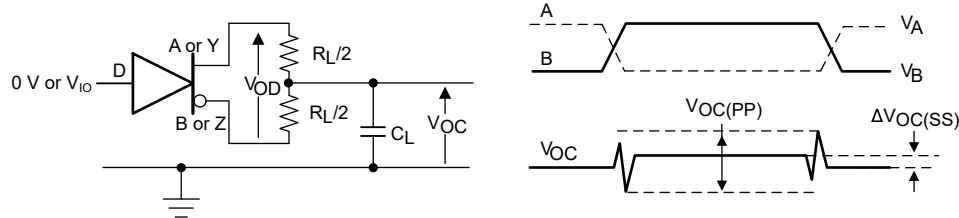


图 6-2. Measurement of Driver Differential and Common-Mode Output With RS-485 Load

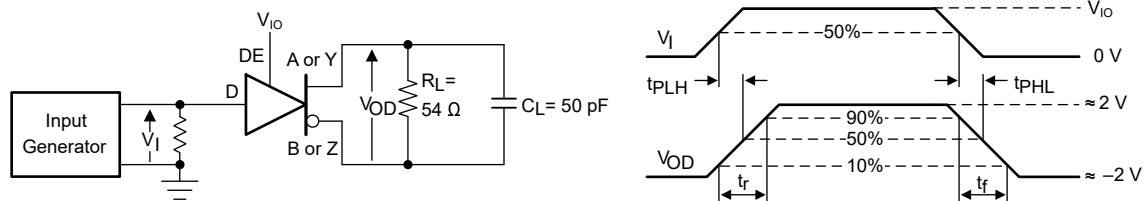


图 6-3. Measurement of Driver Differential Output Rise and Fall Times and Propagation Delays

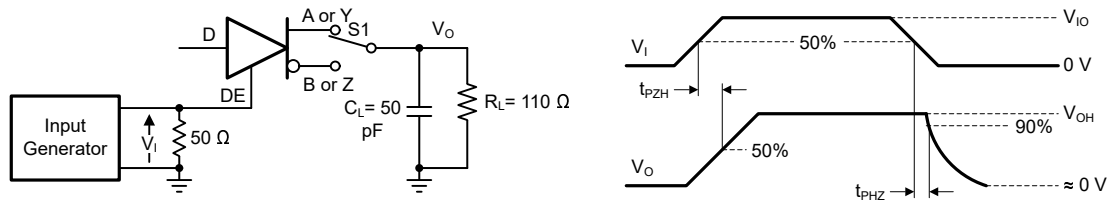


图 6-4. Measurement of Driver Enable and Disable Times With Active High Output and Pull-Down Load

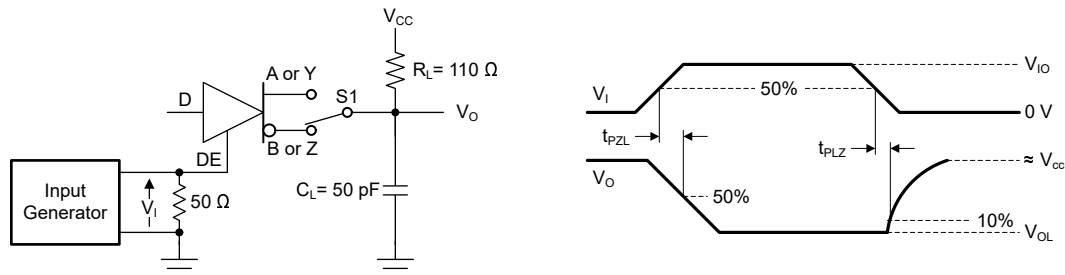


图 6-5. Measurement of Driver Enable and Disable Times With Active Low Output and Pull-up Load

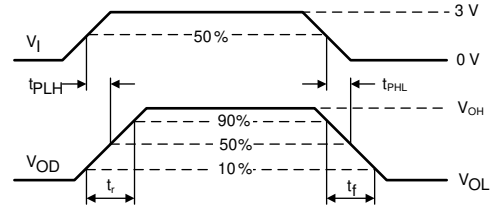
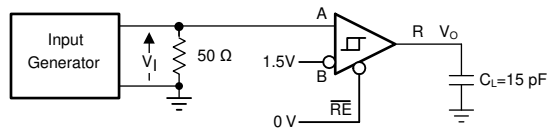


图 6-6. Measurement of Receiver Output Rise and Fall Times and Propagation Delays

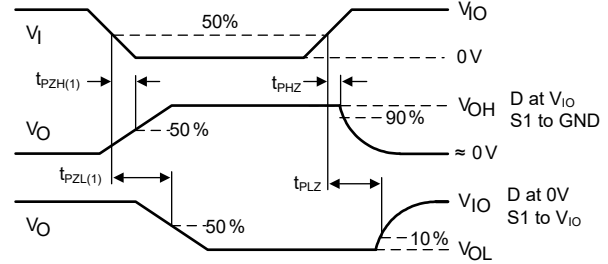
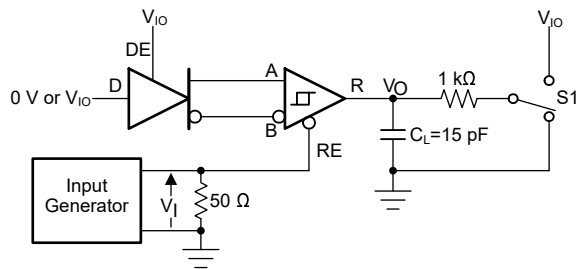


图 6-7. Measurement of Receiver Enable/Disable Times With Driver Enabled

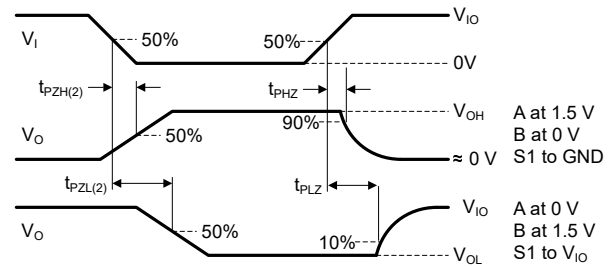
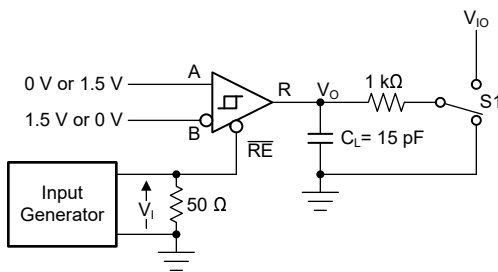


图 6-8. Measurement of Receiver Enable Times With Driver Disabled

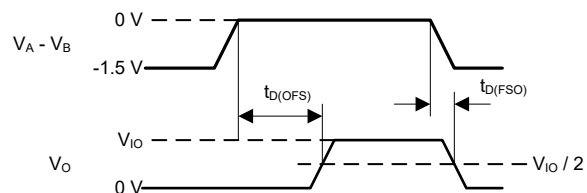
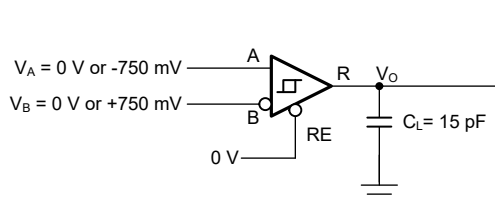


图 6-9. Measurement of Fail-Safe Delay

7 Detailed Description

7.1 Overview

THVD24xxV are $\pm 70\text{V}$ bus fault-protected, $\pm 25\text{V}$ common-mode voltage range capable half and full-duplex RS-485 transceivers. The devices have active-high driver enable and active-low receiver enable logic. Each device has SLR pin which allows it to be used for two different maximum speed settings. This is beneficial as customers can qualify one device and use it in two different end-applications. The devices also have flexible I/O supply pin V_{IO} which enables digital interface voltage range, from 1.65V to 5.5V, different from bus voltage supply 3V to 5.5V.

7.2 Functional Block Diagrams

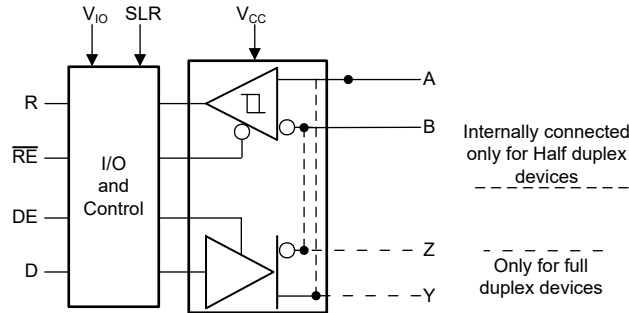


图 7-1. THVD2410 and THVD2450 Block Diagram

7.3 Feature Description

7.3.1 $\pm 70\text{ V}$ Fault Protection

THVD24xxV transceivers have extended bus fault protection compared to standard RS-485 devices. Transceivers that operate in rugged industrial environments are often exposed to voltage transients greater than the -7 V to $+12\text{ V}$ defined by the TIA/EIA-485A standard. To protect against such conditions, the generic RS-485 devices with lower absolute maximum ratings requires expensive external protection components. To simplify system design and reduce overall system cost, THVD24xxV devices are protected up to $\pm 70\text{ V}$ without the need for any external components.

7.3.2 Integrated IEC ESD and EFT Protection

Internal ESD protection circuits protect the transceivers against electrostatic discharges (ESD) according to IEC 61000-4-2 of up to $\pm 15\text{ kV}$ contact and air discharge (for half-duplex devices) and up to $\pm 8\text{ kV}$ contact and air discharge (for full-duplex devices). Bus structures also protect against electrical fast transients (EFT) according to IEC 61000-4-4 for up to $\pm 4\text{ kV}$. With careful system design, integrated bus structures can enable EFT Criterion A at the system level (minimum to no data loss when transient noise is present).

7.3.3 Driver Overvoltage and Overcurrent Protection

The THVD24xxV drivers are protected against any DC supply shorts in the range of -70 V to $+70\text{ V}$. The devices internally limit the short circuit current to $\pm 250\text{ mA}$ in order to comply with the TIA/EIA-485A standard. In addition, a fold-back current limiting circuit further reduces the driver short circuit current to less than $\pm 5\text{ mA}$ if the output fault voltage exceeds $|\pm 25\text{ V}|$.

All devices feature thermal shutdown protection that disables the driver and the receiver if the junction temperature exceeds the T_{SHDN} threshold due to excessive power dissipation.

7.3.4 Enhanced Receiver Noise Immunity

The differential receivers of THVD24xxV feature fully symmetric thresholds to maintain duty cycle of the signal even with small input amplitudes. In addition, 250 mV (typical) hysteresis provides noise immunity. When the device is in slew rate limited mode of 250 kbps , typical 700 ns of glitch filter in receiver signal chain prevents high frequency noise pulses from the bus to appear on R pin.

7.3.5 Receiver Fail-Safe Operation

The receivers are fail-safe to invalid bus states caused by the following:

- Open bus conditions, such as a disconnected connector
- Shorted bus conditions, such as cable damage shorting the twisted-pair together
- Idle bus conditions that occur when no driver on the bus is actively driving

In any of these cases, the receiver outputs a fail-safe logic high state if the input amplitude stays for longer than $t_{D(OFs)}$ at less than $|V_{TH_FSH}|$.

7.3.6 Low-Power Shutdown Mode

Driving DE low and $\overline{RE}$ high for longer than 500 ns puts the devices into the shutdown mode. If either DE goes high or $\overline{RE}$ goes low, the counters reset. The devices does not enter the shutdown mode if the enable pins are in disable state for less than 50 ns. This feature prevents the devices from accidentally going into shutdown mode due to skew between DE and $\overline{RE}$.

7.4 Device Functional Modes

When the driver enable pin, DE, is logic high (H), the differential outputs A/Y and B/Z follow the logic states at data input D. A logic high at D causes A/Y to turn high and B/Z to turn low. In this case, the differential output voltage defined as $V_{OD} = V_A - V_B$ is positive. When D is low (L), the output states reverse: B/Z turns high, A/Y becomes low, and V_{OD} is negative.

When DE is low, both outputs turn high-impedance. In this condition the logic state at D is irrelevant (X). The DE pin has an internal pull-down resistor to ground; thus, when left open the driver is disabled (Z = high-impedance) by default. The D pin has an internal pull-up resistor to V_{IO} ; thus, when left open while the driver is enabled, output A/Y turns high and B/Z turns low.

表 7-1. Driver Function Table

INPUT	ENABLE	OUTPUTS		FUNCTION
D	DE	A/Y	B/Z	
H	H	H	L	Actively drive bus high
L	H	L	H	Actively drive bus low
X	L	Z	Z	Driver disabled
X	OPEN	Z	Z	Driver disabled by default
OPEN	H	H	L	Actively drive bus high by default

When the receiver enable pin, $\overline{RE}$, is logic low, the receiver is enabled. When the differential input voltage defined as $V_{ID} = V_A - V_B$ is higher than the positive input threshold, V_{TH+} , the receiver output, R, turns high. When V_{ID} is lower than the negative input threshold, V_{TH-} , the receiver output, R, turns low. If V_{ID} is between V_{TH+} and V_{TH-} , the output is indeterminate.

When $\overline{RE}$ is logic high or left open, the receiver output is high-impedance and the magnitude and polarity of V_{ID} are irrelevant. Internal biasing of the receiver inputs causes the output to go failsafe-high when the transceiver is disconnected from the bus (open-circuit), the bus lines are shorted to one another (short-circuit), or the bus is not actively driven (idle bus).

表 7-2. Receiver Function Table

DIFFERENTIAL INPUT	ENABLE	OUTPUT	FUNCTION
$V_{ID} = V_A - V_B$	$\overline{RE}$	R	
$V_{TH+} < V_{ID}$	L	H	Receive valid bus high
$V_{TH-} < V_{ID} < V_{TH+}$	L	?	Indeterminate bus state
$V_{ID} < V_{TH-}$	L	L	Receive valid bus low
X	H	Z	Receiver disabled
X	OPEN	Z	Receiver disabled by default
Open-circuit bus	L	H	Fail-safe high output
Short-circuit bus	L	H	Fail-safe high output
Idle (terminated) bus	L	H	Fail-safe high output

表 7-3 shows SLR (slew rate select) pin functionality. SLR has intergated pull-down, so the device remains in higher speed mode until SLR is pulled high which limits the slew rate and puts the device in slower speed mode.

表 7-3. SLR pin control

Device	Functionality w.r.t SLR pin
THVD2410V, THVD2412V	SLR = Low or floating: Both transmitter (TX) and receiver (RX) maximum speed is 1 Mbps SLR = High: Both TX and RX maximum speed is limited to 250 kbps
THVD2450V, THVD2452V	SLR = Low or floating: Both transmitter (TX) and receiver (RX) maximum speed is 50 Mbps SLR = High: Both TX and RX maximum speed is limited to 20 Mbps

Table shows the device behavior in undervoltage scenarios:

表 7-4. Supply Function Table

V_{CC}	V_{IO}	Driver Output	Receiver Output
$> UV_{VCC}(\text{rising})$	$> UV_{VIO}(\text{rising})$	Determined by DE and D inputs	Determined by $\overline{RE}$ and A-B
$< UV_{VCC}(\text{falling})$	$> UV_{VIO}(\text{rising})$	High impedance	High impedance
$> UV_{VCC}(\text{rising})$	$< UV_{VIO}(\text{falling})$	High impedance	High impedance
$< UV_{VCC}(\text{falling})$	$< UV_{VIO}(\text{falling})$	High impedance	High impedance

8 Application and Implementation

备注

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

8.1 Application Information

THVD24xxV are fault-protected, half- and full-duplex RS-485 transceivers commonly used for asynchronous data transmissions. For these devices, the driver and receiver enable pins allow for the configuration of different operating modes.

8.2 Typical Application

An RS-485 bus consists of multiple transceivers connecting in parallel to a bus cable. To eliminate line reflections, each cable end is terminated with a termination resistor, R_T , whose value matches the characteristic impedance, Z_0 , of the cable. This method, known as parallel termination, generally allows for higher data rates over longer cable length.

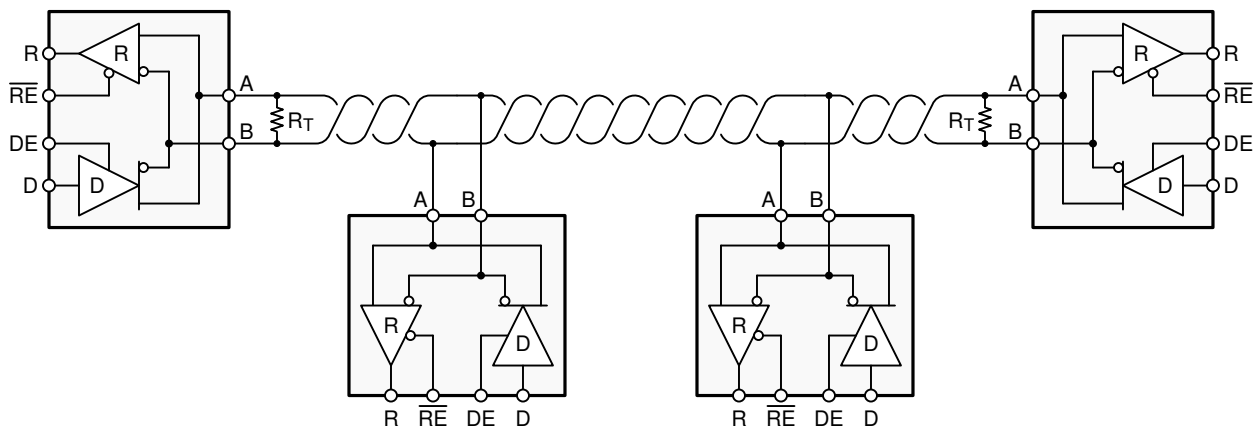


图 8-1. Typical RS-485 Network With Half-Duplex Transceivers

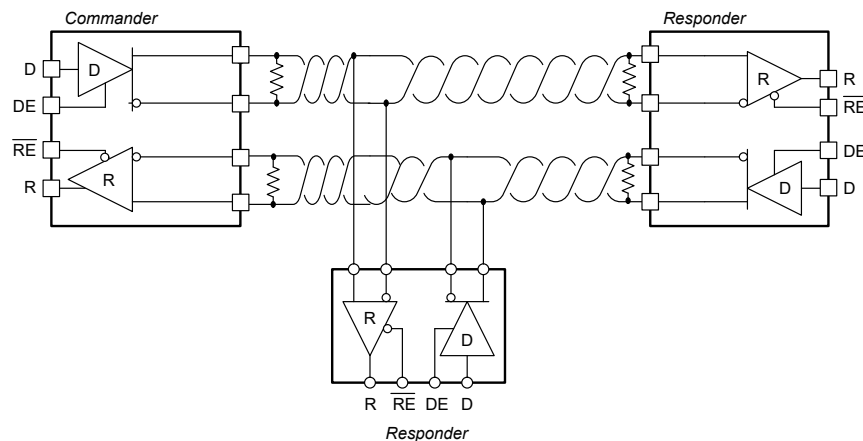


图 8-2. Typical RS-485 Network with Full-Duplex transceivers

8.2.1 Design Requirements

RS-485 is a robust electrical standard suitable for long-distance networking that may be used in a wide range of applications with varying requirements, such as distance, data rate, and number of nodes.

8.2.1.1 Data Rate and Bus Length

There is an inverse relationship between data rate and cable length, which means the higher the data rate, the shorter the cable length; and conversely, the lower the data rate, the longer the cable length. While most RS-485 systems use data rates between 10 kbps and 100 kbps, some applications require data rates up to 250 kbps at distances of 4000 feet and longer. Longer distances are possible by allowing for small signal jitter of up to 5 or 10%.

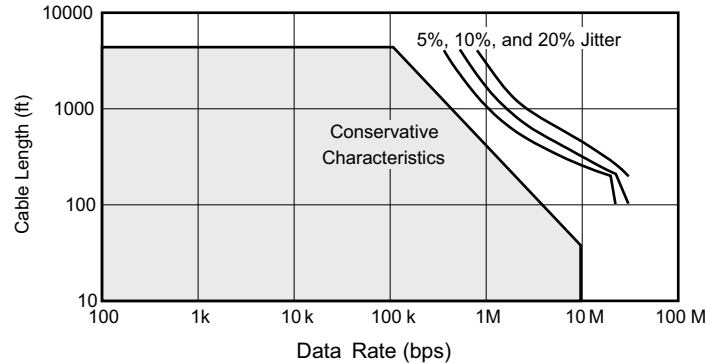


图 8-3. Cable Length vs Data Rate Characteristic

Even higher data rates are achievable (that is, 50 Mbps for the THVD24xxV) in cases where the interconnect is short enough (or has suitably low attenuation at signal frequencies) to not degrade the data.

8.2.1.2 Stub Length

When connecting a node to the bus, the distance between the transceiver inputs and the cable trunk, known as the stub, should be as short as possible. Stubs present a non-terminated piece of bus line which can introduce reflections of varying phase as the length of the stub increases. As a general guideline, the electrical length, or round-trip delay, of a stub should be less than one-tenth of the rise time of the driver, thus giving a maximum physical stub length as shown in 方程式 1.

$$L_{(\text{STUB})} \leq 0.1 \times t_r \times v \times c \quad (1)$$

where

- t_r is the 10/90 rise time of the driver
- c is the speed of light (3×10^8 m/s)
- v is the signal velocity of the cable or trace as a factor of c

8.2.1.3 Bus Loading

The RS-485 standard specifies that a compliant driver must be able to drive 32 unit loads (UL), where 1 unit load represents a load impedance of approximately 12 kΩ. Because the THVD24xxV devices consist of 1/8 UL transceivers, connecting up to 256 receivers to the bus is possible for a limited common mode range of - 7 V to 12 V.

8.2.1.4 Transient Protection

The bus pins of the THVD24xxV transceivers include on-chip ESD protection against ± 16 -kV HBM and ± 15 -kV IEC 61000-4-2 contact discharge for half-duplex devices ± 8 -kV for full-duplex devices. The International Electrotechnical Commission (IEC) ESD test is far more severe than the HBM ESD test. The 50% higher charge capacitance, $C_{(S)}$, and 78% lower discharge resistance, $R_{(D)}$, of the IEC model produce significantly higher discharge currents than the HBM model. As stated in the IEC 61000-4-2 standard, contact discharge is the preferred transient protection test method.

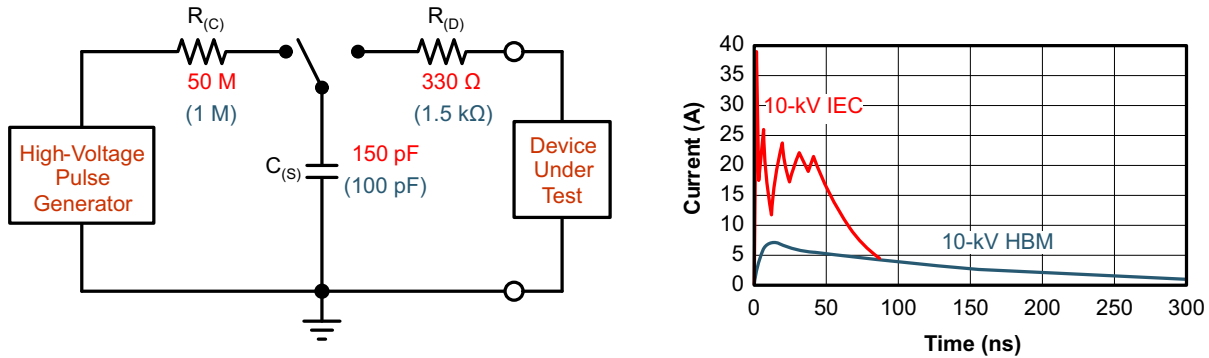


图 8-4. HBM and IEC ESD Models and Currents in Comparison (HBM Values in Parenthesis)

The on-chip implementation of IEC ESD protection significantly increases the robustness of equipment. Common discharge events occur because of human contact with connectors and cables. Designers may choose to implement protection against longer duration transients, typically referred to as surge transients.

EFTs are generally caused by relay-contact bounce or the interruption of inductive loads. Surge transients often result from lightning strikes (direct strike or an indirect strike which induce voltages and currents), or the switching of power systems, including load changes and short circuit switching. These transients are often encountered in industrial environments, such as factory automation and power-grid systems.

图 8-5 compares the pulse-power of the EFT and surge transients with the power caused by an IEC ESD transient. The left side of the diagram shows the relative pulse-power for a 0.5-kV surge transient and 4-kV EFT transient, both of which exceeds the 10-kV ESD transient visible in the lower-left corner. 500-V surge transients are representative of events that may occur in factory environments in industrial and process automation.

The right side of the diagram shows the pulse power of a 6-kV surge transient, relative to the same 0.5-kV surge transient. 6-kV surge transients are may occur in power generation and power-grid systems.

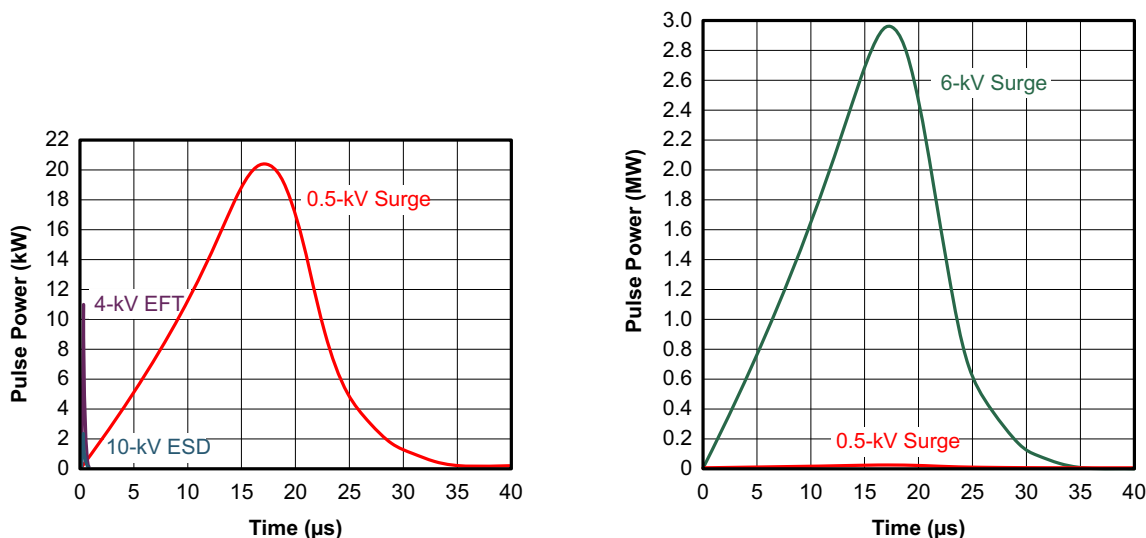


图 8-5. Power Comparison of ESD, EFT, and Surge Transients

For surge transients, high-energy content is characterized by long pulse duration and slow decaying pulse power. The electrical energy of a transient that is dumped into the internal protection cells of a transceiver is converted into thermal energy, which heats and destroys the protection cells, thus destroying the transceiver. 图 8-6 shows the large differences in transient energies for single ESD, EFT, surge transients, and an EFT pulse train that is commonly applied during compliance testing.

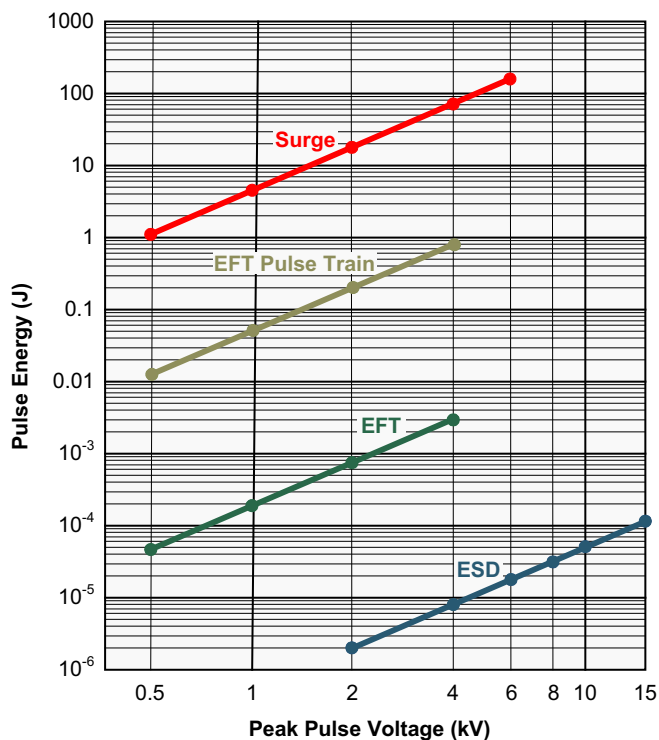


图 8-6. Comparison of Transient Energies

8.2.2 Detailed Design Procedure

图 8-7 suggests a protection circuit against 1kV surge (IEC 61000-4-5) transients. 表 8-1 shows the associated bill of materials. SMAJ30CA TVS diodes are rated to operate up to 30V. This makes sure the protection diodes do not conduct if a direct RS-485 bus shorts to 24V DC industrial power rail.

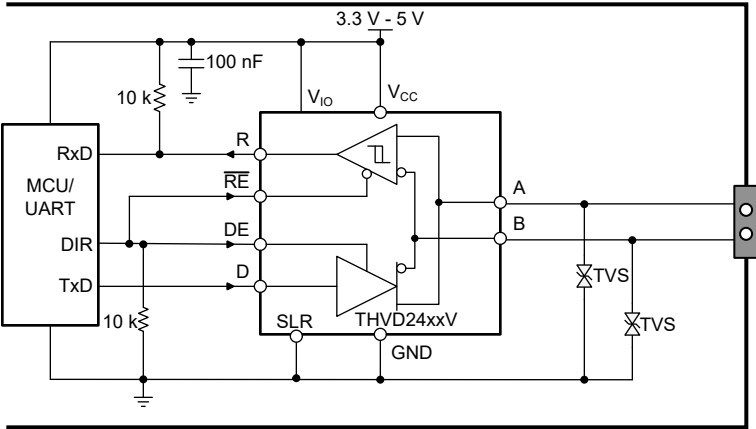



图 8-7. Transient Protection Against Surge Transients for Half-Duplex Devices

表 8-1. Components List

DEVICE	FUNCTION	ORDER NUMBER	MANUFACTURER ⁽¹⁾
XCVR	RS-485 transceiver	THVD2410V or THVD2450V	TI
TVS	Bidirectional 400W transient suppressor	SMAJ30CA	Littelfuse


(1) See [Third-Party Products](#)

8.2.3 Application Curves

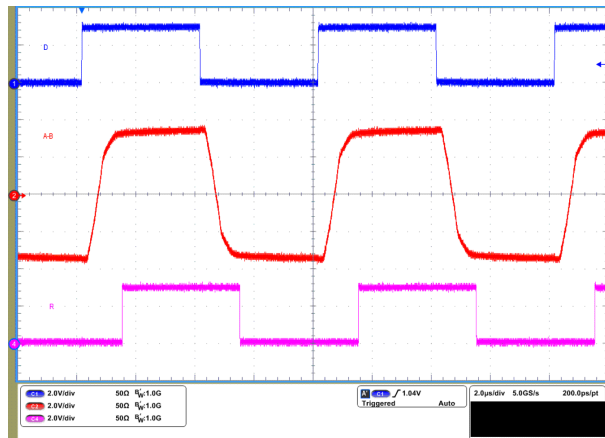


50% duty square wave on D pin at 250 kbps
SLR = V_{IO} $R_L = 54 \Omega$ DE = V_{IO}

图 8-8. THVD2410V Waveforms at $V_{CC} = 5 V$

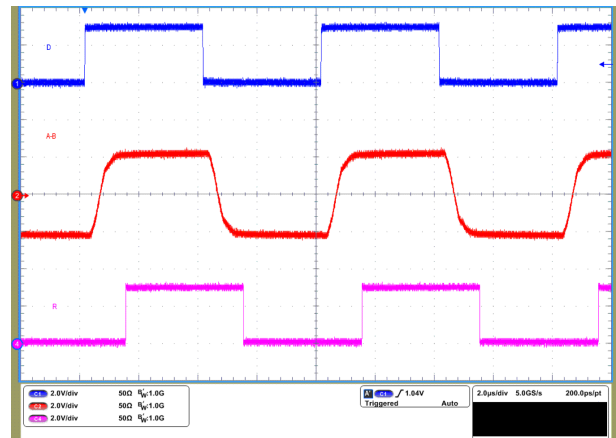


50% duty square wave on D pin at 250 kbps
SLR = V_{IO} $R_L = 54 \Omega$ DE = V_{IO}

图 8-9. THVD2410V Waveforms at $V_{CC} = 3.3 V$

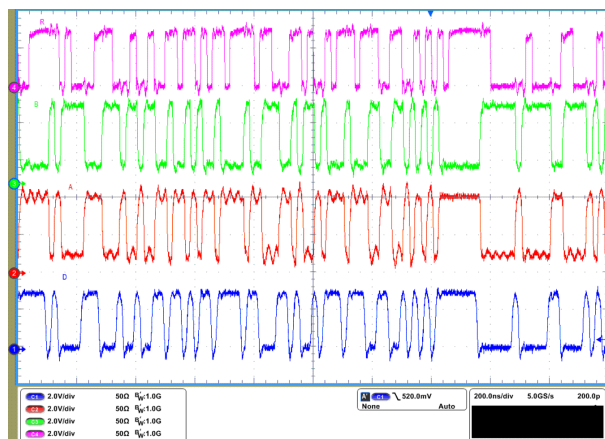


Random (PRBS7) data on D pin at 50 Mbps
SLR = GND $R_L = 54 \Omega$ DE = V_{IO}

图 8-10. THVD2450V Waveforms at $V_{CC} = 5 V$

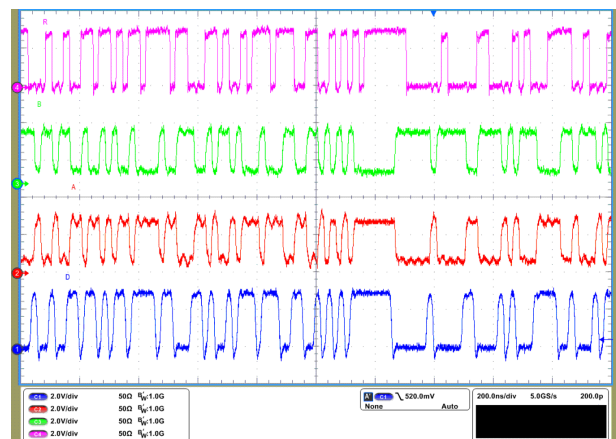

Random (PRBS7) data on D pin at 50 Mbps
SLR = GND $R_L = 54 \Omega$ DE = V_{IO}

图 8-11. THVD2450V Waveforms at $V_{CC} = 3.3 V$

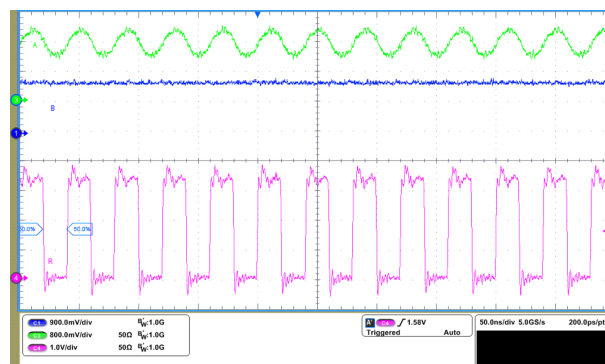

A pin given $\pm 200\text{mV } V_{ID}$ with DC offset of 1.5 V
RE = GND

B pin at 1.5 V

图 8-12. THVD2450V Receiver Waveform with $\pm 200 \text{ mV } V_{ID}$

8.3 Power Supply Recommendations

For reliable operation at all data rates and supply voltages, each supply should be decoupled with a minimum of 100nF ceramic capacitor located as close to the supply pins as possible. This helps to reduce supply voltage ripple present on the outputs of switched-mode power supplies and also helps to compensate for the resistance and inductance of the PCB power planes.

8.4 Layout

8.4.1 Layout Guidelines

Robust and reliable bus node design often requires the use of external transient protection devices in order to protect against surge transients that may occur in industrial environments. Since these transients have a wide frequency bandwidth (from approximately 3MHz to 300MHz), high-frequency layout techniques should be applied during PCB design.

1. Place the protection circuitry close to the bus connector to prevent noise transients from propagating across the board.
2. Use V_{CC} and ground planes to provide low inductance. Note that high-frequency currents tend to follow the path of least impedance and not the path of least resistance.
3. Design the protection components into the direction of the signal path. Do not force the transient currents to divert from the signal path to reach the protection device.
4. Apply 100nF to 220nF decoupling capacitors as close as possible to the V_{CC} and V_{IO} pins of transceiver, UART and/or controller ICs on the board.
5. Use at least two vias for V_{CC} and ground connections of decoupling capacitors and protection devices to minimize effective via inductance.
6. Use 1k Ω to 10k Ω pull-up and pull-down resistors for enable/SLR lines to limit noise currents in these lines during transient events.
7. Insert pulse-proof resistors into the A/Y and B/Z bus lines if the TVS clamping voltage is higher than the specified maximum voltage of the transceiver bus pins. These resistors limit the residual clamping current into the transceiver and prevent it from latching up.

8.4.2 Layout Example

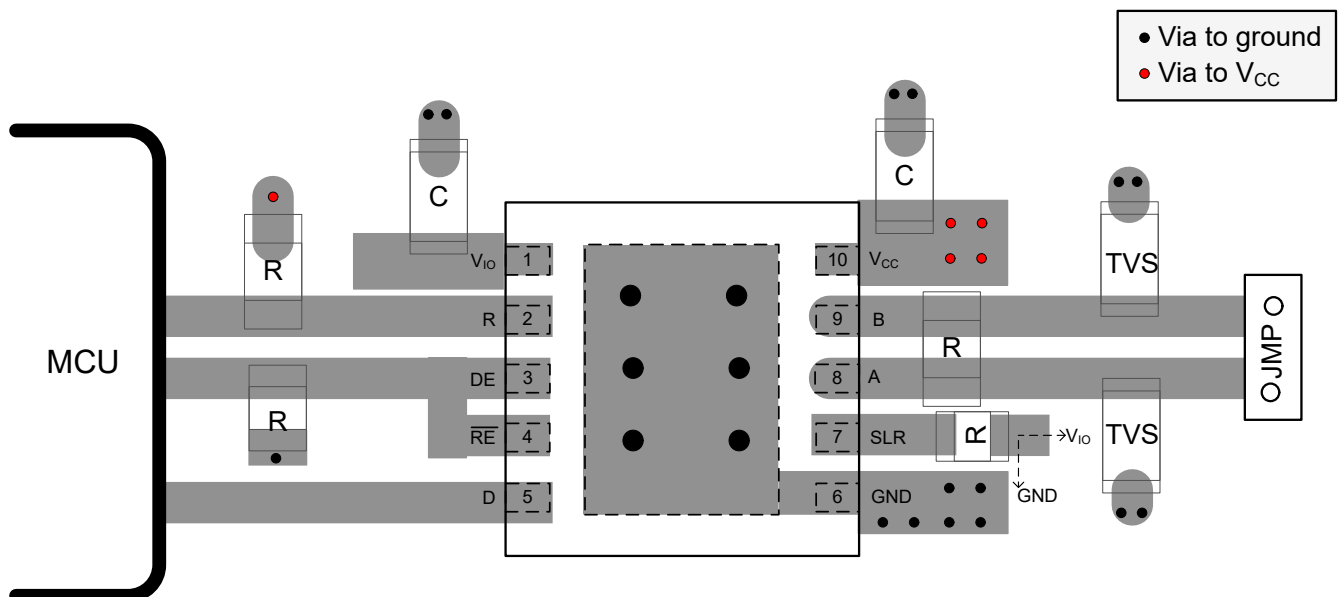


图 8-13. Half-Duplex Layout Example

9 Device and Documentation Support

9.1 Device Support

9.1.1 第三方产品免责声明

TI 发布的与第三方产品或服务有关的信息，不能构成与此类产品或服务或保修的适用性有关的认可，不能构成此类产品或服务单独或与任何 TI 产品或服务一起的表示或认可。

9.2 接收文档更新通知

要接收文档更新通知，请导航至 ti.com 上的器件产品文件夹。点击 [通知](#) 进行注册，即可每周接收产品信息更改摘要。有关更改的详细信息，请查看任何已修订文档中包含的修订历史记录。

9.3 支持资源

[TI E2E™ 中文支持论坛](#) 是工程师的重要参考资料，可直接从专家处获得快速、经过验证的解答和设计帮助。搜索现有解答或提出自己的问题，获得所需的快速设计帮助。

链接的内容由各个贡献者“按原样”提供。这些内容并不构成 TI 技术规范，并且不一定反映 TI 的观点；请参阅 TI 的 [使用条款](#)。

9.4 商标

TI E2E™ is a trademark of Texas Instruments.

所有商标均为其各自所有者的财产。

9.5 静电放电警告



静电放电 (ESD) 会损坏这个集成电路。德州仪器 (TI) 建议通过适当的预防措施处理所有集成电路。如果不遵守正确的处理和安装程序，可能会损坏集成电路。

ESD 的损坏小至导致微小的性能降级，大至整个器件故障。精密的集成电路可能更容易受到损坏，这是因为非常细微的参数更改都可能会导致器件与其发布的规格不相符。

9.6 术语表

[TI 术语表](#) 本术语表列出并解释了术语、首字母缩略词和定义。

10 Revision History

Changes from Revision A (February 2023) to Revision B (March 2024) Page

- 删除了 [封装信息](#) 表中 THVD2412V 和 THVD2452V 的“产品预发布”说明..... [1](#)
- Changed output A and B to: A/Y and B/Z in the *Device Functional Modes*..... [20](#)

Changes from Revision * (December 2022) to Revision A (February 2023) Page

- 删除了 [封装信息](#) 表中 THVD2410V 的“产品预发布”说明..... [1](#)

11 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package Pins	Package qty Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
THVD2410VDR	Active	Production	VSON (DRC) 10	5000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	2410
THVD2410VDR.A	Active	Production	VSON (DRC) 10	5000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	2410
THVD2412VDR	Active	Production	SOIC (D) 14	2500 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	T2412V
THVD2412VDR.A	Active	Production	SOIC (D) 14	2500 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	T2412V
THVD2450VDR	Active	Production	VSON (DRC) 10	5000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	2450
THVD2450VDR.A	Active	Production	VSON (DRC) 10	5000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	2450
THVD2450VDR.CRG4	Active	Production	VSON (DRC) 10	5000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	2450
THVD2450VDR.CRG4.A	Active	Production	VSON (DRC) 10	5000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	2450
THVD2452VDR	Active	Production	SOIC (D) 14	2500 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	T2452V
THVD2452VDR.A	Active	Production	SOIC (D) 14	2500 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	T2452V

⁽¹⁾ **Status:** For more details on status, see our [product life cycle](#).

⁽²⁾ **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

⁽⁴⁾ **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

⁽⁵⁾ **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

⁽⁶⁾ **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative

and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

OTHER QUALIFIED VERSIONS OF THVD2410V, THVD2450V, THVD2452V :

- Enhanced Product : [THVD2410V-EP](#), [THVD2450V-EP](#), [THVD2452V-EP](#)

NOTE: Qualified Version Definitions:

- Enhanced Product - Supports Defense, Aerospace and Medical Applications


TAPE AND REEL INFORMATION



*All dimensions are nominal


Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
THVD2410VDR	VSON	DRC	10	5000	330.0	12.4	3.3	3.3	1.1	8.0	12.0	Q2
THVD2412VDR	SOIC	D	14	2500	330.0	16.4	6.5	9.0	2.1	8.0	16.0	Q1
THVD2450VDR	VSON	DRC	10	5000	330.0	12.4	3.3	3.3	1.1	8.0	12.0	Q2
THVD2450VDR	VSON	DRC	10	5000	330.0	12.4	3.3	3.3	1.1	8.0	12.0	Q2
THVD2452VDR	SOIC	D	14	2500	330.0	16.4	6.5	9.0	2.1	8.0	16.0	Q1

TAPE AND REEL BOX DIMENSIONS

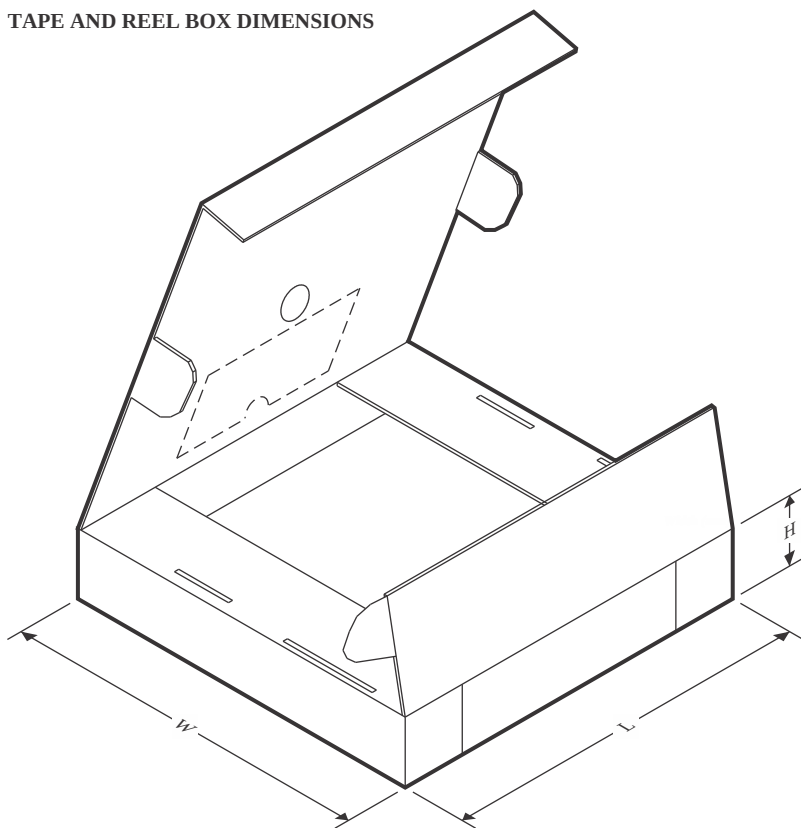


*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
THVD2410VDRCR	VSON	DRC	10	5000	360.0	360.0	36.0
THVD2412VDR	SOIC	D	14	2500	353.0	353.0	32.0
THVD2450VDRCR	VSON	DRC	10	5000	360.0	360.0	36.0
THVD2450VDRCRG4	VSON	DRC	10	5000	367.0	367.0	35.0
THVD2452VDR	SOIC	D	14	2500	353.0	353.0	32.0

D0014A**PACKAGE OUTLINE****SOIC - 1.75 mm max height**

SMALL OUTLINE INTEGRATED CIRCUIT

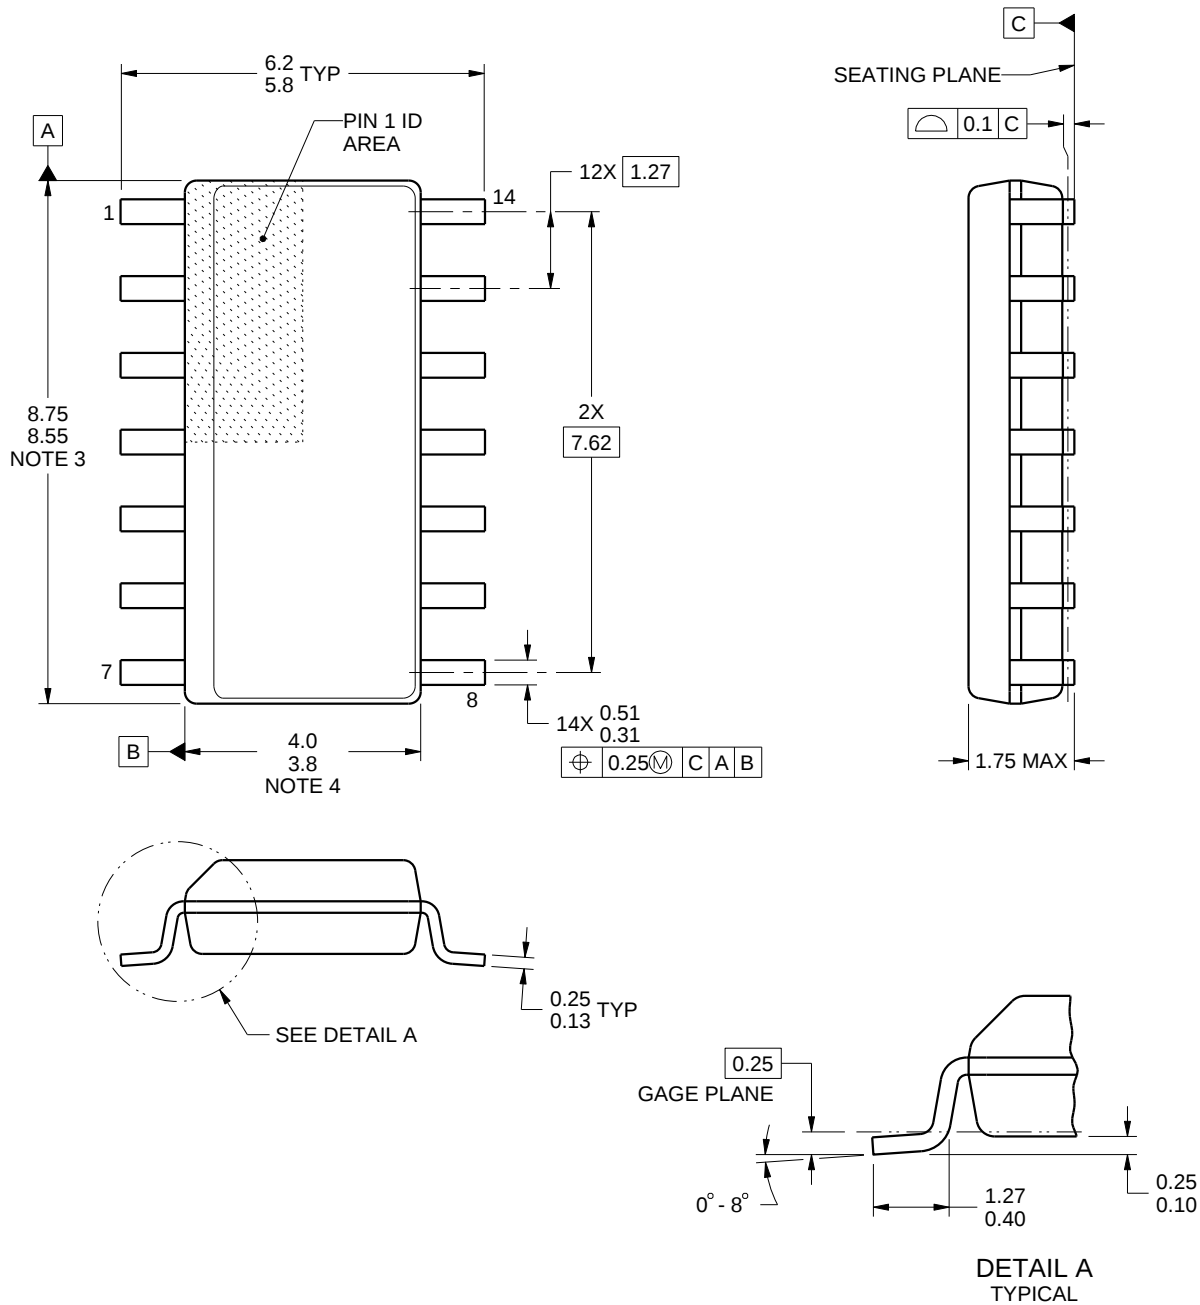

4220718/A 09/2016

NOTES:


1. All linear dimensions are in millimeters. Dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm, per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.43 mm, per side.
5. Reference JEDEC registration MS-012, variation AB.

EXAMPLE BOARD LAYOUT



D0014A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT

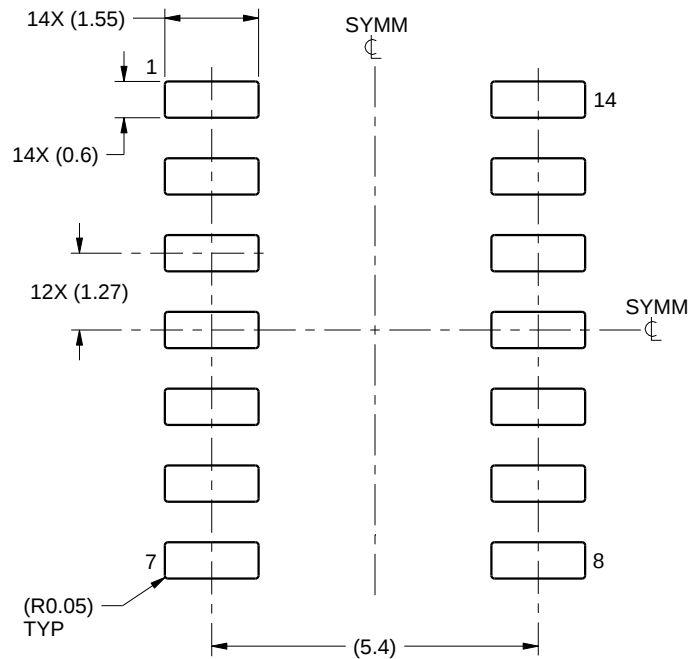

LAND PATTERN EXAMPLE
SCALE:8X

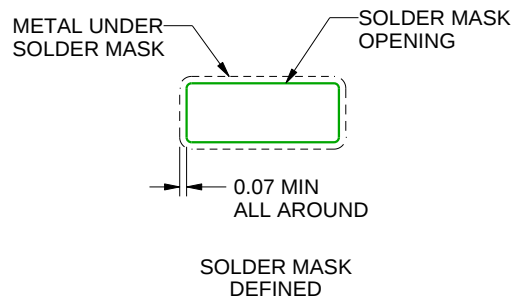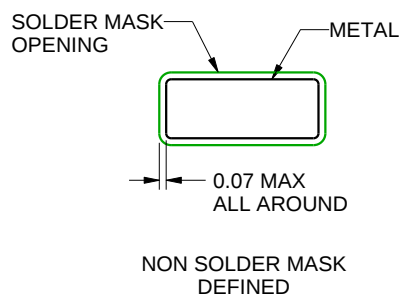

SOLDER MASK DETAILS

4220718/A 09/2016

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.


7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

EXAMPLE STENCIL DESIGN

D0014A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT

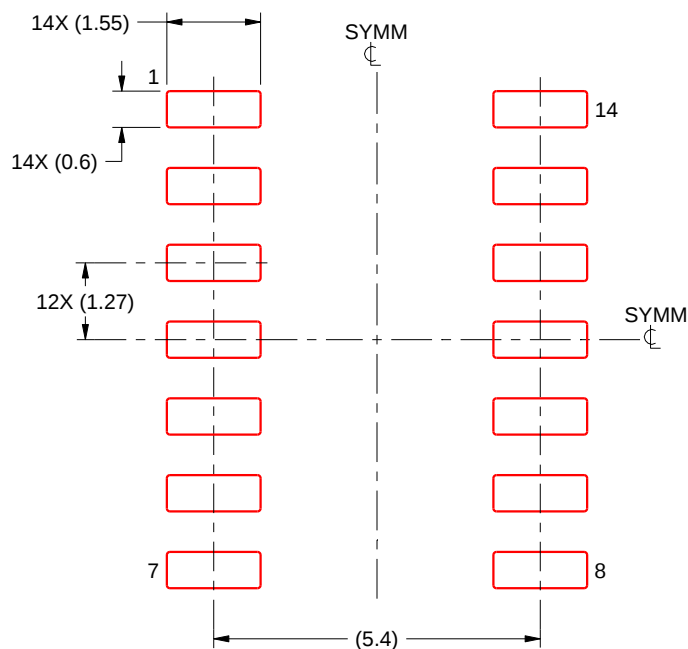

SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL
SCALE:8X

4220718/A 09/2016

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

GENERIC PACKAGE VIEW


DRC 10


VSON - 1 mm max height

3 x 3, 0.5 mm pitch

PLASTIC SMALL OUTLINE - NO LEAD

This image is a representation of the package family, actual package may vary.
Refer to the product data sheet for package details.

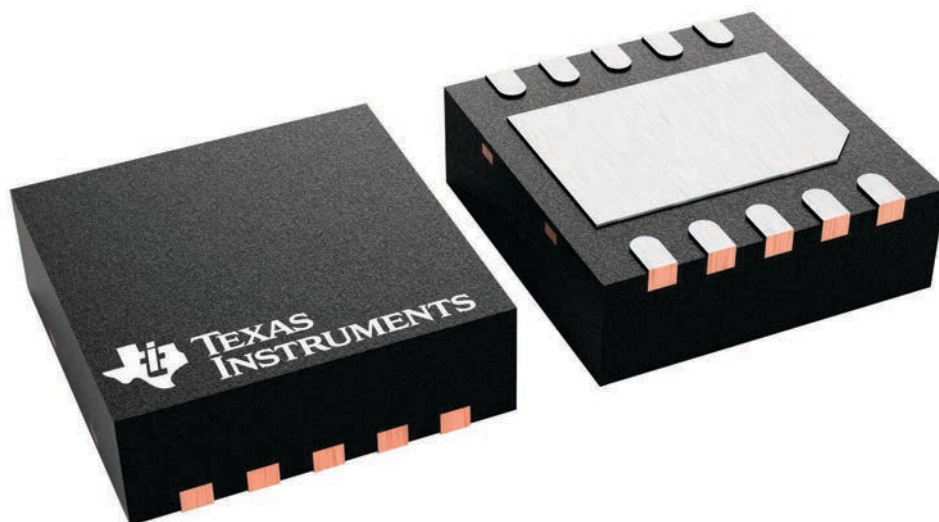

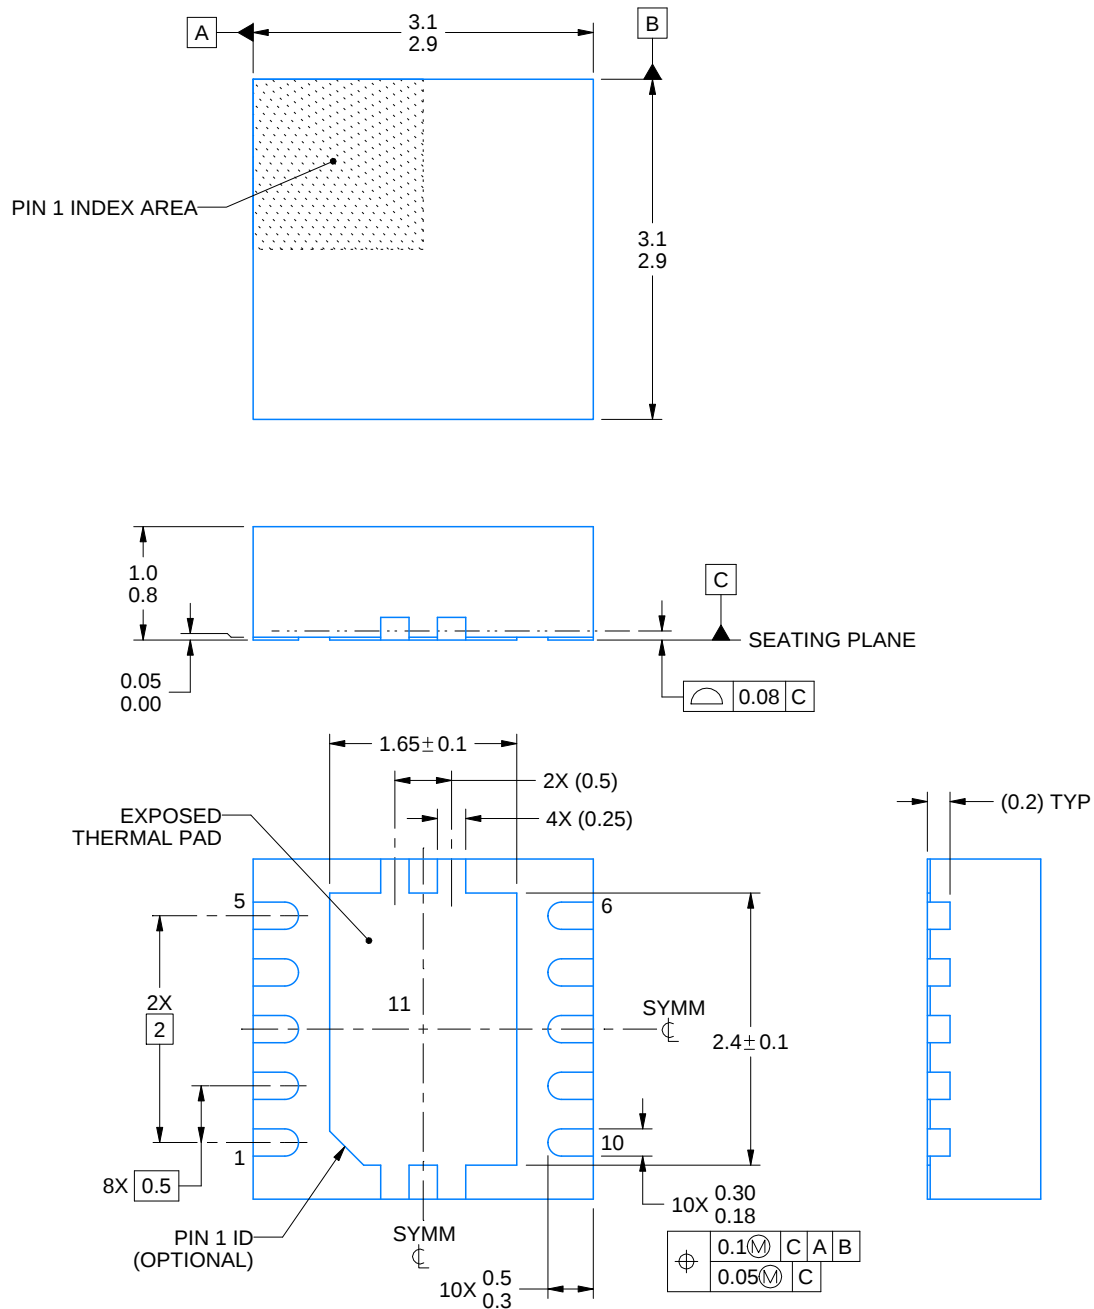

4218878/B 07/2018

NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. The package thermal pad must be soldered to the printed circuit board for optimal thermal and mechanical performance.

EXAMPLE BOARD LAYOUT



DRC0010J

VSON - 1 mm max height

PLASTIC SMALL OUTLINE - NO LEAD

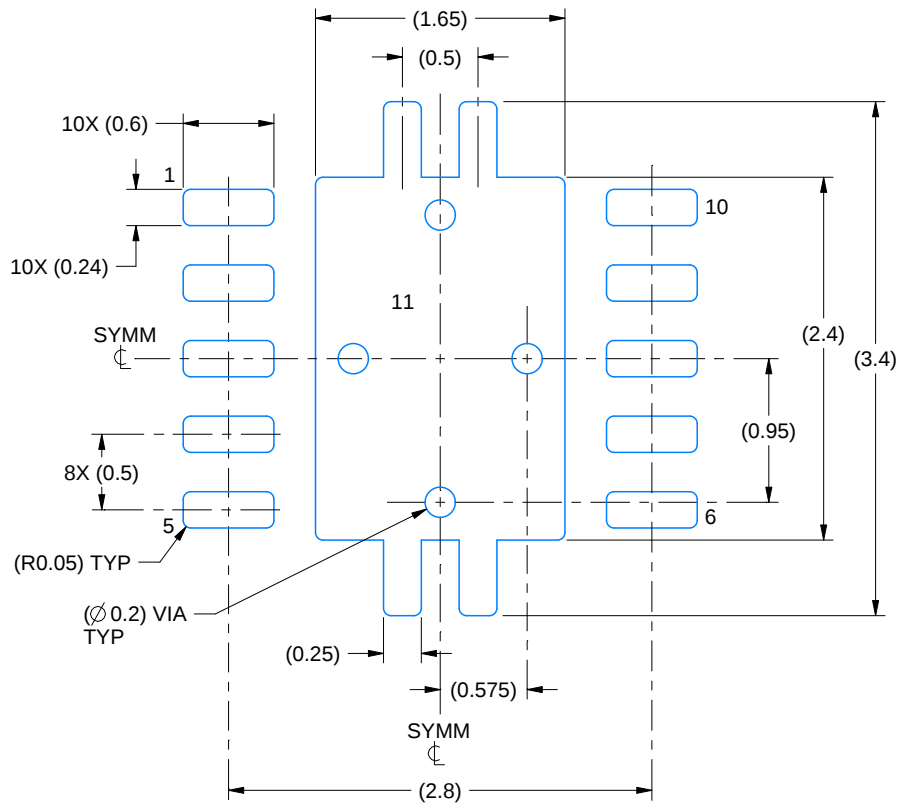

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE:20X

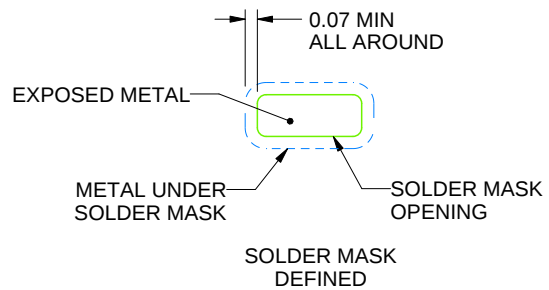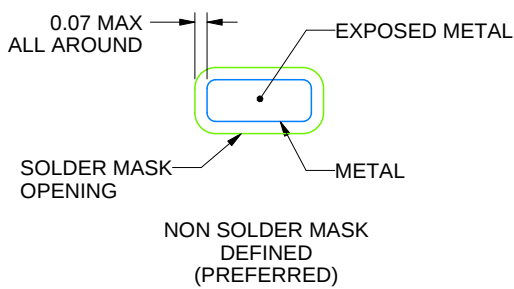

SOLDER MASK DETAILS

4218878/B 07/2018


NOTES: (continued)

- This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 (www.ti.com/lit/sluea271).
- Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.

DRC0010J

VSON - 1 mm max height

PLASTIC SMALL OUTLINE - NO LEAD

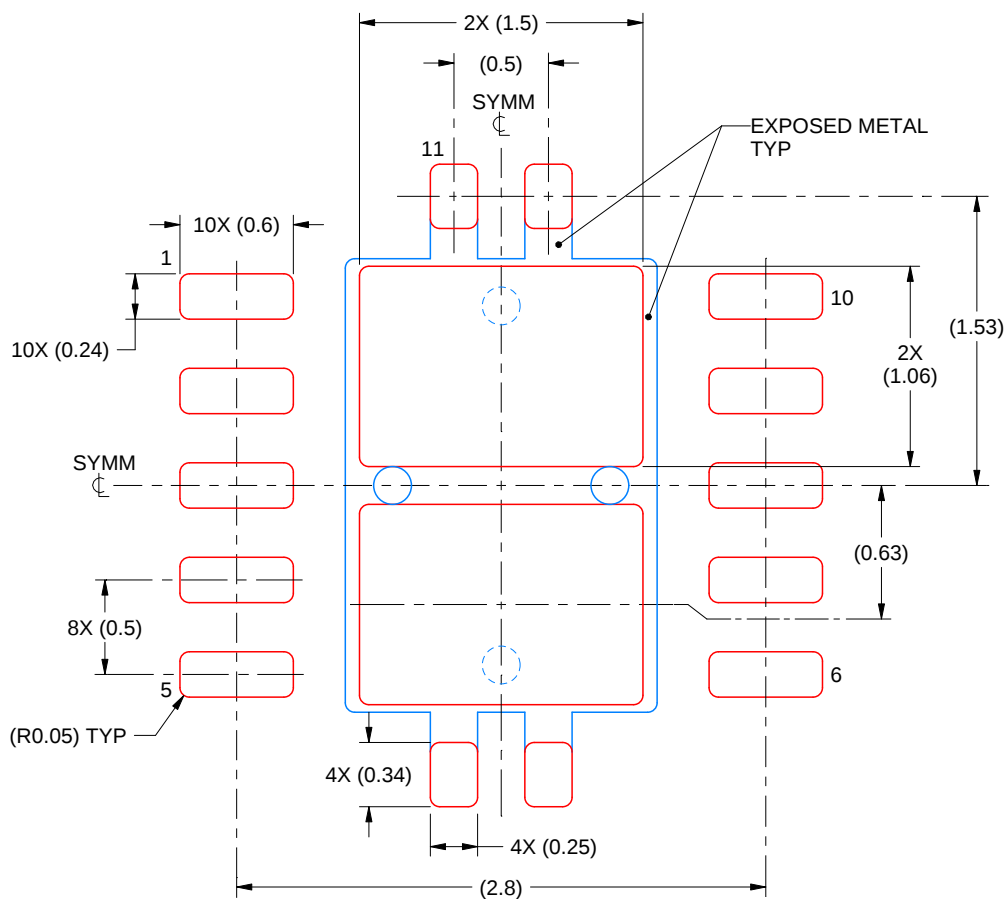

SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL

EXPOSED PAD 11:
80% PRINTED SOLDER COVERAGE BY AREA
SCALE:25X

4218878/B 07/2018

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

重要通知和免责声明

TI“按原样”提供技术和可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证没有瑕疵且不做任何明示或暗示的担保，包括但不限于对适销性、与某特定用途的适用性或不侵犯任何第三方知识产权的暗示担保。

这些资源可供使用 TI 产品进行设计的熟练开发人员使用。您将自行承担以下全部责任：(1) 针对您的应用选择合适的 TI 产品，(2) 设计、验证并测试您的应用，(3) 确保您的应用满足相应标准以及任何其他安全、安保法规或其他要求。

这些资源如有变更，恕不另行通知。TI 授权您仅可将这些资源用于研发本资源所述的 TI 产品的相关应用。严禁以其他方式对这些资源进行复制或展示。您无权使用任何其他 TI 知识产权或任何第三方知识产权。对于因您对这些资源的使用而对 TI 及其代表造成的任何索赔、损害、成本、损失和债务，您将全额赔偿，TI 对此概不负责。

TI 提供的产品受 [TI 销售条款](#)、[TI 通用质量指南](#) 或 [ti.com](#) 上其他适用条款或 TI 产品随附的其他适用条款的约束。TI 提供这些资源并不会扩展或以其他方式更改 TI 针对 TI 产品发布的适用的担保或担保免责声明。除非德州仪器 (TI) 明确将某产品指定为定制产品或客户特定产品，否则其产品均为按确定价格收入目录的标准通用器件。

TI 反对并拒绝您可能提出的任何其他或不同的条款。

版权所有 © 2026，德州仪器 (TI) 公司

最后更新日期：2025 年 10 月