

OPA657-DIE 1.6GHz、低噪声、FET 输入运算放大器

1 特性

- 高增益带宽积：1.6GHz
- 高带宽：275MHz (G = 10)
- 转换率：700V/μs (G = 10, 步长为 1V)
- 低输入偏移电压：±250μV
- 低输入偏置电流：2pA
- 低输入电压噪声：4.8nV/√Hz
- 高输出电流：70mA
- 快速过驱恢复

2 应用

- 宽带光电二极管放大器
- 晶圆扫描设备
- 模数转换器 (ADC) 输入放大器
- 测试和测量前端
- 高增益精密放大器
- 光时域反射计 (OTDR)

3 说明

OPA657 器件将高增益带宽、低失真、电压反馈运算放大器与低电压噪声结型场效应管 (JFET) 输入级相结合，为高精度模数转换器 (ADC) 的驱动或宽带互阻抗应用提供了一个动态范围较大的放大器。光电二极管应用使用这种非完全补偿型高增益带宽放大器降低噪声并改善带宽。

极低电平信号可在带宽和精度特性优异的单一 OPA657 增益级中得到显著放大。即使对于相对较高的源阻抗，极低的输入偏置电流和电容也支持这种性能。宽带光电探测器应用受益于 OPA657 的低电压噪声 JFET 输入。JFET 输入几乎不产生电流噪声，该器件因此成为高增益光电二极管应用的理想选择。

Ordering Information⁽¹⁾

PRODUCT	PACKAGE DESIGNATOR	PACKAGE	ORDERABLE PART NUMBER	PACKAGE QUANTITY
OPA657	TD	Bare Die in Gel Pak VR ⁽²⁾	OPA657TD1	324
			OPA657TD2	10

(1) For the most current package and ordering information, see the Package Option Addendum at the end of this document, or see the TI web site at www.ti.com.

(2) Processing is per the Texas Instruments commercial production baseline and is in compliance with the Texas Instruments Quality Control System in effect at the time of manufacture. Electrical screening consists of DC parametric and functional testing at room temperature only. Unless otherwise specified by Texas Instruments AC performance and performance over temperature is not warranted. Visual Inspection is performed in accordance with MIL-STD-883 Test Method 2010 Condition B at 75X minimum.






This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

4 Bare Die Information

DIE THICKNESS	BACKSIDE FINISH	BACKSIDE POTENTIAL	BOND PAD METALLIZATION COMPOSITION	BOND PAD THICKNESS
15 mils.	Silicon with backgrind	V_{S-}	TiW/AlCu (0.5%)	1100 nm

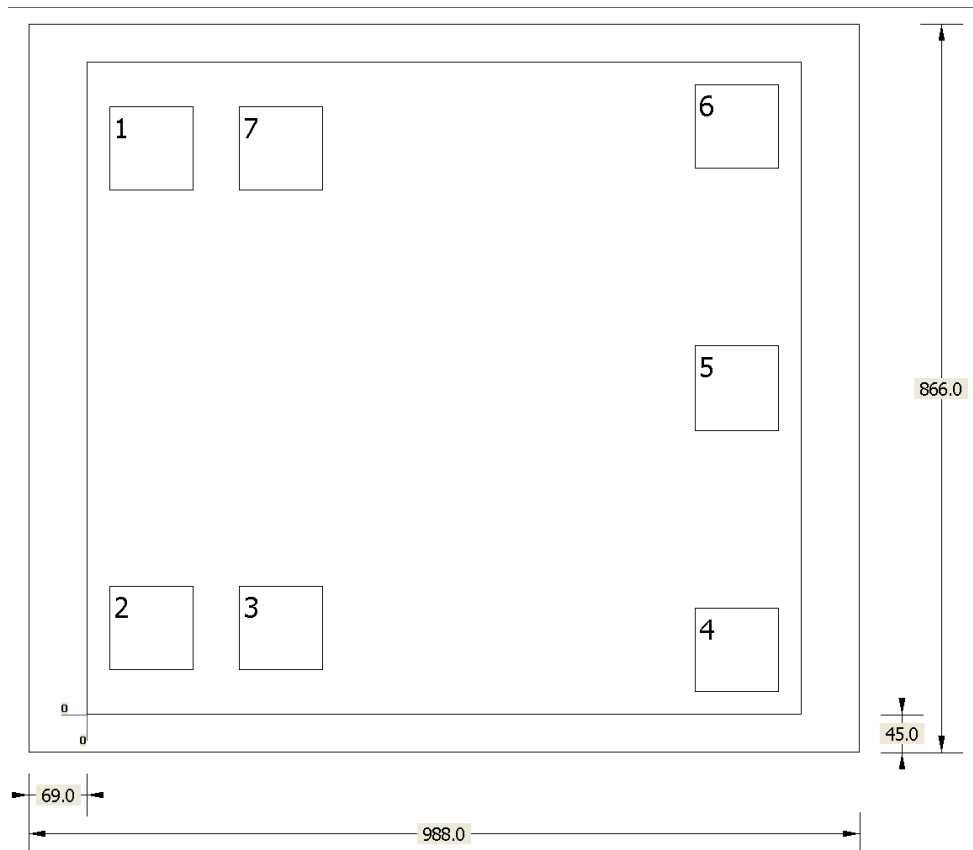

Bond Pad Coordinates in Microns⁽¹⁾

DESCRIPTION	PAD NUMBER	X MIN	Y MIN	X MAX	Y MAX
Inverting input	1	27	623	127	723
NonInverting input	2	27	53	127	153
N/C	3	181	53	281	153
Output	4	723	27	823	127
V_{S-}	5	723	337	823	439
V_{S+}	6	723	649	823	749
N/C	7	181	623	281	723

(1) Substrate is V_{S-} .

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package Pins	Package qty Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
OPA657TD1	Active	Production	null (null) 0	324 NOT REQUIRED	-	Call TI	Call TI	-40 to 85	
OPA657TD1.A	Active	Production	null (null) 0	324 NOT REQUIRED	-	Call TI	Call TI	-40 to 85	
OPA657TD2	Active	Production	null (null) 0	120 NOT REQUIRED	-	Call TI	Call TI	-40 to 85	
OPA657TD2.A	Active	Production	null (null) 0	120 NOT REQUIRED	-	Call TI	Call TI	-40 to 85	

⁽¹⁾ **Status:** For more details on status, see our [product life cycle](#).

⁽²⁾ **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

⁽⁴⁾ **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

⁽⁵⁾ **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

⁽⁶⁾ **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

重要通知和免责声明

TI“按原样”提供技术和可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证没有瑕疵且不做任何明示或暗示的担保，包括但不限于对适销性、与某特定用途的适用性或不侵犯任何第三方知识产权的暗示担保。

这些资源可供使用 TI 产品进行设计的熟练开发人员使用。您将自行承担以下全部责任：(1) 针对您的应用选择合适的 TI 产品，(2) 设计、验证并测试您的应用，(3) 确保您的应用满足相应标准以及任何其他安全、安保法规或其他要求。

这些资源如有变更，恕不另行通知。TI 授权您仅可将这些资源用于研发本资源所述的 TI 产品的相关应用。严禁以其他方式对这些资源进行复制或展示。您无权使用任何其他 TI 知识产权或任何第三方知识产权。对于因您对这些资源的使用而对 TI 及其代表造成的任何索赔、损害、成本、损失和债务，您将全额赔偿，TI 对此概不负责。

TI 提供的产品受 [TI 销售条款](#)、[TI 通用质量指南](#) 或 [ti.com](#) 上其他适用条款或 TI 产品随附的其他适用条款的约束。TI 提供这些资源并不会扩展或以其他方式更改 TI 针对 TI 产品发布的适用的担保或担保免责声明。除非德州仪器 (TI) 明确将某产品指定为定制产品或客户特定产品，否则其产品均为按确定价格收入目录的标准通用器件。

TI 反对并拒绝您可能提出的任何其他或不同的条款。

版权所有 © 2025，德州仪器 (TI) 公司

最后更新日期：2025 年 10 月