

TPS274C65CP 具有诊断功能的 72mΩ 四通道智能高侧开关

1 特性

- 四通道 72mΩ R_{ON} 智能高侧开关
 - 低 R_{ON} 可确保在高达 2A 直流负载下实现低功耗
- 可通过可调电流限制提高系统级可靠性
 - TPS274C65CP：电流限值设置范围为 250mA 至 1.9A
 - TPS274C65CPH：电流限值设置范围为 290mA 至 2.26A
- 可驱动电感、容性和电阻性负载
 - 用于电容器充电的可调节电流限值
 - 集成输出钳位对电感负载进行消磁
- 强大的输出保护
 - 集成热关断
 - 针对对地短路事件提供保护
 - 可配置故障处理
- 诊断功能可提高模块智能
 - 断线检测
 - 电源短路检测
- 小型 6mm × 6mm 无引线封装

2 应用

- 工业 PLC 系统
 - 数字输出模块
 - IOLink 主站端口
 - 传感器电源

3 说明

TPS274C65CP 器件是一款旨在满足工业控制系统要求的四通道智能高侧开关。72mΩ 的低 $R_{DS(on)}$ 可更大限度减少器件功耗，即使提供大的输出负载电流时也是如此。该器件集成了保护和诊断功能，可确保即使在发生短路或负载故障等不利事件时也能提供系统保护。该器件通过可靠的电流限值提供负载保护，电流限值在 300mA 至 2.26A 范围内可调，可在任何输出负载电流下提供保护。

TPS274C65CP 具有一个内部稳压器，可为内部轨生成电压。此外，还提供一个 VDD 引脚来连接外部 VDD 电源，该电源必须来自 VS 以减少功率耗散。全面的故障报告功能包含专用于指示 VS 欠压的 VS_FLT 引脚，以及单独用于指示每通道故障的故障引脚 STx。


TPS274C65CP 采用引脚间距为 0.5mm 的小型 6mm × 6mm VQFN 封装，可更大限度地减小设计 PCB 尺寸。

封装信息

器件型号	封装 ⁽¹⁾	封装尺寸 ⁽²⁾
TPS274C65CP	RHA (VQFN , 40)	6.00mm × 6.00mm
TPS274C65CPH		

(1) 如需了解所有可用封装，请参阅数据表末尾的可订购产品附录。

(2) 封装尺寸 (长 × 宽) 为标称值，并包括引脚 (如适用)。

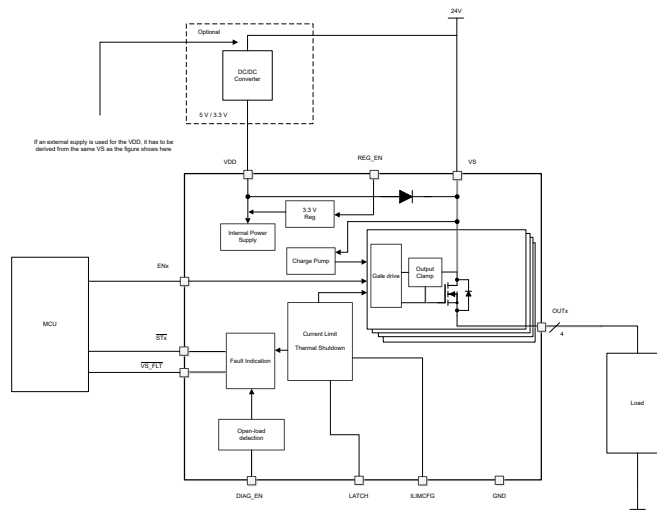

典型应用原理图



Table of Contents

1 特性	1	8.3 Feature Description.....	12
2 应用	1	8.4 Device Functional Modes.....	25
3 说明	1	9 Application and Implementation	26
4 Device Comparison Table	3	9.1 Application Information.....	26
5 Pin Configuration and Functions	4	9.2 Typical Application.....	26
6 Specifications	6	9.3 Power Supply Recommendations.....	28
6.1 Absolute Maximum Ratings.....	6	9.4 Layout.....	28
6.2 ESD Ratings.....	6	10 Device and Documentation Support	30
6.3 Recommended Operating Conditions.....	6	10.1 Documentation Support.....	30
6.4 Thermal Information.....	7	10.2 接收文档更新通知.....	30
6.5 Electrical Characteristics.....	7	10.3 支持资源.....	30
6.6 Switching Characteristics.....	9	10.4 Trademarks.....	30
6.7 Typical Characteristics.....	10	10.5 静电放电警告.....	30
7 Parameter Measurement Information	11	10.6 术语表.....	30
8 Detailed Description	12	11 Revision History	30
8.1 Overview.....	12	12 Mechanical, Packaging, and Orderable Information	31
8.2 Functional Block Diagram.....	12		

4 Device Comparison Table

表 4-1. Functionality Comparison

PART NUMBER	INTERFACE	CURRENT SENSE	CURRENT LIMIT SETTINGS ALLOW FOR 2A OPERATION	WETTABLE FLANK VERSION AVAILABLE
TPS274C65CP	GPIO	No current sense	No	Yes
TPS274C65CPH	GPIO	No current sense	Yes	Yes

5 Pin Configuration and Functions

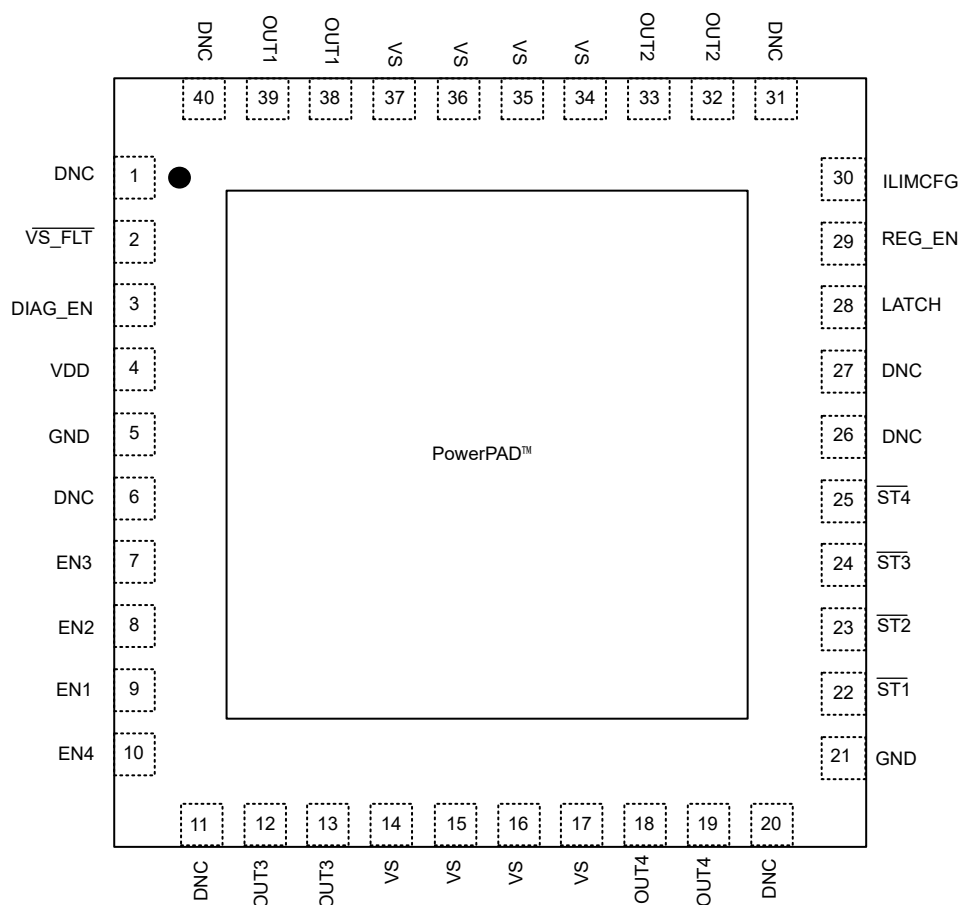


图 5-1. RHA Package, 40-Pin VQFN (Top View)

表 5-1. Pinout - Version CP, CPH

PIN		TYPE ⁽¹⁾	DESCRIPTION
NO.	NAME		
1	DNC	—	Do not connect.
2	$\overline{VS_FLT}$	O	Supply fault output - open drain, pull up with a 4.7K resistor to VDD pin.
3	DIAG_EN	I	Enable diagnostics.
4	VDD	P	Logic supply input ⁽²⁾ .
7	EN3	I	Enable Ch3 output.
8	EN2	I	Enable Ch2 output.
9	EN1	I	Enable Ch1 output.
10	EN4	I	Enable Ch4 output.
30	ILIMCFG	I	Current limit configuration pin - set the 3-bit setting of the current limit with a resistor to the GND pin of the IC.
29	REG_EN	I	Internal regulator enable pin, float to enable. Tie to the GND pin of the IC to disable and use an external supply input to VDD.
28	LATCH	I	Configure the device in latch (on fault) mode when the pin is pulled HI. Set the pin LO for auto-retry on fault.
22	$\overline{ST1}$	O	CH1 fault status, open drain, pull up with a 4.7K resistor to VDD pin.

表 5-1. Pinout - Version CP, CPH (续)

PIN		TYPE ⁽¹⁾	DESCRIPTION
NO.	NAME		
23	ST2	O	CH2 fault status, open drain, pull up with a 4.7K resistor to VDD pin.
24	ST3	O	CH3 fault status, open drain, pull up with a 4.7K resistor to VDD pin.
25	ST4	O	CH4 fault status, open drain, pull up with a 4.7K resistor to VDD pin.
6,26,27,20	DNC	—	Do not connect.
14-17	VS	P	24V switch supply input to the IC.
38,39	OUT1	O	OUT1
32,33	OUT2	O	OUT2
12,13	OUT3	O	OUT3
18,19	OUT4	O	OUT4
34-37	VS	P	24V switch supply input to the IC.
21,5	GND	—	Device ground.
40,31,11,20	DNC	—	Do not connect.
Exposed Pad	GND	I	Connect to the GND pin of the IC.

- (1) I = input, O = output, P = power
 (2) When the device is configured to support an external regulator connected to VDD, the supply input for the external regulator must be derived from the same VS supply of TPS274C65CP, as shown in the Typical Application Schematic.

6 Specifications

6.1 Absolute Maximum Ratings

Over operating free-air temperature range (unless otherwise noted)⁽¹⁾

		MIN	MAX	UNIT
Continuous supply voltage, V_{VS} to IC_GND		- 0.3	40	V
Maximum transient (< 1 ms) voltage at the supply pin (with respect to IC GND), V_{VS} , during ON state		- 0.3	60	V
VOUT voltage to IC_GND		- 30	$V_{VS} + 0.3$	V
V_{DS} voltage	V_{DS} voltage	- 0.7	39	V
Low voltage supply pin voltage, V_{DD}	Low voltage supply pin voltage, V_{DD}	- 0.3	7.0	V
Digital Input pin voltages, V_{DIG}		- 0.3	7.0	V
Analog pin voltage REG_EN		- 0.3	7.0	V
FLT pin voltage, V_{FLT}	FLT pin voltage, V_{FLT}	- 0.3	7.0	V
ST pin voltage, V_{ST}	ST pin voltage, V_{ST}	- 0.3	7.0	V
Reverse ground current, I_{GND}	$V_S < 0$ V		- 50	mA
Maximum junction temperature, T_J			150	°C
Storage temperature, T_{stg}		- 65	150	°C

- (1) Operation outside the *Absolute Maximum Ratings* may cause permanent device damage. *Absolute Maximum Ratings* do not imply functional operation of the device at these or any other conditions beyond those listed under *Recommended Operating Conditions*. If used outside the *Recommended Operating Conditions* but within the *Absolute Maximum Ratings*, the device may not be fully functional, and this may affect device reliability, functionality, performance, and shorten the device lifetime.

6.2 ESD Ratings

				VALUE	UNIT
V_{ESD1}	Electrostatic discharge	Human body model (HBM), per ANSI/ESDA/JEDEC JS-001 ⁽¹⁾	All pins except VS and VOUTx	±2000	V
V_{ESD2}	Electrostatic discharge	Human body model (HBM), per ANSI/ESDA/JEDEC JS-001 ⁽¹⁾	VS and VOUTx with respect to GND	±4000	V
V_{ESD3}	Electrostatic discharge	Charged device model (CDM), per ANSI/ESDA/JEDEC JS-002, all pins ⁽²⁾	All pins	±500	V
V_{surge}	Electrostatic discharge	Surge protection with 42 Ω , per IEC 61000-4-5; 1.2/50 μ s	VS, OUTx	±1000	V

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.
 (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

6.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

		MIN	MAX	UNIT
V_{S_OPMAX}	Nominal supply voltage	12	36	V
V_{DD}	Low voltage supply voltages	3.0	5.5	V
V_{DIG}	All digital input pin voltage	- 0.3	5.5	V
V_{ST}	ST pin voltage	- 0.3	5.5	V
V_{ANA}	REG_EN pin voltage	- 0.3	5.0	V
T_A	Operating free-air temperature	- 40	125	°C

6.4 Thermal Information

THERMAL METRIC ^{(1) (2)}		TPS274C65X	UNIT
		RHA (VQFN)	
		40 PINS	
$R_{\theta JA}$	Junction-to-ambient thermal resistance	25.4	°C/W
$R_{\theta JC(top)}$	Junction-to-case (top) thermal resistance	15.8	°C/W
$R_{\theta JB}$	Junction-to-board thermal resistance	7.6	°C/W
ψ_{JT}	Junction-to-top characterization parameter	0.2	°C/W
ψ_{JB}	Junction-to-board characterization parameter	7.6	°C/W
$R_{\theta JC(bot)}$	Junction-to-case (bottom) thermal resistance	0.6	°C/W

- (1) For more information about traditional and new thermal metrics, see the [SPRA953](#) application report.
(2) The thermal parameters are based on a 4-layer PCB according to the JESD51-5 and JESD51-7 standards.

6.5 Electrical Characteristics

$V_{VS} = 11\text{ V to }36\text{ V}$, $V_{VDD} = 3.0\text{ V to }5.5\text{ V}$, $T_J = -40^{\circ}\text{C to }125^{\circ}\text{C}$ (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
INPUT VOLTAGE AND CURRENT						
$V_{DS_Clamp\ CHX}$	V_{DS} clamp voltage	FET current = 10 mA, $V_S = 24\text{ V}$	40	44	50	V
$V_{DS_Clamp\ CHX}$	V_{DS} clamp voltage	FET current = 10 mA, $V_S = 19\text{ V}$	40	44	50	V
$V_{DS_Clamp\ CHX}$	V_{DS} clamp voltage	FET current = 10 mA, $V_S = 10\text{ V}$	33	37	41	V
V_{S_UVPF}	V_S undervoltage protection falling	Measured with respect to the GND pin of the device, All channels ON	8.6	9	9.3	V
V_{S_UVPR}	V_S undervoltage protection recovery rising	Measured with respect to the GND pin of the device, All channels ON	9.5	10	10.3	V
V_{S_UVPRH}	V_S undervoltage protection deglitch time	Time from triggering the UVP fault to FET turn-off	15	20	25	μs
V_{S_UVWF}	V_S undervoltage warning falling	Measured with respect to the GND pin of the device,	12	12.5	13.5	V
V_{S_UVWR}	V_S undervoltage warning recovery rising	Measured with respect to the GND pin of the device,	11.2	13.5	15.8	V
V_{S_UVLOF}	V_S undervoltage lockout falling	Measured with respect to the GND pin of the device		3.0		V
V_{S_UVLOR}	V_S undervoltage lockout rising	Measured with respect to the GND pin of the device	2.7	3	3.3	V
V_{DD_UVLOF}	V_{DD} undervoltage lockout falling	Measured with respect to the GND pin of the device	2.7	2.8	2.9	V
V_{DD_UVLOR}	V_{DD} undervoltage lockout rising	Measured with respect to the GND pin of the device	2.8	2.88	2.98	V
I_{L_NOM}	Continuous load current, per channel	All channels enabled, $T_{AMB} = 85^{\circ}\text{C}$		1.6		A
		Two channels enabled, $T_{AMB} = 85^{\circ}\text{C}$		2.5		A
I_{OUT_LEAKX}	Leakage current from OUT to GND in OFF state	$V_S = V_{OUT} < 36\text{ V}$, Switch and all diagnostics disabled, measured into the OUTx pin			40	μA

6.5 Electrical Characteristics (续)

$V_{VS} = 11\text{ V}$ to 36 V , $V_{VDD} = 3.0\text{ V}$ to 5.5 V , $T_J = -40^\circ\text{C}$ to 125°C (unless otherwise noted)

PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
I _{OUT(OFF)}	Output leakage current (per channel)	VS ≤ 36 V, V _{OUT} = 0 Channel disabled, diagnostics disabled Tj ≤ 125°C		0	0.8	10	μA
VDD I _Q	V _{DD} quiescent current, all diagnostics disabled, external VDD	VS ≤ 36 V, V _{DD} = 5.5 V All channels enabled, I _{OUTx} = 0 A			1.85	2.1	mA
VS I _Q	VS quiescent current, internal VDD	VS ≤ 36 V, All channels enabled, I _{OUTx} = 0 A			4.9	5.6	mA
VS I _Q	VS quiescent current, external VDD	VS ≤ 36 V, V _{DD} = 3.0 V All channels enabled, I _{OUTx} = 0 A			2.0	2.45	mA
I _{leak_LG}	Leakage current out of the output pins with the GND of IC disconnected, Load ground connected to supply ground	VS≤ 30 V, V _{DD} = 5.5 V, RL = 24 Ω All channels enabled			0.8	0.9	mA
RON CHARACTERISTICS							
RON	On-resistance (Includes MOSFET and package)	10 V ≤ VS ≤ 36 V, I _{OUT1} = I _{OUT2} = 200 mA	TJ = 25°C	72			m Ω
			TJ = 125°C	110			m Ω
	On-resistance when 2 channels are paralleled (Includes MOSFET and package)	10 V ≤ VS ≤ 36 V, I _{OUT1} = I _{OUT2} > 200 mA. V _{OUT1} tied to V _{OUT2}	TJ = 25°C	33			m Ω
			TJ = 125°C	55			m Ω
VDD_REG CHARACTERISTICS							
V _{VDD}	VDD Output voltage (Internal regulator enabled)	6 V ≤ VS ≤ 36 V, I _{VDD} < 20 mA	Includes load and line regulation across the range.	3.1	3.3	3.6	V
LR _{VDD}	Load regulation of internal VDD regulator when enabled	6 V ≤ VS ≤ 36 V, I _{VDD} < 20 mA				0.95	V/A
LR _{tran_VDD}	Load transient regulation of internal VDD regulator when enabled	6 V ≤ VS ≤ 36 V, I _{VDD} <step from 5 mA to 15 mA in 10 μs	1 uF			10	mV
I _{CL_VDD}	Current Limit of internal regulator	6 V ≤ VS ≤ 36 V		25		50	mA
CURRENT LIMIT CHARACTERISTICS							
ICLx	CHx I _{CL} current limitation level, H version	Regulated current at short circuit RL < 200 mohms when Enabled. VDD = 3.3 V.	Setting = 2.26 A	2.01	2.26	2.88	A
			Setting = 1.9 A	1.6	1.9	2.3	A
			Setting = 1.52 A	1.28	1.52	1.76	A
			Setting = 1.15 A	0.92	1.15	1.38	A
			Settting = 0.86 A	0.74	0.86	0.98	A
			Setting = 0.67 A	0.57	0.67	0.77	A
			Setting = 0.48 A	0.38	0.48	0.57	A
			Setting = 0.29 A	0.22	0.29	0.39	A

6.5 Electrical Characteristics (续)

$V_{VS} = 11\text{ V}$ to 36 V , $V_{VDD} = 3.0\text{ V}$ to 5.5 V , $T_J = -40^\circ\text{C}$ to 125°C (unless otherwise noted)

PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
I_{CLx}	CHx I_{CL} current limitation level	Regulated current at short circuit $R_L < 200$ mohms when Enabled. $V_{DD} = 3.3\text{ V}$.	Setting = 1.9 A	1.6	1.9	2.3	A
			Setting = 1.6 A	1.35	1.6	1.85	A
			Setting = 1.25 A	1	1.25	1.5	A
			Setting = 1 A	0.85	1	1.15	A
			Setting = 0.72 A	0.62	0.72	0.82	A
			Setting = 0.56 A	0.47	0.56	0.63	A
			Setting = 0.4 A	0.32	0.4	0.47	A
			Setting = 0.25 A	0.19	0.25	0.33	A
I_{CL_PK1}	CHx Peak current enabling into permanent short	$T_J = -40^\circ\text{C}$ to 125°C , $V_S = 24\text{ V}$	Setting = 1.0A			2.80	A
I_{CL_PK2}	CHx Peak current threshold when short is applied while switch enabled	$T_J = -40^\circ\text{C}$ to 125°C $V_S = 24\text{ V}$, Minimum inductance = $2.2\text{ }\mu\text{H}$	Setting = 1.0A			8	A

FAULT CHARACTERISTICS

I_{WB_OFF}	Off State Wirebreak or Open-load (OL) detection internal pullup current	Switch disabled, $DIAG_EN = \text{HIGH}$	38	51	64	μA
$V_{WB_OFF_TH}$	Off state WireBreak (WB) or Open-load (OL) detection voltage	Channel Disabled, off-state wire-break diagnostics enabled	5.6	6	6.5	V
T_{ABS}	Thermal shutdown		160	185	210	$^\circ\text{C}$
T_{HYS}	Thermal shutdown hysteresis		20	27	35	$^\circ\text{C}$
V_{OL_FLT}	Fault low-output voltage	$I_{FLT} = 2\text{ mA}$, sink current into the pin			0.4	V
t_{RETRY}	Retry time	Time from thermal shutdown until switch re-enable.		0.6		ms

DIGITAL INPUT PIN CHARACTERISTIC

$V_{IH, DIG}$	DIG pin Input voltage high-level	$3.0\text{ V} \leq V_{DD} \leq 5.5\text{ V}$	$0.7 \times V_{VDD}$			V
$V_{IL, DIG}$	DIG pin Input voltage low-level	$3.0\text{ V} \leq V_{DD} \leq 5.5\text{ V}$		$0.3 \times V_{VDD}$		V
R_{REG_EN}	Internal pullup resistance for REG_EN pin			1		$\text{M}\Omega$
R_{DIGx}	Internal pulldown resistor		0.7	1	2.0	$\text{M}\Omega$
$I_{IH, DIG}$	Input current high-level	$V_{DIG} = 5\text{ V}$		5		μA

DIGITAL OUTPUT PIN CHARACTERISTICS

V_{OL_ST}	Output Logic Low Voltage	ST Pin current = -4 mA			0.4	V
--------------	--------------------------	---------------------------------	--	--	-----	---

6.6 Switching Characteristics

$V_S = 6\text{ V}$ to 36 V , $T_J = -40^\circ\text{C}$ to $+125^\circ\text{C}$ (unless otherwise noted)

PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
t_{DR}	CHx Turnon delay time	$V_S = 24\text{ V}$, $R_L = 48\text{ }\Omega$ 50% of EN to 10% of VOUT		5	18	25	μs
t_{DF}	CHx Turnoff delay time	$V_S = 24\text{ V}$, $R_L = 48\text{ }\Omega$ 50% of EN to 90% of VOUT		16	24	33	μs

6.6 Switching Characteristics (续)

$V_S = 6\text{ V to }36\text{ V}$, $T_J = -40^\circ\text{C to }+125^\circ\text{C}$ (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
SR2 _R	VOUTx rising slew rate	$V_S = 24\text{ V}$, 25% to 75% of V_{OUT} , $R_L = 48\ \Omega$	1	1.6	2.2	V/ μs
SR2 _F	VOUTx falling slew rate	$V_S = 24\text{ V}$, 75% to 25% of V_{OUT} , $R_L = 48\ \Omega$	1	1.4	1.8	V/ μs
f _{max}	Maximum PWM frequency				1	kHz
t _{ON}	CHx Turnon time	$V_S = 24\text{ V}$, $R_L = 48\ \Omega$ 50% of EN to 90% of VOUT		33	42	μs
t _{OFF}	CHx Turnoff time	$V_S = 24\text{ V}$, $R_L = 48\ \Omega$ 50% of EN to 10% of VOUT		46	57	μs
t _{ON} - t _{OFF}	CHx Turnon and off matching	1ms ON time switch enable pulse $V_{BB} = 24\text{ V}$, $R_L = 48\ \Omega$	- 41	- 7	23	μs
t _{ON} - t _{OFF}	CHx Turnon and off matching	100- μs OFF time switch enable pulse, $V_S = 24\text{ V}$, $R_L = 48\ \Omega$, $F = f_{\text{max}}$	- 41	- 7	23	μs
t _{ON} - t _{OFF}	CHx Turnon and off matching	100- μs ON time switch enable pulse, $V_S = 24\text{ V}$, $R_L = 48\ \Omega$, $F = f_{\text{max}}$	- 41	- 7	23	μs
Δ PWM	CHx PWM accuracy - average load current	200- μs enable pulse, $V_S = 24\text{ V}$, $R_L =$ 48 Ω $F = f_{\text{max}}$	- 20		20	%

6.7 Typical Characteristics

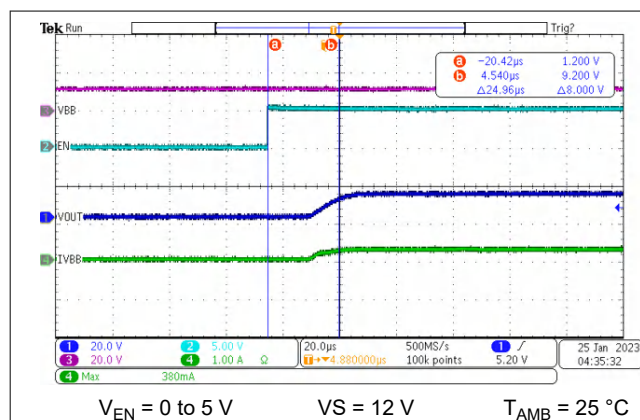


图 6-1. Turn-on Time (t_{ON})

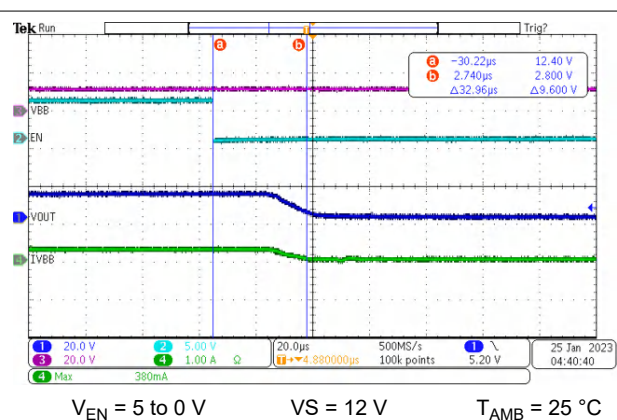


图 6-2. Turn-off Time (t_{OFF})

7 Parameter Measurement Information

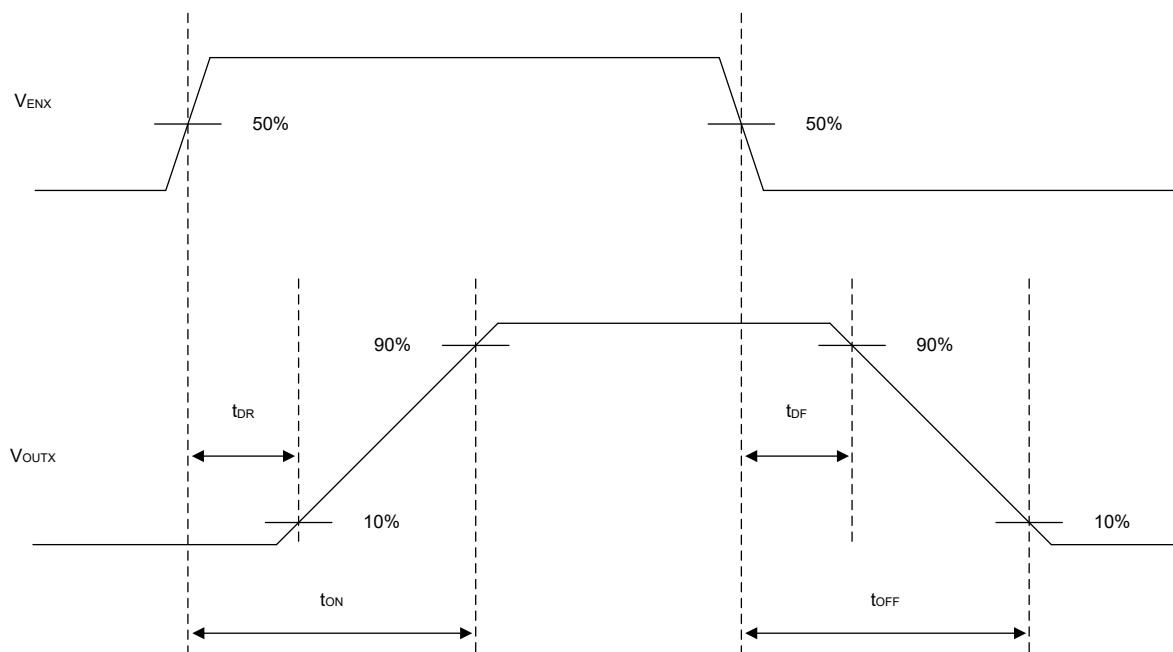


图 7-1. Switching Characteristics Definitions


8 Detailed Description

8.1 Overview

The TPS274C65CP device is a quad channel 72-m Ω smart high-side switch intended for use for output ports with protection for 24-V industrial systems. The device is designed to drive a variety of resistive, inductive and capacitive loads. The device integrates various protection features including overload protection through current limiting, thermal protection, short-circuit protection, and reverse current protection. For more details on the protection features, refer to the [Feature Description](#) and [Application Information](#) sections of the document.

In addition, the device diagnostics features include VS UVLO reporting, individual channel fault reporting, adjustable current limit and thermal shutdown. The device also integrates open load detection in the OFF state to enable protection against wire breaks, the function can be enabled through the DIAG_EN pin. The device includes open drain STx pin output for each channel that indicates device fault states such as short to GND, short-to-supply, overtemperature, and the other fault states discussed.


8.2 Functional Block Diagram

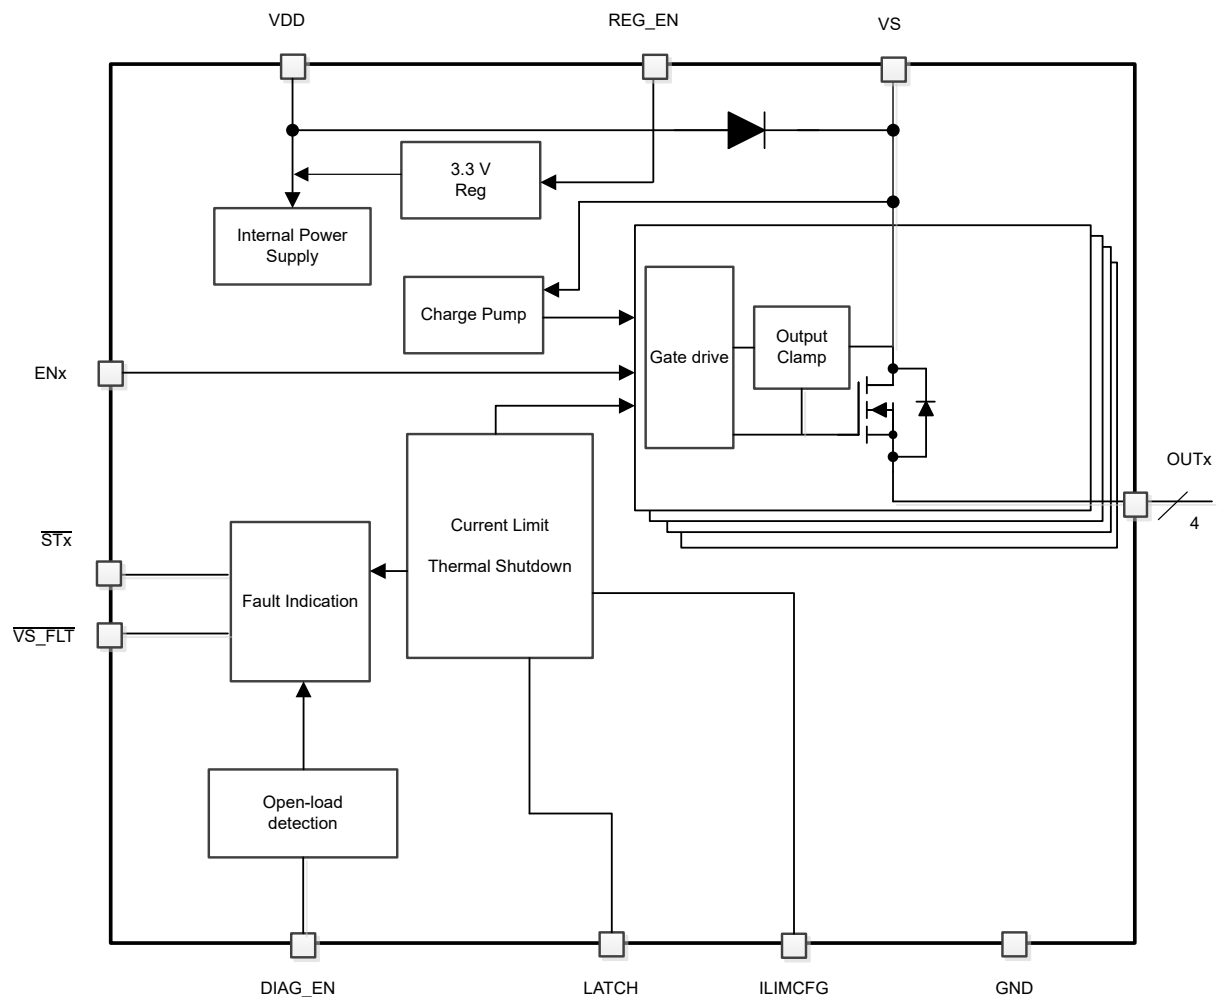

8.3 Feature Description


8.3.1 Pin Diagrams

This section presents the I/O structure of all digital input and output pins.

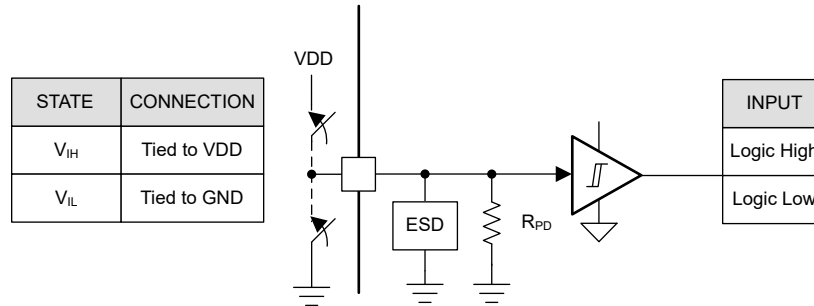

Logic level input pin

图 8-1. Logic Level Input Pin

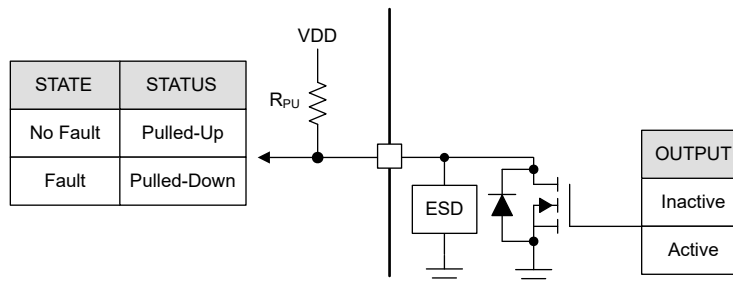

Shows the structure of the open-drain output pin, nFAULT. The open-drain output requires an external pullup resistor to function properly.

图 8-2. Open Drain Output Pin ($\overline{ST}$)

8.3.2 Programmable Current Limit

The TPS274C65CP integrates an adjustable current limit feature. With external resistor at ILIMCFG pin, the current limit of the device can be adjusted. When the overload or short-circuit situation happens, the device clamps the current at preset current limit level.

A lower current limit lowers fault energy and current during a load failure event such as a short-circuit or a partial load failure. By lowering fault energy and current, the overall system improves through:

- Reduced size and cost in current carrying components such as PCB traces and module connectors
- Less disturbance at the power supply (V_S pin) during a short circuit event
- Less additional budget for the power supply to account for overload currents in one channel or more
- Improved protection of the downstream load

表 8-1. ILIMCFG Table for TPS274C65CP

Resistor Value (k Ω) ⁽¹⁾	Typical ILIM Threshold (A)
13.3	0.25
17.8	0.4
23.7	0.56
31.6	0.72
44.2	1
59	1.25
78.7	1.6
110	1.9

表 8-2. ILIMCFG Table for TPS274C65CPH

Resistor Value (k Ω) ⁽¹⁾	Typical ILIM Threshold (A)
13.3	0.29
17.8	0.48
23.7	0.67
31.6	0.86
44.2	1.15
59	1.52
78.7	1.9
110	2.26

(1) The tolerance of the resistance is 1%.

8.3.3 Protection Mechanisms

The TPS274C65CP protects the system against load fault events like short circuits, inductive load kickback, overload events and over-temperature events. This section describes the details for protecting against each of these fault cases.

Thermal shutdown will cause the switch to automatically disable. Another scenario is when switch hits current limit, the switch will get overheated and hit thermal shutdown eventually.

The fault indication is reset and the switch turns back on when all of the below conditions are met:

- t_{RETRY} has expired
- All faults are cleared (thermal shutdown and current limit)
- LATCH pin is low

8.3.3.1 Over-current Protection

When I_{OUT} reaches the current limit threshold, I_{CL} , the device registers an overcurrent fault and begins regulating the current at the set limit. When either switch is in the FAULT state, it is indicated on the corresponding $\overline{\text{STx}}$ pin. This protects the system against overload cases where the load attempts to draw more than the maximum rated current, so the TPS274C65 can recognize and limit current or shut off these cases. In the case of a slow overload with the device channel enabled for a while, the current limit levels are as shown in 图 8-3.

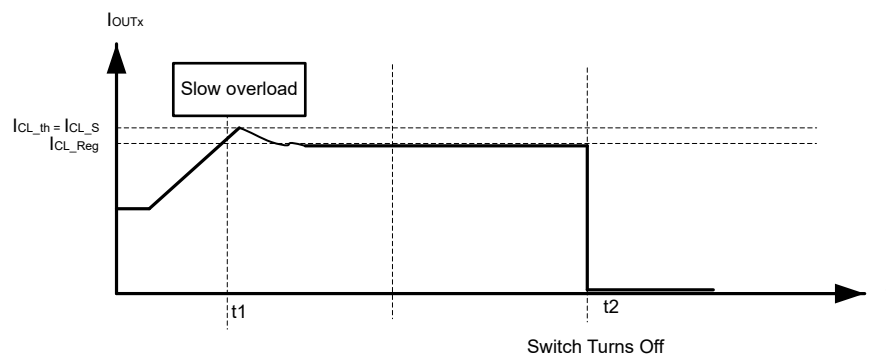


图 8-3. Overload Response

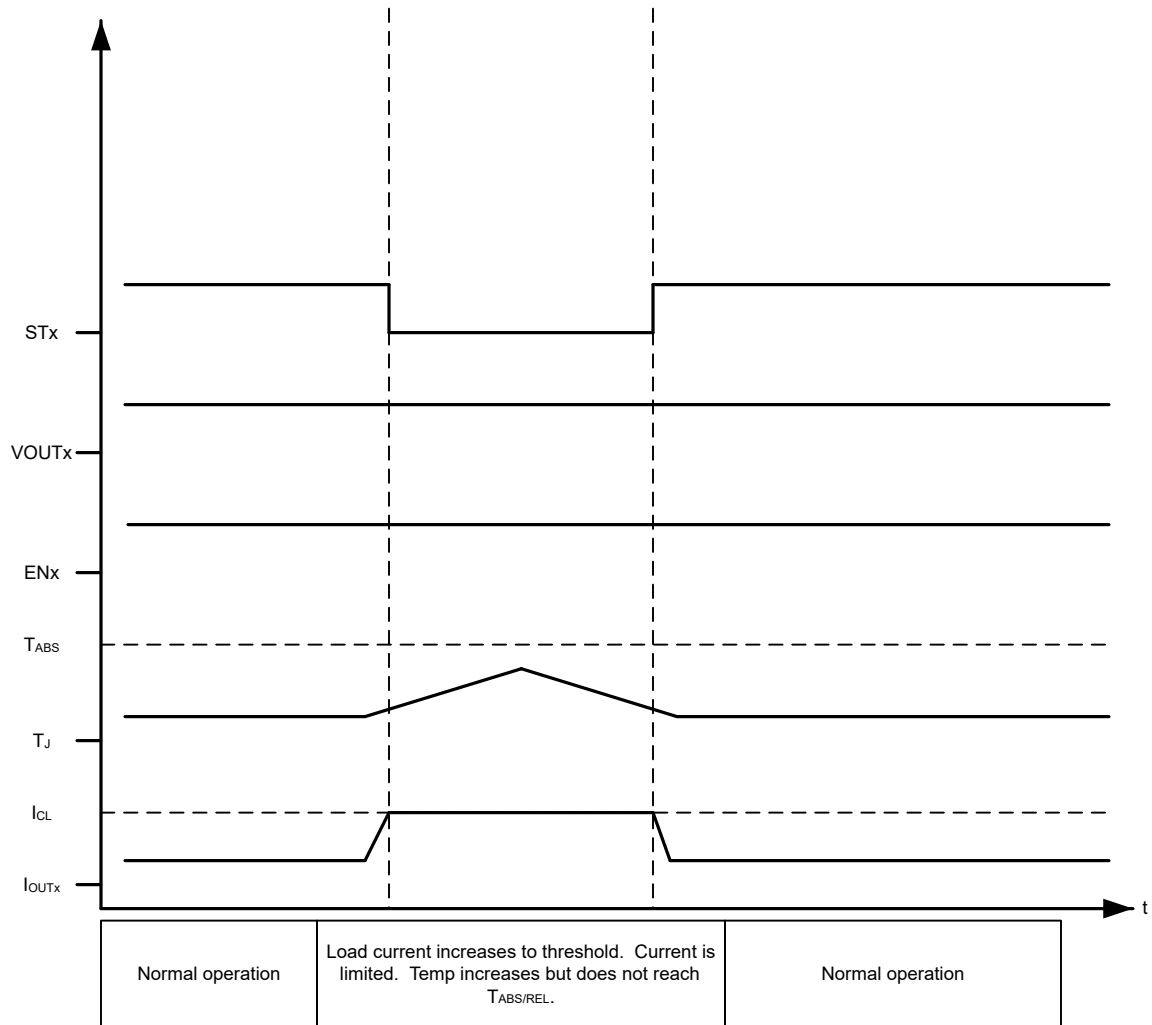


图 8-4. Overcurrent Behavior

For more details on the current limiting functionality, please see [Programmable Current Limit](#).

8.3.3.2 Short-Circuit Protection

The TPS274C65CP provides output short-circuit protection to ensure that the device prevents current flow in the event of a low impedance path to GND, removing the risk of damage or significant supply droop. The TPS274C65CP is guaranteed to protect against short-circuit events regardless of the state of the ILIM pins.

图 8-5 shows the behavior of the TPS274C65CP when the device is enabled into a short circuit.

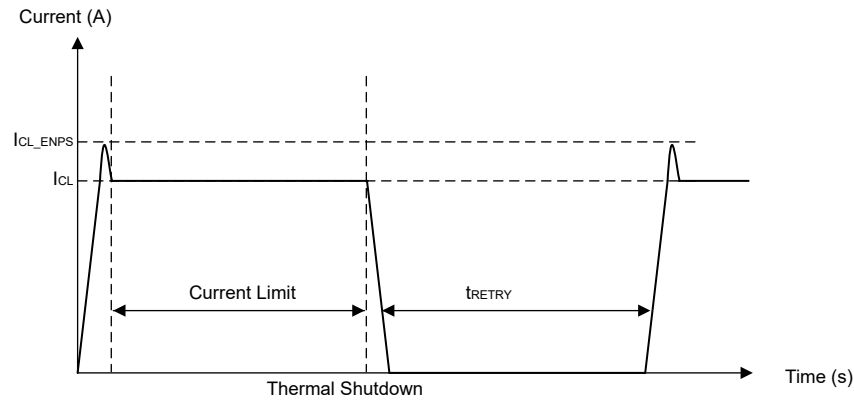


图 8-5. Enable into Short-Circuit Behavior

Due to the low impedance path, the output current rapidly increases until it hits the current limit threshold. Due to series inductance and deglitch, the measured maximum current can temporarily exceed the I_{CL} value defined as I_{CL_ENPS} , however, it settles to the current limit.

In this state, high power is dissipated in the FET, so eventually the internal thermal protection temperature for the FET is reached and the device safely shuts down. If the device is not configured in latch mode, the device waits t_{RETRY} amount of time and turns the channel back on.

图 8-6 shows the behavior of the TPS274C65CP when a short-circuit occurs when the device is in the on-state and already outputting current. When the internal pass FET is fully enabled, the current clamping settling time is slower so to ensure overshoot is limit, the device implements a fast trip level at a level I_{OVCR} . When this fast trip threshold is hit, the device immediately shuts off for a short period of time before quickly re-enabling and clamping the current to I_{CL_Reg} level after a brief transient overshoot to the I_{CL_ENPS} level. The device then keeps the current clamped at the regulation current limit until the thermal shutdown temperature is hit and the device safely shuts off.

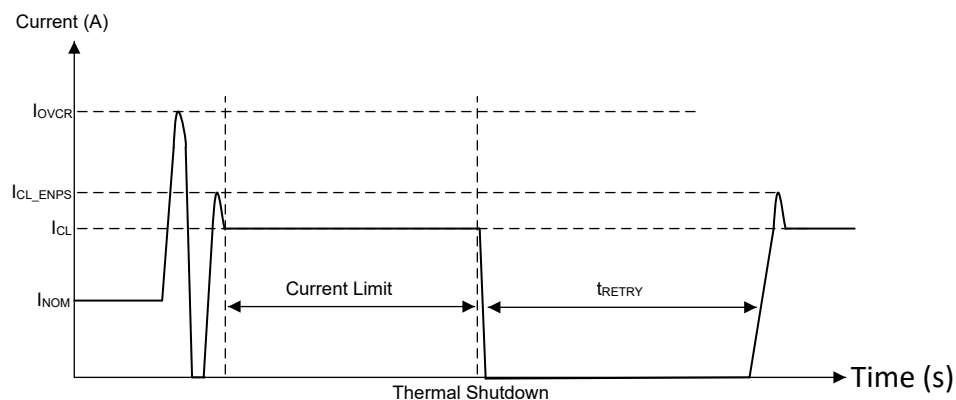


图 8-6. On-State Short-Circuit Behavior

Soft Short- Circuit Behavior shows the behavior of the TPS274C65CP when there is a small change in impedance that sends the load current above the I_{CL} threshold. The current rises to I_{CL_LINPK} since the FET is still in the linear mode. Then the current limit kicks in and the current drops to the I_{CL} value.

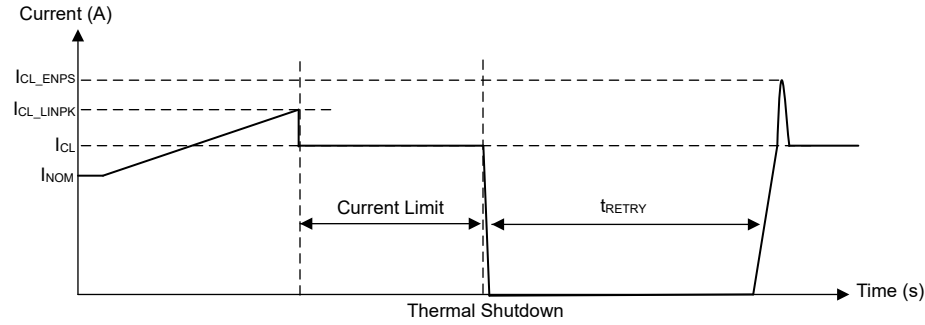


图 8-7. Soft Short-Circuit Behavior

In all of these cases, the internal thermal shutdown is safe to hit repetitively. There is no device risk or lifetime reliability concerns from repeatedly hitting this thermal shutdown level.

8.3.3.2.1 V_S During Short-to-Ground

When V_{OUT} is shorted to ground, the module power supply (V_S) can see a transient decrease. This decrease is caused by the sudden increase in current flowing through the cable inductance. For ideal system behavior, TI recommends that the module supply capacitance be increased by adding bulk capacitance on the power supply node.

8.3.3.3 Thermal Shutdown Behavior

图 8-8 shows the thermal shutdown behavior when LATCH pin is high. As shown, the switch clamps the current until it hits thermal shutdown, and then the device will remain latched off until the EN or LATCH pin toggles. Although the device is configured in latched condition, there is an internal t_{RETRY} period. ST pin will remain low and output will remain OFF even when EN or LATCH toggled within the t_{RETRY} period.

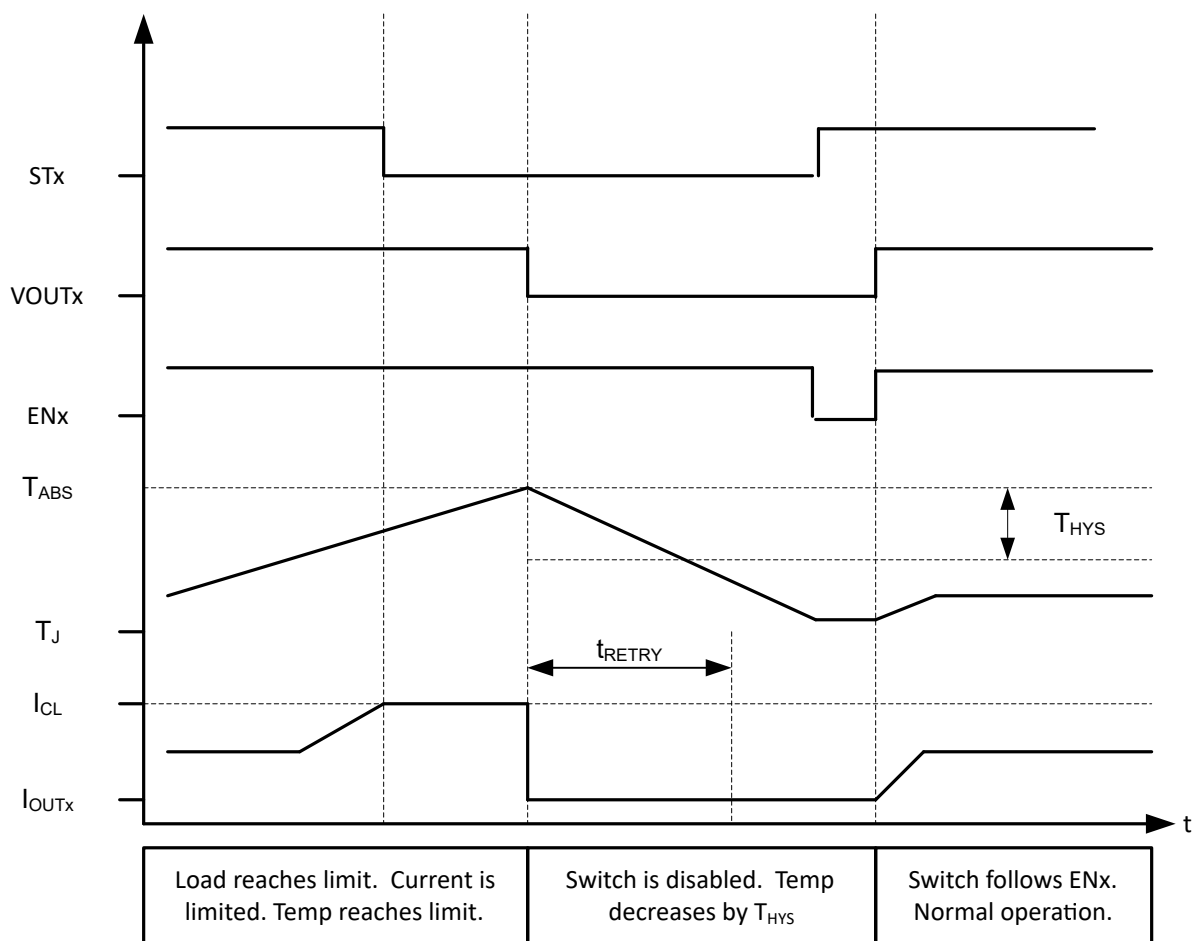


图 8-8. Thermal Shutdown - Latched Behavior

图 8-9 shows the behavior with LATCH pin low (auto-retry mode). hence, the switch will retry after the fault is cleared and t_{RETRY} has expired.

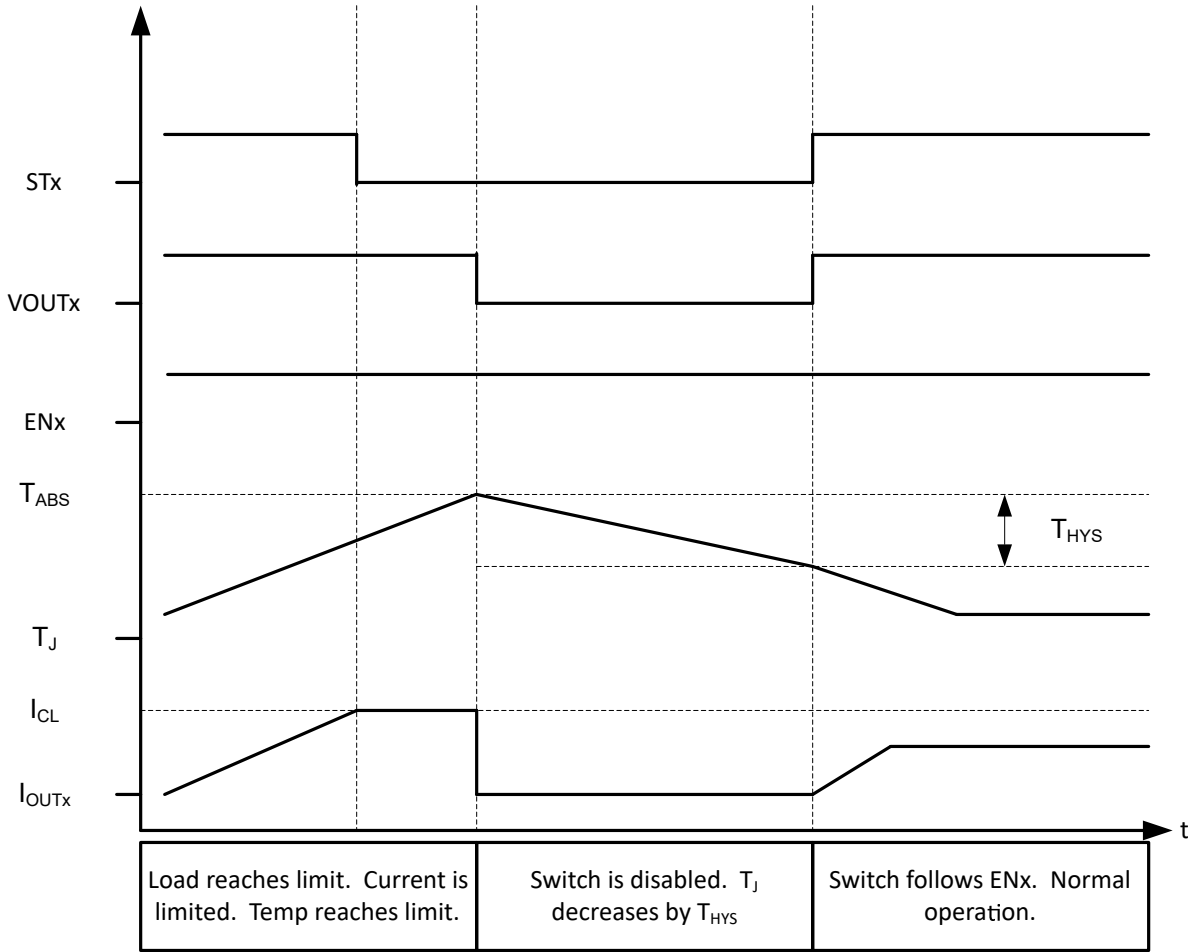


图 8-9. Thermal Shutdown - Auto-retry Behavior

8.3.3.4 Inductive-Load Switching-Off Clamp

When an inductive load is switching off, the output voltage is pulled down to negative, due to the inductance characteristics. The power FET may break down if the voltage is not clamped during the current-decay period. To protect the power FET in this situation, internally clamp the drain-to-source voltage, namely $V_{DS,clamp}$, the clamp diode between the drain and gate.

$$V_{DS,Clamp} = V_S - V_{OUT} \quad (1)$$

During the current-decay period (T_{DECAY}), the power FET is turned on for inductance-energy dissipation. Both the energy of the power supply (E_S) and the load (E_{LOAD}) are dissipated on the high-side power switch itself, which is called E_{HSD} . If resistance is in series with inductance, some of the load energy is dissipated in the resistance.

$$E_{HSD} = E_S + E_{LOAD} = E_S + E_L - E_R \quad (2)$$

From the high-side power switch' s view, E_{HSD} equals the integration value during the current-decay period.

$$E_{HSD} = \int_0^{T_{DECAY}} V_{DS,clamp} \times I_{OUT}(t) dt \quad (3)$$

$$T_{DECAY} = \frac{L}{R} \times \ln\left(\frac{R \times I_{OUT(MAX)} + |V_{OUT}|}{|V_{OUT}|}\right) \quad (4)$$

$$E_{HSD} = L \times \frac{V_{BAT} + |V_{OUT}|}{R^2} \times \left[R \times I_{OUT(MAX)} - |V_{OUT}| \ln\left(\frac{R \times I_{OUT(MAX)} + |V_{OUT}|}{|V_{OUT}|}\right) \right] \quad (5)$$

When R approximately equals 0, E_{HSD} can be given simply as:

$$E_{HSD} = \frac{1}{2} \times L \times I_{OUT(MAX)}^2 \times \frac{V_{BAT} + |V_{OUT}|}{R^2} \quad (6)$$

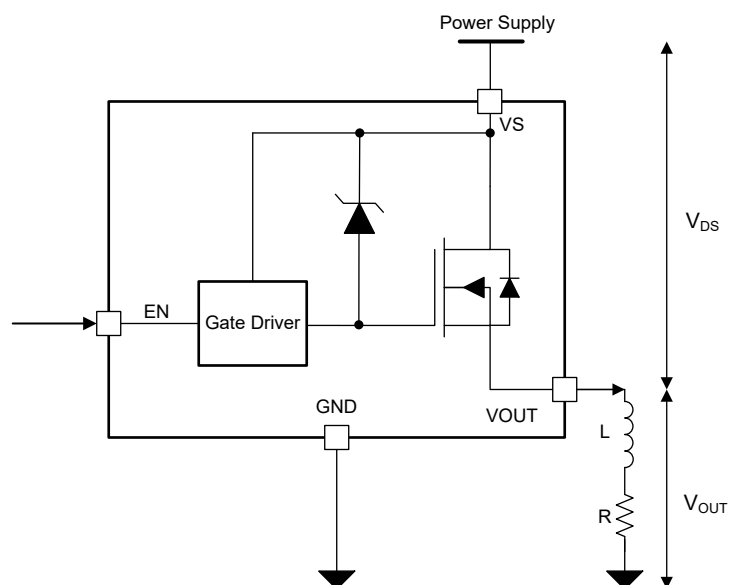


图 8-10. Driving Inductive Load

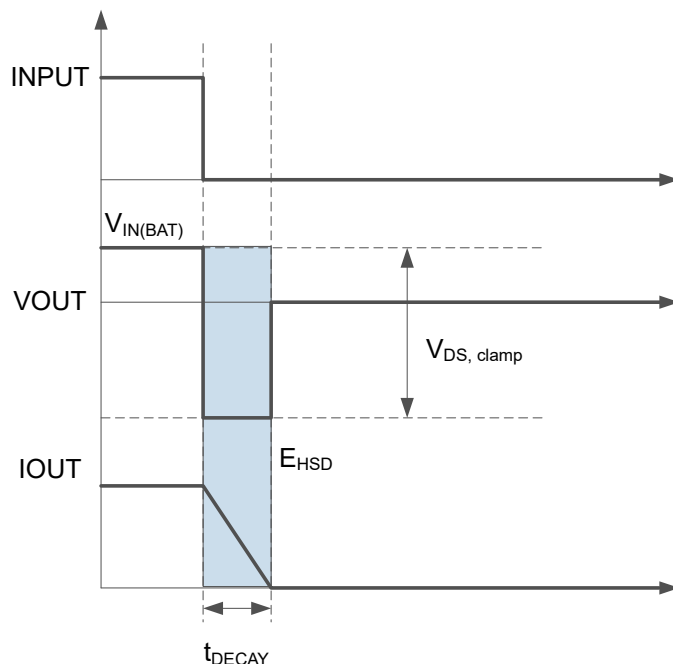


图 8-11. Inductive-Load Switching-Off Diagram

As discussed previously, when switching off, supply energy and load energy are dissipated on the high-side power switch, which leads to the large thermal variation. For each high-side power switch, the upper limit of the maximum safe power dissipation depends on the device intrinsic capacity, ambient temperature, and board dissipation condition.

8.3.3.5 Inductive Load Demagnetization

When switching off an inductive load, the inductor can impose a negative voltage on the output of the switch. The TPS274C65 includes voltage clamps between VS and VOUT to limit the voltage across the FETs and demagnetize load inductance if there is any. The negative voltage applied at the OUT pin drives the discharge of inductor current. 图 8-12 shows the device discharging a load of 100 mH paralleled with 48 Ω , resulting 500mA at the turn-off.

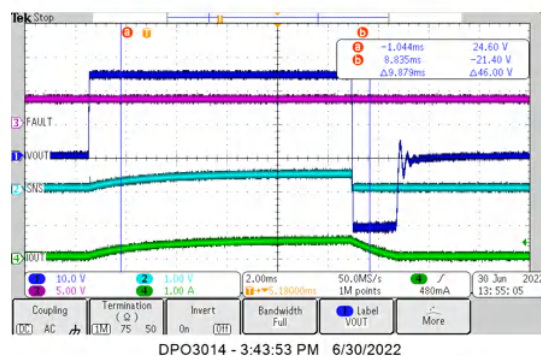


图 8-12. TPS274C65 Inductive Discharge (100 mH + 48 Ω)

The maximum acceptable load inductance is a function of the energy dissipated in the device and therefore the load current and the inductive load. The maximum energy and the load inductance the device can withstand for one pulse inductive dissipation at 125°C is shown in 图 8-13. The device can withstand 40% of this energy for

one million inductive repetitive pulses with a 2-Hz repetitive pulse. If the application parameters exceed this device limit, use a protection device like a freewheeling diode to dissipate the energy stored in the inductor.

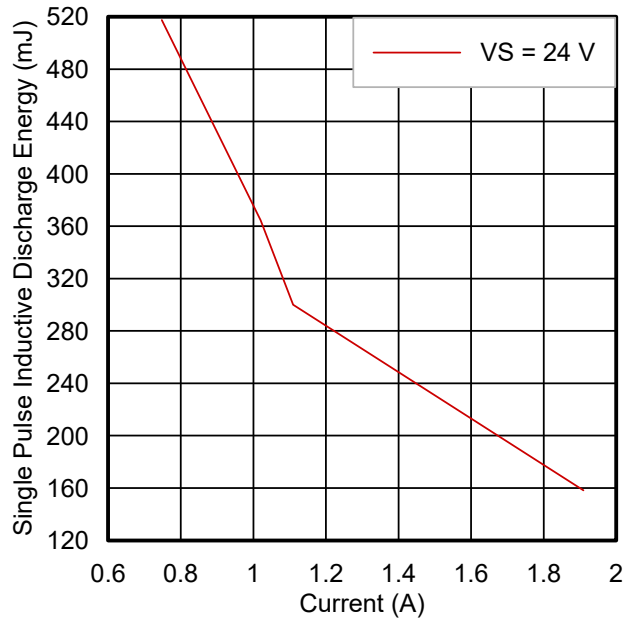


图 8-13. Maximum Energy Dissipation (E_{AS}) Allowed $T_{J, START} = 125^{\circ}\text{C}$ - Single Pulse, One Channel

8.3.3.6 Thermal Shutdown

The TPS274C65CP includes a temperature sensor on the power FET and also within the controller portion of the device. There are two cases that the device registers a thermal shutdown fault:

- $T_{J, FET} > T_{ABS}$
- $(T_{J, FET} - T_{J, controller}) > T_{REL}$

The first condition enables the device to register a long-term overtemperature event (caused by ambient temperature or too high DC current flow), while the second condition allows the device to quickly register transient heating that is causes in events like short-circuits.

After the fault is detected, the switch turns off. If $T_{J, FET}$ passes T_{ABS} , the fault is cleared when the switch temperature decreases by the hysteresis value, T_{HYS} . If instead the T_{REL} threshold is exceeded, the fault is cleared after T_{RETRY} passes.

Each channel shuts down independently in case of a thermal event, as each has its own temperature sensor and fault reporting.

8.3.3.7 Undervoltage Protection on VS (UVP)

The device monitors the supply voltage V_S to prevent unpredicted behaviors in the event that the supply voltage is too low. When the supply voltage falls down to V_{S_UVPF} , the switches shut off. If the voltage is still above the V_{S_UVLOR} , the $\overline{VS_FLT}$ pin is pulled low to signal the supply fault if the supply. When the supply rises up to V_{S_UVPR} , the device turns back on and $\overline{VS_FLT}$ is cleared.

Fault is not indicated on the $\overline{STx}$ pin during an UVLO event. During an initial ramp of V_{VS} from 0 V at a ramp rate slower than 1 V/ms, V_{ENx} pins must be held low until V_S is above the UVP threshold. For best operation, ensure that V_S has risen above UVP before setting the V_{ENx} pins to high.

8.3.3.8 Undervoltage Lockout on Low Voltage Supply (VDD_UVLO)

The device monitors the input supply voltage V_{VDD} (in versions A/C) to prevent unpredictable behavior in the event that the supply voltage is too low. When the supply voltage falls down to V_{VDD_UVLOF} , the device channel outputs are disabled. The device resumes normal operation when VDD rises above the V_{VDD_UVLOR} threshold.

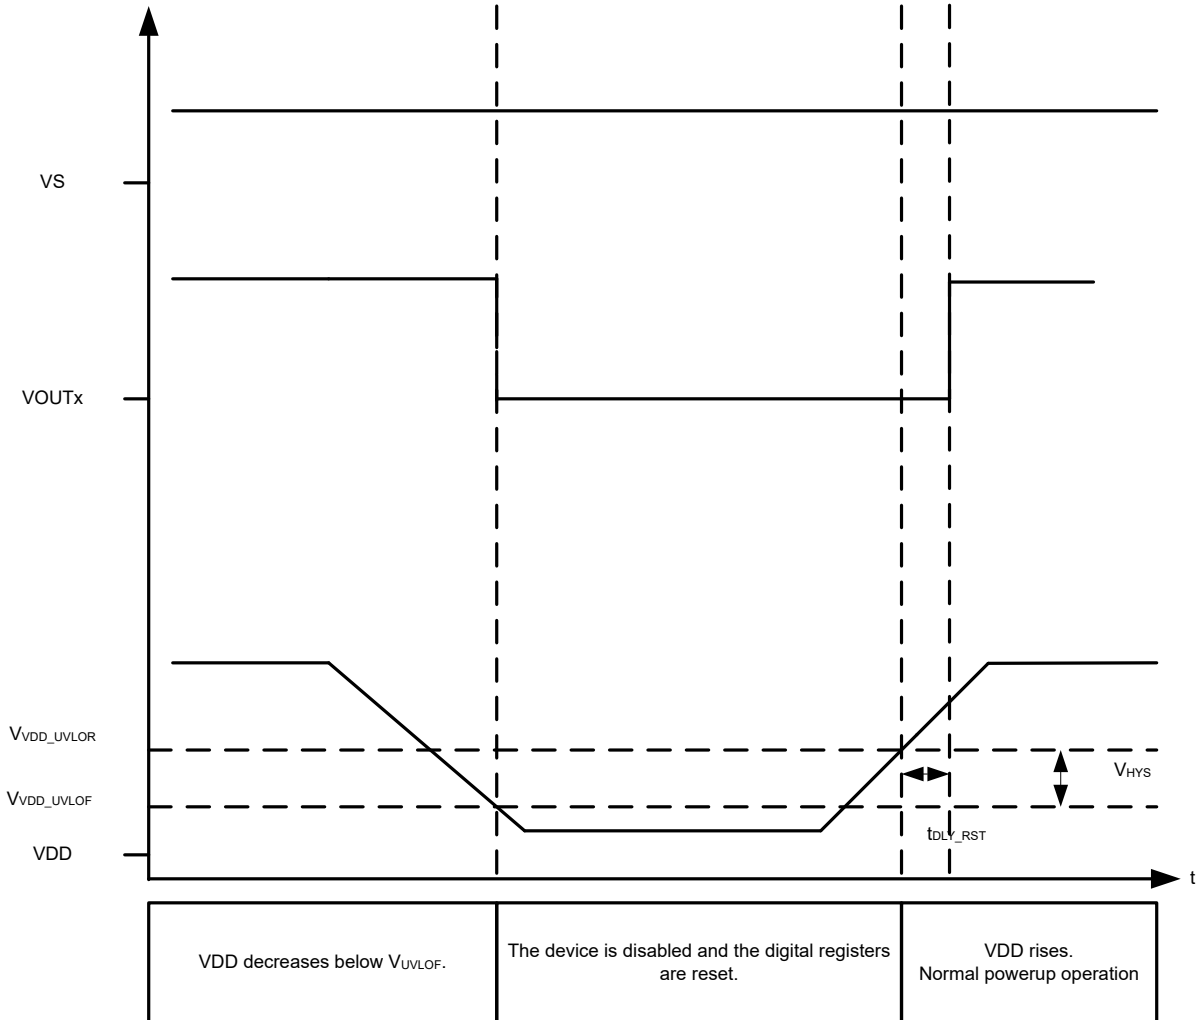


图 8-14. VDD UVLO

8.3.3.9 Power-Up and Power-Down Behavior

Device is in OFF or POR state when the device is not powered. $\overline{STx}$ and V_{OUTx} are in the high-Z state.

After the $V_S > V_{S_UVPR}$ and $V_{DD} > V_{DD_UVLOR}$, the device is ready for full operation.

In case the VDD power supply is enabled first and the VDD voltage exceed V_{DD_UVLOR} before the V_S supply is up and V_S voltage exceeds V_{S_UVPR} , the outputs remain disabled.

8.3.4 Diagnostic Mechanisms

As systems demand more intelligence, having robust diagnostics measuring the conditions of output power is increasingly important. The TPS274C65 integrates many diagnostic features that enable modules to provide predictive maintenance and intelligence power monitoring to the system.

8.3.4.1 Fault Indication

The following faults are a register a fault that show on the $\overline{STx}$ pin:

- FET thermal shutdown
- Active current regulation
- Open load detection in OFF state
- V_{OUT} short to battery during OFF state

Condition	VS	VDD	ENx	OUTx	DIAG_EN	LATCH	VS_FAULT	$\overline{STx}$	FAULT Recovery
VS Undervoltage	$< V_{S_UVP}$	$> V_{DD,UVLO}$	X	X	X	X	L	H	-
Normal	$> V_{S_UVP}$	$> V_{DD,UVLO}$	L	L	X	X	H	H	-
	$> V_{S_UVP}$	$> V_{DD,UVLO}$	H	H	X	X	H	H	-
OFF-state Short to Supply, OFF-state open load	$> V_{S_UVP}$	$> V_{DD,UVLO}$	L	H	H	X	H	L	-
Short to GND, Overload, TSD	$> V_{S_UVP}$	$> V_{DD,UVLO}$	H	L	X	L	H	L	Auto-retry
	$> V_{S_UVP}$	$> V_{DD,UVLO}$	H	L	X	H	H	L	Latch-off. Fault recovers when ENx toggles.

8.3.4.2 Short-to-Battery and Open-Load Detection

The TPS274C65CP is capable of detecting short-to-battery and open-load events when the switch is in the OFF state if the DIAG_EN is high. The fault will be report to $\overline{STx}$ pin. The feature can be turned off by pulling the DIAG_EN pin low. The detection threshold will be when $V_{OUT} > V_{WB_OFF_TH}$.

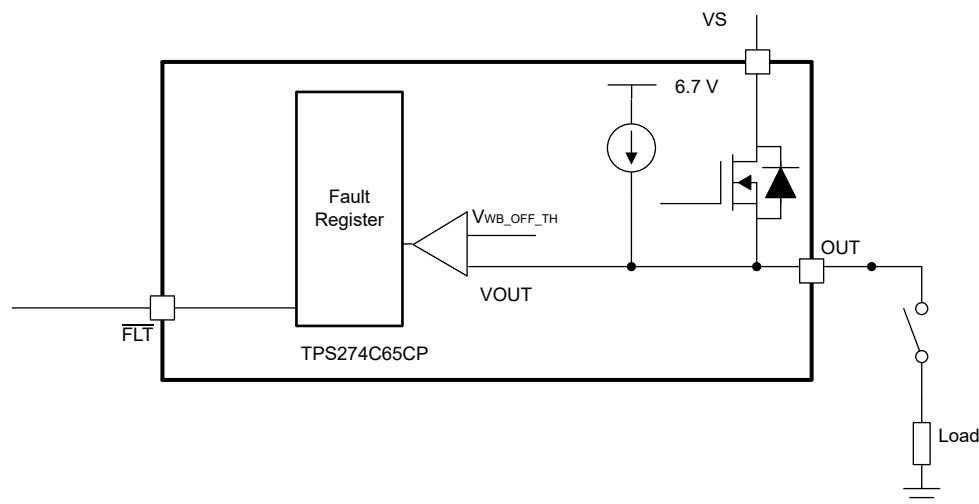


图 8-15. Open-Load Detection Circuit

8.4 Device Functional Modes

During typical operation, the TPS274C65CP can operate in a number of states that are described below.

8.4.1 Off

OFF state occurs when the device is not powered.

8.4.2 Active

In ACTIVE state, the switch is enabled with ENx high. The diagnostic functions can be either on or off during ACTIVE state.

9 Application and Implementation

备注

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes, as well as validating and testing their design implementation to confirm system functionality.

9.1 Application Information

The following sections give examples of typical implementation and design examples.

9.2 Typical Application

图 9-1 shows the schematic of a typical application of the TPS274C65. the schematic includes all standard external components. This section of the data sheet discusses the considerations in implementing commonly required application functionality.

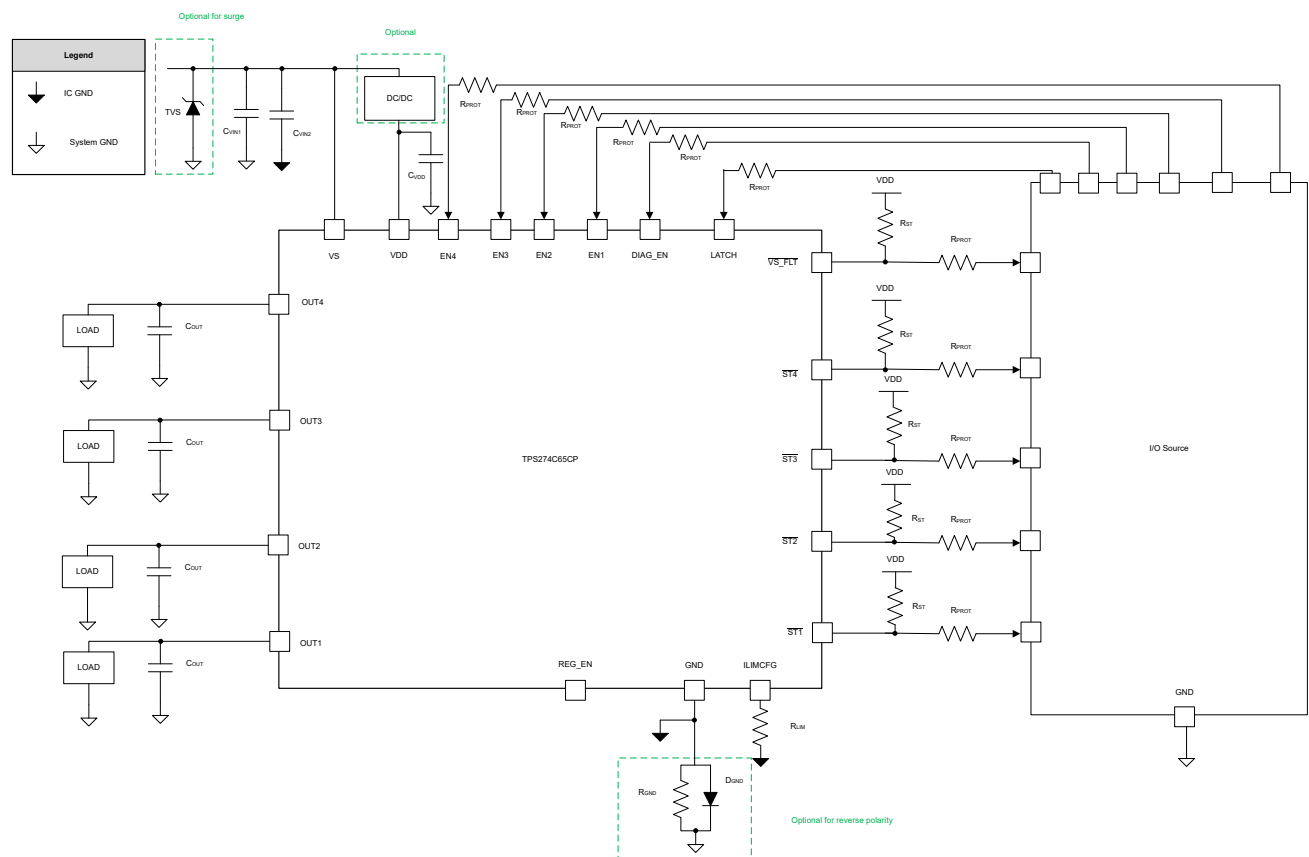


图 9-1. Typical Application Circuit

9.2.1 Design Requirements

表 9-1. Recommended External Components

COMPONENT	TYPICAL VALUE	PURPOSE
R _{PROT}	5-10 k Ω	Protect microcontroller and device I/O pins
R _{ST}	4.7 k Ω	Open-drain pull-up resistor
R _{ILIMx}	13.3 k Ω to 110 k Ω	Discrete value outlined in 表 8-1
C _{Vin1}	100 nF to System GND	Stabilize the input supply and filter out low frequency noise
C _{Vin2}	4.7 nF to IC GND	Filtering of voltage transients (for example, ESD, IEC 61000-4-5) and improved emissions
C _{VDD}	2.2 μ F to Module GND	Stabilize the input supply and limit supply excursions.
C _{OUT}	22 nF	Filtering of voltage transients (for example, ESD, RF transients)
Z _{TVS}	36-V TVS	Clamp surge voltages at the supply input
D _{GND}	Diode with < 0.7-V forward voltage drop	Optional for reverse polarity protection - if needed
R _{GND}	4.7 k Ω	Stabilize IC GND in the event of negative output swings when GND network is used

9.2.2 Detailed Design Procedure

In an example application with maximum load current of 500 mA, the current limit must be set to an acceptable level. With the current limit variation and tolerance allowed for this specific application, the current limit setting of 1 A is chosen. Referring back to the 表 8-1, 44.2-k Ω resistor with 1% tolerance needs to be placed at the ILIMCFG pin.

Depending on the tolerance on the maximum current for the application, the current limit resistor can be chosen to leave the overhead needed before the current limit engages.

9.2.2.1 IEC 61000-4-5 Surge

The TPS274C65 is designed to survive against IEC 61000-4-5 surge using external TVS clamps. The device is rated to 48 V ensuring that external TVS diodes can clamp below the rated maximum voltage of the TPS274C65. Above 48 V, the device includes V_{DS} clamps to help shunt current and ensure that the device survives the transient pulses. Depending on the class of the output, TI recommends that the system has a SMBJ36A or SMCJ36A between VS and module GND.

9.2.2.2 Loss of GND

The ground connection can be lost either on the device level or on the module level. If the ground connection is lost, both the channel outputs are disabled irrespective of the EN input level. If the switch was already disabled when the ground connection was lost, the outputs remain disabled even when the channels are enabled. The steady state current from the output to the load that remains connected to the system ground is below the level specified in the [Specifications](#) section of this document. When the ground is reconnected, normal operation resumes.

9.2.2.3 Paralleling Channels

If an application requires lower power dissipation than is possible with a 65-m Ω switch. Since the retry timer for each channel is not synchronized in TPS274C65CP, TI recommends to have the current limit for a single channel set higher than the total current for the paralleled channel. For example, if two of the channel are paralleled to drive 2A total current through the two channels, then the individual channel current limit needs to be set higher than 2A.

If the current limit cannot be set higher, a manual toggle of ENx (enable signals for the channels being paralleled) is needed after a thermal fault event happened.

9.2.3 Application Curves

图 9-2 shows a test example of switching the load with 250 kHz PWM signal. Test conditions: $V_S = 12\text{ V}$, Duty Cycle = 5%, $T_{AMB} = 25\text{ }^{\circ}\text{C}$. Channel 1 is V_{OUT} voltage. Channel 2 is EN pin voltage. Channel 3 is V_S voltage. Channel 4 is V_S current.

图 9-3 shows a test example of enabling a switch while there is a short at the output. Test conditions: $V_S = 24\text{ V}$, $T_{AMB} = 25\text{ }^{\circ}\text{C}$. Channel 1 is V_{OUT} voltage. Channel 2 is FAULT pin voltage. Channel 3 is V_S voltage. Channel 4 is V_S current.

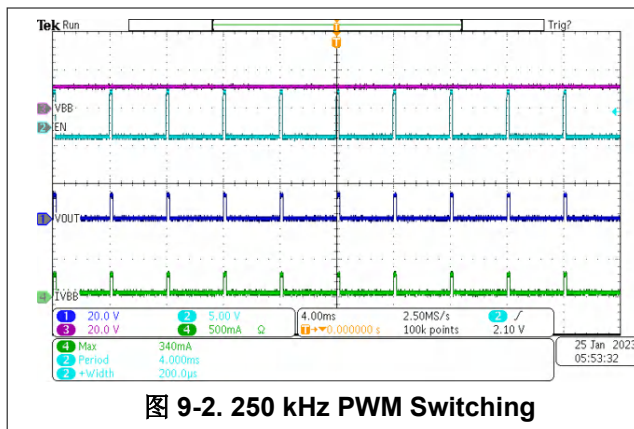


图 9-2. 250 kHz PWM Switching

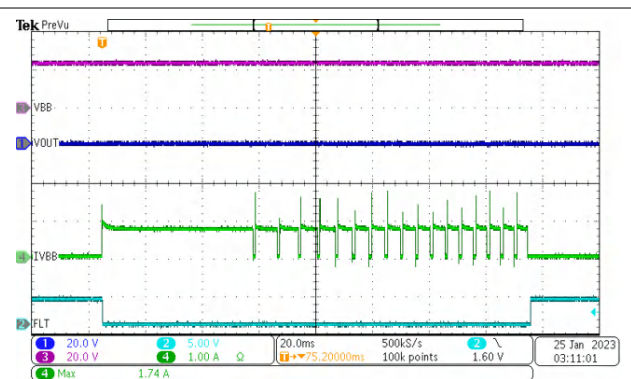


图 9-3. Enable into Short Circuit

9.3 Power Supply Recommendations

表 9-2. Operating Voltage Range

V_S Voltage Range	Note
12 V to 36 V	Nominal supply voltage, all parametric specifications apply. The device is completely short-circuit protected up to 125°C.
36 V to 39 V	Functional operation per data sheet (switch can turn off), but can not meet parametric specifications.

9.4 Layout

9.4.1 Layout Guidelines

To prevent thermal shutdown, T_J must be less than T_{ABS} . If the output current is very high, the power dissipation can be large. The VQFN package has good thermal impedance. However, the PCB layout is very important. Good PCB design can optimize heat transfer, which is absolutely essential for the long-term reliability of the device.

1. Maximize the copper coverage on the PCB to increase the thermal conductivity of the board. The major heat-flow path from the package to the ambient is through the copper on the PCB. Maximum copper is extremely important when there are not any heat sinks attached to the PCB on the other side of the board opposite the package.
2. Add as many thermal vias as possible directly under the package ground pad to optimize the thermal conductivity of the board
3. Plate shut or plug and cap all thermal vias on both sides of the board to prevent solder voids. To ensure reliability and performance, the solder coverage must be at least 85%.

9.4.2 Layout Example

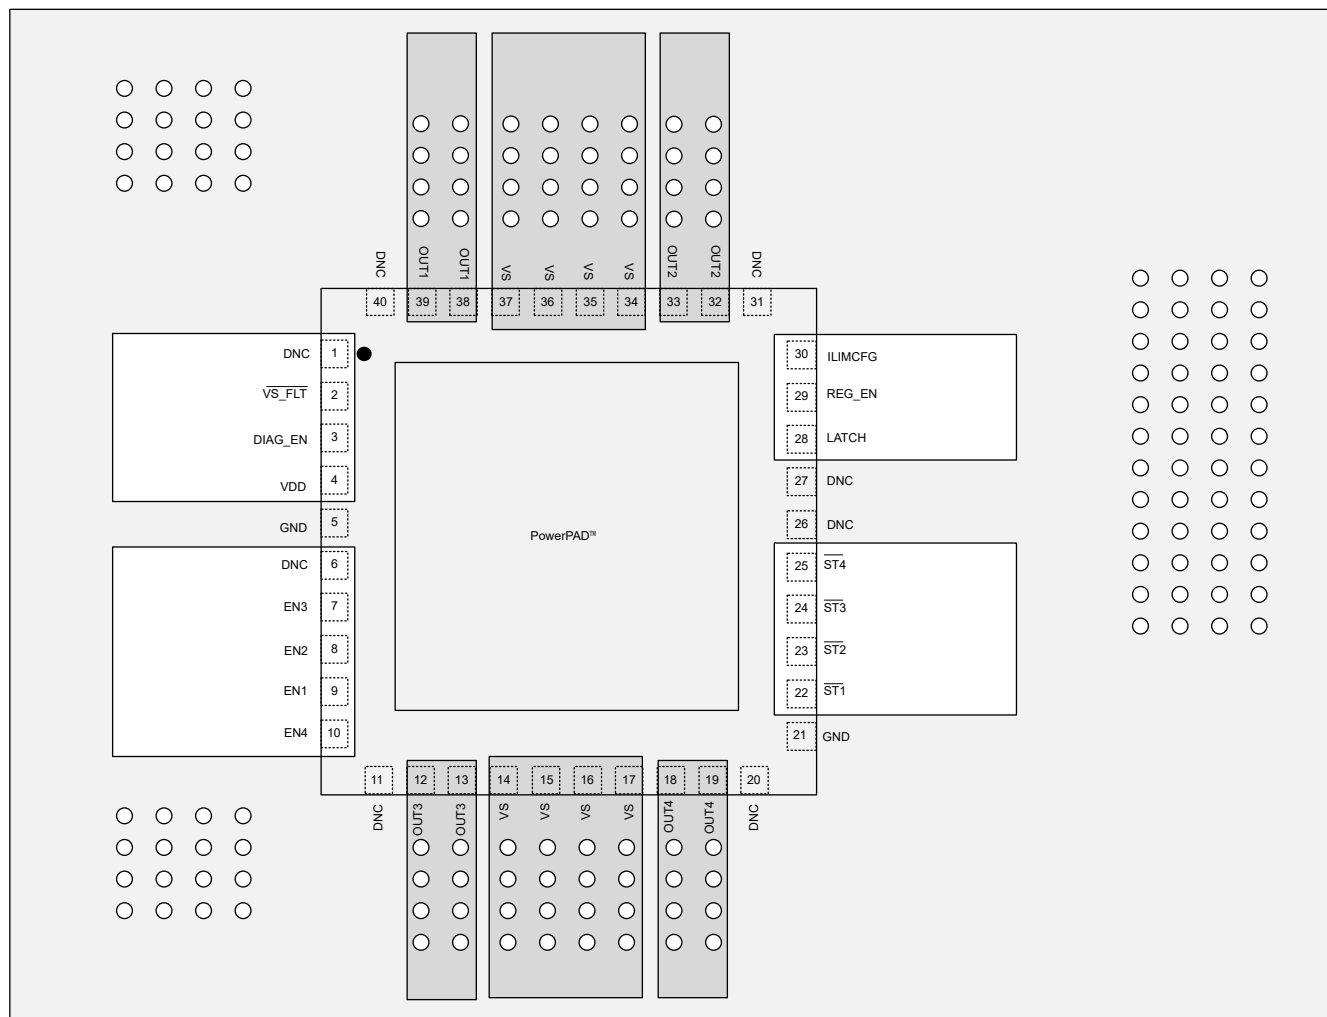


图 9-4. TPS274C65CP Layout Example

10 Device and Documentation Support

10.1 Documentation Support

10.1.1 Related Documentation

Texas Instruments, [Adjustable Current Limit of Smart Power Switches](#) application report

Texas Instruments, [How to Drive Resistive, Inductive, Capacitive, and Lighting Loads](#) application report

Texas Instruments, [Improved Automotive Short Circuit Reliability Through Adjustable Current Limiting](#) application note

10.2 接收文档更新通知

要接收文档更新通知，请导航至 [ti.com](#) 上的器件产品文件夹。点击 [通知](#) 进行注册，即可每周接收产品信息更改摘要。有关更改的详细信息，请查看任何已修订文档中包含的修订历史记录。

10.3 支持资源

[TI E2E™ 中文支持论坛](#) 是工程师的重要参考资料，可直接从专家处获得快速、经过验证的解答和设计帮助。搜索现有解答或提出自己的问题，获得所需的快速设计帮助。

链接的内容由各个贡献者“按原样”提供。这些内容并不构成 TI 技术规范，并且不一定反映 TI 的观点；请参阅 TI 的 [使用条款](#)。

10.4 Trademarks

TI E2E™ is a trademark of Texas Instruments.

所有商标均为其各自所有者的财产。

10.5 静电放电警告



静电放电 (ESD) 会损坏这个集成电路。德州仪器 (TI) 建议通过适当的预防措施处理所有集成电路。如果不遵守正确的处理和安装程序，可能会损坏集成电路。

ESD 的损坏小至导致微小的性能降级，大至整个器件故障。精密的集成电路可能更容易受到损坏，这是因为非常细微的参数更改都可能会导致器件与其发布的规格不相符。

10.6 术语表

[TI 术语表](#) 本术语表列出并解释了术语、首字母缩略词和定义。

11 Revision History

注：以前版本的页码可能与当前版本的页码不同

Changes from Revision * (October 2023) to Revision A (February 2024)	Page
• Updated <i>Device Comparison Table</i> to include the H version.....	3
• Updated <i>Electrical Characteristics</i> table to include the current limit for H version devices.....	6
• Added plots for thermal shutdown latched and auto-retry behavior in <i>Thermal Shutdown Behavior</i> section...	17

12 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package Pins	Package qty Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
TPS274C65CPHRHAR	Active	Production	VQFN (RHA) 40	2500 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	TPS274C6 5CPHRHA
TPS274C65CPHRHAR.A	Active	Production	VQFN (RHA) 40	2500 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	TPS274C6 5CPHRHA
TPS274C65CPHWRHAR	Active	Production	VQFN (RHA) 40	2500 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	TPS274C6 5CPHWRHA
TPS274C65CPHWRHAR.A	Active	Production	VQFN (RHA) 40	2500 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	TPS274C6 5CPHWRHA
TPS274C65CPRHAR	Active	Production	VQFN (RHA) 40	2500 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	TPS274C 65CPRHA
TPS274C65CPRHAR.A	Active	Production	VQFN (RHA) 40	2500 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	TPS274C 65CPRHA
TPS274C65CPWRHAR	Active	Production	VQFN (RHA) 40	2500 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	TPS274C 65CPWRHA
TPS274C65CPWRHAR.A	Active	Production	VQFN (RHA) 40	2500 LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	TPS274C 65CPWRHA

⁽¹⁾ **Status:** For more details on status, see our [product life cycle](#).

⁽²⁾ **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

⁽⁴⁾ **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

⁽⁵⁾ **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

⁽⁶⁾ **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION



*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TPS274C65CPHRHAR	VQFN	RHA	40	2500	330.0	16.4	6.3	6.3	1.1	12.0	16.0	Q2
TPS274C65CPHWRHAR	VQFN	RHA	40	2500	330.0	16.4	6.3	6.3	1.1	12.0	16.0	Q2
TPS274C65CPRHAR	VQFN	RHA	40	2500	330.0	16.4	6.3	6.3	1.1	12.0	16.0	Q2
TPS274C65CPWRHAR	VQFN	RHA	40	2500	330.0	16.4	6.3	6.3	1.1	12.0	16.0	Q2

TAPE AND REEL BOX DIMENSIONS



*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TPS274C65CPHRHAR	VQFN	RHA	40	2500	367.0	367.0	35.0
TPS274C65CPHWRHAR	VQFN	RHA	40	2500	367.0	367.0	35.0
TPS274C65CPRHAR	VQFN	RHA	40	2500	367.0	367.0	35.0
TPS274C65CPWRHAR	VQFN	RHA	40	2500	367.0	367.0	35.0

GENERIC PACKAGE VIEW


RHA 40

VQFN - 1 mm max height

6 x 6, 0.5 mm pitch

PLASTIC QUAD FLATPACK - NO LEAD


This image is a representation of the package family, actual package may vary.
Refer to the product data sheet for package details.

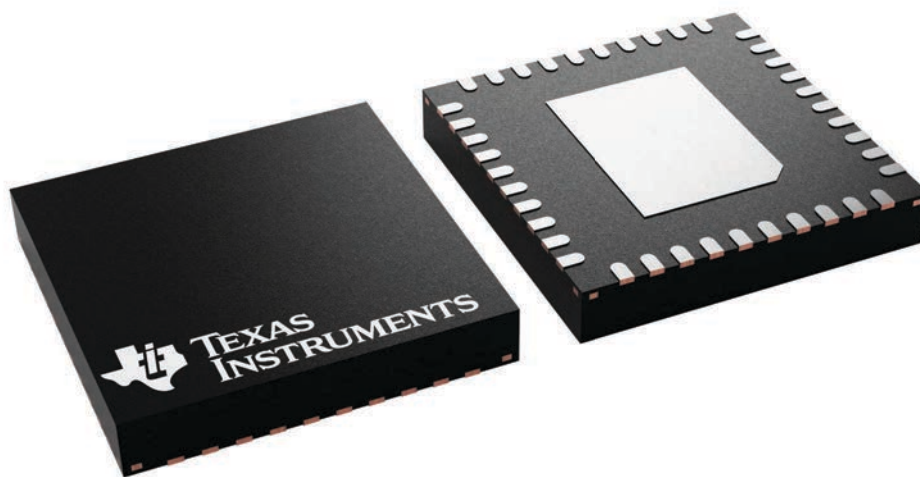



VQFN - 1 mm max height

PLASTIC QUAD FLATPACK - NO LEAD




1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. The package thermal pad must be soldered to the printed circuit board for thermal and mechanical performance.

EXAMPLE BOARD LAYOUT



RHA0040B

VQFN - 1 mm max height

PLASTIC QUAD FLATPACK - NO LEAD

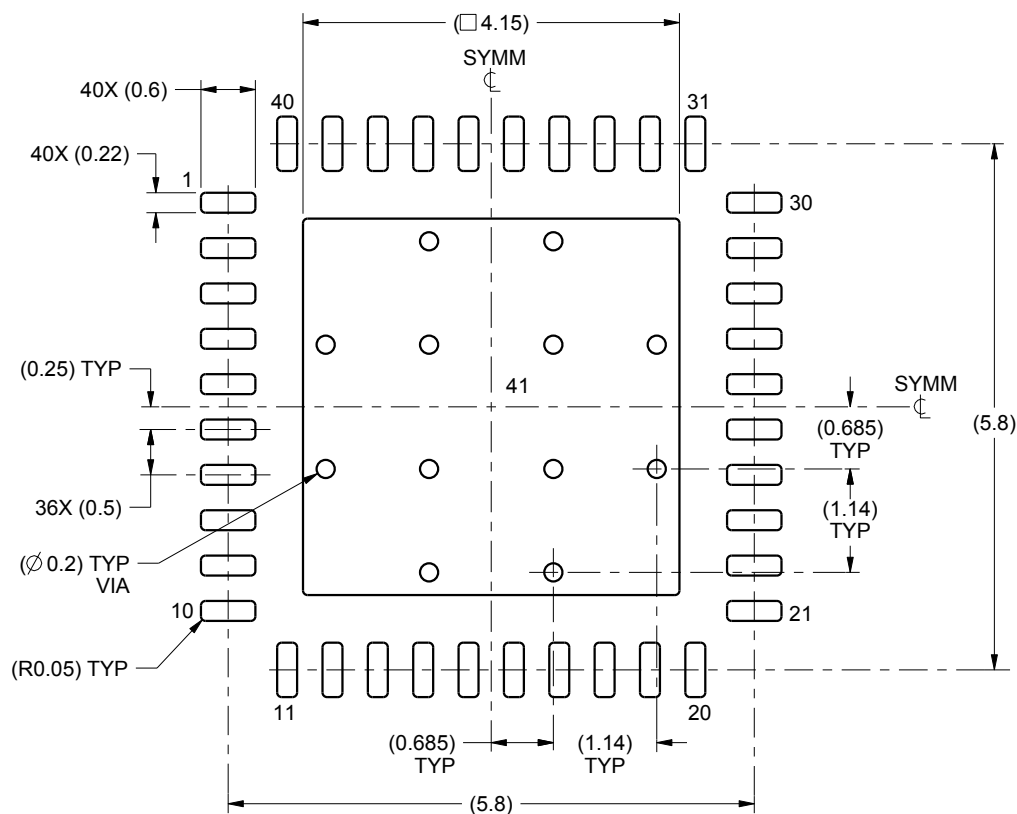

LAND PATTERN EXAMPLE
SCALE:12X

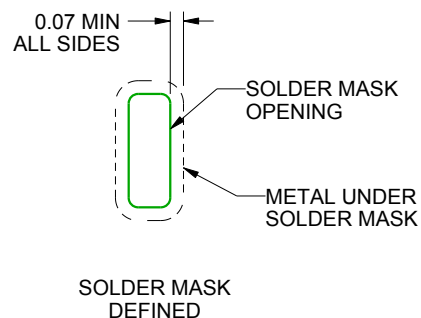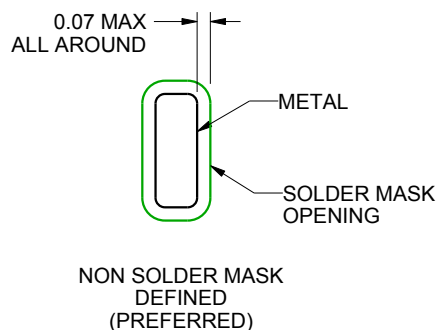

SOLDER MASK DETAILS

4219052/A 06/2016


NOTES: (continued)

- This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 (www.ti.com/lit/sluea271).

RHA0040B

VQFN - 1 mm max height

PLASTIC QUAD FLATPACK - NO LEAD

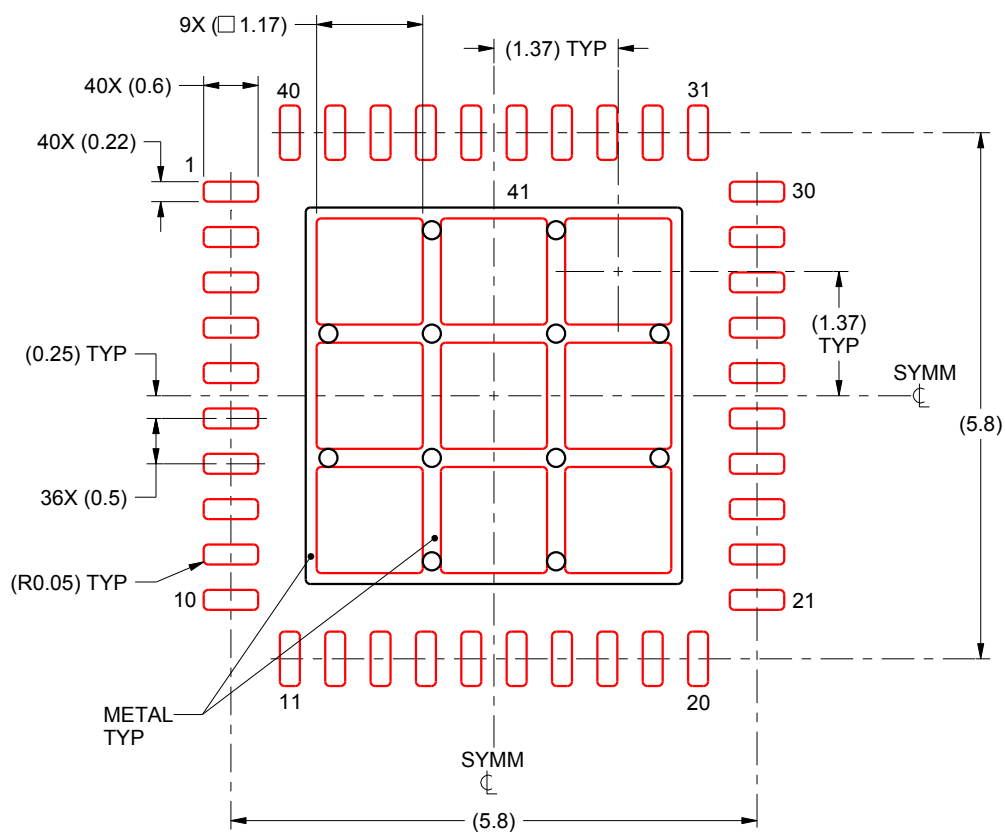



SOLDER PASTE EXAMPLE BASED ON 0.125 mm THICK STENCIL

EXPOSED PAD 41:
72% PRINTED SOLDER COVERAGE BY AREA UNDER PACKAGE
SCALE:12X

4219052/A 06/2016

NOTES: (continued)

5. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

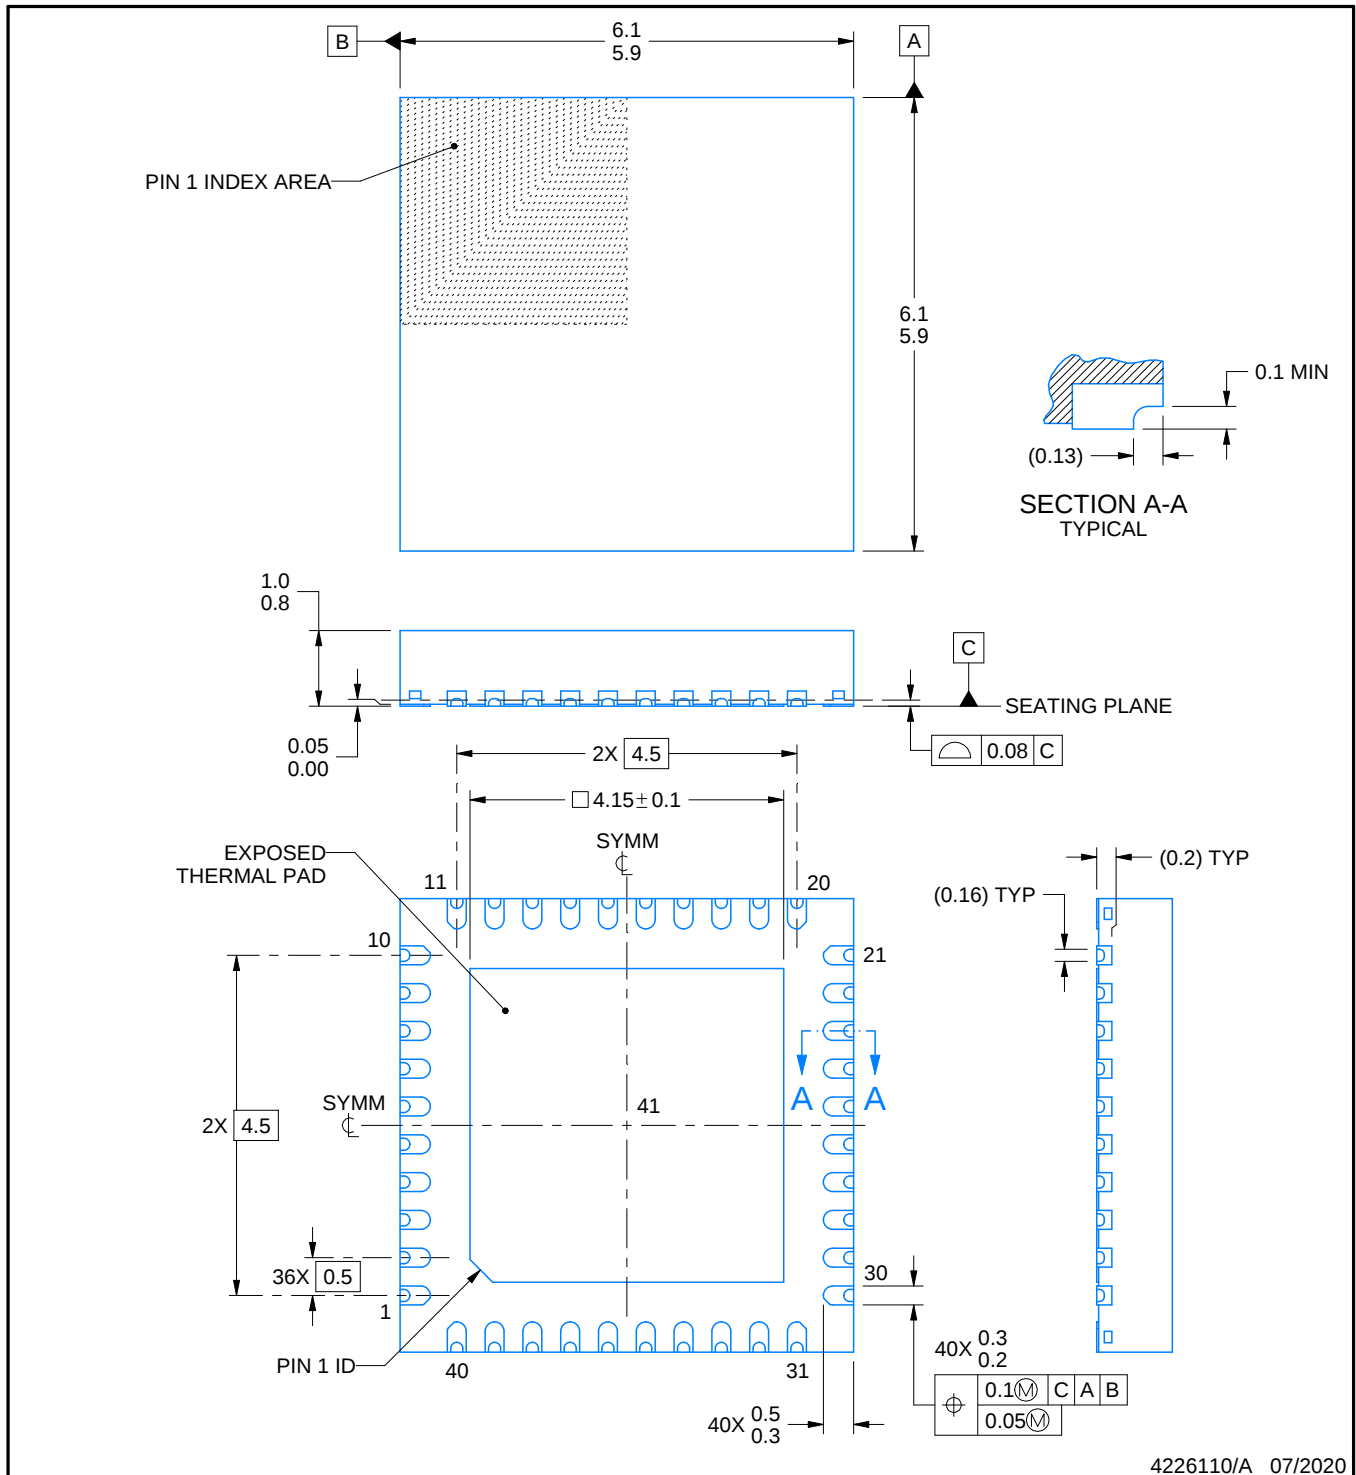

4226110/A 07/2020

NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. The package thermal pad must be soldered to the printed circuit board for thermal and mechanical performance.

EXAMPLE BOARD LAYOUT


RHA0040M

VQFN - 1 mm max height

PLASTIC QUAD FLATPACK - NO LEAD

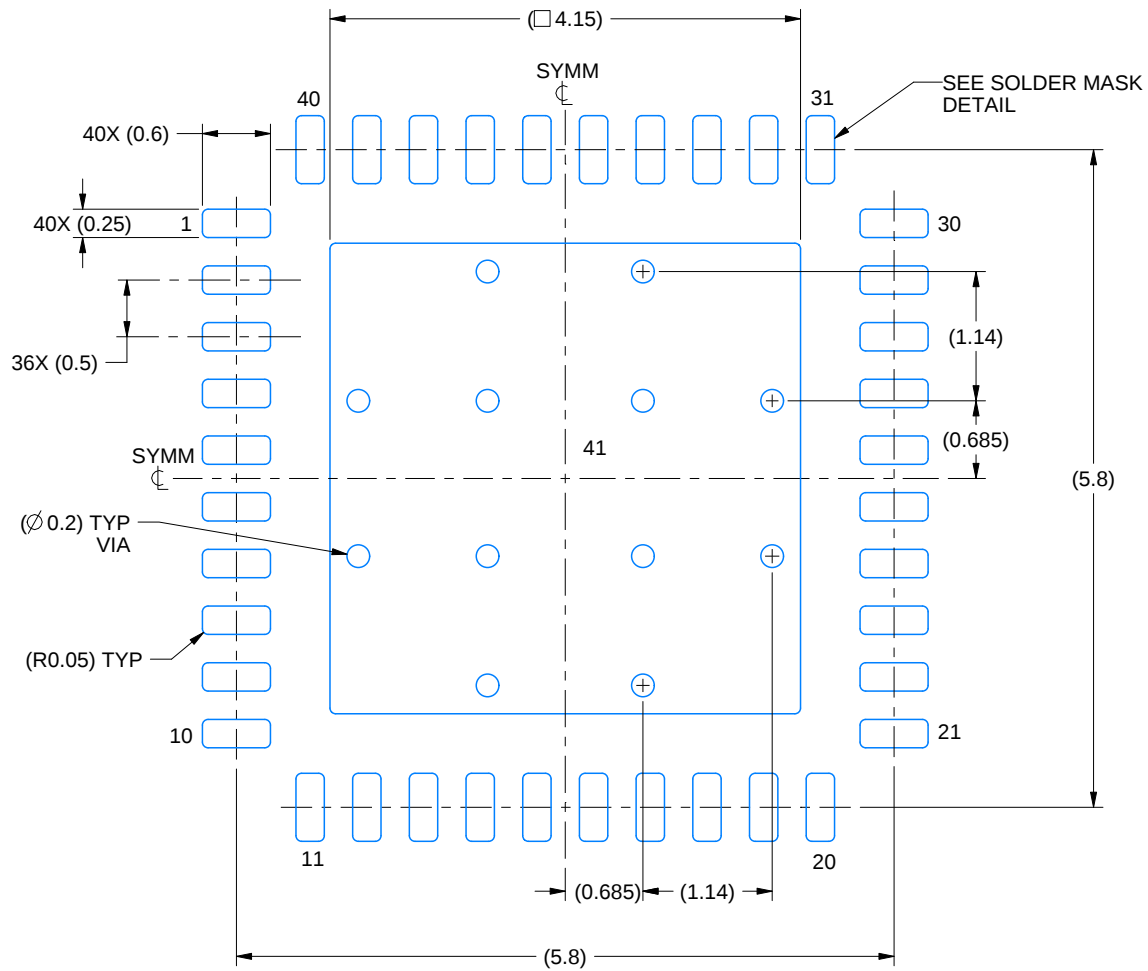

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE: 15X

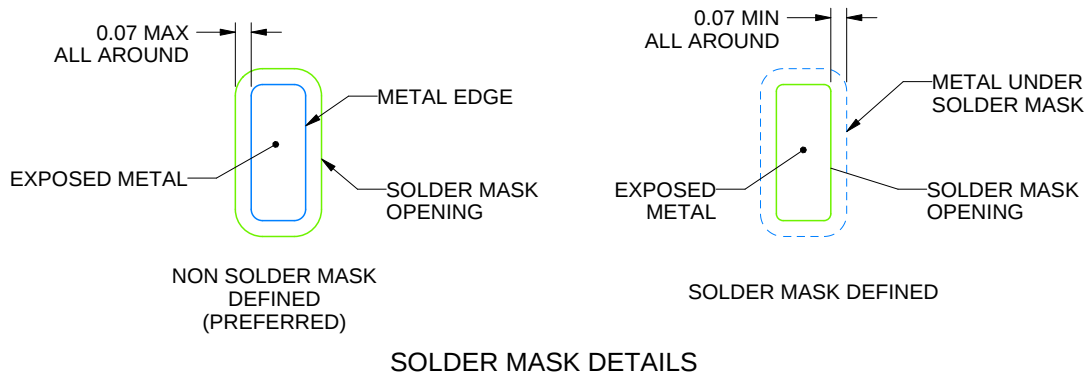

4226110/A 07/2020

NOTES: (continued)


4. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 (www.ti.com/lit/sluea271).
5. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.

EXAMPLE STENCIL DESIGN

RHA0040M

VQFN - 1 mm max height

PLASTIC QUAD FLATPACK - NO LEAD

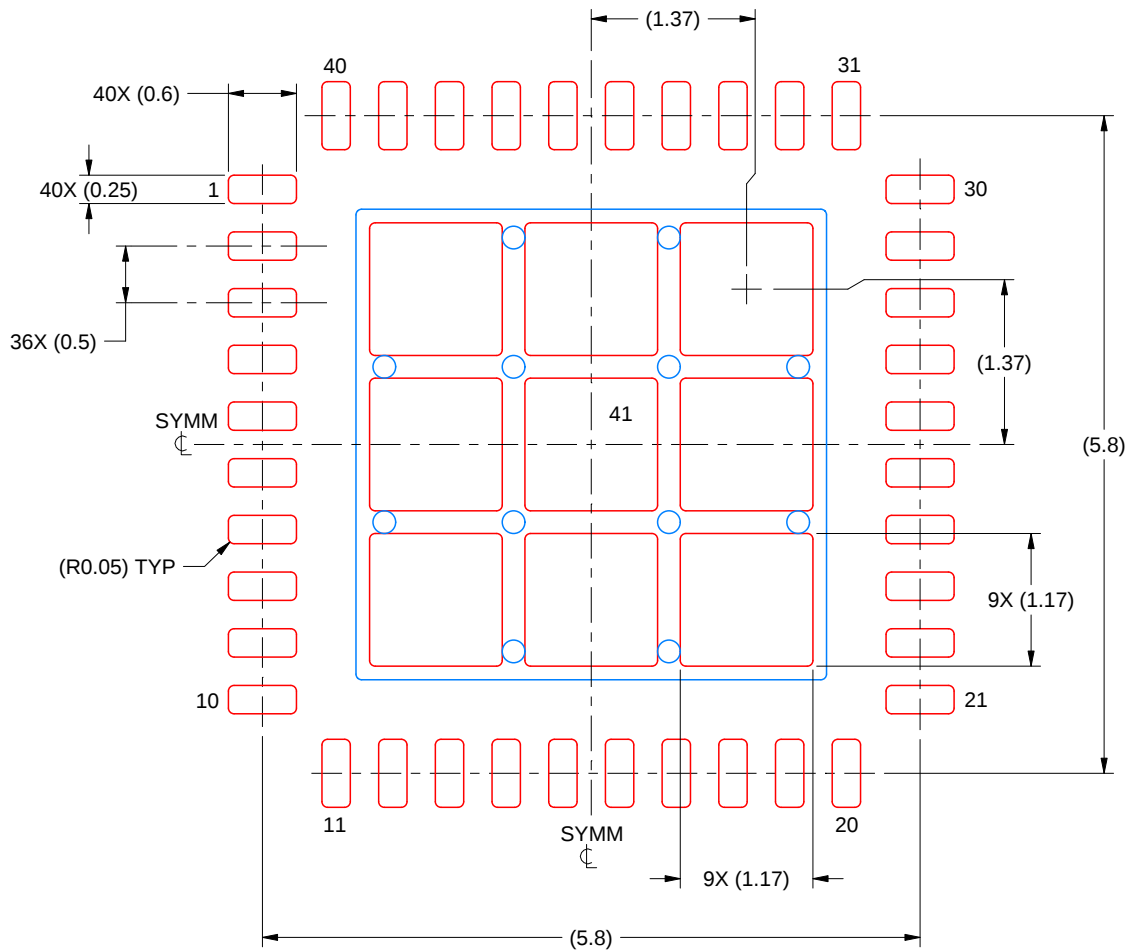

SOLDER PASTE EXAMPLE
 BASED ON 0.125 MM THICK STENCIL
 SCALE: 15X

EXPOSED PAD 41
 72% PRINTED SOLDER COVERAGE BY AREA UNDER PACKAGE

4226110/A 07/2020

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.

重要通知和免责声明

TI“按原样”提供技术和可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证没有瑕疵且不做任何明示或暗示的担保，包括但不限于对适销性、与某特定用途的适用性或不侵犯任何第三方知识产权的暗示担保。

这些资源可供使用 TI 产品进行设计的熟练开发人员使用。您将自行承担以下全部责任：(1) 针对您的应用选择合适的 TI 产品，(2) 设计、验证并测试您的应用，(3) 确保您的应用满足相应标准以及任何其他安全、安保法规或其他要求。

这些资源如有变更，恕不另行通知。TI 授权您仅可将这些资源用于研发本资源所述的 TI 产品的相关应用。严禁以其他方式对这些资源进行复制或展示。您无权使用任何其他 TI 知识产权或任何第三方知识产权。对于因您对这些资源的使用而对 TI 及其代表造成的任何索赔、损害、成本、损失和债务，您将全额赔偿，TI 对此概不负责。

TI 提供的产品受 [TI 销售条款](#)、[TI 通用质量指南](#) 或 [ti.com](#) 上其他适用条款或 TI 产品随附的其他适用条款的约束。TI 提供这些资源并不会扩展或以其他方式更改 TI 针对 TI 产品发布的适用的担保或担保免责声明。除非德州仪器 (TI) 明确将某产品指定为定制产品或客户特定产品，否则其产品均为按确定价格收入目录的标准通用器件。

TI 反对并拒绝您可能提出的任何其他或不同的条款。

版权所有 © 2026，德州仪器 (TI) 公司

最后更新日期：2025 年 10 月