



Literature Number: ZHCA393

Device Marking Conventions

National Semiconductor marks devices sold in order to provide device identification and manufacturing traceability information. The method of presenting the information marked on the device is dependent on the size of the device package and the area available for marking, as well as the nature and specifications of the device.

The information presented here describes the majority of the device markings a customer will observe. Specific package marking for a given device is given in the datasheet for that device. A package may have up to four lines of marking. The following information is usually contained in each line.

First line: Manufacturing information

- Company logo
- Wafer and/or assembly plant codes (optional) (see *Table 1* and *Table 2*)
- Date code (see *Table 4*, *Table 5*, and *Table 6*)
- Die run (wafer lot) code

Second Line: Device part number

- Device family (see *Table 7*)
- Device type
- Options
- Package code (see *Table 8*)

Third or fourth line: Optional, depending on device, package size, and customer

- Continuation of device identification (if too long for the second line)
- "Stampoff" number as required by specific customer request and specification
- Notice(s) related to copyright or trademarks

Very small packages, such as SOT-23, SOT-223, SC70, and SC90, are too small to contain all the information discussed above. Device identification marking is assigned differently, consisting of a four-character code:

- Device type (see *Table 10*)
- Device identification code
- Grade

These small packages also have a date code mark on the underside of the package. This is a one-character alpha code that represents a particular 6-week period during a 3-year span.

The specific marking for a given device can be found in the device datasheet. Other date code information, which would be typically found in the "first line" marking, is identified on the container labels.

Figure 1, *Figure 2*, and *Figure 3* show the typical arrangement of marking on large, medium, and very small packages. Codes that are most often used in the device marking are listed in the following tables. For chip scale packaged devices and all other recent updates, please refer to www.national.com/packaging.

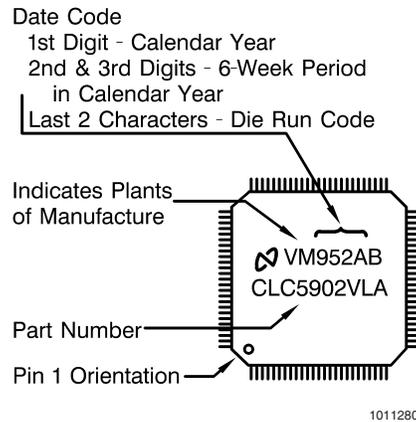


FIGURE 1. Marking Convention for Larger Packages

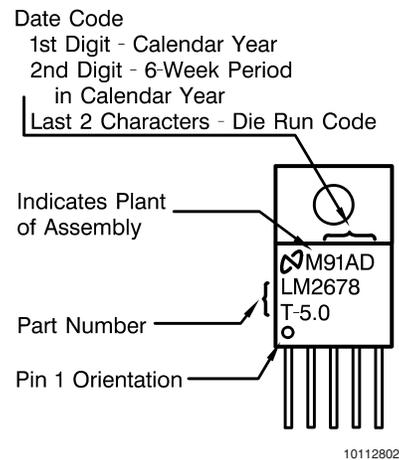


FIGURE 2. Marking Convention for Smaller Packages

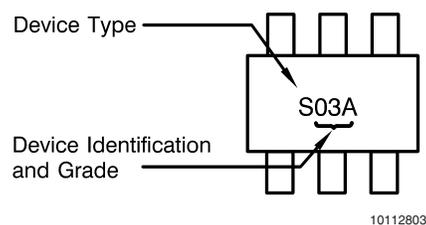


FIGURE 3. Marking Convention for Very Small Packages

Wafer Fab and Assembly Plant Codes

Table 1 lists single-letter codes for National Semiconductor's wafer fabrication plants. Letters that are not in this list indicate wafer fabrication at one of National Semiconductor's approved sub-contractors.

TABLE 1. Wafer Fab Plant Code

Code	Fab Location
E	Arlington, TX
J	Greenock, UK
R	Santa Clara, CA
V	South Portland, ME
X	Arlington, TX
0	Multiple Fab Origin
1	USA (Sub-con)
2	Taiwan (Sub-con)
3	USA (Sub-con)
8	Singapore (Sub-con)
M	USA (Sub-con)
N	Israel (Sub-con)
P	China (Sub-con)
W	Japan (Sub-con)
Z	USA (Sub-con)

Table 2 lists single-letter codes for National Semiconductor's device assembly plants. Letters that are not in this list indicate device assembly at another of National Semiconductor's approved sub-contractors see Table 3.

TABLE 2. Assembly Plant Code NSC Assembly Sites

Code	Assembly Location
F	Santa Clara, CA
C	China
M	Malacca, Malaysia
S	Singapore

TABLE 3. Assembly Plant Code Sub-Contractors

Code	Assembly Location
B	Thailand
E	Korea
H	Philippines
J	Japan
K	Hong Kong
N	Malaysia
P	Malaysia
R	Malaysia
T	Taiwan
U	China
V	Malaysia
X	USA
Y	Malaysia

Date of Manufacture Codes

Marks indicating the date of manufacture occur in four, three, two, or one digit versions. The date code represents a six-week period in which the device was assembled. The one-digit code is an alpha code for the very small packages, such as SOT, SC70, and SC90, and ranges from A to Z plus the character @, representing a 6-week period during a 3-year span. For the four, three, and two digit codes, the allocation of digits between year and week information in each scheme is summarized in Table 4:

TABLE 4. Year Code

Version	Year Digits	Week Range Digits
Four-digit (YYWW)	2	2
Three-digit (YWW)	1	2
Two-digit (YW)	1	1

Year: The year code is the last one or two digits of the calendar year of manufacture. For example, a device manufactured in 1999 would have a one-digit code of "9" or a two-digit code of "99".

Week: The week code is based on the starting calendar week of the six-week period during which the device was assembled. Table 5 summarizes the six-week date code schedule for one- and two-digit codes.

TABLE 5. Six-Week Period Code

Six-Week Period		Two-Digit Code	One-Digit Code
From Week	To Week		
52	05	52	9
06	11	06	1
12	17	12	2
18	23	18	3
24	29	24	4
30	35	30	5
36	41	36	6
42	47	42	7
48	51	48	8

Some example date codes are shown in Table 6:

TABLE 6. Date Code Examples

Date of Manufacture	4-Digit Code	3-Digit Code	2-Digit Code
Calendar week 48, 1999	9948	948	98
Calendar week 6, 2000	0006	006	01
Calendar week 14, 2000	0012	012	02
Calendar week 32, 2001	0130	130	15

Die Run (Wafer Lot) Codes

The die run code is a two letter alpha code, ranging from AB through ZZ for each device, that is automatically assigned to each lot by an internal manufacturing system. When the date code is combined with the die run code, a unique identifier is created. In case of any problems with a device, this identification facilitates backward traceability to manufacturing processes where containment and corrective actions can be defined. These actions, in turn, minimize, and eventually eliminate, any negative impact on customers.

Device Family and Package Codes

TABLE 7. Device Family

ADC, ADCV	Data Conversion
CLC	Comlinear Products
COP	Control Oriented Processor
DAC	Data Conversion
DS, DSV	Interface Products
FPD	Flat Panel Devices
LF	Linear (Bi-FET™)
LM	Linear (Monolithic)
LMC	Linear CMOS
LMD	Linear DMOS
LMF, MF	Linear Monolithic Filter
LMH	Linear Monolithic High Speed
LMS	Linear Second Source
LMV	Linear Low Voltage
LMX	Wireless
LP	Linear Low Power
LPC	Linear CMOS (Low Power)
LPV	Linear Low Power, Low Voltage
SC	Digital Cordless Telephony
SCAN	JTAG Products
TP	Telecom Products

TABLE 8. Package Type

BP	Micro Surface-Mount Device (MicroSMD)
D, DA, DH	Ceramic Sidebrazed Dual-In-Line Package
DT, TD	Molded D-Pak (TO-252)
EA, E	Ceramic Leaded Chip Carrier (LCC)
EL	Ceramic Quad Flatpack (CQFP, CQJB)
H, HA	3-Lead Metal Can (TO-46, TO-39)
J, JA	Ceramic Dual-In-Line Package (CerDIP)
K, KA, KC, KS	TO-3 Metal Can (Steel)
LD, LQ, LQA	Leadless Leadframe Package (LLP)
M, MA	Molded Small Outline Package (SO, SOT)

M3, M5, M6, MF	Molded Small Outline Package (SOT-23)
M7, MG	SC70
MB, MBH, MBS, MDA, MDB	Thin Small Outline Package (TSOP)
MC	Ceramic Small Outline Package (CSOP)
MEA, MEB, MEC, MED, MQ, MQA, MS, MSA, MSC	Molded Shrink Small Outline Package (SSOP)
MH, MXP	TSSOP with exposed pad
MJ	Molded surface mount with J-bend (SOJ)
MM	Miniature Molded Small Outline Package (MSOP, Mini SO)
MP	Molded Small Outline Package (SOT-223)
MTB, MTC, MTD, MTE	Molded Thin Shrink Small Outline Package (TSSOP)
MW, WM	Wide Body Molded Small Outline Package (SO, SOT)
MWA	Power Small Outline Package (PSOP)
N, NA	Molded Dual-In-Line Package (DIP)
P, PA, TB	Molded TO-202 Power Package
S, TS	Molded Power Surface Mount Package (TO-263)
SL, SLB	Chip Scale Packaging (CSP) Laminate
SM, SLC	Ball Grid Array (BGA)
T, TA	Molded TO-220 Power Package
TF	Molded TO-220 Power Package With Isolated Tab
U, UA, UC	Ball Grid Array (BGA)
U, UE	Ceramic Pin Grid Array (CPGA)
UP	Plastic Pin Grid Array (PPGA)
V, VA	28 & 44-Lead Molded Plastic Leaded Chip Carrier (PLCC)
V, VV, VW, VY	Leaded Quad Flat Pack (LQFP)
VC, VD, VE, VF, VH, VI, VJ, VK, VM, VN, VO, VP	Molded Plastic Quad Flat Package (PQFP)
VS, VT, VU	Molded Plastic Thin Quad Flat Package (TQFP)
W, WA	Ceramic Flatpack
W, WQ	Ceramic Quad Flatpak
WG	Ceramic Small Outline Package and Quad Flatpak with Gullwing Lead Form
YA	TQFP with exposed pad
Z, ZA, R	Molded 3-Lead Transistor Package (TO-92)

Device Family and Package Codes

(Continued)

TABLE 9. Package Type — CLC Products

E	Molded Small Outline Package (SO, SOT)
Q	Molded Plastic Leaded Chip Carrier (PLCC)

Small Surface-Mount Package Marking

For packages such as SOT23 (3-, 5-, and 6-lead), SOT223, and MSOP, there is insufficient space to mark the entire part number, so a four-character code is used instead. The first character represents the device type (see *Table 10*). The second two characters are a code relating to the device part number and options. The fourth character relates to device

performance grade. This four-character “top mark” is usually fully specified in the device datasheet, for all options and grades of the product.

TABLE 10. Device Type Code

A	Amplifier
B	Buffer
C	Comparator
D	Driver
H	Comlinear
L	Low-Dropout Linear Regulator
R	Voltage Reference
S	Switched-Capacitor Voltage Converter
T	Temperature Sensor
Z	Audio

National does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and National reserves the right at any time without notice to change said circuitry and specifications.

For the most current product information visit us at www.national.com.

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT AND GENERAL COUNSEL OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
- A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

BANNED SUBSTANCE COMPLIANCE

National Semiconductor manufactures products and uses packing materials that meet the provisions of the Customer Products Stewardship Specification (CSP-9-111C2) and the Banned Substances and Materials of Interest Specification (CSP-9-111S2) and contain no “Banned Substances” as defined in CSP-9-111S2.

Leadfree products are RoHS compliant.



National Semiconductor
Americas Customer
Support Center
Email: new.feedback@nsc.com
Tel: 1-800-272-9959

National Semiconductor
Europe Customer Support Center
Fax: +49 (0) 180-530 85 86
Email: europe.support@nsc.com
Deutsch Tel: +49 (0) 69 9508 6208
English Tel: +44 (0) 870 24 0 2171
Français Tel: +33 (0) 1 41 91 8790

National Semiconductor
Asia Pacific Customer
Support Center
Email: ap.support@nsc.com

National Semiconductor
Japan Customer Support Center
Fax: 81-3-5639-7507
Email: jpn.feedback@nsc.com
Tel: 81-3-5639-7560

重要声明

德州仪器(TI) 及其下属子公司有权在不事先通知的情况下, 随时对所提供的产品和服务进行更正、修改、增强、改进或其它更改, 并有权随时中止提供任何产品和服务。客户在下订单前应获取最新的相关信息, 并验证这些信息是否完整且是最新的。所有产品的销售都遵循在订单确认时所提供的TI 销售条款与条件。

TI 保证其所销售的硬件产品的性能符合TI 标准保修的适用规范。仅在TI 保证的范围内, 且TI 认为有必要时才会使用测试或其它质量控制技术。除非政府做出了硬性规定, 否则没有必要对每种产品的所有参数进行测试。

TI 对应用帮助或客户产品设计不承担任何义务。客户应对其使用TI 组件的产品和应用自行负责。为尽量减小与客户产品和应用相关的风险, 客户应提供充分的设计与操作安全措施。

TI 不对任何TI 专利权、版权、屏蔽作品权或其它与使用了TI 产品或服务的组合设备、机器、流程相关的TI 知识产权中授予的直接或隐含权限作出任何保证或解释。TI 所发布的与第三方产品或服务有关的信息, 不能构成从TI 获得使用这些产品或服务的许可、授权、或认可。使用此类信息可能需要获得第三方的专利权或其它知识产权方面的许可, 或是TI 的专利权或其它知识产权方面的许可。

对于TI 的产品手册或数据表, 仅在没有对内容进行任何篡改且带有相关授权、条件、限制和声明的情况下才允许进行复制。在复制信息的过程中对内容的篡改属于非法的、欺诈性商业行为。TI 对此类篡改过的文件不承担任何责任。

在转售TI 产品或服务时, 如果存在对产品或服务参数的虚假陈述, 则会失去相关TI 产品或服务的明示或暗示授权, 且这是非法的、欺诈性商业行为。TI 对此类虚假陈述不承担任何责任。

TI 产品未获得用于关键的安全应用中的授权, 例如生命支持应用(在该类应用中一旦TI 产品故障将预计造成重大的人员伤亡), 除非各方官员已经达成了专门管控此类使用的协议。购买者的购买行为即表示, 他们具备有关其应用安全以及规章衍生所需的所有专业技术和知识, 并且认可和同意, 尽管任何应用相关信息或支持仍可能由TI 提供, 但他们将独力负责满足在关键安全应用中使用其产品及TI 产品所需的所有法律、法规和安全相关要求。此外, 购买者必须全额赔偿因在此类关键安全应用中使用TI 产品而对TI 及其代表造成的损失。

TI 产品并非设计或专门用于军事/航空应用, 以及环境方面的产品, 除非TI 特别注明该产品属于“军用”或“增强型塑料”产品。只有TI 指定的军用产品才满足军用规格。购买者认可并同意, 对TI 未指定军用的产品进行军事方面的应用, 风险由购买者单独承担, 并且独力负责在此类相关使用中满足所有法律和法规要求。

TI 产品并非设计或专门用于汽车应用以及环境方面的产品, 除非TI 特别注明该产品符合ISO/TS 16949 要求。购买者认可并同意, 如果他们在汽车应用中使用任何未被指定的产品, TI 对未能满足应用所需要求不承担任何责任。

可访问以下URL 地址以获取有关其它TI 产品和应用解决方案的信息:

	产品		应用
数字音频	www.ti.com.cn/audio	通信与电信	www.ti.com.cn/telecom
放大器和线性器件	www.ti.com.cn/amplifiers	计算机及周边	www.ti.com.cn/computer
数据转换器	www.ti.com.cn/dataconverters	消费电子	www.ti.com/consumer-apps
DLP® 产品	www.dlp.com	能源	www.ti.com/energy
DSP - 数字信号处理器	www.ti.com.cn/dsp	工业应用	www.ti.com.cn/industrial
时钟和计时器	www.ti.com.cn/clockandtimers	医疗电子	www.ti.com.cn/medical
接口	www.ti.com.cn/interface	安防应用	www.ti.com.cn/security
逻辑	www.ti.com.cn/logic	汽车电子	www.ti.com.cn/automotive
电源管理	www.ti.com.cn/power	视频和影像	www.ti.com.cn/video
微控制器 (MCU)	www.ti.com.cn/microcontrollers		
RFID 系统	www.ti.com.cn/rfidsys		
OMAP 机动性处理器	www.ti.com/omap		
无线连通性	www.ti.com.cn/wirelessconnectivity		
	德州仪器在线技术支持社区		www.deyisupport.com

邮寄地址: 上海市浦东新区世纪大道 1568 号, 中建大厦 32 楼 邮政编码: 200122
Copyright © 2011 德州仪器 半导体技术 (上海) 有限公司