



Wideband Operational Amplifier

FEATURES

- **Wide Bandwidth:** 3 GHz
- **High Slew Rate:** 830 V/ μ s
- **Low Voltage Noise:** 2.4 nV/ $\sqrt{\text{Hz}}$
- **Single Supply:** 5 V, 3 V
- **Quiescent Current:** 18 mA

APPLICATIONS

- **Active Filter**
- **ADC Driver**
- **Ultrasound**
- **Gamma Camera**
- **RF/Telecom**



DESCRIPTION

The THS4304 is a wideband, voltage-feedback operational amplifier designed for use in high-speed analog signal-processing chains operating with a single 5-V power supply. Developed in the BiCom3 silicon germanium process technology, the THS4304 offers best-in-class performance using a single 5-V supply as opposed to previous generations of operational amplifiers requiring ± 5 -V supplies.

The THS4304 is a traditional voltage-feedback topology that provides the following benefits: balanced inputs, low offset voltage and offset current, low offset drift, high common mode and power supply rejection ratio.

The THS4304 is offered in 8-pin MSOP package (DGK), the 8-pin SOIC package (D), and the space-saving 5-pin SOT-23 package (DBV).

DIFFERENTIAL ADC DRIVE

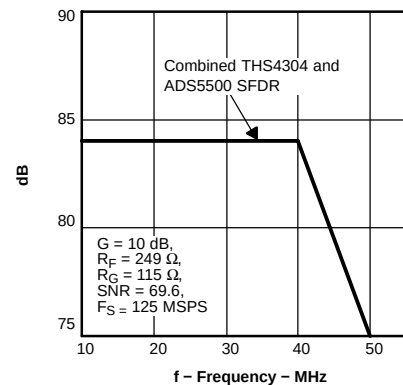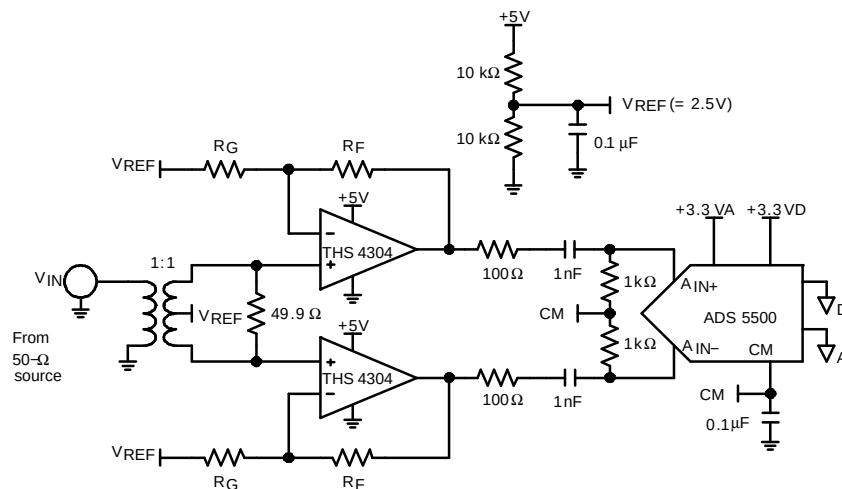


Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

PINOUT DRAWING

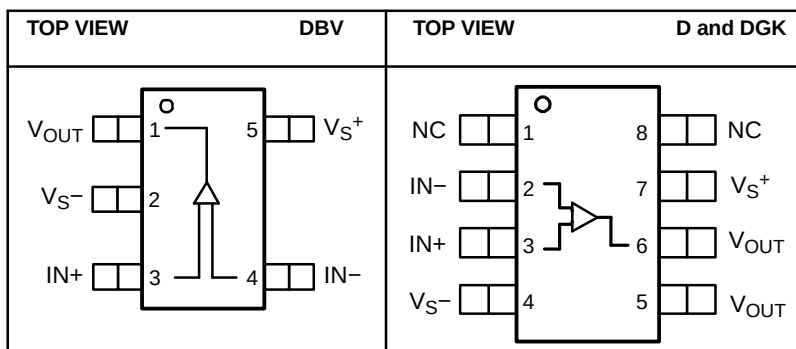

NOTE: NC indicates there is no internal connection to these pins.

PACKAGING / ORDERING INFORMATION

PACKAGED DEVICES	PACKAGE TYPE	PACKAGE MARKINGS	TRANSPORT MEDIA, QUANTITY
THS4304DBVT	SOT-23-5	AKW	Tape and Reel, 250
THS4304DBVR			Tape and Reel, 3000
THS4304D	SOIC-8	—	Rails, 75
THS4304DR			Tape and Reel, 2500
THS4304DGK	MSOP-8	AKU	Rails, 100
THS4304DGKR			Tape and Reel, 2500

DISSIPATION RATINGS

PACKAGE	θ_{JC} (°C/W)	θ_{JA} (°C/W) ⁽¹⁾	POWER RATING ⁽²⁾	
			$T_A \leq 25^\circ\text{C}$	$T_A = 85^\circ\text{C}$
DBV (5)	55	255.4	391 mW	156 mW
D (8)	38.3	97.5	1.02 W	410 mW
DGK (8)	71.5	180.8	553 mW	221 mW

(1) This data was taken using the JEDEC standard High-K test PCB.

(2) Power rating determined with a junction temperature of 125°C. This is the point where distortion starts to substantially increase. Thermal management of the final PCB should strive to keep the junction temperature at or below 125°C for best performance and long-term reliability.

ABSOLUTE MAXIMUM RATINGS⁽¹⁾

over operating free-air temperature range (unless otherwise noted)

		UNIT
V_S	Supply voltage	+6.0 V
V_I	Input voltage	$\pm V_S$
I_O	Output current	150 mA
V_{ID}	Differential input voltage	± 2 V
Continuous power dissipation		See Dissipation Rating Table
T_J	Maximum junction temperature, any condition ⁽²⁾	150°C
	Operating free-air temperature range, continuous operation, long-term reliability ⁽²⁾	125°C
T_{stg}	Storage temperature range	–65°C to 150°C
Lead temperature: 1,6 mm (1/16 inch) from case for 10 seconds		300°C
ESD Ratings	HBM	1600 V
	CDM	1000 V
	MM	100 V

- (1) The absolute maximum ratings under any condition is limited by the constraints of the silicon process. Stresses above these ratings may cause permanent damage. Exposure to absolute maximum conditions for extended periods may degrade device reliability. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those specified is not implied.
- (2) The maximum junction temperature for continuous operation is limited by package constraints. Operation above this temperature may result in reduced reliability and/or lifetime of the device.

RECOMMENDED OPERATING CONDITIONS

over operating free-air temperature range (unless otherwise noted)

		MIN	MAX	UNIT
Supply voltage, (V_{S+} and V_{S-})	Dual supply	± 1.35	± 2.5	V
	Single supply	2.7	5	
Input common-mode voltage range		$V_{S-} - 0.2$	$V_{S+} + 0.2$	V

ELECTRICAL CHARACTERISTICSSpecifications: $V_S = 5\text{ V}$; $R_F = 249\ \Omega$, $R_L = 100\ \Omega$, and $G = +2$ unless otherwise noted

PARAMETER	CONDITIONS		TYP	OVER TEMPERATURE				MIN/ MAX	TEST LEVEL ⁽¹⁾
			25°C	25°C	0°C to 70°C	–40°C to 85°C	UNITS		
AC PERFORMANCE									
Small-Signal Bandwidth	G = +1, V _O = 100 mVpp		3				GHz	Typ	C
	G = +2, V _O = 100 mVpp		1				GHz	Typ	C
	G = +5, V _O = 100 mVpp		187				MHz	Typ	C
	G = +10, V _O = 100 mVpp		87				MHz	Typ	C
Gain Bandwidth Product	G >+10		870				MHz	Typ	C
0.1-dB Flat Bandwidth	G= +2, V _O = 100 mVpp, C _F = 0.5 pF		300				MHz	Typ	C
Large-Signal Bandwidth	G = +2, V _O = 2 V _{PP}		240				MHz	Typ	C
Slew Rate	G = +2, V _O = 1-V Step		830				V/μs	Typ	C
	G = +2, V _O = 2-V Step		790				V/μs	Typ	C
Settling Time to 1%	G = –2, V _O = 2-V Step		4.5				ns	Typ	C
Settling Time to 0.1%	G = –2, V _O = 2-V Step		7.5				ns	Typ	C
Settling Time to 0.01%	G = –2, V _O = 2-V Step		35				ns	Typ	C
Rise / Fall Times	G = +2, V _O = 2-V Step		2.5				ns	Typ	C
Harmonic Distortion									
Second Harmonic Distortion	G = +2, V _O = 2 V _{PP} , f = 10 MHz	R _L = 100 Ω	–84				dBc	Typ	C
		R _L = 1 kΩ	–95				dBc	Typ	C
Third Harmonic Distortion		R _L = 100 Ω	–100				dBc	Typ	C
		R _L = 1 kΩ	–100				dBc	Typ	C
Third-Order Intermodulation Distortion (IMD ₃)	G = +2, V _O = 2-V _{PP} envelope, 200-kHz tone spacing, f = 20 MHz		–84				dBc	Typ	C
Third-Order Output Intercept (OIP ₃)			48				dBm	Typ	C
Noise Figure	G = +2, f = 1 GHz		15				dB	Typ	C
Input Voltage Noise	f = 1 MHz		2.4				nV/√Hz	Typ	C
Input Current Noise	f = 1 MHz		2.1				pA/√Hz	Typ	C
DC PERFORMANCE									
Open-Loop Voltage Gain (A _{OL})	V _O = ± 0.8 V, V _{CM} = 2.5 V		65	54	50	50	dB	Min	A
Input Offset Voltage	V _{CM} = 2.5 V		0.5	4	5	5	mV	Max	A
Input Offset Voltage Drift					5	5	μV/°C	Typ	B
Input Bias Current			7	12	18	18	μA	Max	A
Input Bias Current Drift					50	50	nA/°C	Typ	B
Input Offset Current			0.5	1	1.2	1.2	μA	Max	A
Input Offset Current Drift					10	10	nA/°C	Typ	B
INPUT CHARACTERISTICS									
Common-Mode Input Range			–0.2 to 5.2	0.2 to 4.8	0.4 to 4.6	0.4 to 4.6	V	Min	A
Common-Mode Rejection Ratio	V _O = ± 0.2 V, V _{CM} = 2.5 V		95	80	73	73	dB	Min	A
Input Resistance	Each input, referenced to GND		100				kΩ	Typ	C
Input Capacitance			1.5				pF	Typ	C

(1) Test levels: (A) 100% tested at 25°C. Over temperature limits by characterization and simulation. (B) Limits set by characterization and simulation. (C) Typical value only for information.

ELECTRICAL CHARACTERISTICS (continued)

Specifications: $V_S = 5\text{ V}$; $R_F = 249\ \Omega$, $R_L = 100\ \Omega$, and $G = +2$ unless otherwise noted

PARAMETER	CONDITIONS	TYP	OVER TEMPERATURE					TEST LEVEL ⁽¹⁾
		25°C	25°C	0°C to 70°C	–40°C to 85°C	UNITS	MIN/ MAX	
OUTPUT CHARACTERISTICS								
Output Voltage Swing	R _L = 100 Ω	1.1 to 3.9	1.2 to 3.8	1.3 to 3.7	1.3 to 3.7	V	Min	A
	R _L = 1 kΩ	1 to 4	1.1 to 3.9	1.2 to 3.8	1.2 to 3.8			
Output Current (Sourcing)	R _L = 10 Ω	140	100	57	57	mA	Min	A
Output Current (Sinking)	R _L = 10 Ω	92	65	40	40	mA	Min	A
Output Impedance	f = 100 kHz	0.016				Ω	Typ	A
POWER SUPPLY								
Maximum Operating Voltage		5	5.5	5.5	5.5	V	Max	A
Minimum Operating Voltage		5	2.7	2.7	2.7		Min	
Maximum Quiescent Current		18	18.9	19.4	19.4	mA	Max	A
Minimum Quiescent Current		18	17.5	16.6	16.6	mA	Min	A
Power Supply Rejection (+PSRR)	V _{S+} = 5.5 V to 4.5 V, V _{S–} = 0 V	80	73	66	66	dB	Min	A
Power Supply Rejection (-PSRR)	V _{S+} = 5 V, V _{S–} = –0.5 V to +0.5 V	60	57	54	54	dB	Min	A

ELECTRICAL CHARACTERISTICSSpecifications: $V_S = 3\text{ V}$; $R_F = 249\ \Omega$, $R_L = 499\ \Omega$, and $G = +2$ unless otherwise noted

PARAMETER	CONDITIONS		TYP	OVER TEMPERATURE					TEST LEVEL ⁽¹⁾
			25°C	25°C	0°C to 70°C	–40°C to 85°C	UNITS	MIN/ MAX	
AC PERFORMANCE									
Small-Signal Bandwidth	G = +1, V _O = 100 mVpp		3				GHz	Typ	C
	G = +2, V _O = 100 mVpp		900				MHz	Typ	C
	G = +5, V _O = 100 mVpp		190				MHz	Typ	C
	G = +10, V _O = 100 mVpp		83				MHz	Typ	C
Gain Bandwidth Product	G >+10		830				MHz	Typ	C
Large-Signal Bandwidth	G = +2, V _O = 1 V _{PP}		450				MHz	Typ	C
Slew Rate	G = +2, V _O = 1-V Step		750				V/μs	Typ	C
	G = +2, V _O = 1-V Step		675				V/μs	Typ	C
Settling Time to 1%	G = –2, V _O = 0.5-V Step		4.5				ns	Typ	C
Settling Time to 0.1%	G = –2, V _O = 0.5-V Step		20				ns	Typ	C
Rise / Fall Times	G = +2, V _O = 0.5-V Step		1.5				ns	Typ	C
Harmonic Distortion									
Second Harmonic Distortion	G = +2, V _O = 0.5 V _{PP} , f = 10 MHz	R _L = 499 Ω	–92				dBc	Typ	C
Third Harmonic Distortion			–91				dBc	Typ	C
Noise Figure	G = +2, f = 1 GHz		15				dB	Typ	C
Input Voltage Noise	f = 1 MHz		2.4				nV/√Hz	Typ	C
Input Current Noise	f = 1 MHz		2.1				pA/√Hz	Typ	C
DC PERFORMANCE									
Open-Loop Voltage Gain (A _{OL})	V _O = ± 0.5 V, V _{CM} = 1.5 V		49	44			dB	Min	A
Input Offset Voltage	V _{CM} = 1.5 V		2	4	5	5	mV	Max	A
Input Offset Voltage Drift					5	5	μV/°C	Typ	B
Input Bias Current			7	12	18	18	μA	Max	A
Input Bias Current Drift					50	50	nA/°C	Typ	B
Input Offset Current			0.4	1	1.2	1.2	μA	Max	A
Input Offset Current Drift					10	10	nA/°C	Typ	B
INPUT CHARACTERISTICS									
Common-Mode Input Range			–0.2 to 3.2	0.2 to 2.8	0.4 to 2.6	0.4 to 2.6	V	Min	A
Common-Mode Rejection Ratio	V _O = ± 0.09 V, V _{CM} = 1.5 V		92	80	70	70	dB	Min	A
Input Resistance	Each input, referenced to GND		100				kΩ	Typ	C
Input Capacitance			1.5				pF	Typ	C

(1) Test levels: (A) 100% tested at 25°C. Over temperature limits by characterization and simulation. (B) Limits set by characterization and simulation. (C) Typical value only for information.

ELECTRICAL CHARACTERISTICS (continued)

Specifications: $V_S = 3\text{ V}$; $R_F = 249\ \Omega$, $R_L = 499\ \Omega$, and $G = +2$ unless otherwise noted

PARAMETER	CONDITIONS	TYP	OVER TEMPERATURE					TEST LEVEL ⁽¹⁾
		25°C	25°C	0°C to 70°C	−40°C to 85°C	UNITS	MIN/ MAX	
OUTPUT CHARACTERISTIC								
Output Voltage Swing	R _L = 100 Ω	1.1 to 1.9	1.2 to 1.8	1.3 to 1.7	1.3 to 1.7	V	Min	A
	R _L = 1 kΩ	1 to 2	1.1 to 1.9	1.2 to 1.8	1.2 to 1.8			
Output Current (Sourcing)	R _L = 10 Ω	57	50	40	40	mA	Min	A
Output Current (Sinking)	R _L = 10 Ω	57	45	35	35	mA	Min	A
Output Impedance	f = 100 kHz	0.016				Ω	Typ	A
POWER SUPPLY								
Maximum Operating Voltage		3	5.5	5.5	5.5	V	Max	A
Minimum Operating Voltage		3	2.7	2.7	2.7		Min	
Maximum Quiescent Current		17.2	17.9	18.4	18.4	mA	Max	A
Minimum Quiescent Current		17.2	16.5	15.6	15.6	mA	Min	A
Power Supply Rejection (+PSRR)	V _{S+} = 3.3 V to 2.7 V, V _{S−} = 0 V	80	60	54	54	dB	Min	A
Power Supply Rejection (-PSRR)	V _{S+} = 5 V, V _{S−} = −0.5 V to +0.5 V	60	55	52	52	dB	Min	A

TYPICAL CHARACTERISTICS

Table of Graphs

		FIGURE
5 V		
Frequency response		1–3, 5, 6
0.1-dB Flatness		4
Frequency response by package		7
S-Parameters	vs Frequency	8
2nd Harmonic distortion	vs Frequency	9, 11
3rd Harmonic distortion	vs Frequency	10, 12
2nd Harmonic distortion	vs Output voltage	13
3rd Harmonic distortion	vs Output voltage	14
IMD ₃ 3rd Order intermodulation distortion	vs Frequency	15
OIP ₃ 3rd Order output intercept point	vs Frequency	16
SR Slew rate	vs Output voltage	17
V _n /I _n Noise	vs Frequency	18
Noise figure	vs Frequency	19
I _q Quiescent current	vs Supply voltage	20
Rejection ratio	vs Frequency	21
V _O Output voltage	vs Load resistance	22
V _{OS} Input offset voltage	vs Input common-mode voltage	23
I _{IB} Input bias and offset current	vs Case temperature	24
V _{OS} Input offset voltage	vs Case temperature	25
Open-loop gain	vs Frequency	26
V _O Small-signal transient response		27
V _O Large-signal transient response		28
V _O Settling time		29
V _O Overdrive recovery time		30
Z _O Output impedance	vs Frequency	31
3 V		
Frequency response		32–35
2nd Harmonic distortion	vs Frequency	36
3rd Harmonic distortion	vs Frequency	37
Harmonic Distortion	vs Output voltage	38
SR Slew rate	vs Output voltage	39
V _O Settling time		40
V _O Output voltage	vs Load resistance	41
I _{IB} Input bias and offset current	vs Case temperature	42
V _{OS} Input offset voltage	vs Case temperature	43
V _O Large-signal transient response		44
V _O Overdrive recovery time		45
Z _O Output impedance	vs Frequency	46

TYPICAL CHARACTERISTICS (5 V)

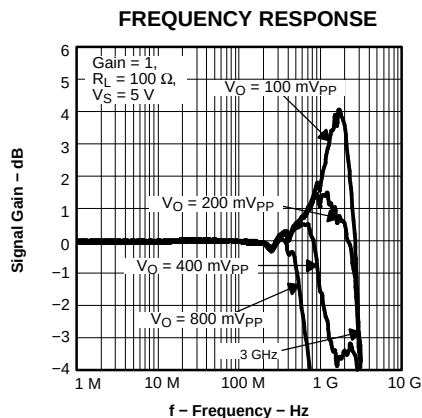


Figure 1.

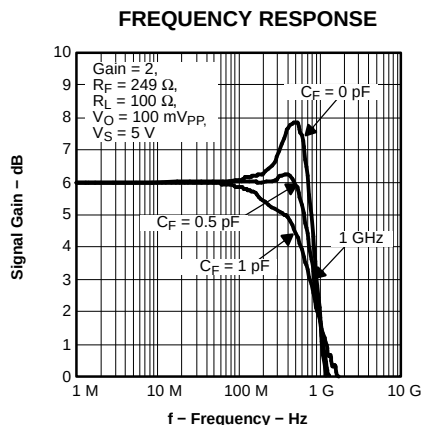


Figure 2.

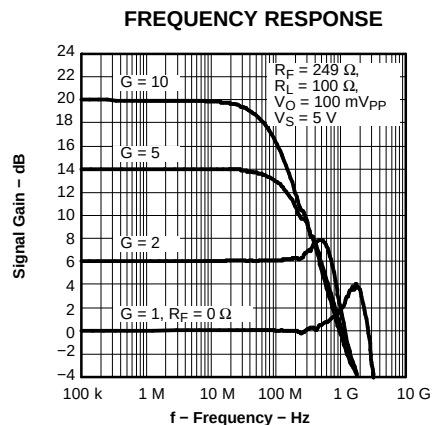


Figure 3.

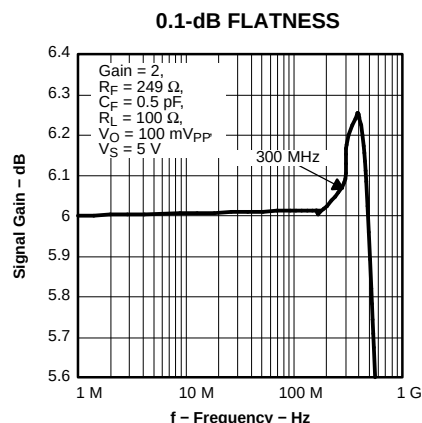


Figure 4.

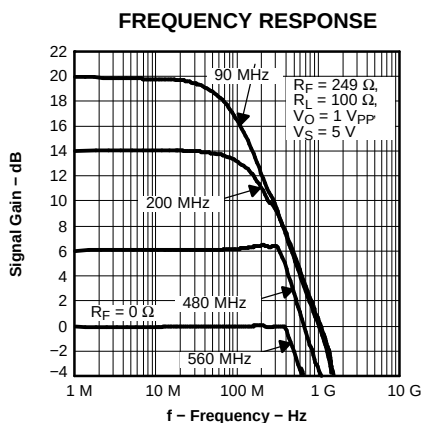


Figure 5.

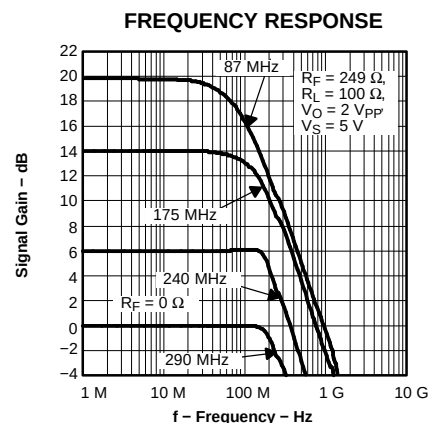


Figure 6.

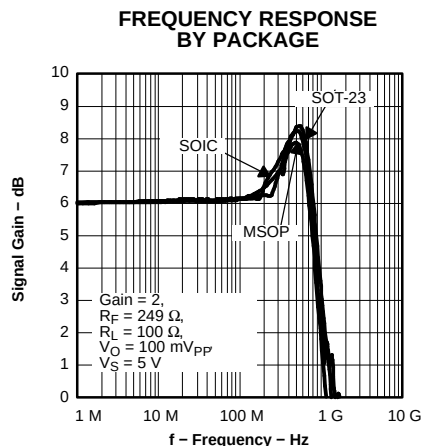


Figure 7.

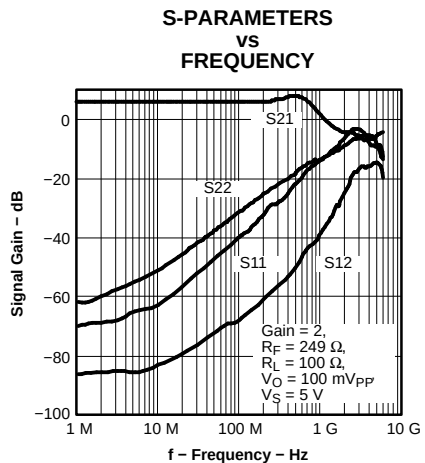


Figure 8.

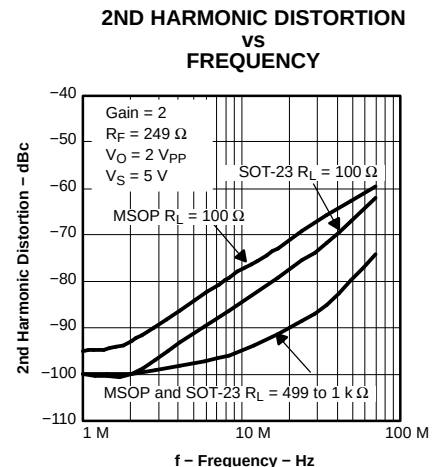


Figure 9.

TYPICAL CHARACTERISTICS (5 V) (continued)

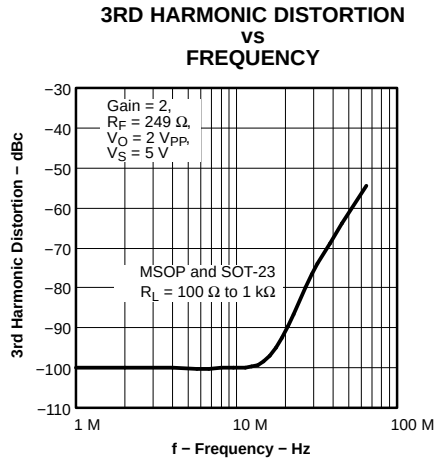


Figure 10.

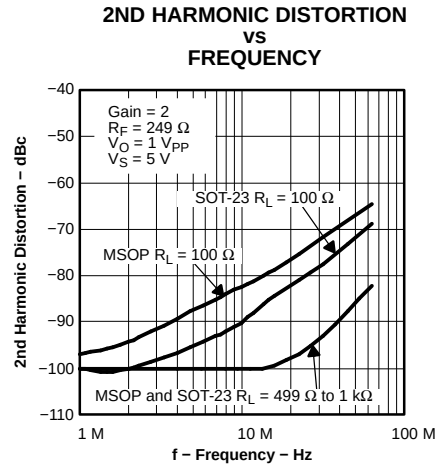


Figure 11.

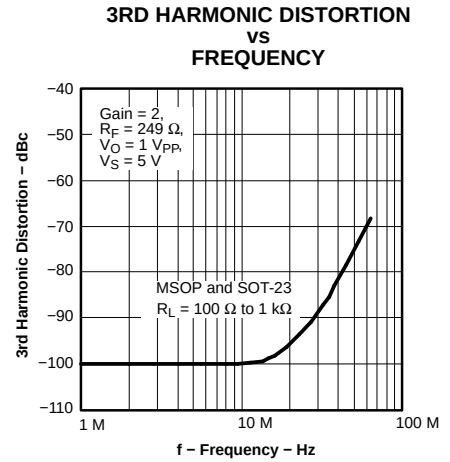


Figure 12.

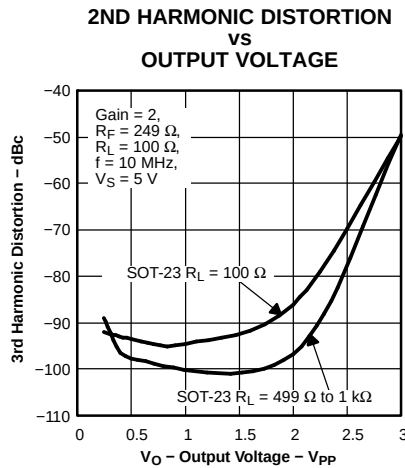


Figure 13.

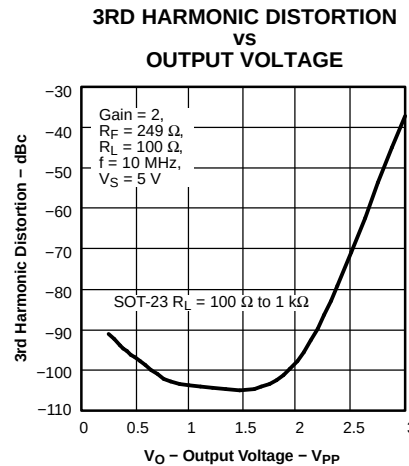


Figure 14.

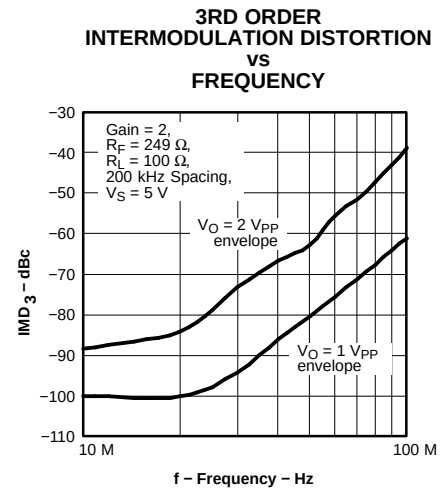


Figure 15.

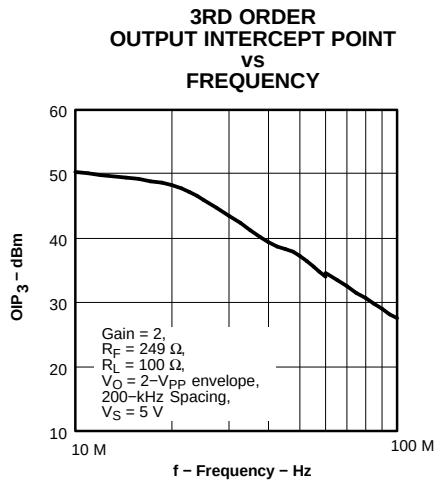


Figure 16.

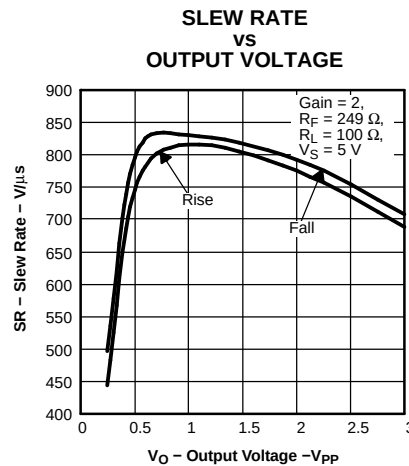


Figure 17.

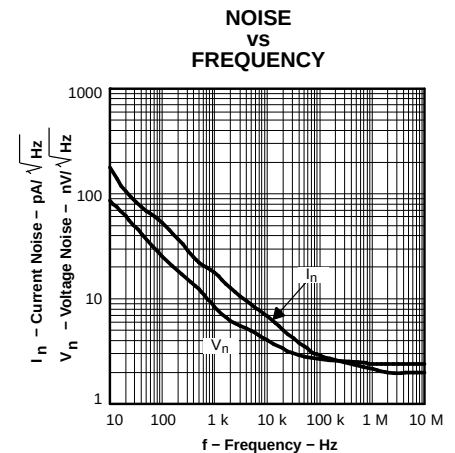


Figure 18.

TYPICAL CHARACTERISTICS (5 V) (continued)

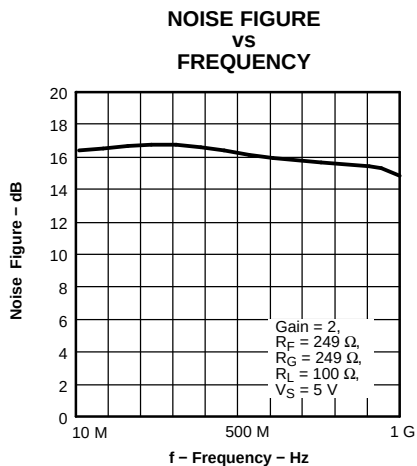


Figure 19.

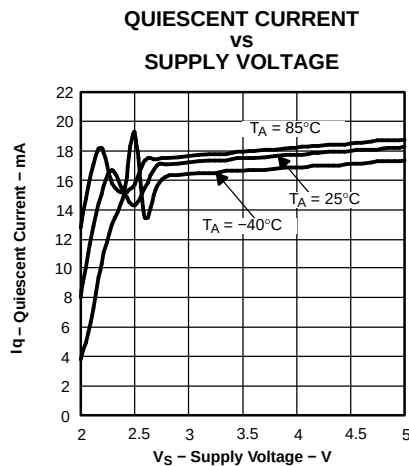


Figure 20.

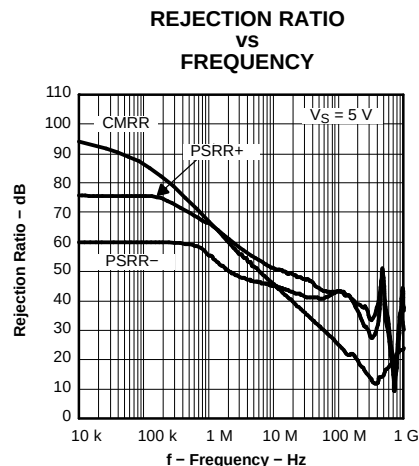


Figure 21.

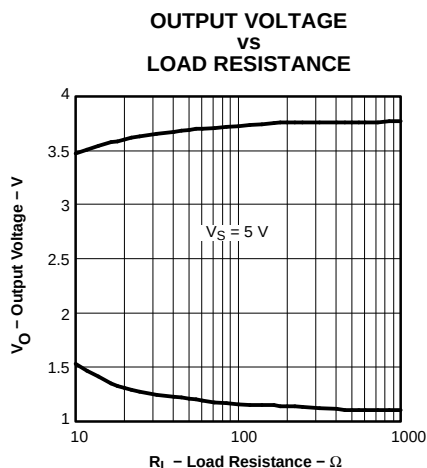


Figure 22.

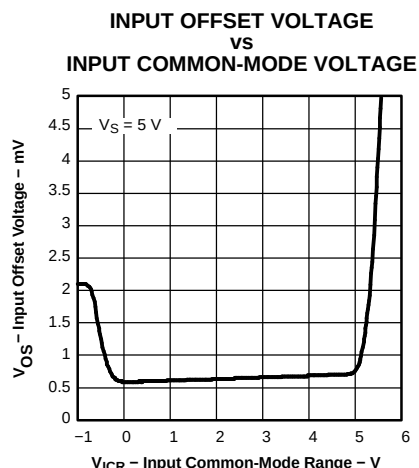


Figure 23.

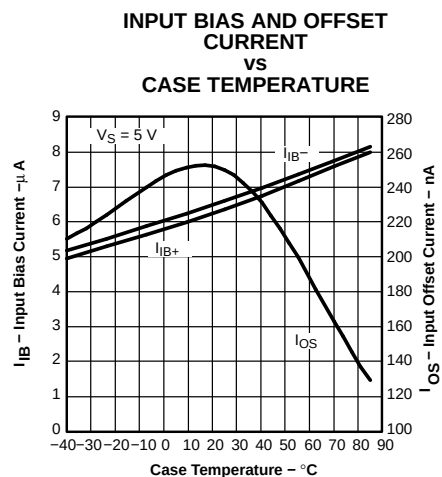


Figure 24.

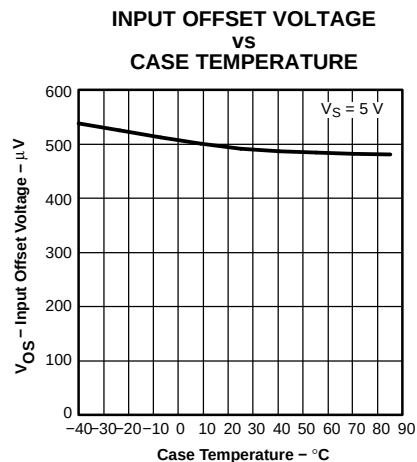


Figure 25.

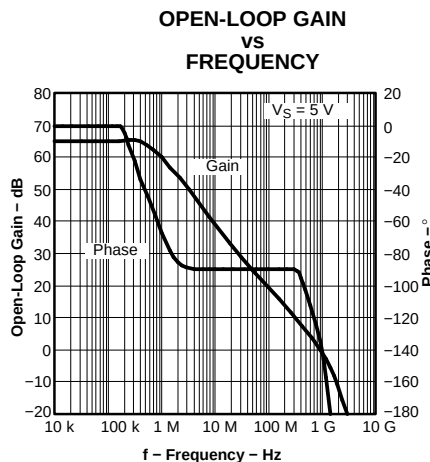


Figure 26.

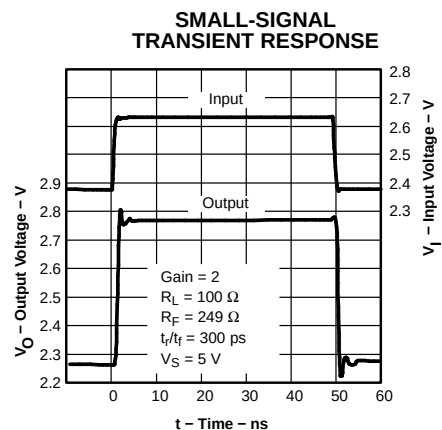


Figure 27.

TYPICAL CHARACTERISTICS (5 V) (continued)

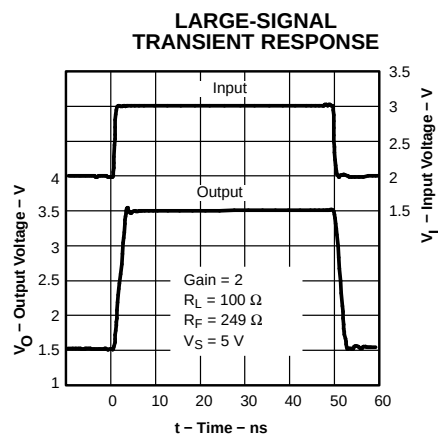


Figure 28.

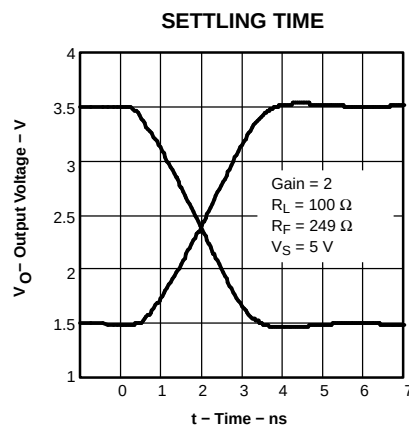


Figure 29.

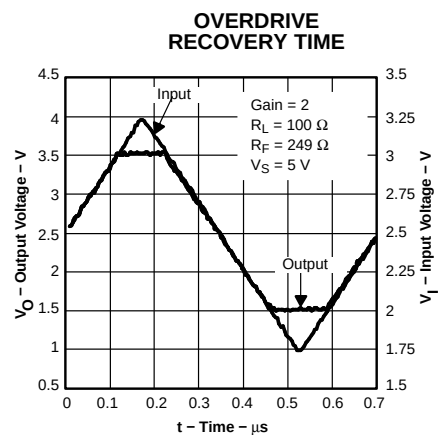


Figure 30.

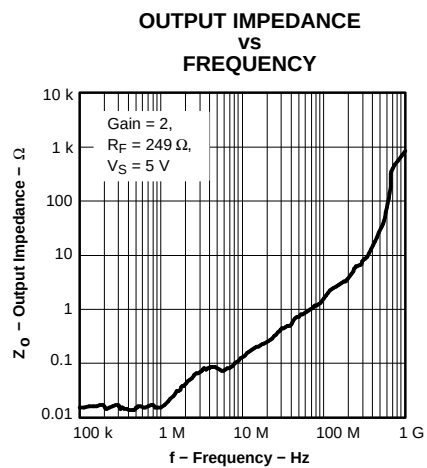


Figure 31.

TYPICAL CHARACTERISTICS (3 V)

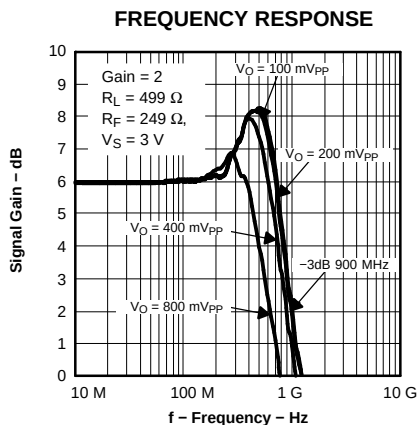


Figure 32.

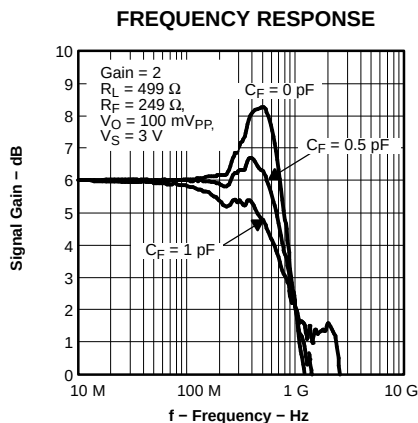


Figure 33.

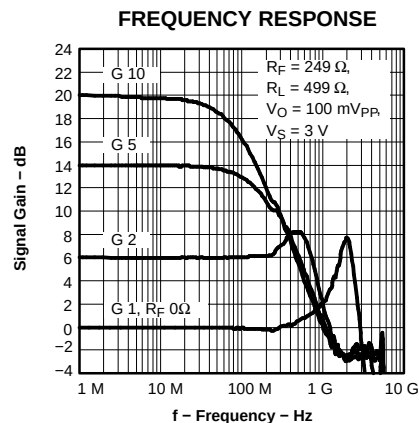


Figure 34.

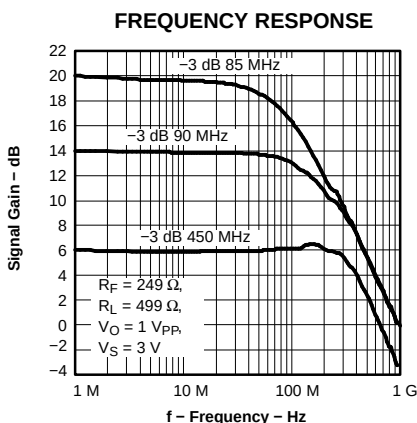


Figure 35.

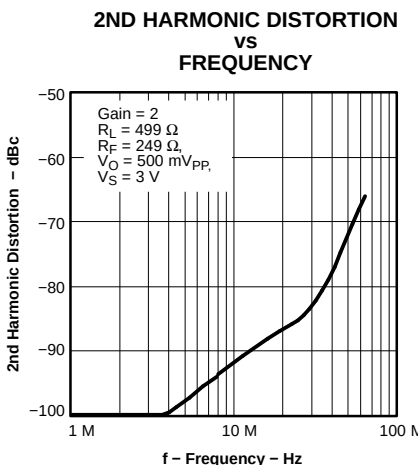


Figure 36.

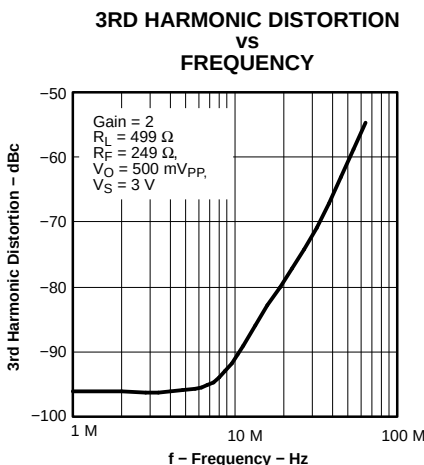


Figure 37.

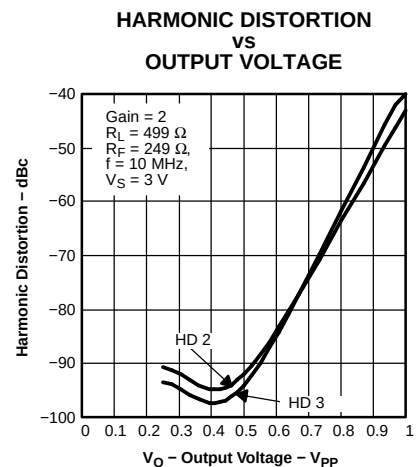


Figure 38.

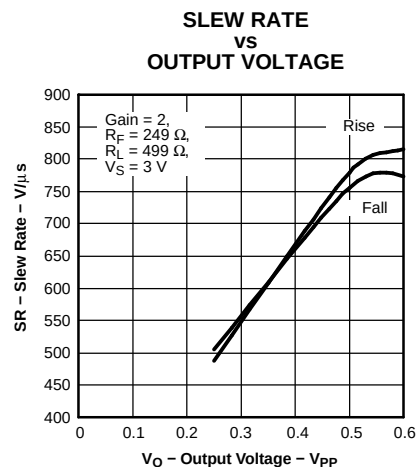


Figure 39.

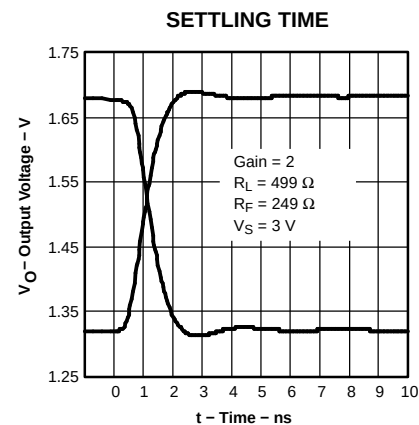


Figure 40.

TYPICAL CHARACTERISTICS (3 V) (continued)

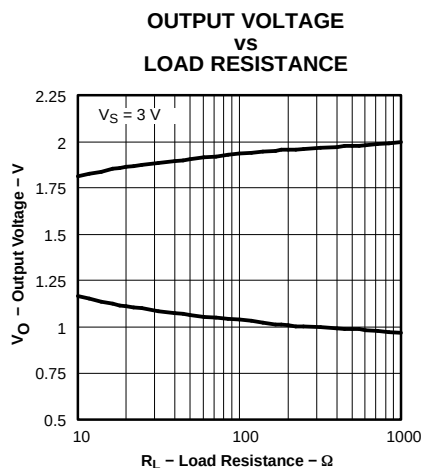


Figure 41.

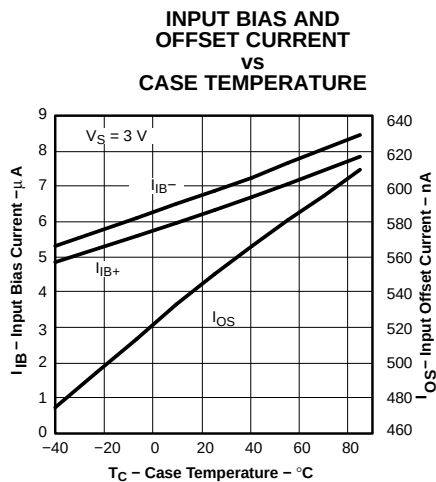


Figure 42.

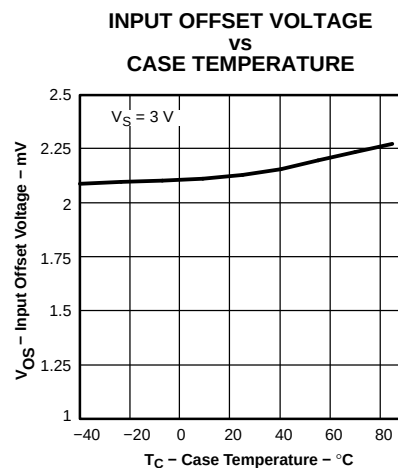


Figure 43.

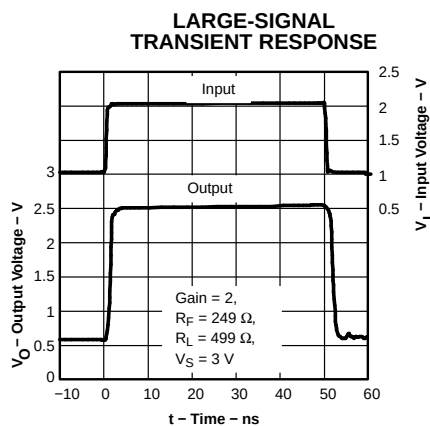


Figure 44.

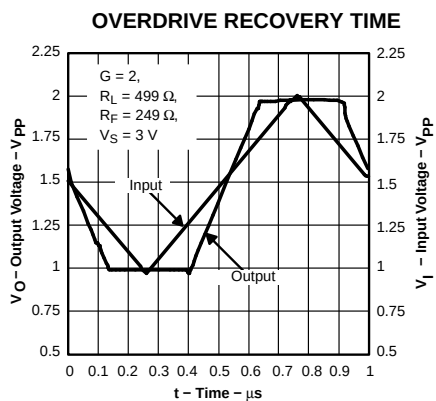


Figure 45.

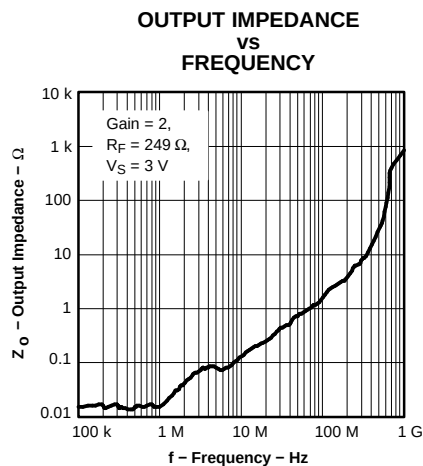


Figure 46.

APPLICATION INFORMATION

For many years, high-performance analog design has required the generation of split power supply voltages, like ± 15 V, ± 8 V, and more recently ± 5 V, in order to realize the full performance of the amplifiers available. Modern trends in high-performance analog are moving towards single-supply operation at 5 V, 3 V, and lower. This reduces power supply cost due to less voltages being generated and conserves energy in low power applications. It can also take a toll on available dynamic range, a valuable commodity in analog design, if the available voltage swing of the signal must also be reduced.

Two key figures of merit for dynamic range are signal-to-noise ratio (SNR) and spurious free dynamic range (SFDR).

SNR is simply the signal level divided by the noise:

$$\text{SNR} = \frac{\text{Signal}}{\text{Noise}}$$

and SFDR is the signal level divided by the highest spur:

$$\text{SFDR} = \frac{\text{Signal}}{\text{Spur}}$$

In an operational amplifier, reduced supply voltage typically results in reduced signal levels due to lower voltage available to operate the transistors within the amplifier. When noise and distortion remain constant, the result is a commensurate reduction in SNR and SFDR. To regain dynamic range, the process and the architecture used to make the operational amplifier must have superior noise and distortion performance with lower power supply overhead required for proper transistor operation.

The THS4304 BiCom3 operational amplifier is just such a device. It is able to provide 2-V_{pp} signal swing at its output on a single 5-V supply with noise and distortion performance similar to the best 10-V operational amplifiers on the market today

GENERAL APPLICATION

The THS4304 is a traditional voltage-feedback topology with wideband performance up to 3 GHz at unity gain. Care must be taken to ensure that parasitic elements do not erode the phase margin.

Capacitance at the output and inverting input, and resistance and inductance in the feedback path, can cause problems.

To reduce parasitic capacitance, the ground plane should be removed from under the part.

To reduce inductance in the feedback, the circuit traces should be kept as short and direct as possible. For best performance in non-inverting unity gain ($G=+1V/V$), it is recommended to use a wide trace directly between the output and inverting input.

For a gain of $+2V/V$, it is recommended to use a 249- Ω feedback resistor. With good layout, this should keep the frequency response peaking to around 2 dB. This resistance is high enough to not load the output excessively, and the part is capable of driving 100- Ω load with good performance. Higher-value resistors can be used, with more peaking. For example, 499 Ω gives about 5 dB of peaking, and gives slightly better distortion performance with 100- Ω load. Lower value feedback resistors can also be used to reduce peaking, but degrades the distortion performance with heavy loads.

Power supply bypass capacitors are required for proper operation. The most critical are 0.1- μF ceramic capacitors; these should be placed as close to the part as possible. Larger bulk capacitors can be shared with other components in the same area as the operational amplifier.

HARMONIC DISTORTION

For best second harmonic (HD2), it is important to use a single-point ground between the power supply bypass capacitors when using a split supply. It is also recommended to use a single ground or reference point for input termination and gain-setting resistors (R8 and R11 in the non-inverting circuit). It is recommended to follow the EVM layout closely in your application.

APPLICATION INFORMATION (continued)

SOT-23 versus MSOP

With light loading of 500-Ω and higher resistance, the THS4304 shows HD2 that is not dependant of package. With heavy output loading of 100 Ω, the THS4304 in SOT-23 package shows about 6 dB better HD2 performance versus the MSOP package.

EVALUATION MODULES

The THS4304 has two evaluation modules (EVMs) available. One is for the MSOP (DGK) package and the other for the SOT-23 (DBV) package. These provide a convenient platform for evaluating the performance of the part and building various different circuits. The full schematics, board layout, and bill of materials (as supplied) for the boards are shown in the following illustrations.

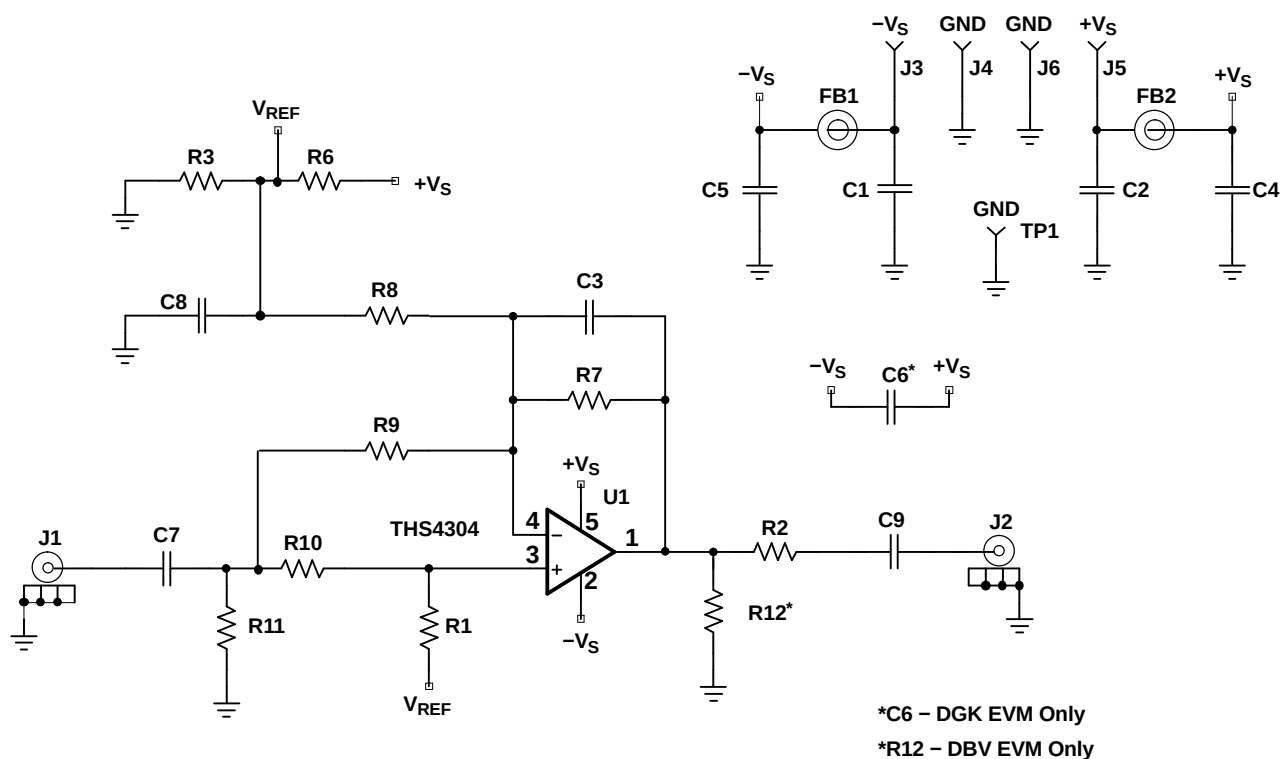


Figure 47. EVM Full Schematic

APPLICATION INFORMATION (continued)
EVM BILL OF MATERIALS

THS4304 EVM ⁽¹⁾						
Item	Description	SMD Size	Reference Designator	PCB Quantity	Manufacturer's Part Number	Distributor's Part Number
1	Bead, ferrite, 3-A, 80-Ω	1206	FB1, FB2	2	(STEWART) HI1206N800R-00	(DIGI-KEY) 240-1010-1-ND
2	Capacitor, 3.3-μF, Ceramic	1206	C1, C2	2	(AVX) 1206YG335ZAT2A	(GARRETT) 1206YG335ZAT2A
3	Capacitor, 0.1-μF, Ceramic	0603	C4, C5	2	(AVX) 0603YC104KAT2A	(GARRETT) 0603YC104KAT2A
4	Open	0603	C3, C6 ⁽²⁾	2		
5	Open	0603	R1, R3, R6, R9, R12 ⁽³⁾	5		
6	Resistor, 0-Ω, 1/10-W, 1%	0603	C7, C8, C9, C10	4	(KOA) RK73Z1JTDD	(GARRETT) RK73Z1JTDD
7	Resistor, 49.9-Ω, 1/10-W, 1%	0603	R2, R11	2	(KOA) RK73H1JLTD49R9F	(GARRETT) RK73H1JLTD49R9F
8	Resistor, 249-Ω, 1/10-W, 1%	0603	R7, R8	2	(KOA) RK73H1JLTD2490F	(GARRETT) RK73H1JLTD2490F
9	Jack, banana receptacle, 0.25-in. diameter hole		J3, J4, J5, J6	4	(HH SMITH) 101	(NEWARK) 35F865
10	Test point, black		TP1	1	(KEYSTONE) 5001	(DIGI-KEY) 5001K-ND
11	Connector, edge, SMA PCB jack		J1, J2	2	(JOHNSON) 142-0701-801	(NEWARK) 90F2624
12	Integrated Circuit, THS4304		U1	1	(TI) THS4304DGK, or (TI) THS4304DBV	
13	Standoff, 4-40 HEX, 0.625-in. Length			4	(KEYSTONE) 1808	NEWARK) 89F1934
14	Screw, Phillips, 4-40, 0.250-in.			4	SHR-0440-016-SN	
15	Board, printed-circuit			1	(TI) THS4304DGK ENG A, or (TI) THS4304DBV ENG A	

(1) NOTE: All items are designated for both the DBV and DGK EVMs unless otherwise noted.

(2) C6 used on DGK EVM only.

(3) R12 used on DBV EVM only.

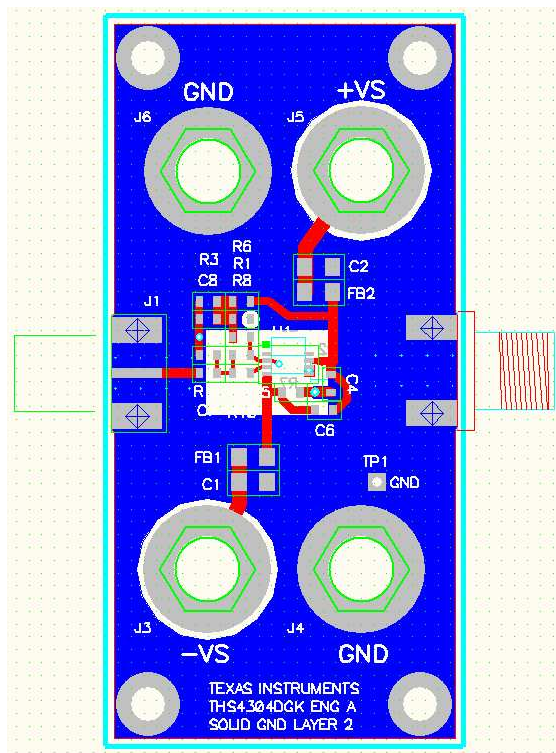


Figure 48. THS4304DGK EVM Layout Top and L2

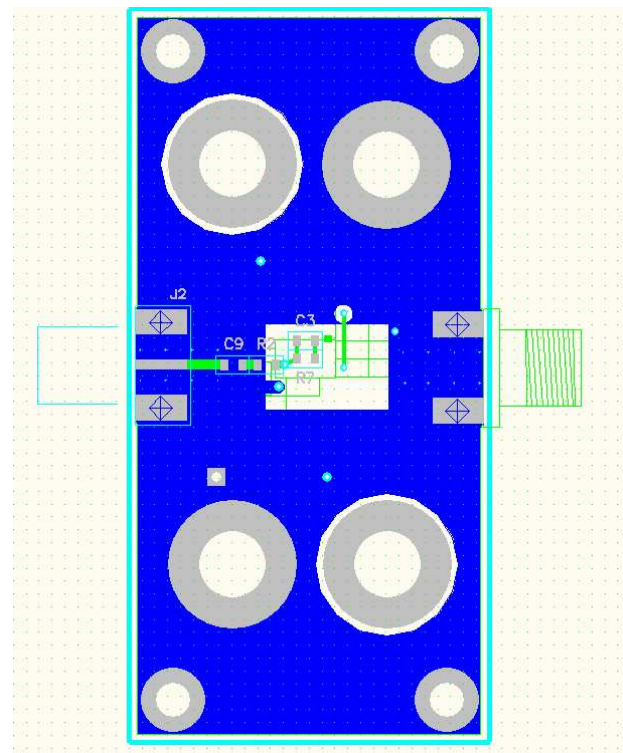


Figure 49. THS4304DGK EVM Layout Bottom and L3

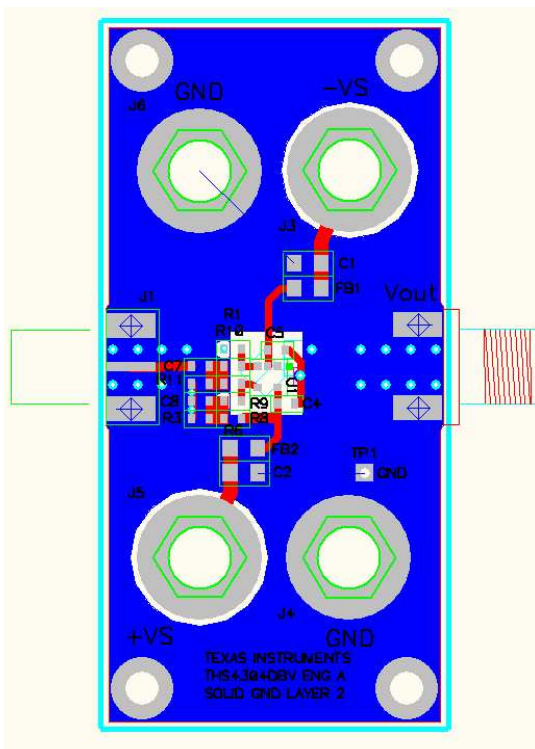


Figure 50. THS4304DBV EVM Layout Top and L2

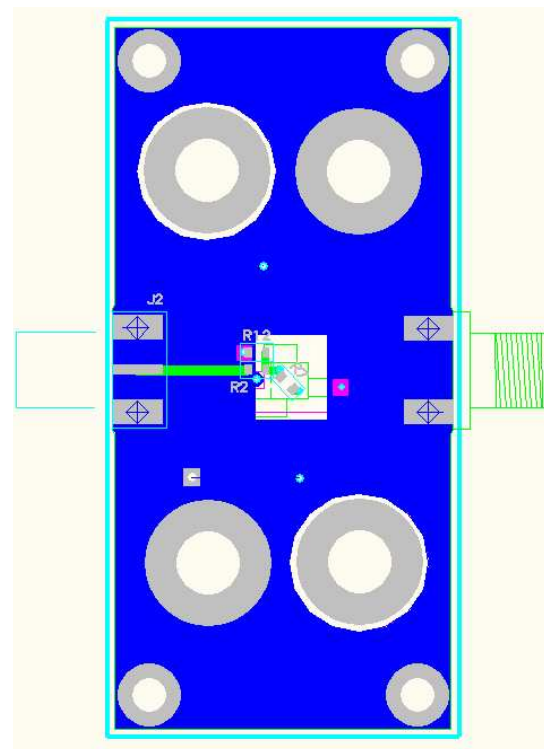


Figure 51. THS4304DBV EVM Layout Bottom and L3

NON-INVERTING GAIN WITH SPLIT SUPPLY

The following schematic shows how to configure the operational amplifier for non-inverting gain with split power supply ($\pm 2.5\text{V}$). This is how the EVM is supplied from TI. This configuration is convenient for test purposes because most signal generators and analyzer are designed to use ground-referenced signals by default. Note the input and output provides 50- Ω termination.

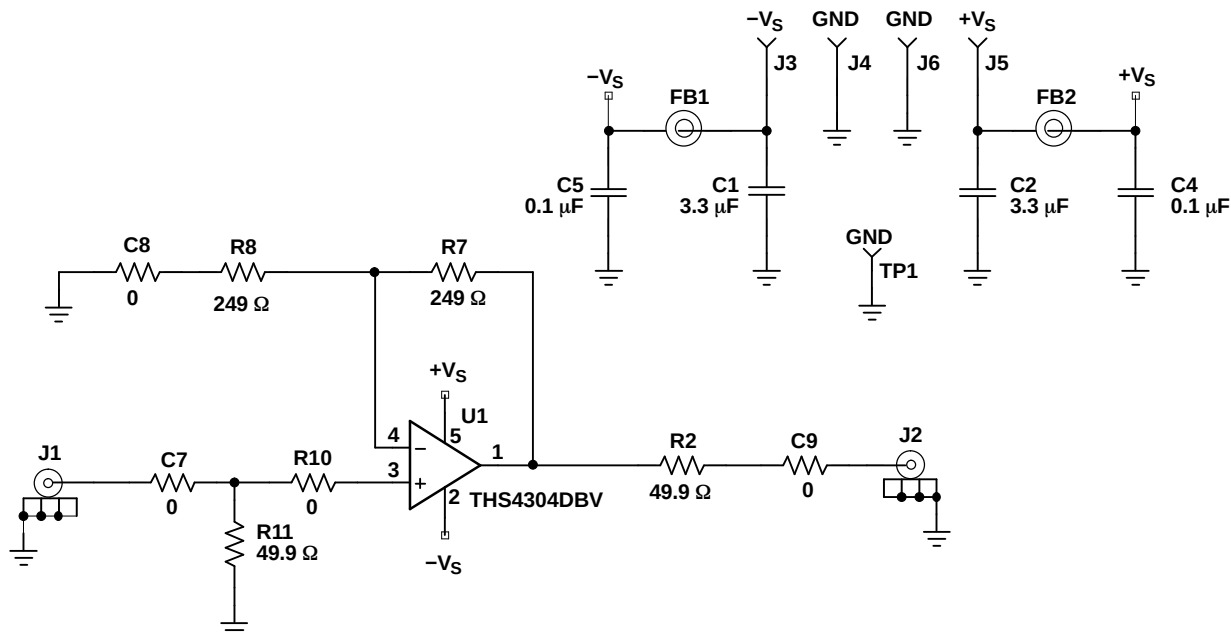


Figure 52. Non-Inverting Gain with Split Power Supply

INVERTING GAIN WITH SPLIT POWER SUPPLY

The following schematic shows how to configure the operational amplifier for inverting gain of 1 (-1 V/V) with split power supply (± 2.5 V). Note the input and output provides 50- Ω termination for convenient interface to common test equipment.

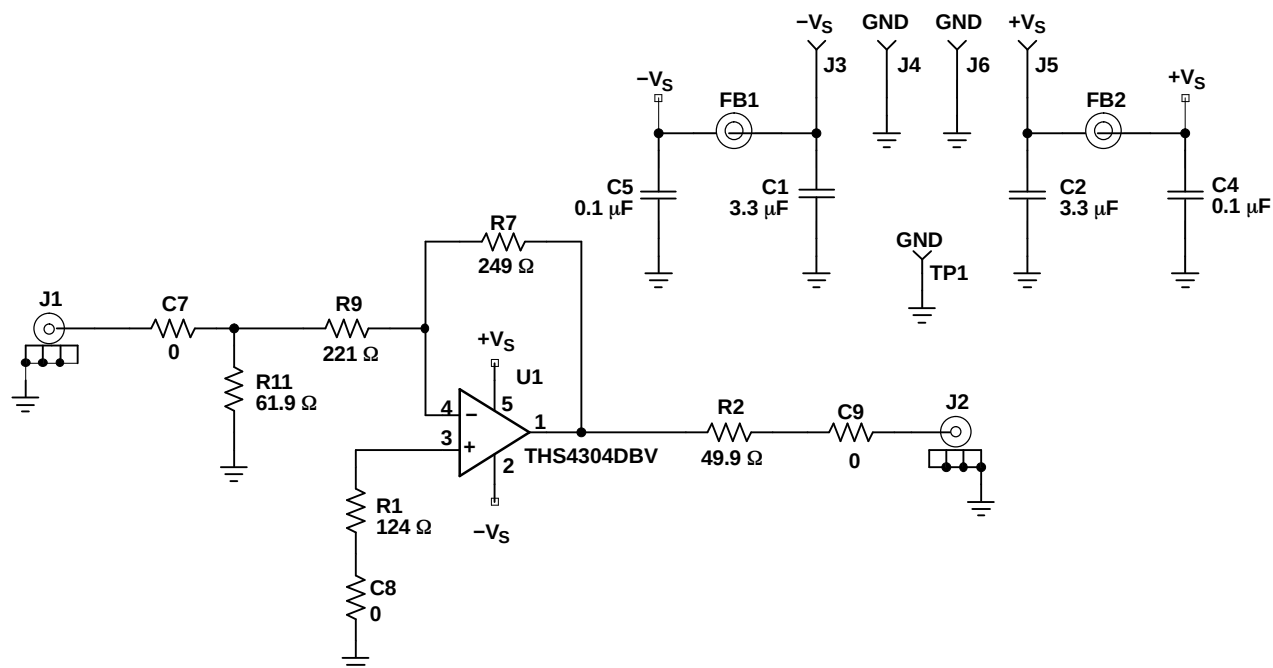


Figure 53. Inverting Gain with Split Power Supply

The differential topology employed in this circuit provides for significant suppression of the 2nd-order harmonic distortion of the amplifiers. This, along with the superior 3rd-order harmonic distortion performance of the amplifiers, results in the SFDR performance of the circuit (at frequencies up to 40 MHz) being set by higher-order harmonics generated by the sampling process of the ADS5500.

The amplifier circuit (with resistor divider for bias voltage generation) requires a total of 185 mW of power from a single 5-V power supply.

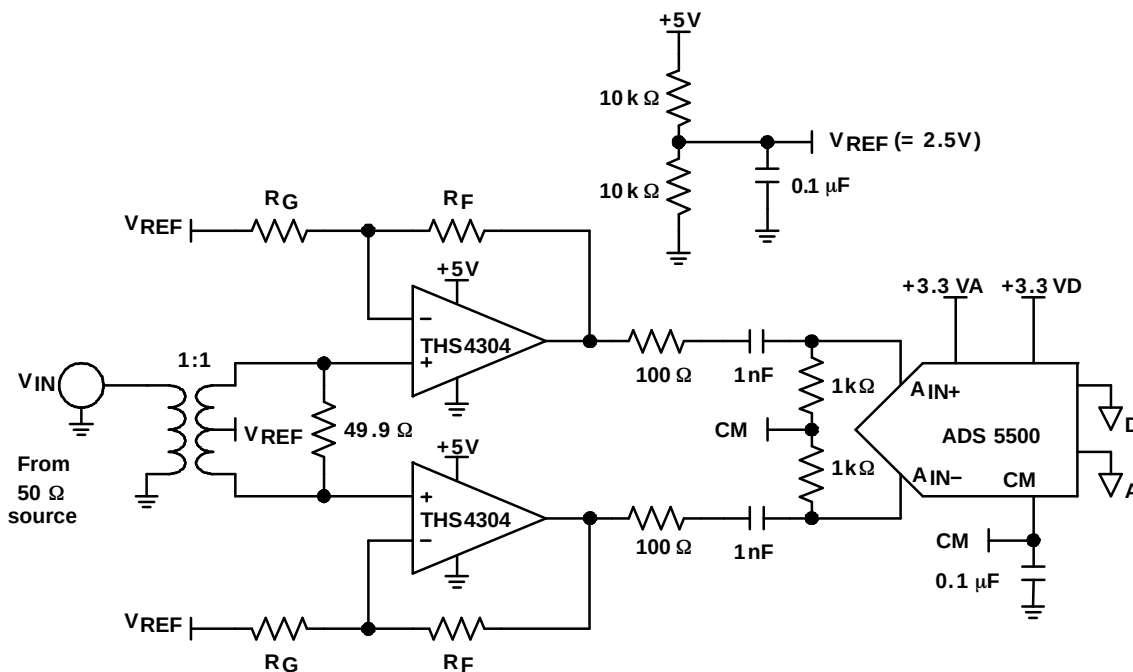


Figure 55. Differential ADC Drive Amplifier Circuit

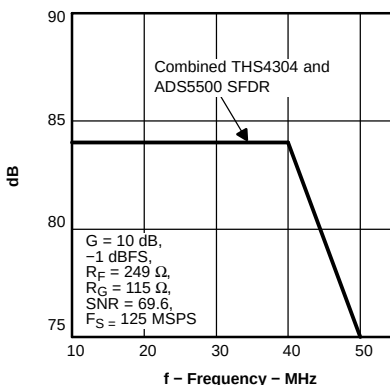


Figure 56. SFDR Performance versus Frequency – THS4304 Driving ADS5500

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package Pins	Package qty Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
THS4304D	Active	Production	SOIC (D) 8	75 TUBE	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	4304
THS4304D.B	Active	Production	SOIC (D) 8	75 TUBE	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	4304
THS4304DBVR	Active	Production	SOT-23 (DBV) 5	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	AKW
THS4304DBVR.B	Active	Production	SOT-23 (DBV) 5	3000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	AKW
THS4304DBVT	Active	Production	SOT-23 (DBV) 5	250 SMALL T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	AKW
THS4304DBVT.B	Active	Production	SOT-23 (DBV) 5	250 SMALL T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	AKW
THS4304DG4	Active	Production	SOIC (D) 8	75 TUBE	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	4304
THS4304DGK	Active	Production	VSSOP (DGK) 8	80 TUBE	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	AKU
THS4304DGK.B	Active	Production	VSSOP (DGK) 8	80 TUBE	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	AKU
THS4304DGKR	Active	Production	VSSOP (DGK) 8	2500 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	AKU
THS4304DGKR.B	Active	Production	VSSOP (DGK) 8	2500 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	AKU

⁽¹⁾ **Status:** For more details on status, see our [product life cycle](#).

⁽²⁾ **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

⁽⁴⁾ **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

⁽⁵⁾ **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

⁽⁶⁾ **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.


OTHER QUALIFIED VERSIONS OF THS4304 :

- Space : [THS4304-SP](#)

NOTE: Qualified Version Definitions:

- Space - Radiation tolerant, ceramic packaging and qualified for use in Space-based application


TAPE AND REEL INFORMATION

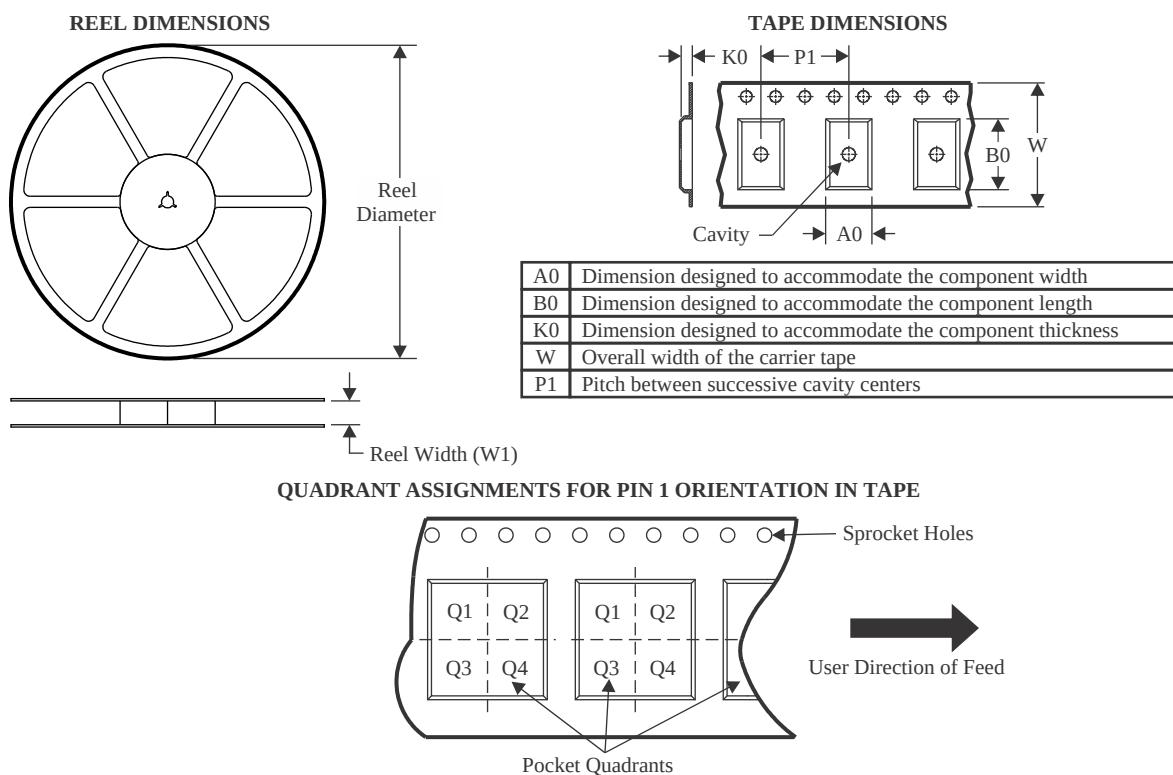

*All dimensions are nominal


Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
THS4304DBVR	SOT-23	DBV	5	3000	180.0	9.0	3.15	3.2	1.4	4.0	8.0	Q3
THS4304DBVT	SOT-23	DBV	5	250	180.0	9.0	3.15	3.2	1.4	4.0	8.0	Q3
THS4304DGKR	VSSOP	DGK	8	2500	330.0	12.4	5.3	3.4	1.4	8.0	12.0	Q1

TAPE AND REEL BOX DIMENSIONS

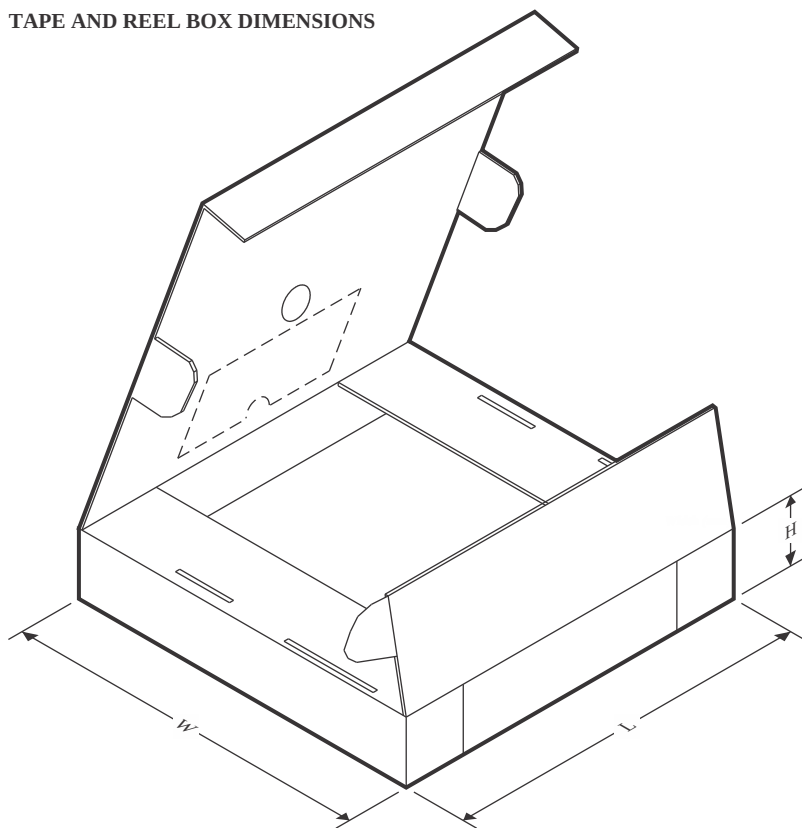

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
THS4304DBVR	SOT-23	DBV	5	3000	182.0	182.0	20.0
THS4304DBVT	SOT-23	DBV	5	250	182.0	182.0	20.0
THS4304DGKR	VSSOP	DGK	8	2500	346.0	346.0	29.0

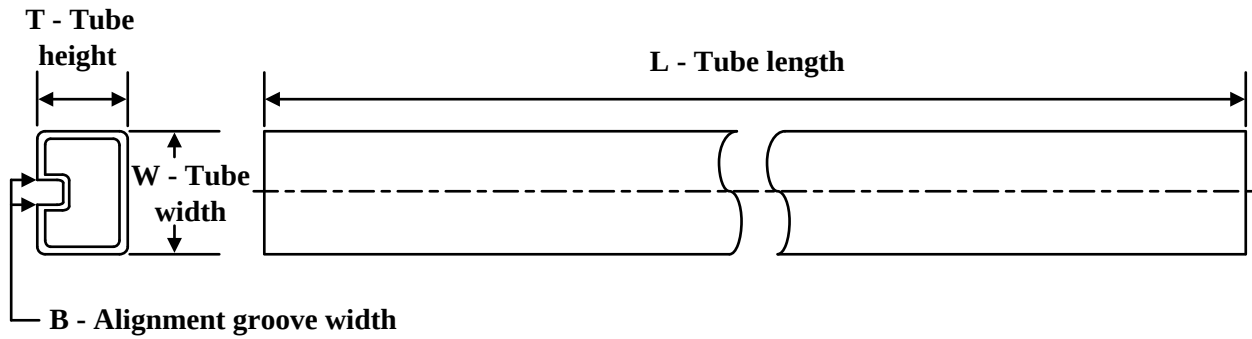TUBE


*All dimensions are nominal

Device	Package Name	Package Type	Pins	SPQ	L (mm)	W (mm)	T (μm)	B (mm)
THS4304D	D	SOIC	8	75	505.46	6.76	3810	4
THS4304D.B	D	SOIC	8	75	505.46	6.76	3810	4
THS4304DG4	D	SOIC	8	75	505.46	6.76	3810	4
THS4304DGK	DGK	VSSOP	8	80	274	6.2	2540	2.5
THS4304DGK.B	DGK	VSSOP	8	80	274	6.2	2540	2.5



PACKAGE OUTLINE

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT




1. Linear dimensions are in inches [millimeters]. Dimensions in parenthesis are for reference only. Controlling dimensions are in inches. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed .006 [0.15] per side.
4. This dimension does not include interlead flash.
5. Reference JEDEC registration MS-012, variation AA.

EXAMPLE BOARD LAYOUT


D0008A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT

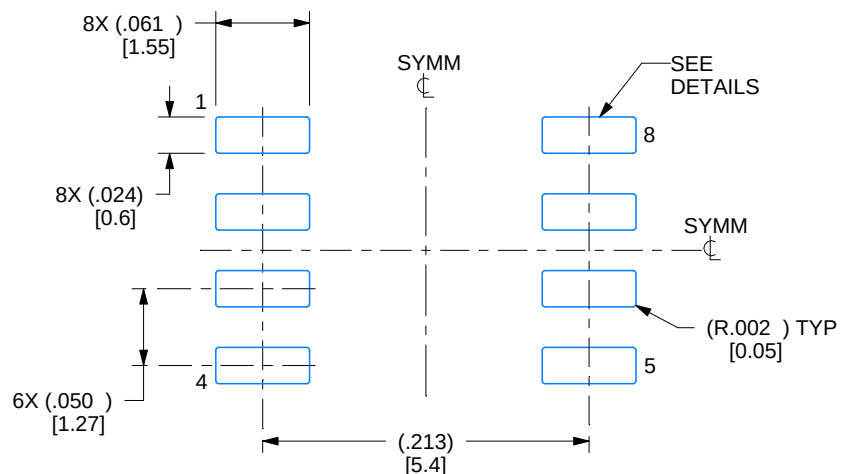

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE:8X

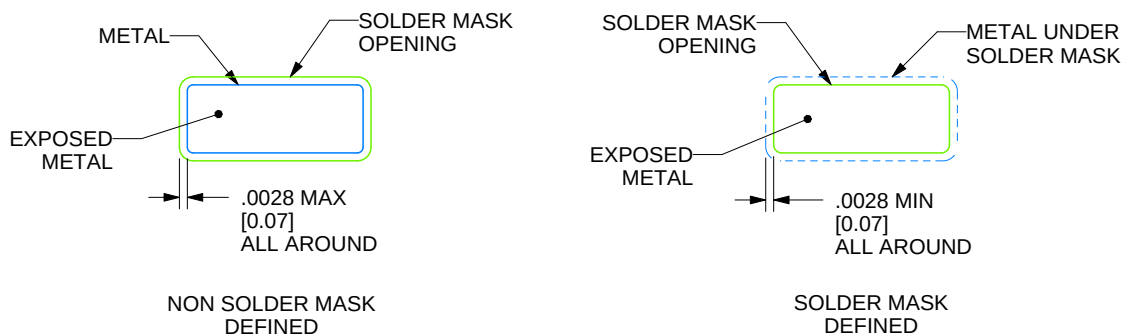

SOLDER MASK DETAILS

4214825/C 02/2019

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.


7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

EXAMPLE STENCIL DESIGN

D0008A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT

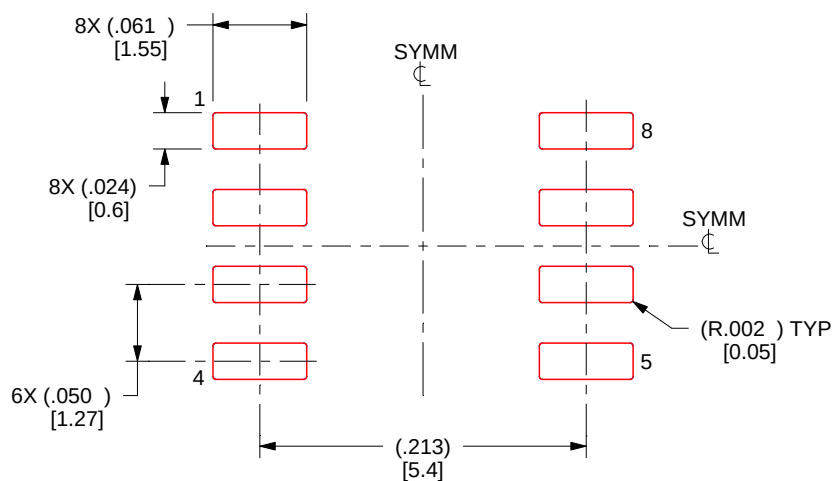

SOLDER PASTE EXAMPLE
BASED ON .005 INCH [0.125 MM] THICK STENCIL
SCALE:8X

4214825/C 02/2019

NOTES: (continued)


8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

EXAMPLE BOARD LAYOUT


DBV0005A

SOT-23 - 1.45 mm max height

SMALL OUTLINE TRANSISTOR

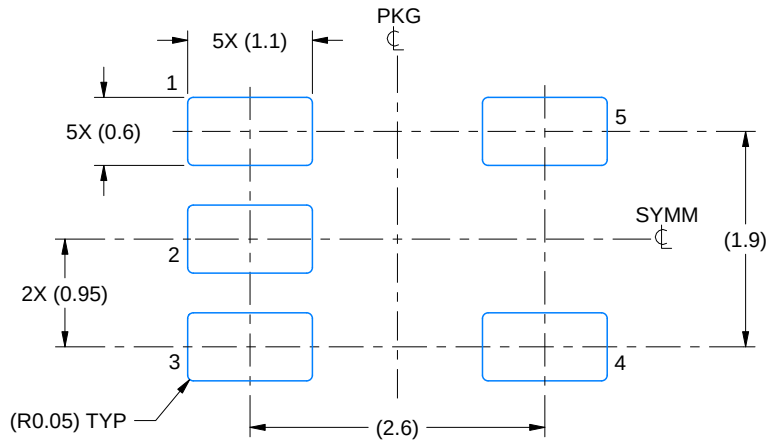

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE:15X

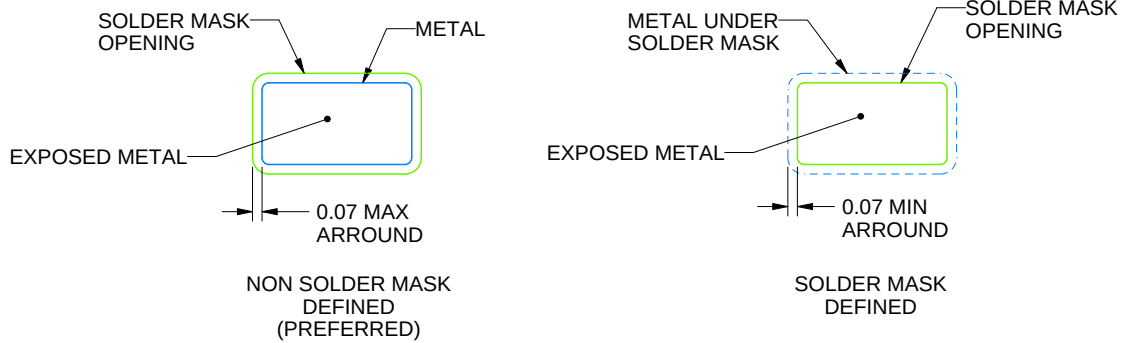

SOLDER MASK DETAILS

4214839/K 08/2024

NOTES: (continued)


6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

EXAMPLE STENCIL DESIGN

DBV0005A

SOT-23 - 1.45 mm max height

SMALL OUTLINE TRANSISTOR

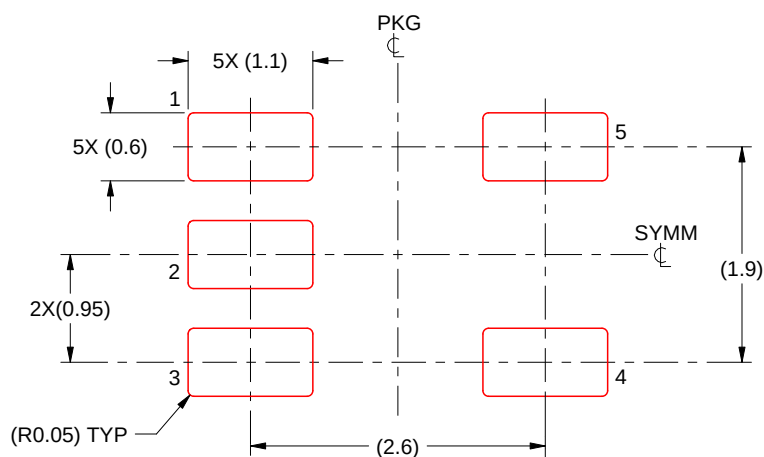

SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL
SCALE:15X

4214839/K 08/2024

NOTES: (continued)



8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.



VSSOP - 1.1 mm max height

Technical drawing of a 6-pin connector. The drawing includes a top view and a side view. The top view shows a rectangular component with six pins on the right side. Dimensions include a total width of 5.05 (typical) and 4.75, a pin pitch of 1.95 (2X), and a pin width of 0.65 (6X). A circular feature is labeled "PIN 1 INDEX AREA". The side view shows the component's profile with a height of 3.1 (typical) and 2.9, and a pin height of 0.38 (typical) and 0.25. A "SEATING PLANE" is indicated. Callouts A, B, and C are present. A table of values is provided at the bottom right.

⊕	0.13	Ⓜ	C	A	B
---	------	---	---	---	---

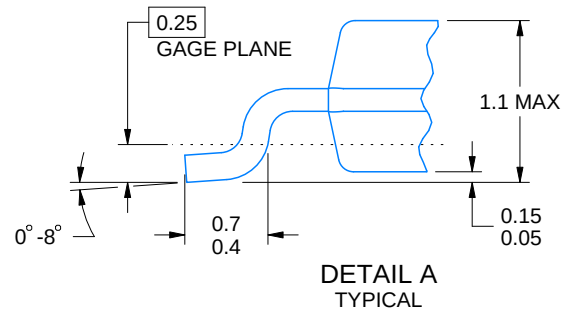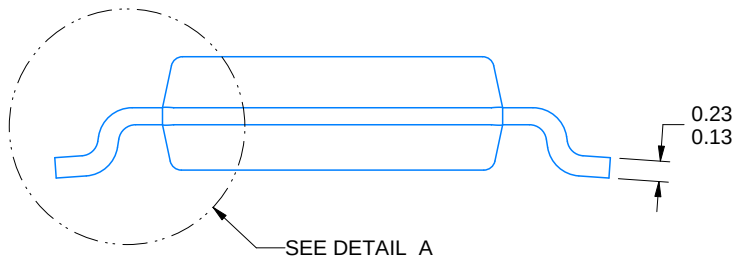


EXAMPLE BOARD LAYOUT


DGK0008A

TM VSSOP - 1.1 mm max height

SMALL OUTLINE PACKAGE

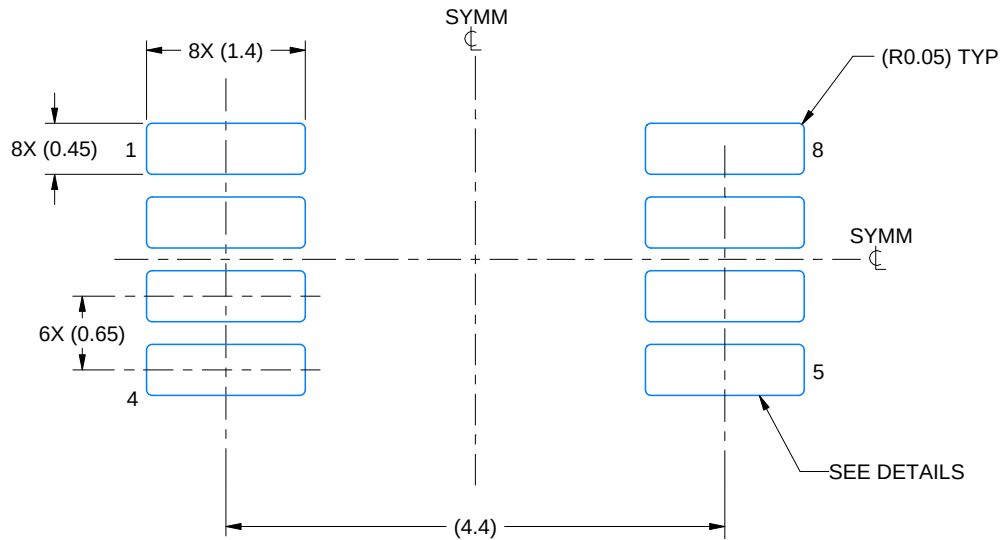

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE: 15X

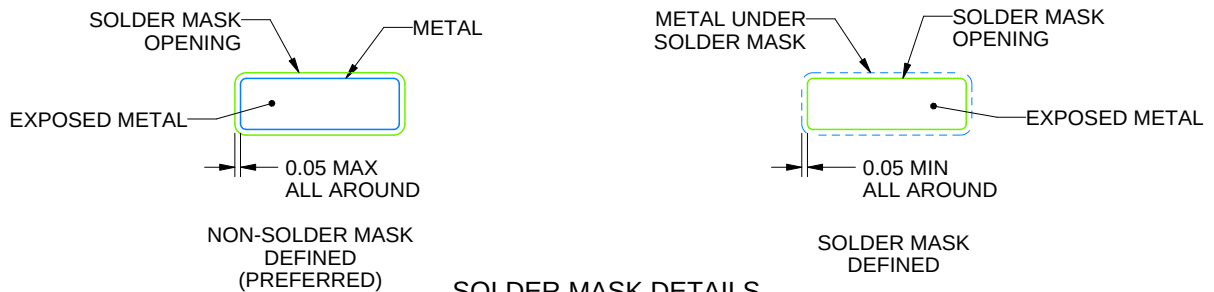

SOLDER MASK DETAILS

4214862/A 04/2023

NOTES: (continued)


6. Publication IPC-7351 may have alternate designs.
7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.
8. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.
9. Size of metal pad may vary due to creepage requirement.

EXAMPLE STENCIL DESIGN

DGK0008A

TM VSSOP - 1.1 mm max height

SMALL OUTLINE PACKAGE

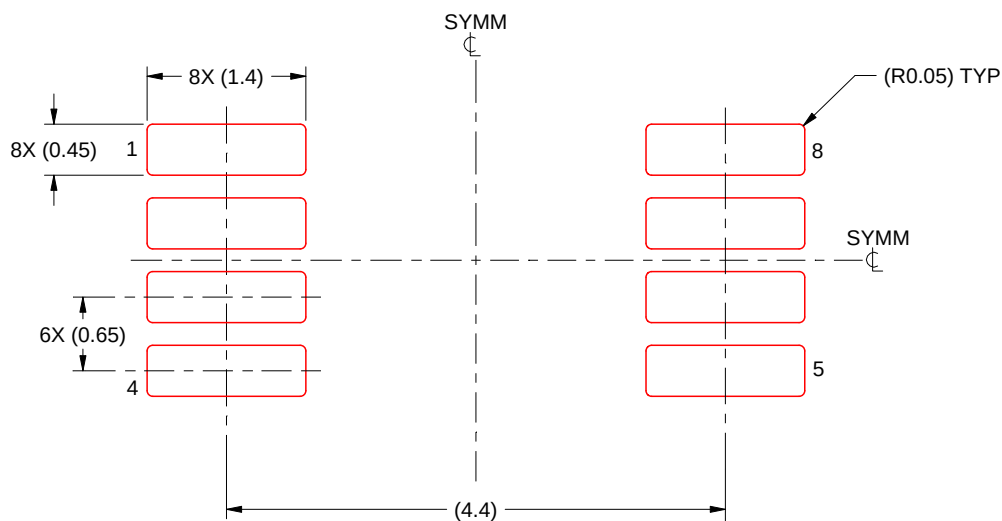

SOLDER PASTE EXAMPLE
SCALE: 15X

4214862/A 04/2023

NOTES: (continued)

11. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
12. Board assembly site may have different recommendations for stencil design.

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#), [TI's General Quality Guidelines](#), or other applicable terms available either on [ti.com](#) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2026, Texas Instruments Incorporated

Last updated 10/2025