


- Wide Bandwidth . . . Typ 100 MHz at -3 dB
  - Three Channels
  - 0 V to 4 V, Digital Level-Contrast Control
  - 0 V to 4 V, Digital Level-Gain Adjust Control
  - 20-Pin Plastic DIP for Small PCB Area Required
  - Fewer Peripheral Components Required Than for LM1203 Applications
  - Independent CLAMP(+) Adjustment to Each Channel

## description

The TLS1233 is a 100-MHz wide-band video preamplifier system intended for mid-to-high-resolution RGB (red-green-blue) color monitors. Each video amplifier (R, G, and B) contains a gain set for adjusting maximum system gain ( $A_V = 7.8$  V/V). The TLS1233 provides digital level-operated contrast, brightness, and gain adjustment control. All the control inputs offer high input impedance and an operation range from 0 V to 4 V for easy interface to the serial digital buses. Provided in a 20-pin plastic dual-in-line package (DIP), the TLS1233 integrates most of the external components required to accommodate the video system.

The TLS1233 operates from a 12-V supply and contains an internal input bias voltage. Also, the TLS1233 contains the feedback resistor required between output and CLAMP(–) for dc level holding. The device is characterized for operation from 0°C to 70°C.

## functional block diagram

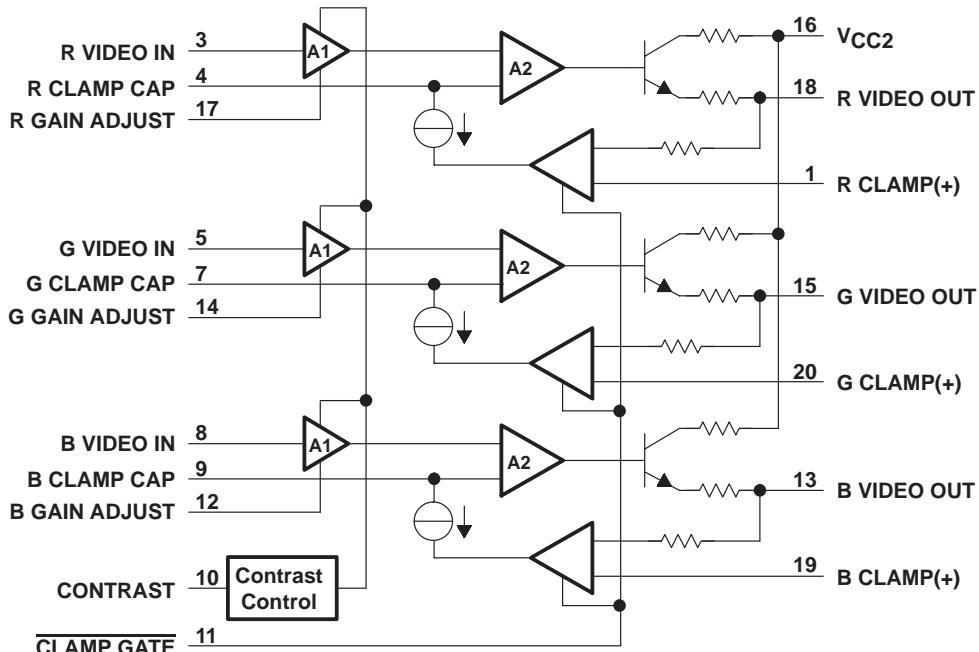

Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

**PRODUCTION DATA** information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

Copyright © 1996, Texas Instruments Incorporated




# TLS1233 VIDEO PREAMPLIFIER SYSTEM

SLVS126C – JULY 1995 – REVISED JUNE 1996

## TLS1233Y chip information

This chip, when properly assembled, displays characteristics similar to the TLS1233. Thermal compression or ultrasonic bonding may be used on the doped-aluminum bonding pads. The chips may be mounted with conductive epoxy or a gold-silicon preform.

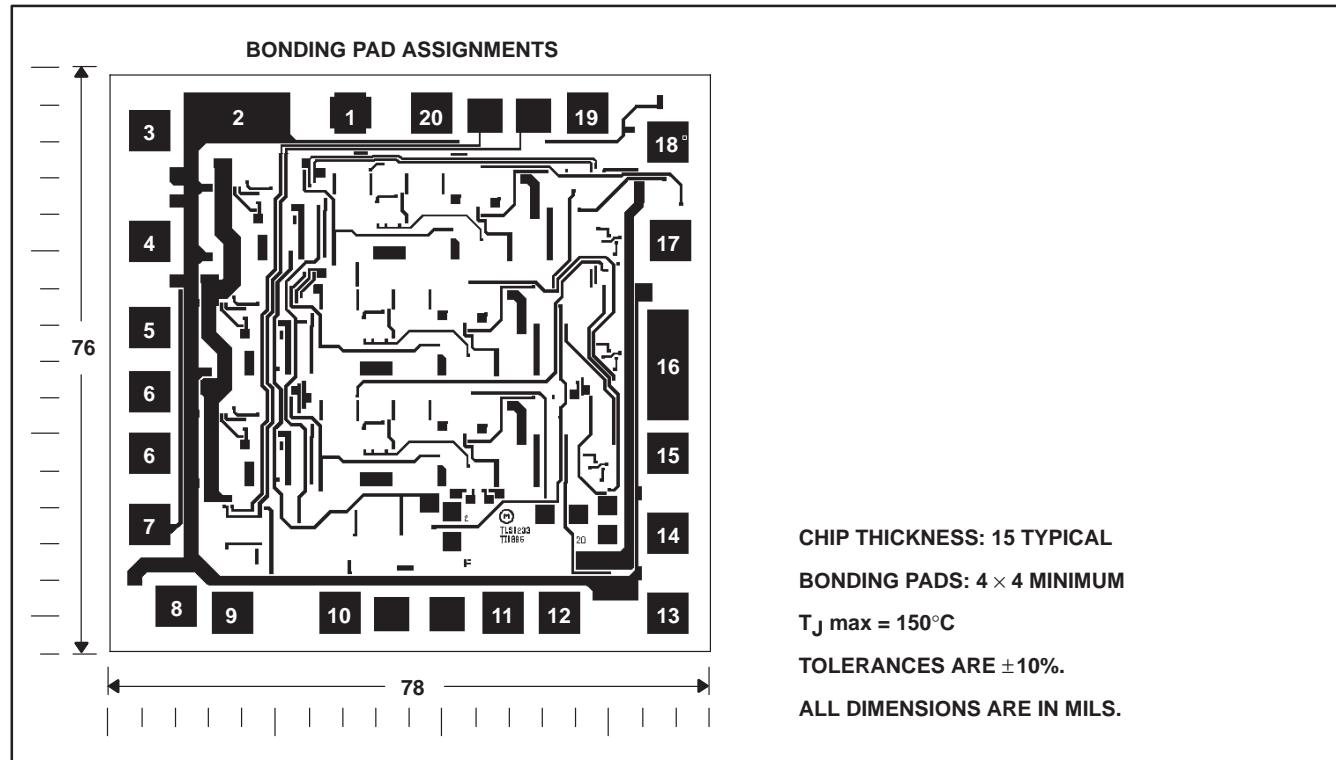

## absolute maximum ratings over operating free-air temperature range (unless otherwise noted)<sup>†</sup>

Supply voltage, $V_{CC}$ .....	13.5 V
Input voltage range, $V_I$ (see Note 1) .....	0 V to $V_{CC}$
Video output current, $I_O$ (per channel) .....	28 mA
Total power dissipation at (or below) 25°C free-air temperature (see Note 2) .....	1.87 W
Operating virtual junction temperature range, $T_J$ .....	-55°C to 150°C
Operating free-air temperature range, $T_A$ .....	0°C to 70°C
Storage temperature range, $T_{stg}$ .....	-65°C to 150°C
Lead temperature 1.6 mm (1/16 inch) from case for 10 seconds .....	260°C

<sup>†</sup> Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTES: 1. All  $V_{CC}$  terminals must be externally wired together to prevent internal damage during  $V_{CC}$  power-on/-off cycles.  
2. For operation above 25°C free-air temperature, derate linearly from 1.87 W ( $T_A = 25^\circ\text{C}$ ) to 1.2 W ( $T_A = 70^\circ\text{C}$ ). This equates to a derating factor of 15 mW/°C.

**recommended operating conditions**

		MIN	NOM	MAX	UNIT
Supply voltage, $V_{CC1}$ and $V_{CC2}$		11	12	13	V
High-level input voltage range, CLAMP GATE, $V_{IH}$	Clamp comparators off	2.4	5	5	V
Low-level input voltage range, CLAMP GATE, $V_{IL}$	Clamp comparators on	0	0.8	0.8	V
Operating free-air temperature, $T_A$		0	70	70	°C

**electrical characteristics at 25°C free-air temperature range, CLAMP GATE = 0 V, CLAMP(+) = 2 V, CONTRAST = R,G,B GAIN ADJUST = 4 V,  $V_{CC1} = V_{CC2} = 12$  V (see Figure 2) (unless otherwise noted)**


PARAMETER	ALTERNATE SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
$I_{CC}$	Supply current	$V_{CC1} + V_{CC2}$		84	94	mA
$V_{ref}$	Video input reference voltage	Measure R/G/B video input	2.1	2.3	2.5	V
$I_I$	Contrast and R,G,B GAIN ADJUST input current	Measure CONTRAST, R/G/B GAIN ADJUST		-0.5	-10	μA
$I_{IL}$	Clamp gate low input current	CLAMP GATE = 0 V		-0.5	-2.4	μA
$I_{IH}$	Clamp gate high input current	CLAMP GATE = 12 V	0.005	1	1	μA
	Clamp capacitor charge current	$I_K(chg)$ R,G,B CLAMP CAP = 0 V		1	1	mA
	Clamp capacitor discharge current	$I_K(dschg)$ R,G,B CLAMP CAP = 5 V		-1	-1	mA
$V_{OL}$	Low-level output voltage	R,G,B CLAMP CAP = 0 V	0.3	0.3	0.3	V
$V_{OH}$	High-level output voltage	R,G,B CLAMP CAP = 5 V	7.8	7.8	7.8	V
$V_{O(dif)}$	$V_{O(dif)}$	Between any two channels	±0.5	±50	±50	mV

**operating characteristics at 25°C free-air temperature, CLAMP GATE = 0 V, CLAMP(+) = 4 V, CONTRAST = R,G,B GAIN ADJUST = 4 V,  $f_I = 10$  kHz,  $V_{CC1} = V_{CC2} = 12$  V (unless otherwise noted)**

PARAMETER	ALTERNATE SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
$A_V(max)$	$A_{VMAX}$	CONTRAST = 4 V, $V_{I(PP)} = 700$ mV		7.8	7.8	V/V
$A_V(mid)$	$A_{VMID}$	CONTRAST = 2 V, $V_{I(PP)} = 700$ mV		2	2	V/V
Contrast voltage for minimum amplification	$V_{CONT-LOW}$	$V_{I(PP)} = 1$ V, See Note 3		1	1	V
Amplification match at $A_V(max)$	$A_{Vmax(dif)}$	CONTRAST = 4 V, See Note 4		±0.2	±0.2	dB
Amplification match at $A_V(mid)$	$A_{Vmid(dif)}$	CONTRAST = 2 V, See Note 3		±0.2	±0.2	dB
Amplification match at $A_V(low)$	$A_{Vlow(dif)}$	CONTRAST = $V_{CONT-LOW}$ , See Note 3 and 4		±0.2	±0.2	dB
THD	Total harmonic distortion	CONTRAST = 1 V, $V_{I(PP)} = 1$ V	0.5	0.5	0.5	%
BW	Amplifier bandwidth	$BW(-3$ dB)	CONTRAST = 4 V, See Notes 5 And 7	100	100	MHz
Crosstalk attenuation	$a_x$	CONTRAST = 4 V, $f = 10$ kHz, See Note 6		60	60	dB
		CONTRAST = 4 V, $f = 10$ MHz, See Notes 6 or 7		40	40	dB
Pulse test for rise time	$t_r$	CONTRAST = 4 V, CLAMP(+) = 2 V, $V_{O(PP)} = 4$ V	3	3	3	ns
Pulse test for fall time	$t_f$	See Notes 5 and 7	4	4	4	ns


- NOTES: 3. Determine  $V_{CONT-LOW}$  for -40 dB attenuation of output. Reference to  $A_V(max)$ .  
 4. Measure gain difference between any two amplifiers,  $V_{I(PP)} = 1$  V.  
 5. Adjust input frequency from 10 kHz ( $A_V(max)$  reference level) to the -3-dB corner frequency ( $f = 3$  dB).  $V_{I(PP)} = 700$  mV.  
 6.  $V_{I(PP)} = 700$  mV at  $f = 10$  kHz to any amplifier. Measure output levels of the other two undriven amplifiers relative to driven amplifier.  
 7. A special test fixture without a socket and a double-sided full-ground-plane PC board are required.

## PARAMETER MEASUREMENT INFORMATION

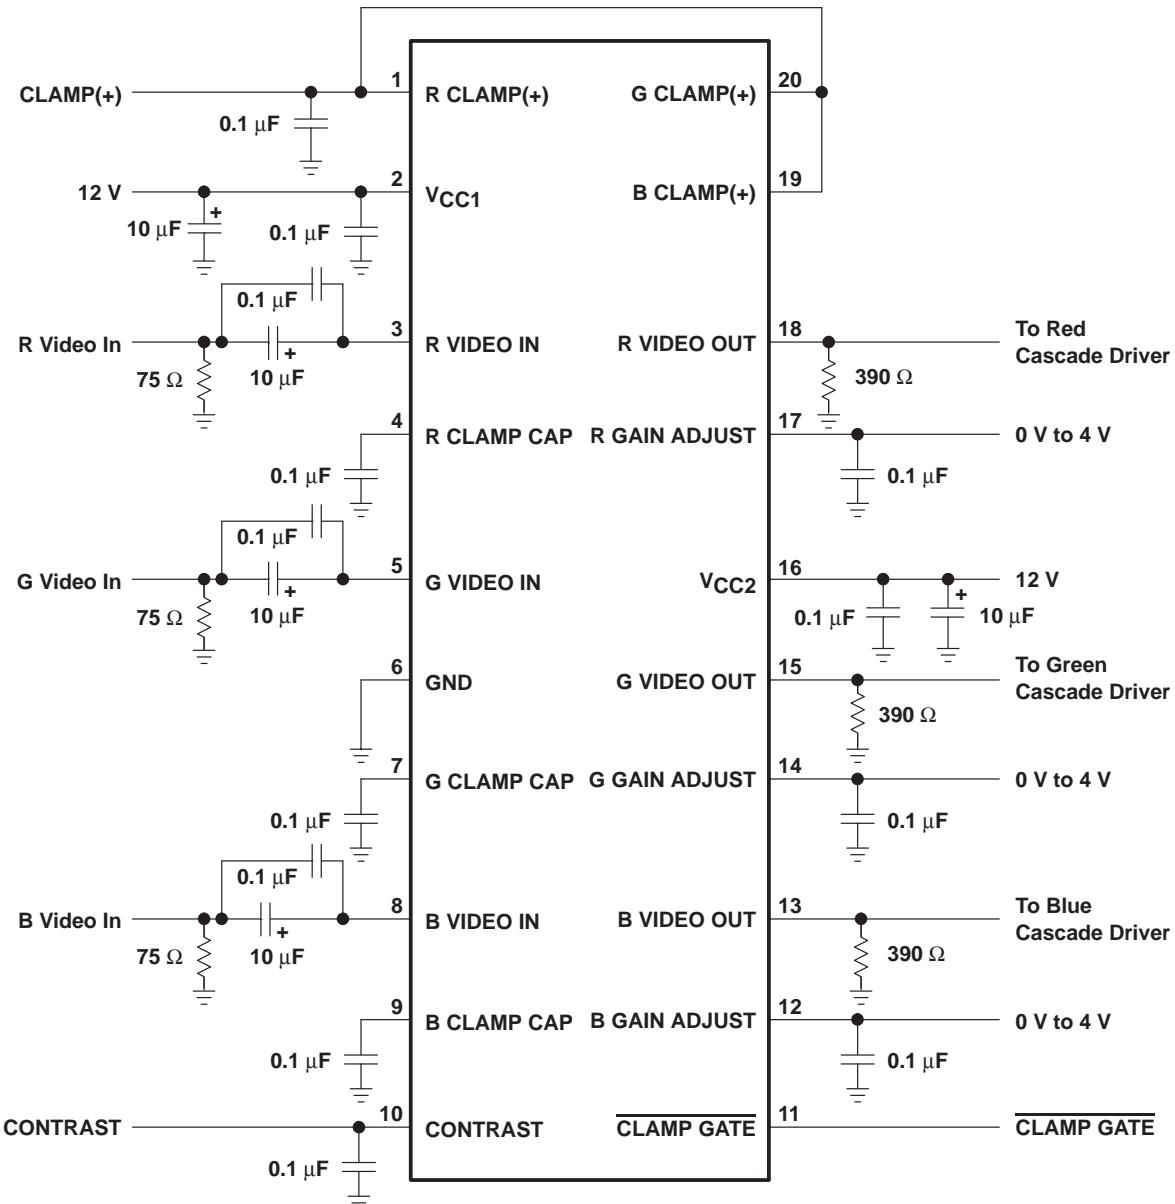

**Figure 1. Test Circuit**

## APPLICATION INFORMATION

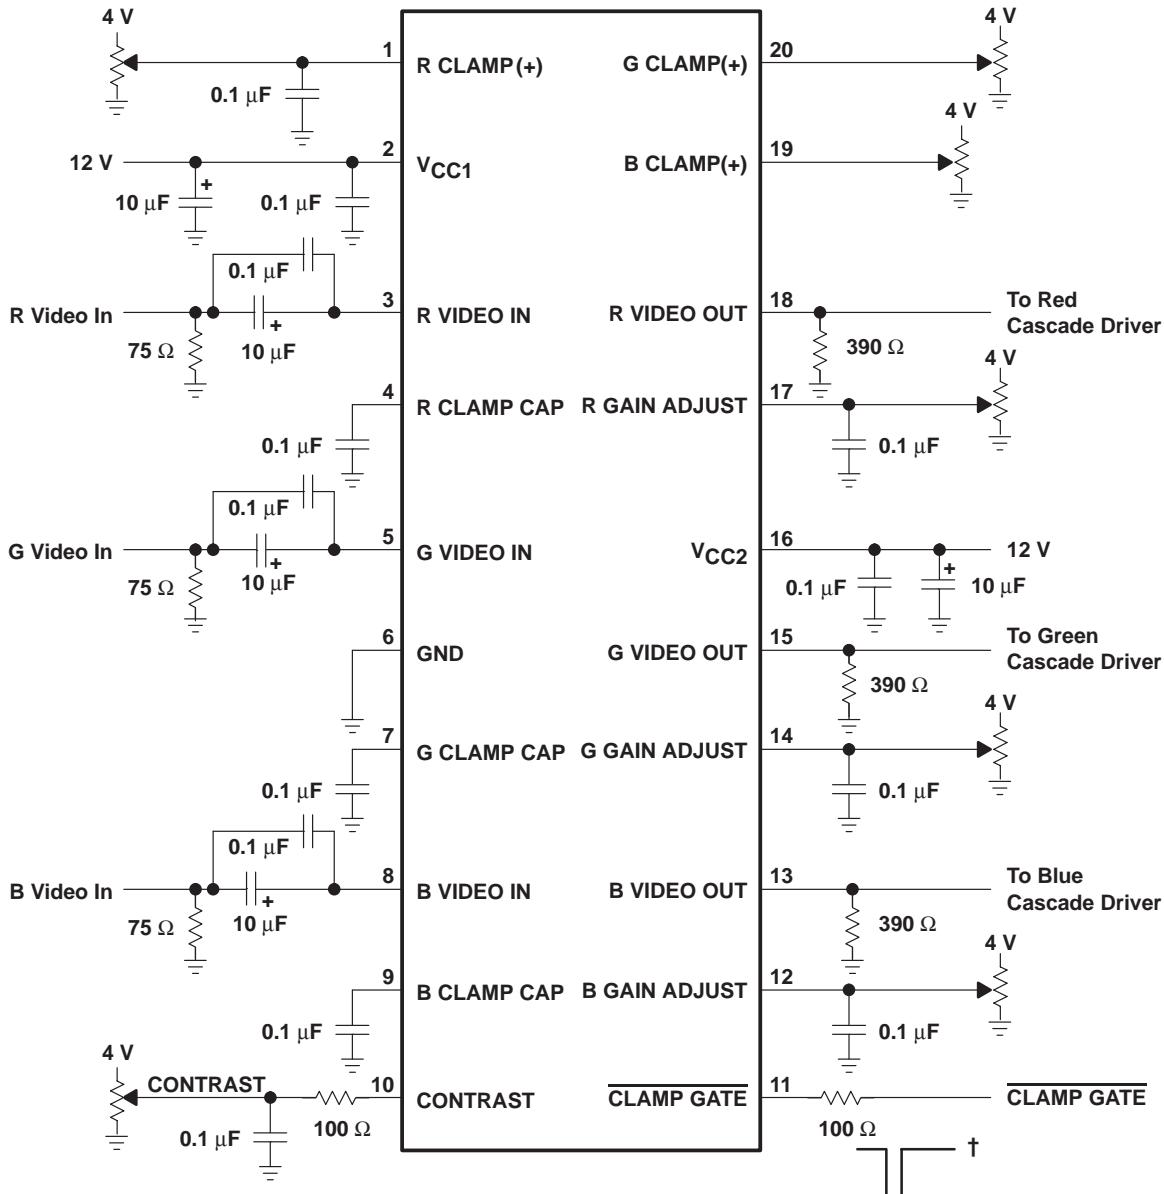

† Minimum pulse width: 300 ns

**Figure 2. Application Circuit**

# TLS1233


## VIDEO PREAMPLIFIER SYSTEM

SLVS126C – JULY 1995 – REVISED JUNE 1996

### MECHANICAL DATA

N (R-PDIP-T\*\*) 16 PIN SHOWN

PLASTIC DUAL-IN-LINE PACKAGE

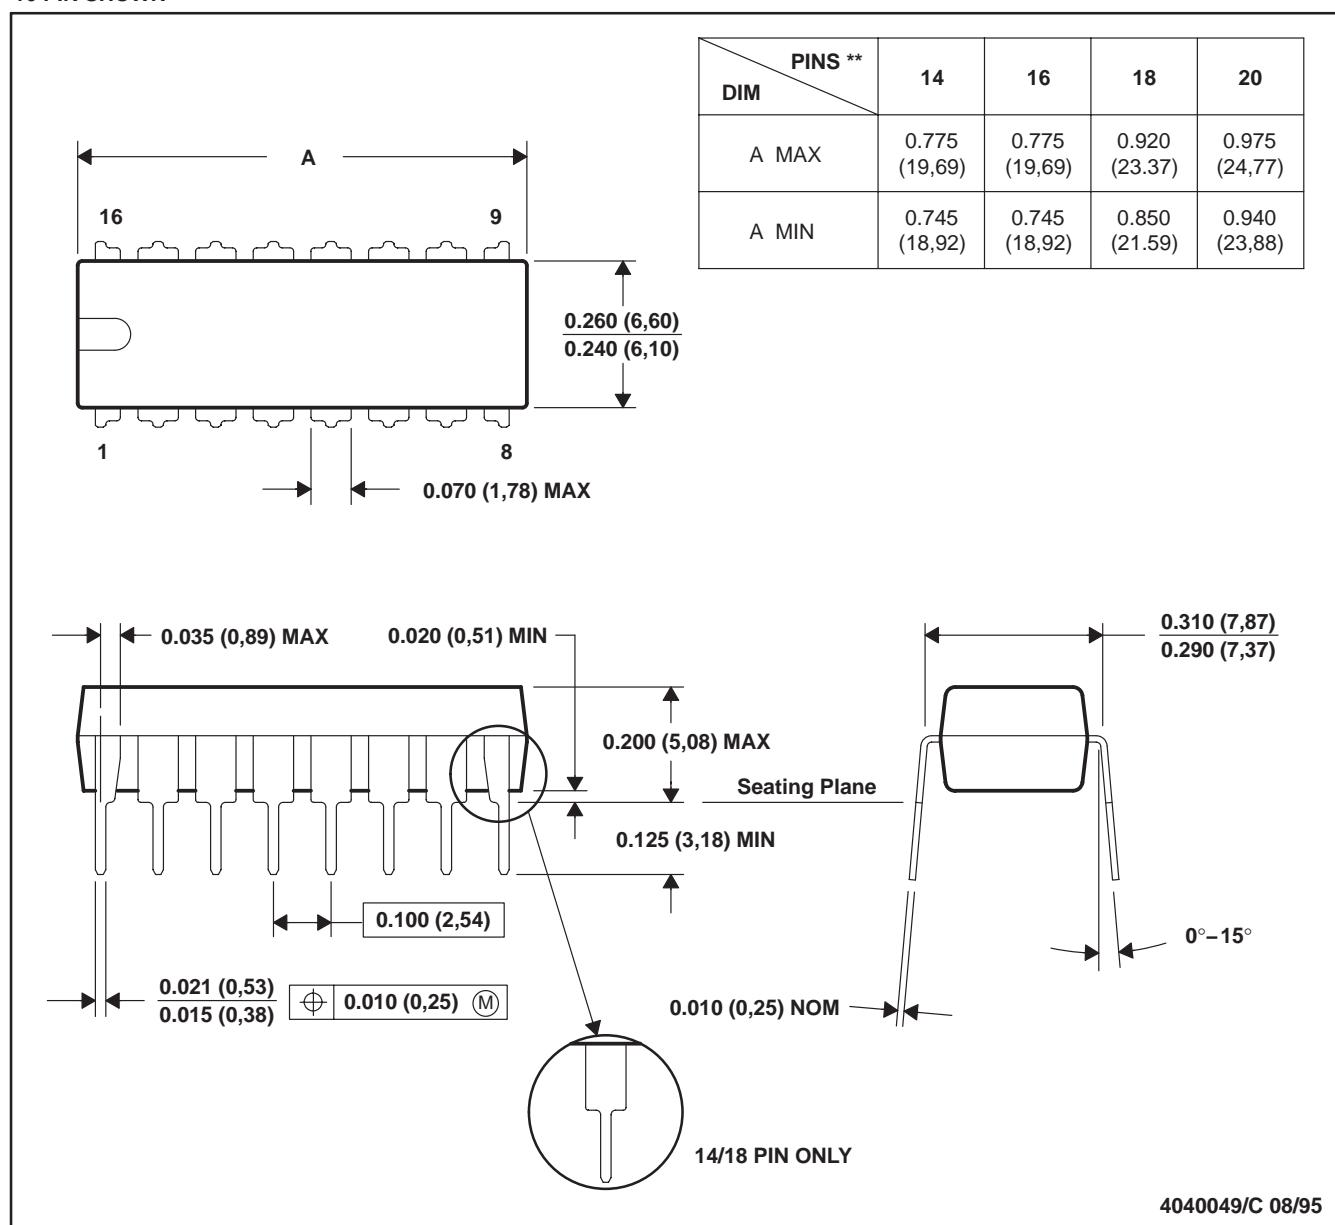

- NOTES: A. All linear dimensions are in inches (millimeters).  
 B. This drawing is subject to change without notice.  
 C. Falls within JEDEC MS-001 (20 pin package is shorter than MS-001.)

**PACKAGING INFORMATION**

Orderable part number	Status (1)	Material type (2)	Package   Pins	Package qty   Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
<b>TLS1233N</b>	Active	Production	PDIP (N)   20	20   TUBE	Yes	NIPDAU	N/A for Pkg Type	0 to 70	TLS1233N
TLS1233N.A	Active	Production	PDIP (N)   20	20   TUBE	Yes	NIPDAU	N/A for Pkg Type	0 to 70	TLS1233N

<sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).

<sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

<sup>(4)</sup> **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.


<sup>(5)</sup> **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

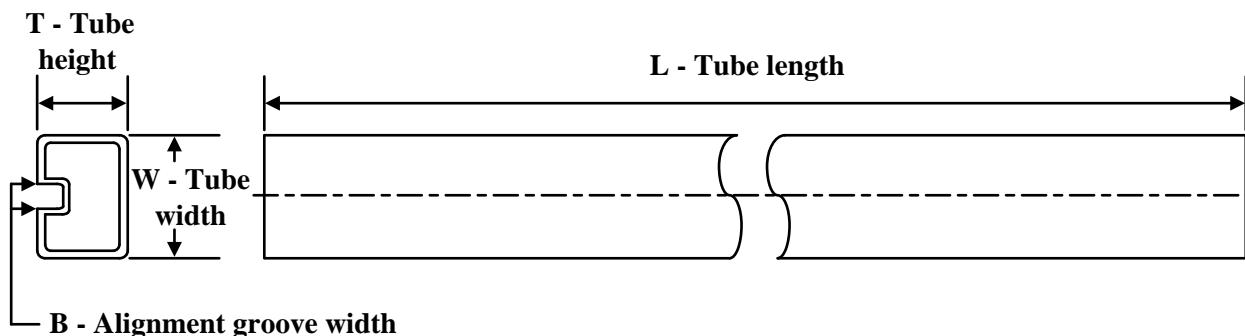**TUBE**


\*All dimensions are nominal

Device	Package Name	Package Type	Pins	SPQ	L (mm)	W (mm)	T (μm)	B (mm)
TLS1233N	N	PDIP	20	20	506	13.97	11230	4.32
TLS1233N.A	N	PDIP	20	20	506	13.97	11230	4.32

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#), [TI's General Quality Guidelines](#), or other applicable terms available either on [ti.com](#) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2026, Texas Instruments Incorporated

Last updated 10/2025