

±12-V Input, Next-Generation, Reinforced Isolated Amplifier for Voltage Sensing



Introduction

In high-voltage industrial applications in order to determine power and energy, both high-side voltage and current have to be measured. The voltage can be measured using a resistor divider circuit followed by an isolated amplifier. Texas Instruments offers a wide variety of basic and reinforced isolated amplifiers optimized for voltage and current sensing.

The ISO224, next generation ISO12x, is a high-precision reinforced isolated amplifier designed for isolated voltage sensing of ±10-V signals which are widely used in high-voltage industrial applications. The device features a very high input resistance, ideal for voltage sensing applications, and offers improved isolation ratings, higher performance, and simplified system-level design and diagnostics.

Typical applications include but not limited to:

- [Analog Input Modules](#)
- [AC Analog Input Modules](#)
- [Compact Relays](#)
- [Rail Transport](#)
- [Inverter and Motor Control](#)

Figure 1 shows ISO224 implementation in power line monitoring.

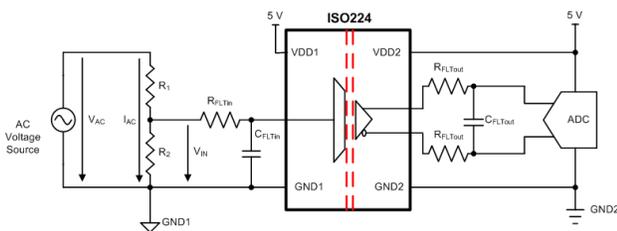


Figure 1. AC Voltage Sensing with the ISO224

ISO224 Improved Isolation Ratings

With TI's *Capacitive Isolation Technology* that enables higher working voltages and the longest insulation barrier lifetimes, engineers can now design more robust and reliable systems. The ISO224 is fully-certified per DIN VDE V 0884-11 and UL1577, can withstand an isolation working voltage breakdown of 1500 V_{RMS} , and provides reinforced galvanic isolation of 7071 kVpeak.

The device also features high CMTI of 80 kV/μs (typ) to maintain safe operation and ensure data integrity in the presence of high common mode transients.

Table 1. Isolation Ratings

Parameter	ISO124	ISO224
Isolation Working Voltage (max) (V_{RMS}) per DIN VDE V 0884-11	not specified	1500
Isolation Transient Overvoltage (max) (V_{PEAK})	2100	7071
Surge Isolation Voltage (max) (V_{PEAK})	4000	12800
CMTI (typ) (kV/μs)	not specified	80

Higher Performance with the ISO224

The ISO224 is offered in 2 grades of performance and enables more stable and accurate measurements over extended industrial temperature range that allow engineers to design high-precision systems and overcome current performance limitations.

The ISO224 offers:

- More accurate measurements with lower offset and gain error
- Lower impact of signal source impedance on overall gain error with higher input resistance of 1 MΩ (min)
- Higher temperature stability with lower offset and gain error drift over a wider temperature range
- Faster system response for broader use range with wider output bandwidth

Table 2. Electrical Parameters

Parameter	ISO124	ISO224A	ISO224B
Input Resistance (typ) (MΩ)	0.2	1.25	1.25
Input Offset (max) (mV)	±50	±50	±5
Input Offset Drift (max) ($\mu V/^\circ C$)	±200 (typ)	±60	±15
Gain Error (max) (%)	±0.5	±1	±0.3
Gain Error Drift (max) (ppm/°C)	±10 (typ)	±60	±35
Output BW (typ) (kHz)	50	185	275
Temperature Range (°C)	-25 to 85	-55 to 125	-55 to 125

ISO224 System-Level Improvement

The ISO224 operates of a single supply on the high-side, features an integrated voltage detection, an reduces the board space.

ISO224 offers:

- Simplified design of isolated power supply and reduced system size and cost due to unipolar high-side supply VDD1
- Simplified system-level diagnostics with the ISO224 fail-safe mode, integrated voltage detection feature, that activates when the high-side supply VDD1 is missing
- Reduced board space due to fully-differential output structure that supports direct connectivity to an ADCs with 5 V input
- Reduced board space as a result of 60%+ smaller package

Table 3. Operating Conditions and Package Information

Parameter	ISO124	ISO224
Power Supply	Bipolar	Unipolar
VDD1 (V)	±15	4.5-18 (LDO)
VDD2 (V)	±15	4.5-5.5
Input Voltage Range (V)	±10 / (FSR: ±12.5)	±12 (FSR: ±12.3)
Fail Safe Mode	No	Yes
Output	Single-ended	Differential
Output Voltage Range (V)	±10	±4
Package	17.9 mm × 7.5 mm (PDIP-16)	5.85 mm x 7.50 mm (SOIC-8)
	20.01 mm × 6.61 mm (SOIC-28)	

Conclusion

With isolated amplifiers being a key components in high-voltage industrial applications, it is critical to choose the devices that not only meet the performance requirements, but also provide the highest reliability and support the longest lifetime in harsh environments. The ISO224 offers designers all of the benefits of reinforced isolation with higher working voltages and longer lifetimes, supports more stable and accurate measurements over extended temperature range, and reduces the board space for compact designs.

References

- [ISO224 Fail-Safe Output Feature Application Report](#)
- [±12-V Voltage Sensing Circuit With an Isolated Amplifier and Differential Input SAR ADC Application Report](#)
- [Isolated Amplifiers Overview](#)
- [TI Precision Labs - Isolation](#)

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#) or other applicable terms available either on [ti.com](#) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2022, Texas Instruments Incorporated