

# TPS2595xx 2.7V 至 18V、4A、34mΩ 电子保险丝，具有快速过压保护

## 1 特性

- 宽输入电压范围：2.7V 至 18V
  - 绝对最大值为 20V
  - TPS2595x5 版本：3V 至 18V
- 低导通电阻： $R_{ON} = 34m\Omega$ （典型值）
- 快速过压保护钳位（3.8V、5.7V 和 13.7V），响应时间  $5\mu s$ （典型值）
- TPS2595x0、TPS2595x1、TPS2595x5：带有可调节欠压锁定 (UVLO) 的高电平有效使能输入
- TPS2595x3：带有可调节过压锁定 (OVLO) 的低电平有效使能输入
- 配备负载电流监控器输出 (ILM) 的可调节电流限制
  - 电流范围：0.5A 至 4A
  - 电流限制准确度： $\pm 7.5\%$
- 可调节的输出转换率控制 (dVdt)
- 过热保护 (OTP)
- 故障指示引脚 ( $\overline{FLT}$ )
- UL 2367 认证 – 文件号 E169910
  - $R_{ILM} \geq 487\Omega$ （最大电流 4.42A）
- IEC 62368-1 认证
- 单点故障测试期间安全 (IEC 62368-1)
  - ILM 引脚断开/短路检测

## 2 应用

- 热插拔
- 适配器供电型系统
- 多功能打印机
- 固态硬盘 (SSD) 和硬盘 (HDD)
- 工业系统
- 白色家电
- 机顶盒
- 数字电视

## 3 说明

TPS2595xx 系列电子保险丝（集成式 FET 热插拔设备）是小型封装内高度集成电路的保护和电源管理解决方案。这些设备只需很少的外部组件即可提供多种保护模式，能够非常有效地抵御过载、短路、电压浪涌和过多浪涌电流。

输出电流限制级别可通过单个外部电阻设定。还可能通过测量整个电流限制电阻的压降实现对输出负载电流的准确感应。对浪涌电流有特别要求的应用可以通过单个外部电容器设定输出转换率。过压事件由内部钳位电路快速限制在一个安全的固定最大值，而无需外部组件。TPS259573 型号提供可以设置用户定义过压截止阈值的选项。

在 TPS2595x5 型号中，可通过将 OUT 引脚连接到 QOD 引脚实施快速输出放电功能。


这些器件的独特运行温度范围为  $-40^{\circ}C$  至  $+125^{\circ}C$ 。

器件信息(1)


器件型号	封装	封装尺寸（标称值）
TPS2595xxDSG	WSON (8)	2.00mm x 2.00mm

(1) 如需了解所有可用封装，请参阅数据表末尾的可订购产品附录。

简化原理图

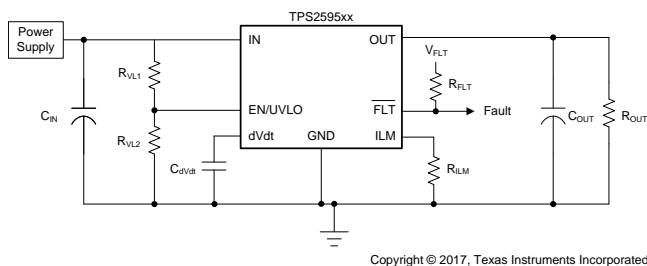

TPS25953x 过压钳位响应时间

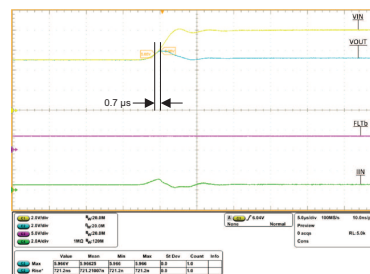

## 目录

<b>1</b>	特性 .....	<b>1</b>	8.4	Device Functional Modes .....	<b>25</b>
<b>2</b>	应用 .....	<b>1</b>	<b>9</b>	<b>Application and Implementation</b> .....	<b>27</b>
<b>3</b>	说明 .....	<b>1</b>	9.1	Application Information .....	<b>27</b>
<b>4</b>	修订历史记录 .....	<b>2</b>	9.2	Typical Application .....	<b>27</b>
<b>5</b>	<b>Device Comparison Table</b> .....	<b>3</b>	<b>10</b>	<b>Power Supply Recommendations</b> .....	<b>33</b>
<b>6</b>	<b>Pin Configuration and Functions</b> .....	<b>4</b>	10.1	Transient Protection .....	<b>33</b>
<b>7</b>	<b>Specifications</b> .....	<b>5</b>	10.2	Output Short-Circuit Measurements .....	<b>34</b>
7.1	Absolute Maximum Ratings .....	<b>5</b>	<b>11</b>	<b>Layout</b> .....	<b>34</b>
7.2	ESD Ratings .....	<b>5</b>	11.1	Layout Guidelines .....	<b>34</b>
7.3	Recommended Operating Conditions .....	<b>5</b>	11.2	Layout Example .....	<b>35</b>
7.4	Thermal Information .....	<b>6</b>	<b>12</b>	器件和文档支持 .....	<b>36</b>
7.5	Electrical Characteristics .....	<b>7</b>	12.1	文档支持 .....	<b>36</b>
7.6	Switching Characteristics .....	<b>8</b>	12.2	接收文档更新通知 .....	<b>36</b>
7.7	Typical Characteristics .....	<b>10</b>	12.3	社区资源 .....	<b>36</b>
<b>8</b>	<b>Detailed Description</b> .....	<b>18</b>	12.4	商标 .....	<b>36</b>
8.1	Overview .....	<b>18</b>	12.5	静电放电警告 .....	<b>36</b>
8.2	Functional Block Diagram .....	<b>18</b>	12.6	术语表 .....	<b>36</b>
8.3	Feature Description .....	<b>18</b>	<b>13</b>	机械、封装和可订购信息 .....	<b>37</b>

## 4 修订历史记录

<b>Changes from Revision B (March 2018) to Revision C</b>		<b>Page</b>
•	已添加 将 (IEC 62368-1) 添加到特性 部分中的单点故障测试期间安全 .....	<b>1</b>
•	Changed UL 60950 to IEC 62368-1 in the Specifications <i>Electrical Characteristics</i> table .....	<b>5</b>

<b>Changes from Revision A (December 2017) to Revision B</b>		<b>Page</b>
•	已更改 multiplication symbol to an equal symbol before 229.2 mW in 公式 15 .....	<b>29</b>


<b>Changes from Original (June 2017) to Revision A</b>		<b>Page</b>
•	将状态从预告信息更改成了生产数据 .....	<b>1</b>

## 5 Device Comparison Table


DEVICE NUMBER	OUTPUT VOLTAGE CLAMP	RESPONSE TO THERMAL SHUTDOWN (TSD)	ENABLE	QUICK OUTPUT DISCHARGE
TPS259520DSG	3.8 V (typ)	Latch-off	Active high	No
TPS259521DSG	3.8 V (typ)	Auto-retry	Active high	No
TPS259530DSG	5.7 V (typ)	Latch-off	Active high	No
TPS259531DSG	5.7 V (typ)	Auto-retry	Active high	No
TPS259533DSG	5.7 V (typ)	Auto-retry	<b>Active low</b>	No
TPS259540DSG	13.7 V (typ)	Latch-off	Active high	No
TPS259541DSG	13.7 V (typ)	Auto-retry	Active high	No
TPS259570DSG	No OV clamp	Latch-off	Active high	No
TPS259571DSG	No OV clamp	Auto-retry	Active high	No
TPS259573DSG	Programmable Overvoltage Lockout	Auto-retry	<b>Active low</b>	No
TPS259525DSG	3.8 V (typ)	Auto-retry	Active high	<b>Yes</b>
TPS259535DSG	5.7 V (typ)	Auto-retry	Active high	<b>Yes</b>

## 6 Pin Configuration and Functions


**TPS2595x0/1 DSG Package  
8-Pin WSON  
Top View**

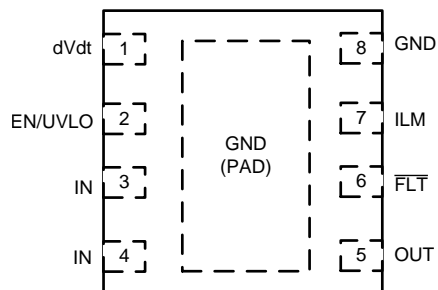

**TPS2595x5 DSG Package  
8-Pin WSON  
Top View**

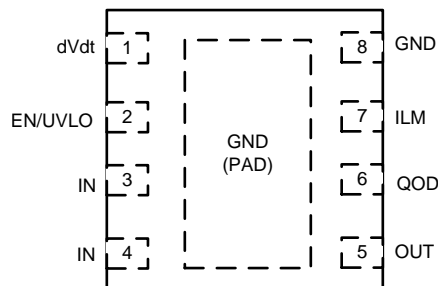

**TPS2595x3 DSG Package  
8-Pin WSON  
Top View**

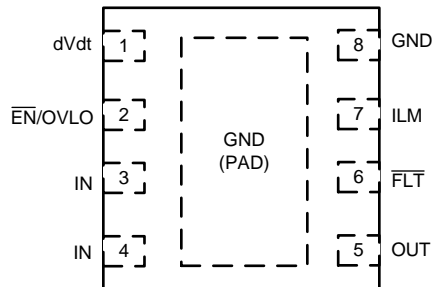

### Pin Functions

PIN		TYPE	DESCRIPTION
NO.	NAME		
1	dVdt	Analog I/O	A capacitor from this pin to GND sets the output turn on slew rate. Leave this pin floating for the fastest turn on slew rate. (See <a href="#">Switching Characteristics</a> ).
2	EN/UVLO	Analog input	Active high enable for the <b>TPS2595x0</b> , <b>TPS2595x1</b> , <b>TPS2595x5</b> variants. A resistor divider can be used to adjust the undervoltage lockout threshold. Do not leave floating.
	$\overline{\text{EN/OVLO}}$		Active low enable for the <b>TPS2595x3</b> variants. A resistor divider can be used to adjust the overvoltage lockout threshold. Do not leave floating.
3,4	IN	Power	Power input
5	OUT	Power	Power output
6	$\overline{\text{FLT}}$	Digital output	<b>TPS2595x0</b> , <b>TPS2595x1</b> , <b>TPS2595x3</b> : Fault event indicator which is pulled low when a fault is detected. It is an open drain output that requires an external pull up resistance.
	QOD		<b>TPS2595x5</b> : Quick Output Discharge Pin, when tied to OUT directly or through external resistor.
7	ILM	Analog I/O	This is a dual function pin used to limit and monitor the output current. An external resistor from this pin to GND sets the output current limit. The pin voltage can also be used to monitor the output load current. Do not leave floating.
8	GND	Ground	Ground
PAD	GND	Thermal/Ground	The exposed pad is used primarily for heat dissipation and must be connected to GND.

## 7 Specifications

### 7.1 Absolute Maximum Ratings

Over operating free-air temperature range (unless otherwise noted)<sup>(1)</sup>

			MIN	MAX	UNIT
V <sub>IN</sub>	Maximum input voltage	IN	-0.3	20	V
V <sub>OUT</sub>	Maximum output voltage	OUT	-0.3	V <sub>IN</sub> + 0.3	V
V <sub>OUT,PLS</sub>	Minimum output voltage pulse (< 1 μs)	OUT	-1.2		V
V <sub>EN</sub>	Maximum enable pin voltage	EN/UVLO or EN/OVLO	-0.3	7	V
V <sub>FLTB</sub>	Maximum fault pin voltage (TPS2595x0/1/3)	FLT	-0.3	7	V
V <sub>QOD</sub>	Maximum QOD pin voltage (TPS2595x5)	QOD	-0.3	7	V
V <sub>dVdt</sub>	Maximum dVdt pin voltage	dVdt		2.5	V
I <sub>FLTB</sub>	Maximum fault pin sink current	FLT		10	mA
I <sub>MAX</sub>	Maximum continuous switch current	IN to OUT	Internally limited		
T <sub>J,MAX</sub>	Maximum junction temperature		Internally limited		
T <sub>LEAD</sub>	Maximum lead temperature			300	°C
T <sub>STG</sub>	Storage temperature		-65	150	°C

- (1) Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under *Recommended Operating Conditions*. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

### 7.2 ESD Ratings

		VALUE	UNIT
V <sub>(ESD)</sub>	Electrostatic discharge	Human-body model (HBM), per ANSI/ESDA/JEDEC JS-001 <sup>(1)</sup>	V
		Charged-device model (CDM), per JEDEC specification JESD22-C101 <sup>(2)</sup>	
		±2500	
		±500	

- (1) JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.

- (2) JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.

### 7.3 Recommended Operating Conditions

Over operating free-air temperature range (unless otherwise noted)

			MIN	MAX	UNIT
V <sub>IN</sub>	Input voltage range (TPS2595x0/1/3)	IN	2.7	18 <sup>(1)</sup>	V
V <sub>IN</sub>	Input voltage range (TPS2595x5)	IN	3.0	18 <sup>(1)</sup>	V
V <sub>OUT</sub>	Output voltage	OUT	0	V <sub>IN</sub> + 0.3	V
V <sub>EN</sub>	Enable pin voltage	EN/UVLO or EN/OVLO	0	6 <sup>(2)</sup>	V
V <sub>FLTB</sub>	Fault pin voltage (TPS2595x0/1/3)	FLT	0	6	V
V <sub>QOD</sub>	Fault pin voltage (TPS2595x5)	QOD	0	6	V
I <sub>MAX</sub>	Continuous output current (T <sub>J</sub> = -40 to 125°C)	IN to OUT		4	A
	Continuous output current (T <sub>J</sub> = -40 to 105°C)	IN to OUT		5 <sup>(3)</sup>	A
R <sub>ILM</sub>	ILM pin resistance (Active Current Limiting Operation)	ILM	487	5000	Ω
C <sub>dVdt</sub>	dVdt capacitor value	dVdt	3300		pF
V <sub>dVdt</sub>	dVdt pin capacitor voltage rating	dVdt	4		V
T <sub>J</sub>	Operating junction temperature		-40	125	°C

- (1) The nominal input voltage should be limited to the output clamp voltage for the selected device option as listed in the Electrical Characteristics section

- (2) For supply voltages below 6V, it is okay to pull up the EN pin to IN directly. For supply voltages greater than 6V, it is recommended to use an appropriate resistor divider between IN, EN and GND to ensure the voltage at the EN pin is within the specified limits.

- (3) Guaranteed by design. Not tested at production.

## 7.4 Thermal Information

THERMAL METRIC <sup>(1)</sup>		TPS2595x	UNIT
		DSG (WSON)	
		8 PINS	
$R_{\theta JA}$	Junction-to-ambient thermal resistance	65.6	°C/W
$R_{\theta JC(top)}$	Junction-to-case (top) thermal resistance	73.3	°C/W
$R_{\theta JB}$	Junction-to-board thermal resistance	28.3	°C/W
$\Psi_{JT}$	Junction-to-top characterization parameter	2	°C/W
$\Psi_{JB}$	Junction-to-board characterization parameter	28.4	°C/W
$R_{\theta JC(bot)}$	Junction-to-case (bottom) thermal resistance	9.8	°C/W

(1) For more information about traditional and new thermal metrics, see the [Semiconductor and IC Package Thermal Metrics](#) application report.

## 7.5 Electrical Characteristics

(Test conditions unless otherwise noted)  $-40^{\circ}\text{C} \leq T_J \leq 125^{\circ}\text{C}$ ,  $V_{\text{IN}} = 12\text{ V}$  for TPS25954x/7x,  $V_{\text{IN}} = 5\text{ V}$  for TPS25953x,  $V_{\text{IN}} = 3.3\text{ V}$  for TPS25952x,  $V_{\text{EN}} = 5\text{ V}$  ( $= 0\text{ V}$  for TPS2595x3 only),  $R_{\text{ILM}} = 487\ \Omega$ ,  $C_{\text{dVdT}} = \text{Open}$ ,  $\text{OUT} = \text{Open}$ . All voltages referenced to GND.

PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
<b>INPUT SUPPLY (IN)</b>							
$I_{\text{Q}}$	IN quiescent current	TPS2595x0/1/5	$V_{\text{EN}} \geq V_{\text{UVLO}}$	175	250		$\mu\text{A}$
		TPS2595x3	$V_{\text{EN}} \leq V_{\text{OVLO}}$				
$I_{\text{SD}}$	IN shutdown current	TPS2595x0/1/5	$V_{\text{EN}} < 0.5\text{ V}$	$V_{\text{IN}} \leq 5\text{ V}$	0.04		$\mu\text{A}$
				$5\text{ V} < V_{\text{IN}} \leq 18\text{ V}$	0.45	2	$\mu\text{A}$
		TPS2595x3	$V_{\text{EN}} > 2\text{ V}$		45	65	$\mu\text{A}$
$V_{\text{UVP}}$	IN Undervoltage Protection Threshold	TPS2595x5	$V_{\text{IN}}$ Rising	2.7	2.8	2.9	V
		TPS2595x5	$V_{\text{IN}}$ Falling	2.58	2.68	2.78	V
		TPS2595x0/1/3	$V_{\text{IN}}$ Rising	2.44	2.54	2.64	V
		TPS2595x0/1/3	$V_{\text{IN}}$ Falling	2.33	2.43	2.53	V
<b>OUTPUT VOLTAGE CLAMP (OUT)</b>							
$V_{\text{OVC}}$	Overvoltage clamp threshold <sup>(1)</sup>	TPS25952x	$V_{\text{IN}}$ Rising, $R_{\text{OUT}} = 10\text{ k}\Omega$	3.65	3.87	4.1	V
		TPS25953x		5.5	5.7	5.9	V
		TPS25954x		13.3	13.7	14.3	V
$V_{\text{CLAMP}}$	Output voltage while clamping <sup>(1)</sup>	TPS25952x	$V_{\text{IN}} \geq V_{\text{OVC}}$ , $I_{\text{OUT}} = 10\text{ mA}$	3.4	3.6	3.8	V
		TPS25953x		5.2	5.45	5.7	V
		TPS25954x		13	13.55	14.1	V
$t_{\text{OVC}}$	Output clamp response time <sup>(1)</sup>	TPS25952x/3x/4x	$I_{\text{OUT}} = 4\text{ A}$	5			$\mu\text{s}$
			$I_{\text{OUT}} = 100\text{ mA}$	10			$\mu\text{s}$
<b>OUTPUT CURRENT LIMIT AND MONITOR (ILM)</b>							
$G_{\text{IMON}}$	Current monitor gain as measured on ILM pin ( $I_{\text{ILM}} / I_{\text{OUT}}$ )		$I_{\text{OUT}} = 4\text{ A}$	254	276	299	$\mu\text{A/A}$
			$I_{\text{OUT}} = 1\text{ A}$	249	276	304	$\mu\text{A/A}$
$I_{\text{LIMIT}}$	$I_{\text{OUT}}$ Current limit <sup>(2)</sup>		$R_{\text{ILM}} = 487\ \Omega$	3.87	4.17	4.42	A
			$R_{\text{ILM}} = 1780\ \Omega$	1.09	1.17	1.24	A
			$R_{\text{ILM}} = 4420\ \Omega$ <sup>(3)</sup>	0.46	0.49	0.52	A
			$R_{\text{ILM}} = \text{Open}$ (Single Point Failure Test IEC 62368-1)		0		A
$I_{\text{CB}}$	$I_{\text{OUT}}$ Circuit Breaker Threshold during $R_{\text{ILM}}$ Short condition		$R_{\text{ILM}} = \text{Short to GND}$ (Single Point Failure Test IEC 62368-1)		3		A
$t_{\text{LIM}}$	Current limit response time <sup>(2)</sup>		$I_{\text{OUT}} > I_{\text{LIMIT}} + 20\%$ to $I_{\text{OUT}} \leq I_{\text{LIMIT}}$		250		$\mu\text{s}$
$t_{\text{SC}}$	Short circuit response time <sup>(4)</sup>		$I_{\text{OUT}} > I_{\text{SC}}$ to $I_{\text{OUT}} \leq I_{\text{LIMIT}}$		5		$\mu\text{s}$
<b>ON-RESISTANCE (IN - OUT)</b>							
$R_{\text{ON}}$	ON state resistance	$V_{\text{IN}} = 4\text{ V to }18\text{ V}$	$T_J = 25^{\circ}\text{C}$	34	37		$\text{m}\Omega$
			$T_J = -40^{\circ}\text{C to }85^{\circ}\text{C}$		47		$\text{m}\Omega$
			$T_J = -40^{\circ}\text{C to }125^{\circ}\text{C}$		53		$\text{m}\Omega$
		$V_{\text{IN}} = 2.7\text{ V to }4\text{ V}$	$T_J = 25^{\circ}\text{C}$	36	40		$\text{m}\Omega$
			$T_J = -40^{\circ}\text{C to }85^{\circ}\text{C}$		51		$\text{m}\Omega$
			$T_J = -40^{\circ}\text{C to }125^{\circ}\text{C}$		58		$\text{m}\Omega$

(1) Refer to Fig 49

(2) Refer to Fig 50

(3) Guaranteed by design and characterization. Not tested at production.

(4) Refer to Fig 52

## Electrical Characteristics (continued)

(Test conditions unless otherwise noted)  $-40^{\circ}\text{C} \leq T_J \leq 125^{\circ}\text{C}$ ,  $V_{\text{IN}} = 12\text{ V}$  for TPS25954x/7x,  $V_{\text{IN}} = 5\text{ V}$  for TPS25953x,  $V_{\text{IN}} = 3.3\text{ V}$  for TPS25952x,  $V_{\text{EN}} = 5\text{ V}$  ( $= 0\text{ V}$  for TPS2595x3 only),  $R_{\text{ILM}} = 487\ \Omega$ ,  $C_{\text{dVdT}} = \text{Open}$ ,  $\text{OUT} = \text{Open}$ . All voltages referenced to GND.

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
<b>ENABLE / UNDERVOLTAGE LOCKOUT (EN/UVLO) - TPS2595x0/1/5</b>						
$I_{\text{EN}}$	EN/UVLO pin leakage current		-0.1		0.1	$\mu\text{A}$
$V_{\text{UVLO(R)}}$	Undervoltage lockout threshold	$V_{\text{EN}}$ rising	1.13	1.2	1.27	V
$V_{\text{UVLO(F)}}$		$V_{\text{EN}}$ falling	1.03	1.1	1.17	V
<b>ENABLE / OVERVOLTAGE LOCKOUT (<math>\overline{\text{EN}}</math>/OVLO) - TPS2595x3</b>						
$I_{\text{EN}}$	$\overline{\text{EN}}$ /OVLO pin leakage current		-0.1		0.1	$\mu\text{A}$
$V_{\text{OVLO(R)}}$	Overvoltage lockout threshold	$V_{\text{EN}}$ rising	1.13	1.2	1.27	V
$V_{\text{OVLO(F)}}$		$V_{\text{EN}}$ falling	1.03	1.1	1.17	V
$t_{\text{OVLO}}$	Overvoltage lockout response time	$V_{\text{EN}} > V_{\text{OVLO}}$ to $\overline{\text{FLT}} \downarrow$		3		$\mu\text{s}$
<b>FAULT INDICATION (<math>\overline{\text{FLT}}</math>) - TPS2595x0/1/3</b>						
$R_{\text{FLT B}}$	$\overline{\text{FLT}}$ pin resistance	$\overline{\text{FLT}} \downarrow$		12		$\Omega$
$I_{\text{FLT B}}$	$\overline{\text{FLT}}$ pin leakage current	$V_{\text{EN}} = 2\text{ V}$ , $V_{\text{FLT B}} = 0\text{ V}$ to $6\text{ V}$	-0.1		0.1	$\mu\text{A}$
<b>QUICK OUTPUT DISCHARGE (QOD) - TPS2595x5</b>						
$R_{\text{QOD}}$	QOD effective resistance	IN connected to EN, OUT connected to QOD, $\text{EN} \downarrow$ to $1\text{ V}$		19		$\Omega$
<b>OVERTEMPERATURE PROTECTION (TSD)</b>						
TSD	Thermal shutdown		$T_J$ Rising		157	$^{\circ}\text{C}$
$T_{\text{SD HYS}}$	Thermal shutdown hysteresis		$T_J$ Falling		5	$^{\circ}\text{C}$
$t_{\text{TSD,RST}}$	Thermal Shutdown Auto-Retry Interval	TPS2595x1/3/5	Device Enabled and $T_J < T_{\text{SD}}$ - $T_{\text{SD HYS}}$		93	ms

## 7.6 Switching Characteristics

Typical Values are taken at  $T_J = 25^{\circ}\text{C}$  unless specifically noted otherwise.  $R_{\text{OUT}} = 100\ \Omega$ ,  $C_{\text{OUT}} = 1\ \mu\text{F}$

PARAMETER		$V_{\text{IN}}$	$C_{\text{dVdT}} = \text{Open}$	$C_{\text{dVdT}} = 3300\text{pF}$	UNIT
$\text{SR}_{\text{ON}}$	Output Rising slew rate	3.3 V	16.3	10.0	V/ms
		5 V	21.9	11.6	
		12 V	38.2	12.4	
$t_{\text{D,ON}}$	Turn on delay	3.3 V	147	254	$\mu\text{s}$
		5 V	149	289	
		12 V	153	335	
$t_{\text{R}}$	Rise time	3.3 V	157	259	$\mu\text{s}$
		5 V	179	349	
		12 V	248	763	
$t_{\text{D,OFF}}$	Turn off delay	3.3 V	11.6	11.6	$\mu\text{s}$
		5 V	11.3	11.5	
		12 V	11.0	11.4	



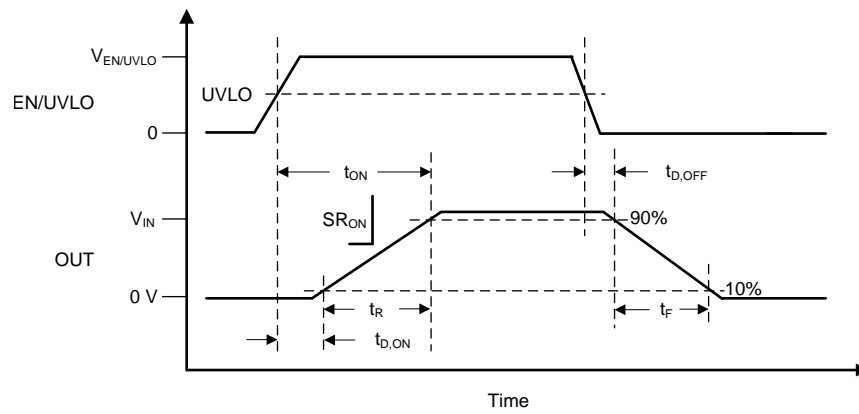


图 1. TPS2595x0, TPS2595x1, TPS2595x5 Switching Times

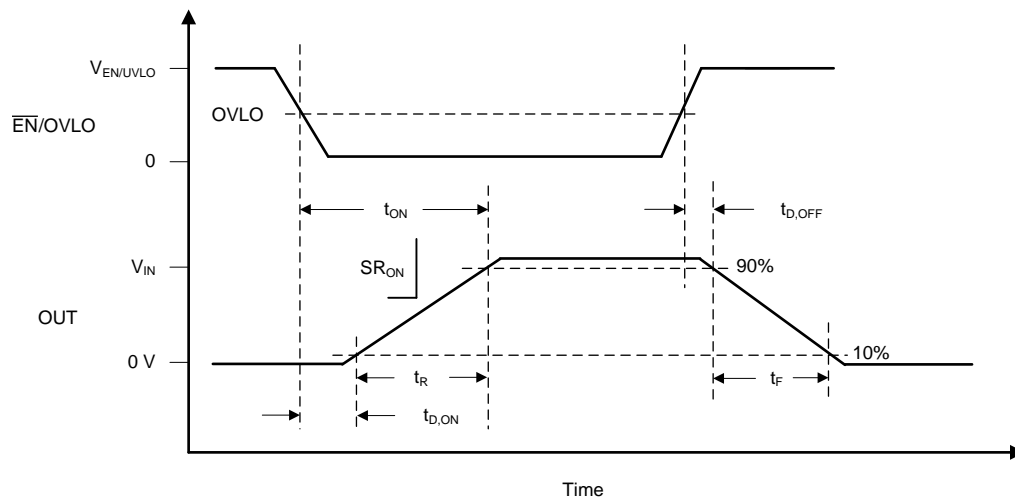


图 2. TPS2595x3 Switching Times

### 7.7 Typical Characteristics

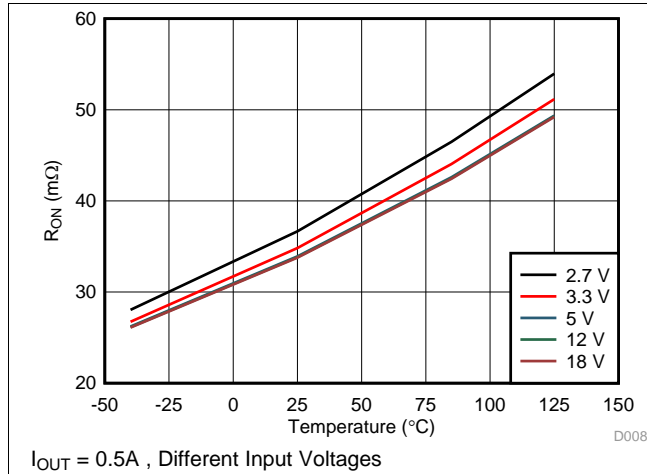


图 3. On-resistance vs Temperature

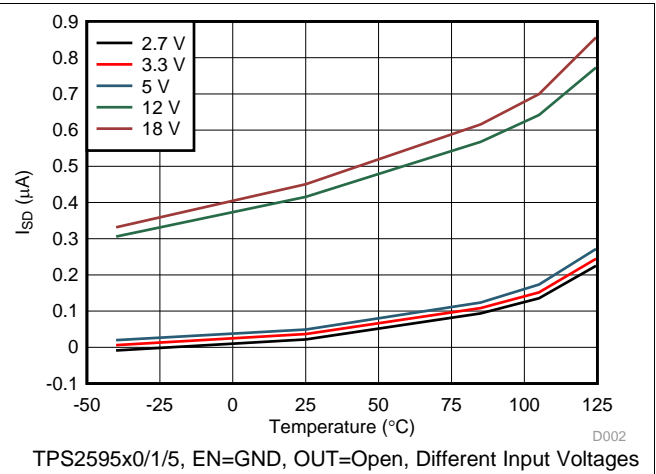


图 4. Shutdown Current vs Temperature

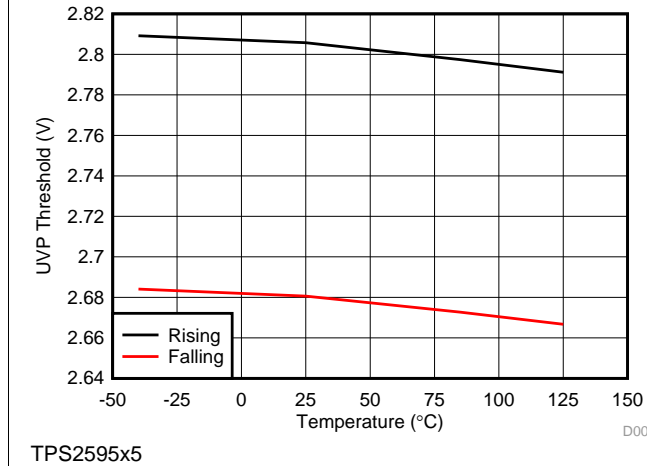


图 5. UVP Threshold vs Temperature

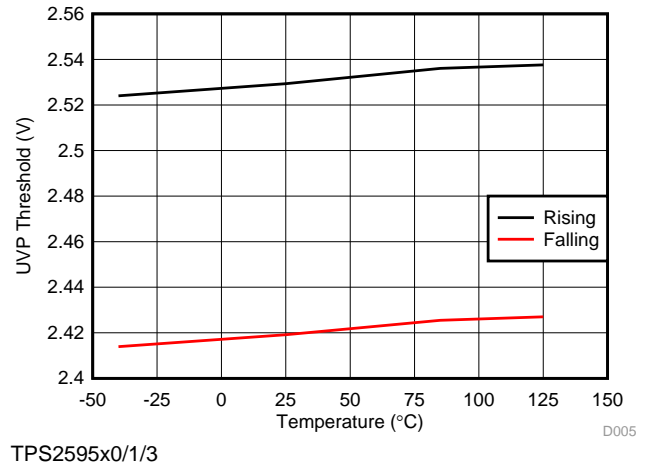


图 6. UVP Threshold vs Temperature

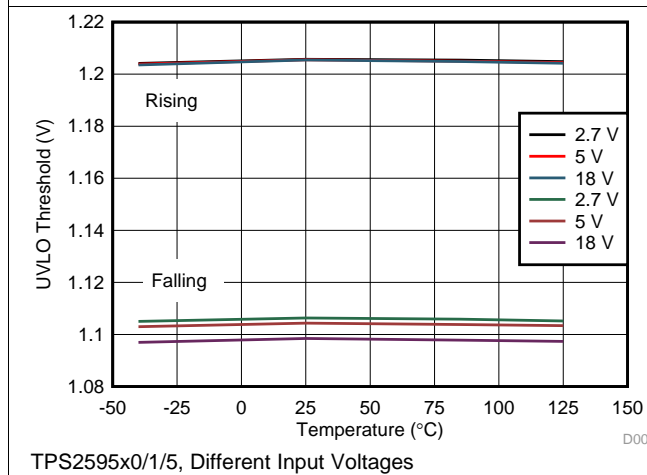


图 7. UVLO Threshold vs Temperature

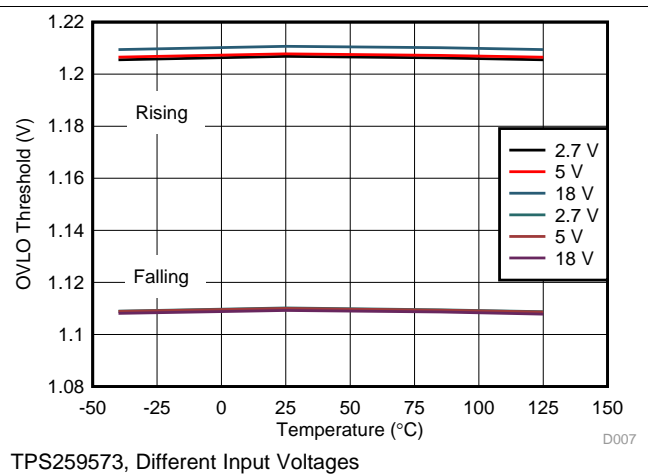


图 8. OVLO Threshold vs Temperature

Typical Characteristics (接下页)



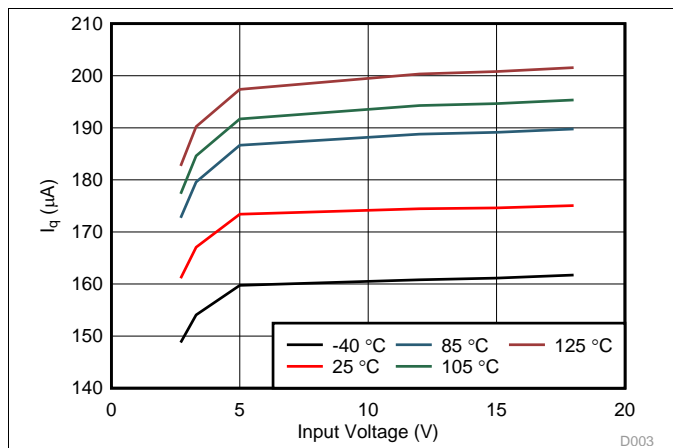


图 9. Quiescent Current vs Input Voltage

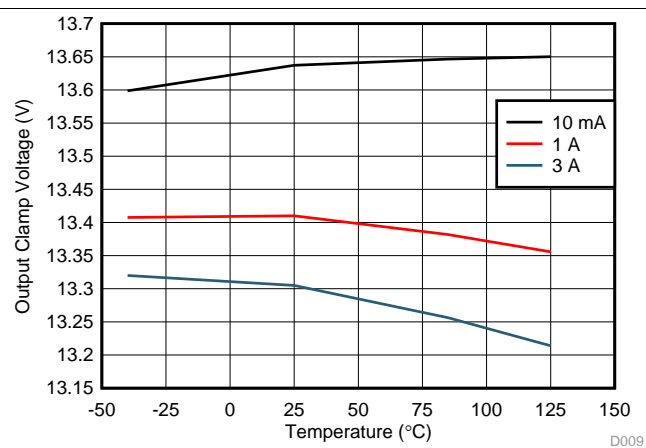


TPS25954x, Different Output Load Currents

图 10. OVC Threshold vs Temperature

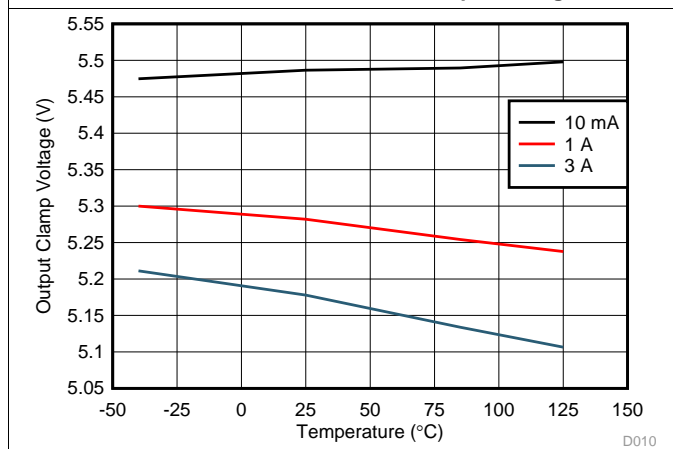

TPS25953x, Different Output Load Currents

图 11. OVC Threshold vs Temperature

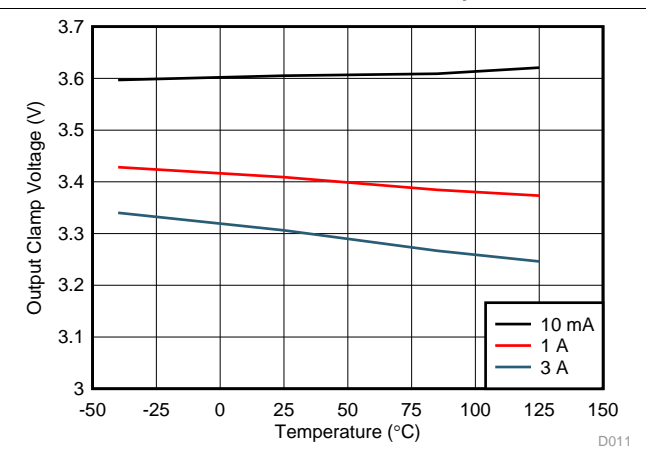

TPS25952x, Different Output Load Currents

图 12. OVC Threshold vs Temperature


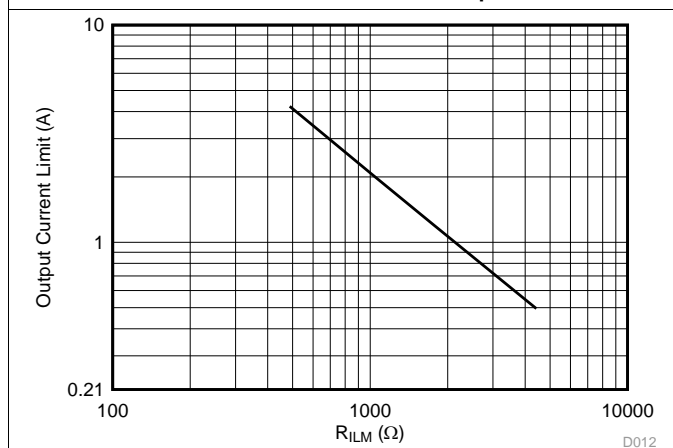








图 13. Output Current Limit (I<sub>LIMIT</sub>) vs R<sub>ILM</sub>

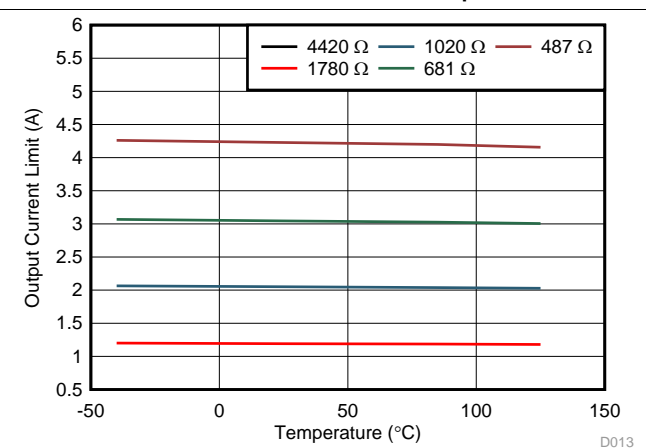

V<sub>IN</sub> = 12V, Different R<sub>ILM</sub> values

图 14. Output Current Limit (I<sub>LIMIT</sub>) vs Temperature

Typical Characteristics (接下页)

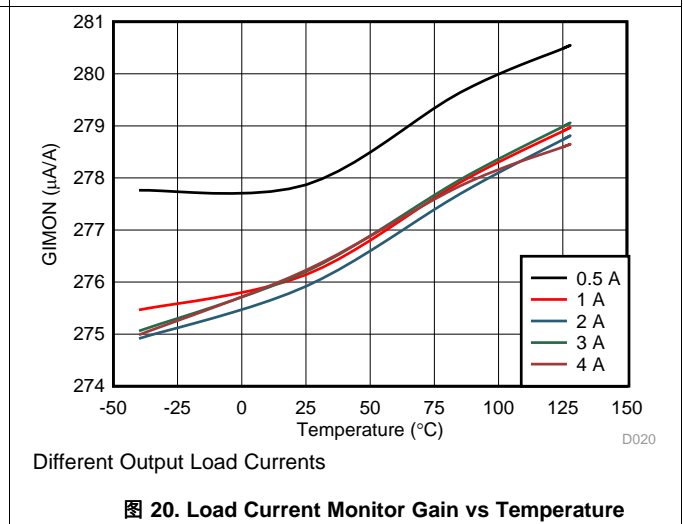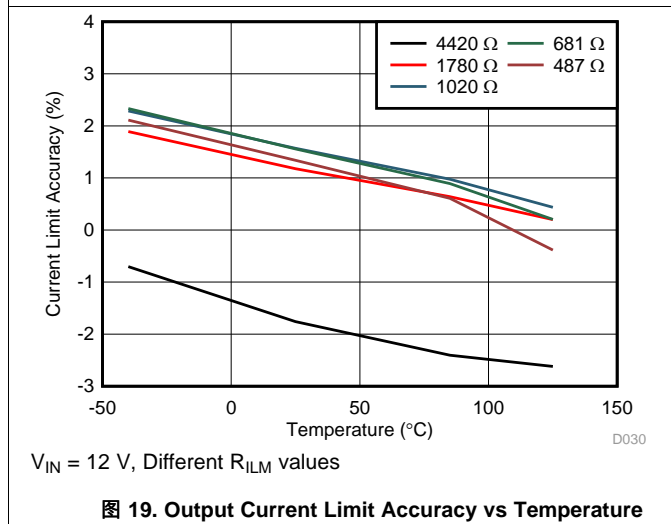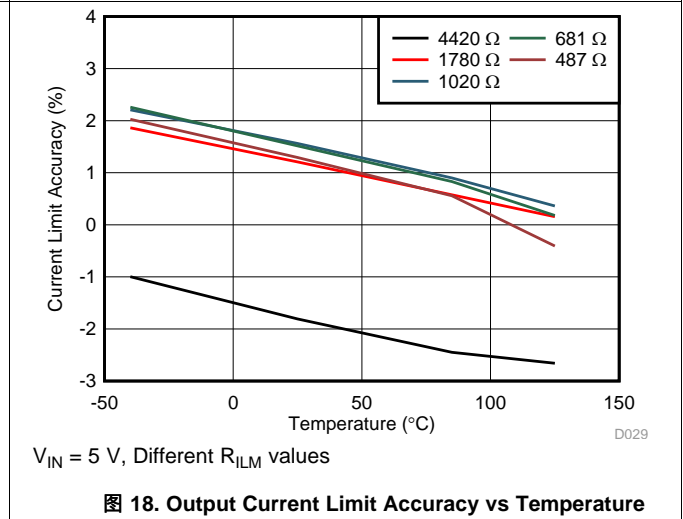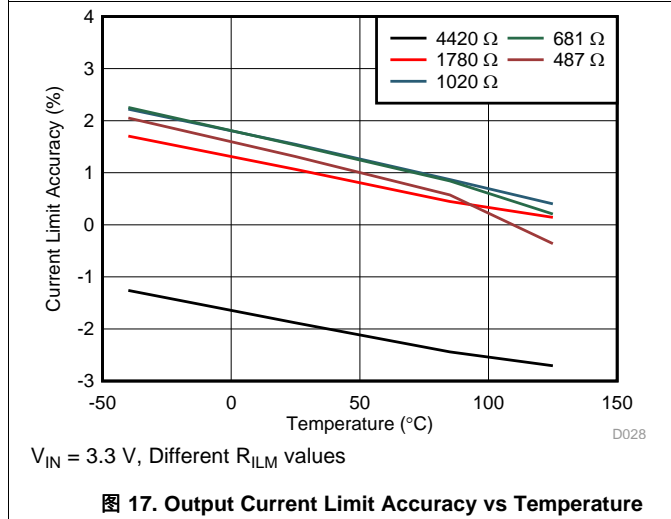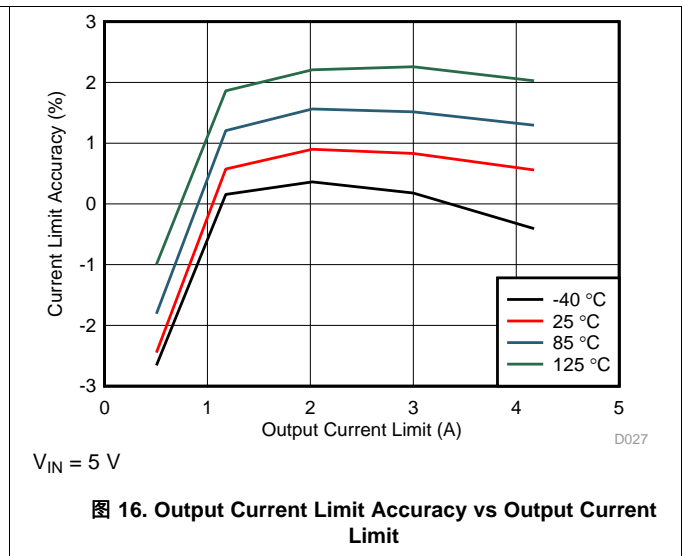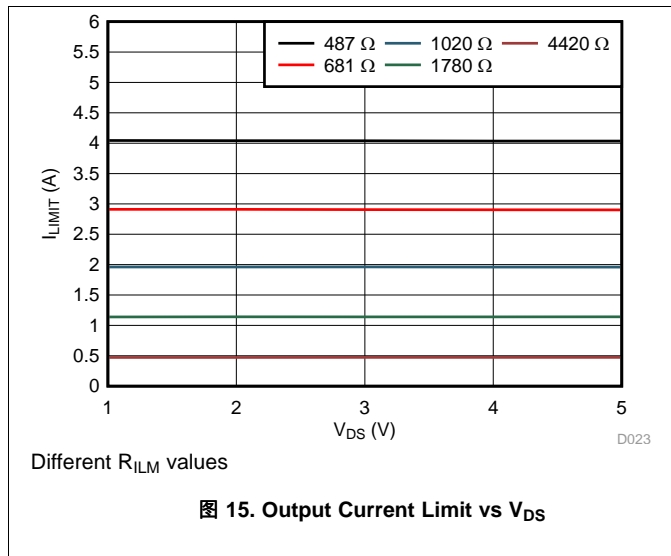

Typical Characteristics (接下页)

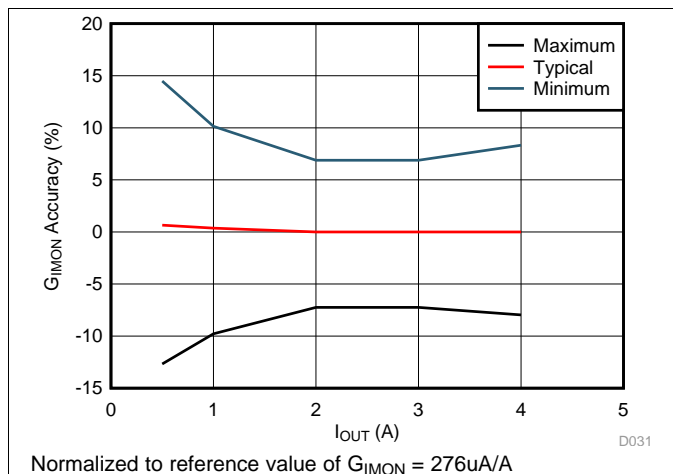


图 21. Load Current Monitor Gain Accuracy vs Load Current

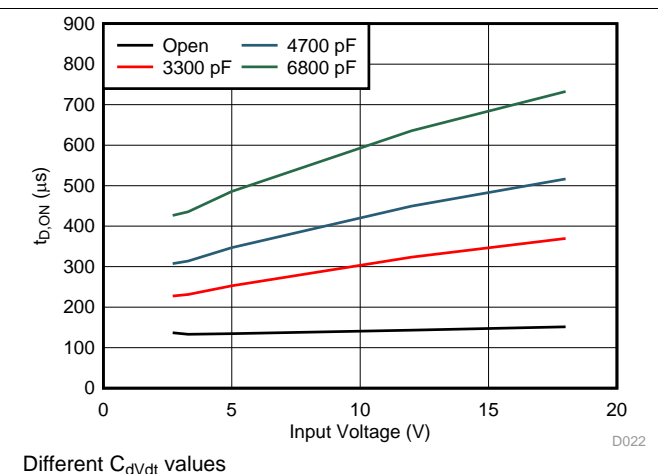


图 22. Turn on Delay vs Input Voltage

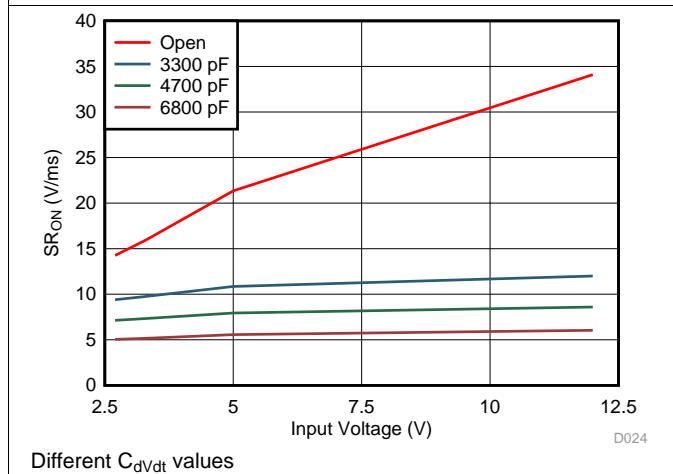


图 23. ON Slew Rate vs Input Voltage

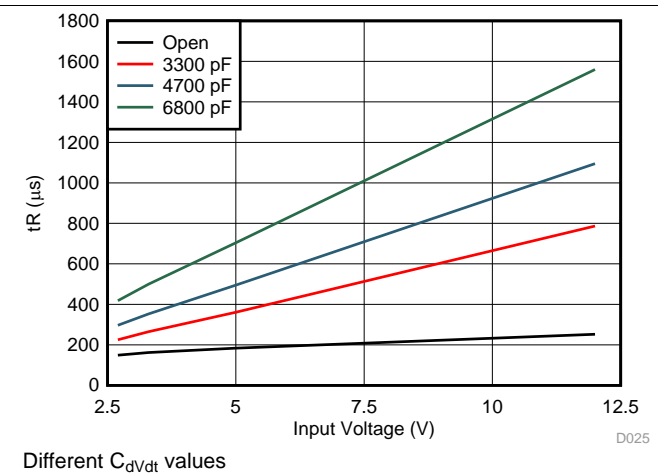


图 24. Rise Time vs Input Voltage

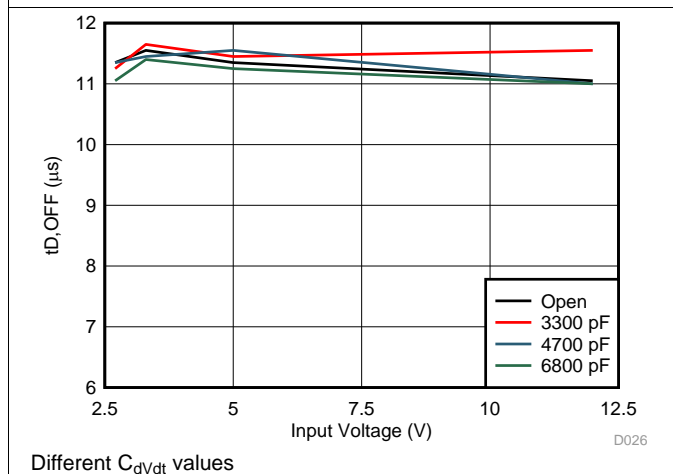


图 25. Turn OFF Delay vs Input Voltage

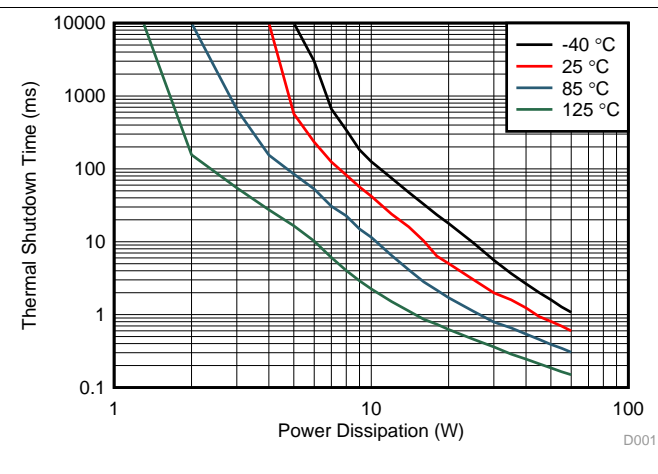


图 26. Thermal Shutdown Time vs Power Dissipation

Typical Characteristics (接下页)

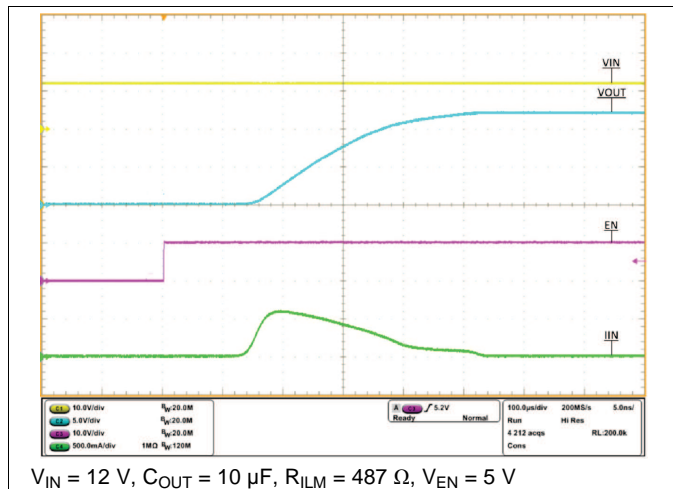
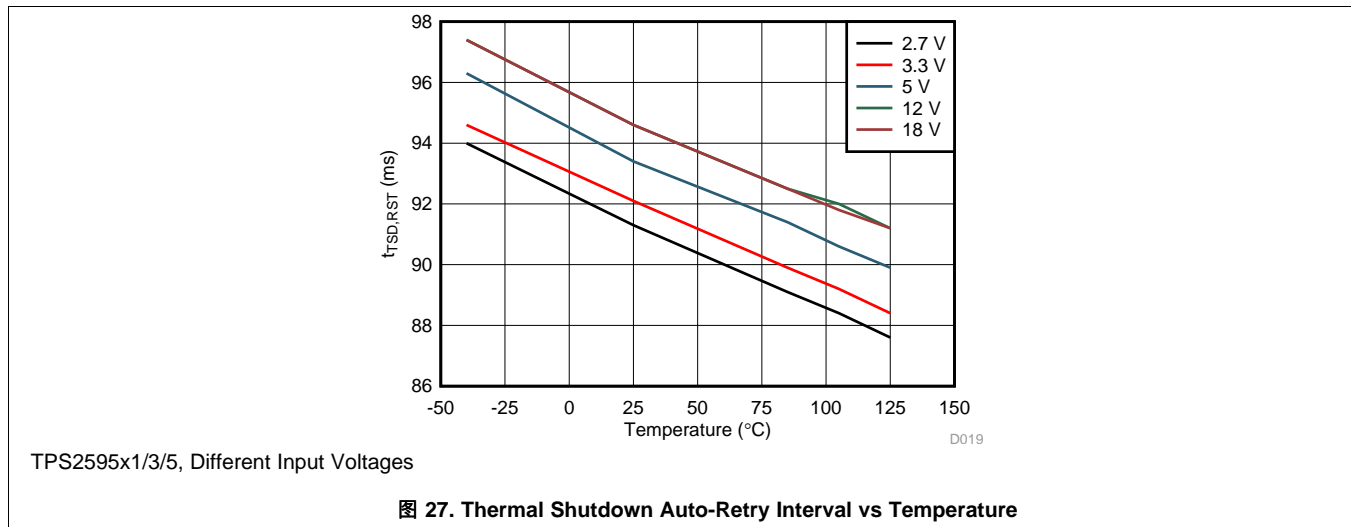


图 28. Output Voltage Ramp and Inrush Current at Start Up,  $C_{dvdt} = \text{Open}$

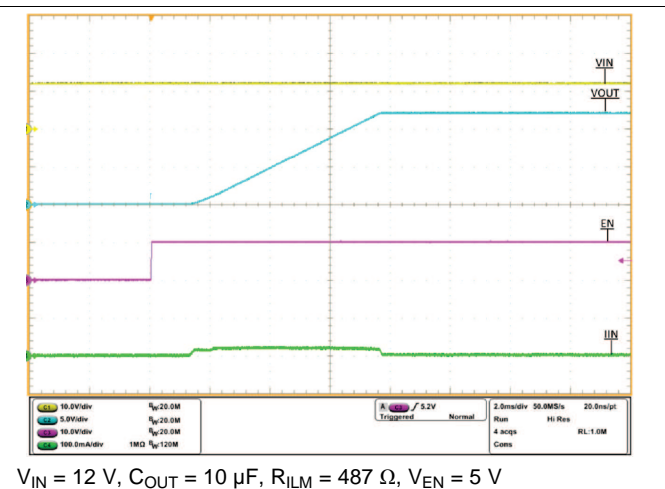


图 29. Output Voltage Ramp and Inrush Current at Start Up,  $C_{dvdt} = 22\text{ nF}$

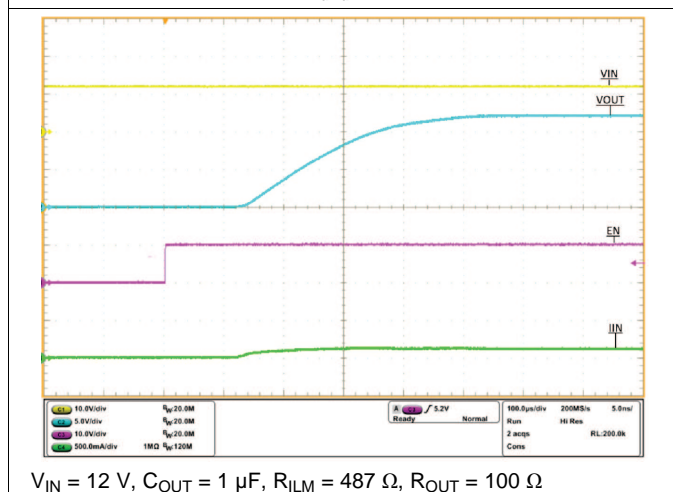


图 30. Turn ON Delay








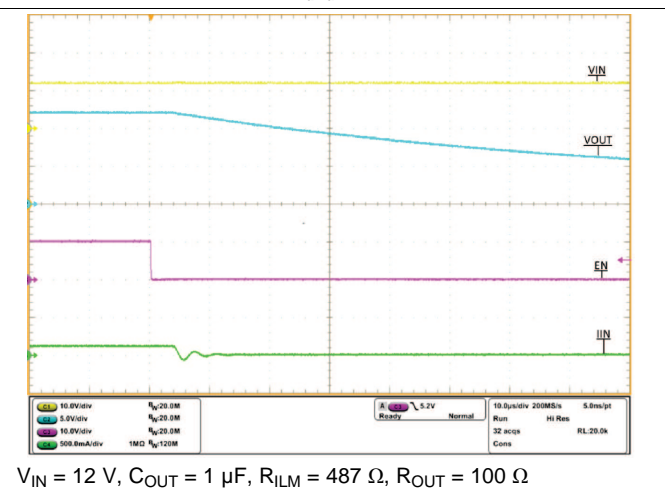


图 31. Turn OFF Delay

Typical Characteristics (接下页)

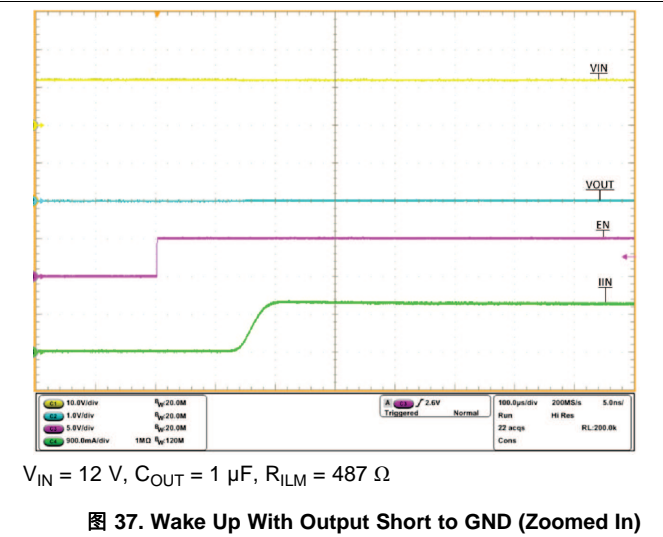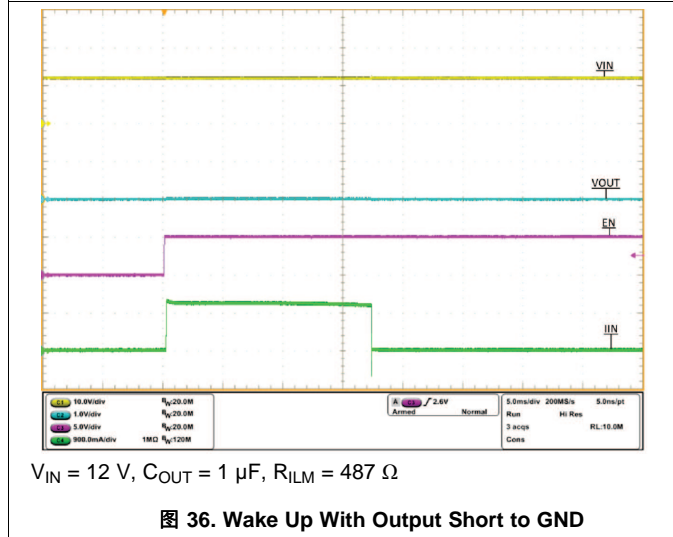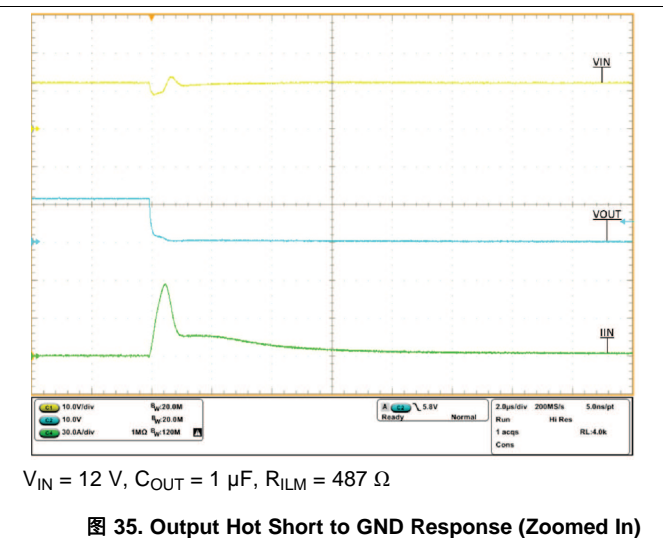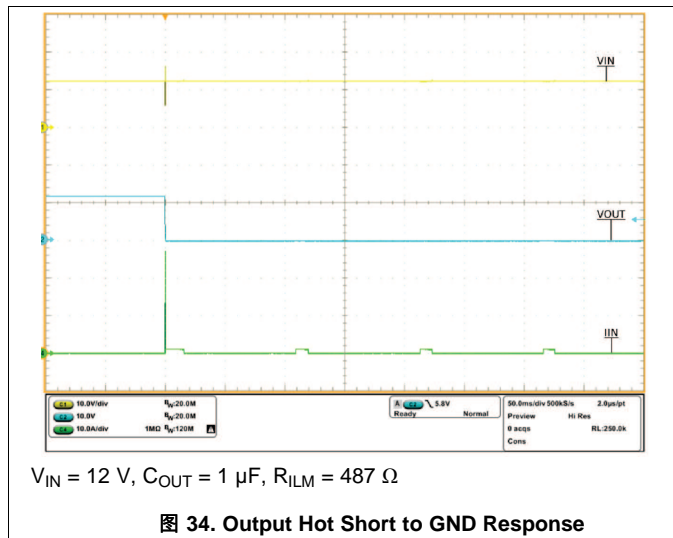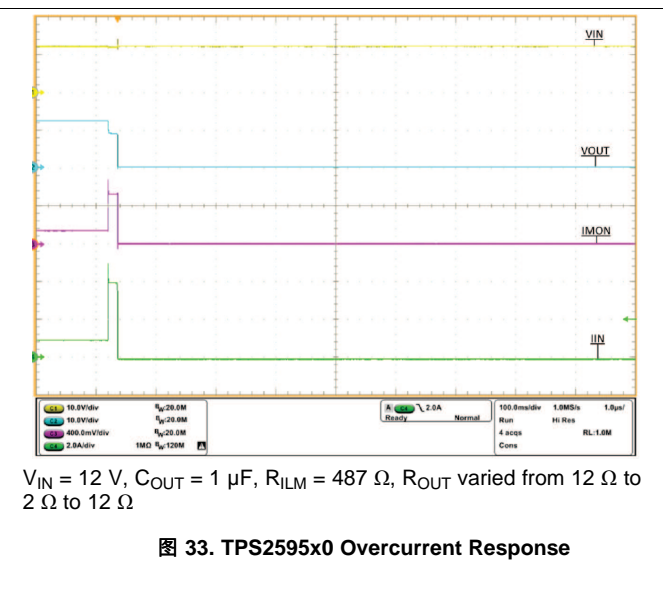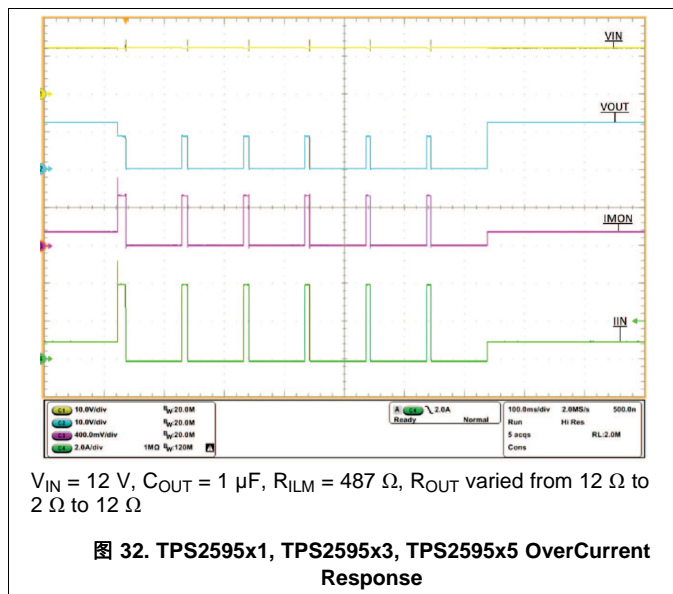


Typical Characteristics (接下页)

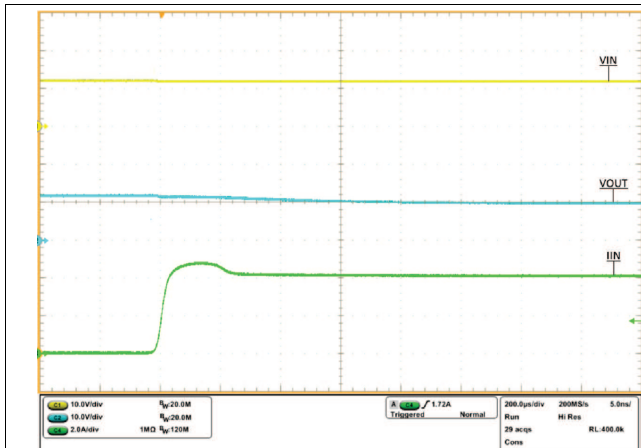


$V_{IN} = 12\text{ V}$ ,  $C_{OUT} = 1\ \mu\text{F}$ ,  $R_{ILM} = 487\ \Omega$ ,  $I_{OUT}$  stepped from 4 A to 4.8 A

图 38. Output Load Transient Response

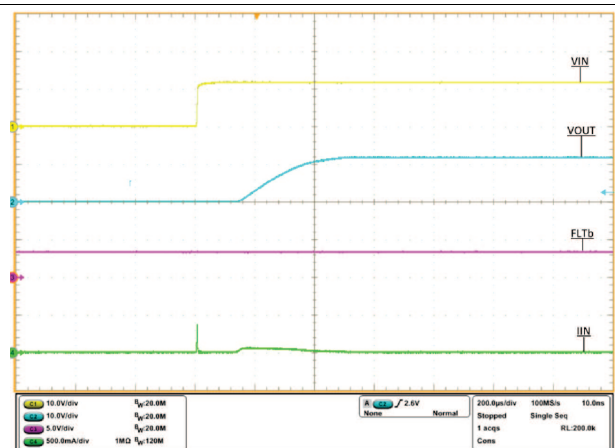


$V_{IN} = 12\text{ V}$ ,  $C_{OUT} = 1\ \mu\text{F}$ ,  $R_{ILM} = 487\ \Omega$ ,  $\overline{FLT} = 3.3\text{ V}$  through 10 k $\Omega$

图 39. Hot Plug Response

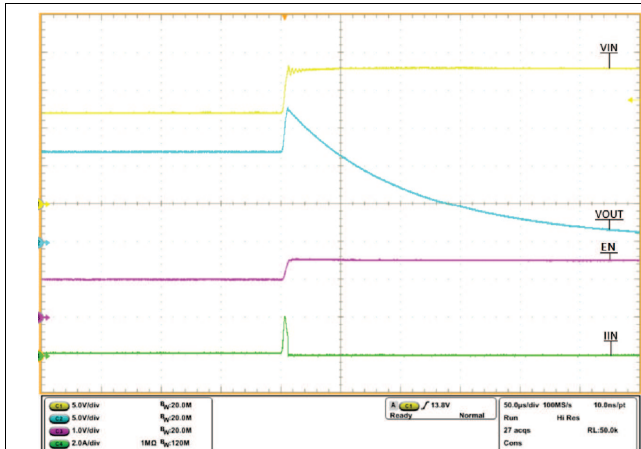


$V_{IN}$  stepped from 12 V to 18 V,  $C_{OUT} = 1\ \mu\text{F}$ ,  $R_{ILM} = 487\ \Omega$ ,  $\overline{FLT} = 3.3\text{ V}$  through 10 k $\Omega$ ,  $R_{OUT} = 100\ \Omega$

图 40. TPS259573 Overvoltage Lockout Response

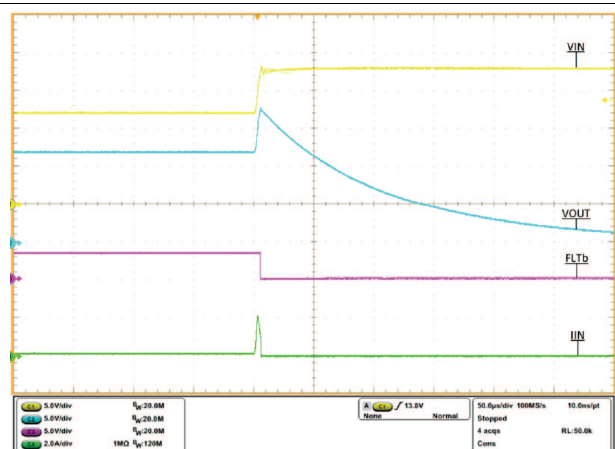


$V_{IN}$  stepped from 12 V to 18 V,  $C_{OUT} = 1\ \mu\text{F}$ ,  $R_{ILM} = 487\ \Omega$ ,  $\overline{FLT} = 3.3\text{ V}$  through 10 k $\Omega$ ,  $R_{OUT} = 100\ \Omega$

图 41. TPS259573 Overvoltage Lockout FLT Response

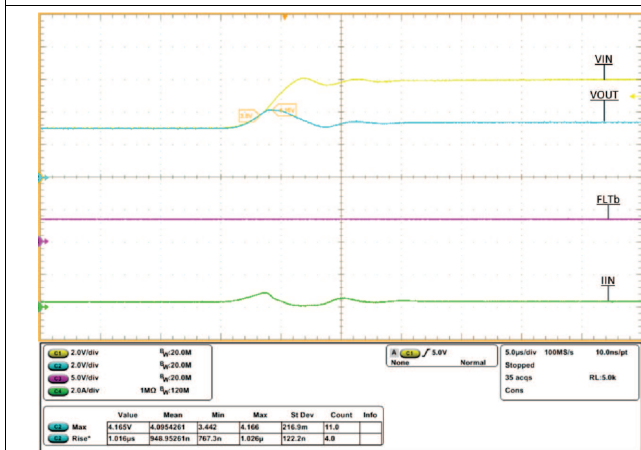

$V_{IN}$  stepped from 3 V to 6 V,  $C_{OUT} = 1\ \mu\text{F}$ ,  $R_{ILM} = 487\ \Omega$ ,  $\overline{FLT} = 3.3\text{ V}$  through 10 k $\Omega$ ,  $R_{OUT} = 10\ \Omega$

图 42. TPS25952x Overvoltage Clamp Response

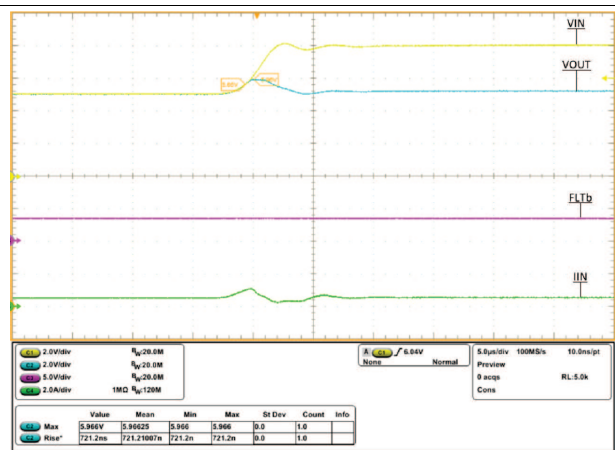


$V_{IN}$  stepped from 5 V to 8 V,  $C_{OUT} = 1\ \mu\text{F}$ ,  $R_{ILM} = 487\ \Omega$ ,  $\overline{FLT} = 3.3\text{ V}$  through 10 k $\Omega$ ,  $R_{OUT} = 10\ \Omega$

图 43. TPS25953x Overvoltage Clamp Response




Typical Characteristics (接下页)

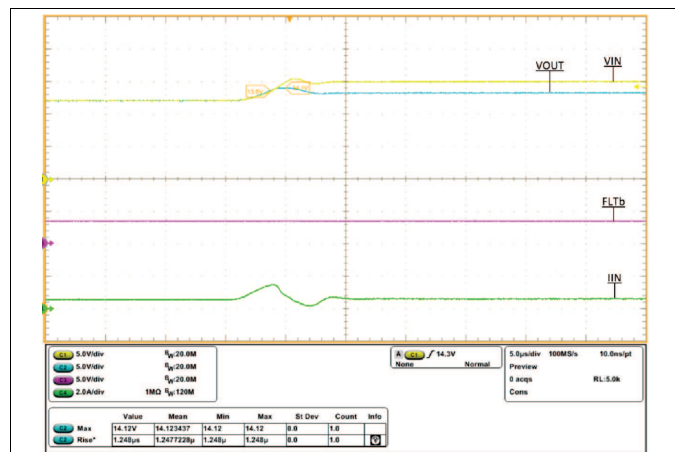


V<sub>IN</sub> Stepped from 12 V to 15 V, C<sub>OUT</sub> = 1 µF, R<sub>ILM</sub> = 487 Ω, FLT = 3.3 V through 10 kΩ, R<sub>OUT</sub> = 20 Ω

图 44. TPS2595x4 Overvoltage Clamp Response

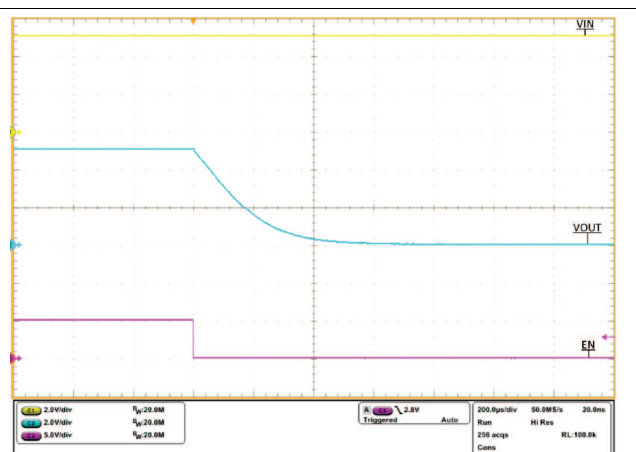

V<sub>IN</sub> = 5 V, C<sub>OUT</sub> = 1 µF, R<sub>ILM</sub> = 487 Ω

图 45. TPS2595x5 Quick Output Discharge, EN stepped from 5 V to 0 V

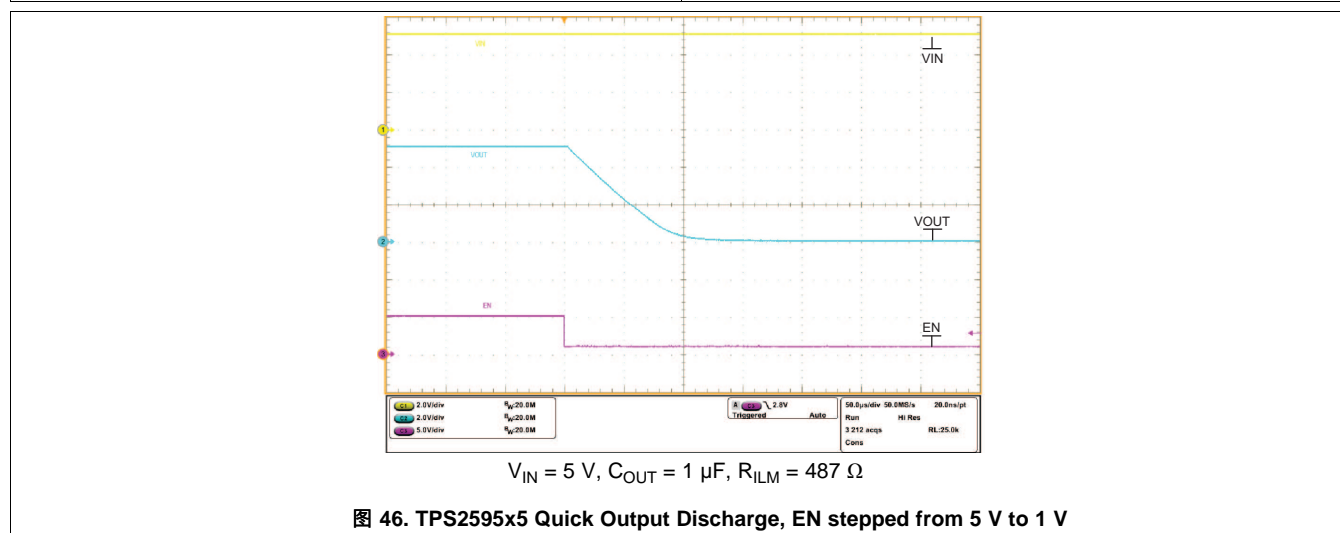

V<sub>IN</sub> = 5 V, C<sub>OUT</sub> = 1 µF, R<sub>ILM</sub> = 487 Ω


图 46. TPS2595x5 Quick Output Discharge, EN stepped from 5 V to 1 V

## 8 Detailed Description

### 8.1 Overview

The TPS2595xx devices are integrated eFuse that are used to manage load voltage and load current. The device provides various factory programmed settings and user manageable settings, which allow device configuration for handling different transient and steady state supply and load fault conditions, thereby protecting the input supply and the downstream circuits connected to the device. The device also uses an in-built thermal shutdown mechanism to protect itself during these fault events.

### 8.2 Functional Block Diagram

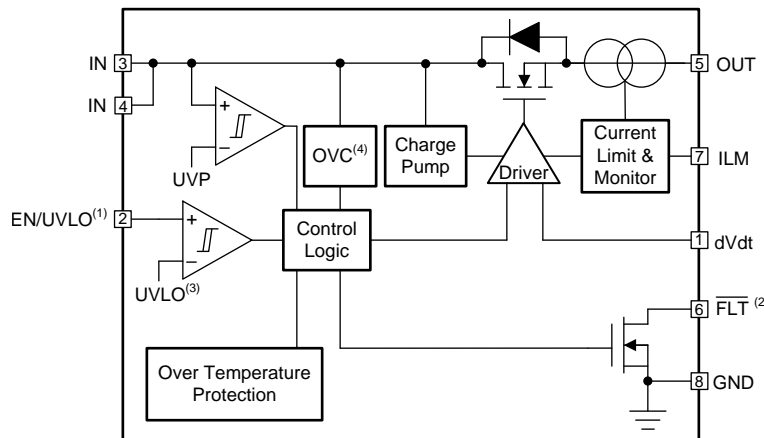

- (1) For TPS2595x3, this pin is  $\overline{\text{EN/OVLO}}$
- (2) For TPS2595x5, this pin is QOD
- (3) For TPS2595x3, this voltage is OVLO
- (4) This block is not available in the TPS25957x

### 8.3 Feature Description

#### 8.3.1 Undervoltage Protection (UVP) and Undervoltage Lockout (UVLO)

All the TPS2595xx devices constantly monitor the input supply to ensure that the load is powered up only when the voltage is at a sufficient level. During the start-up condition, the device waits for the input supply to rise above a fixed threshold  $V_{\text{UVP}}$  before it proceeds to turn ON the FET. Similarly, during the ON condition, if the input supply falls below the UVP threshold, the FET is turned OFF. The UVP rising and falling thresholds are slightly different, thereby providing some hysteresis and ensuring stable operation around the threshold voltage.

The TPS2595x0, TPS2595x1, TPS2595x5 devices provide an user programmable UVLO mechanism to ensure that the load is powered up only when the voltage is at a sufficient level. This can be achieved by dividing the input supply and feeding it to the EN/UVLO pin. Whenever the voltage at the EN/UVLO pin falls below a threshold  $V_{\text{UVLO}}$ , the device turns OFF the FET. The FET is turned ON again when the voltage rises above the threshold. The rising and falling thresholds on this pin are slightly different, thereby providing some hysteresis and ensuring stable operation around the threshold voltage.

The user must choose the resistor divider values appropriately to map the desired input undervoltage level to the UVLO threshold of the part. See [Figure 47](#).

## Feature Description (接下页)




图 47. Undervoltage Lockout

$$V_{\text{SUPPLY}} = \frac{V_{\text{UVLO}} \times (R1 + R2)}{R2} \quad (1)$$

### 8.3.2 Overvoltage Protection

The TPS2595xx devices provide 2 ways to handle an input overvoltage condition.

#### 8.3.2.1 Overvoltage Lockout (OVLO)

The TPS259573 device provides an user programmable OVLO mechanism to ensure that the supply to the load is cut off if the input supply voltage exceeds a certain level. This can be achieved by dividing the input supply and feeding it to the EN/OVLO pin. Whenever the voltage at the EN/OVLO pin rises above a threshold  $V_{\text{OVLO}}$ , the device turns OFF the FET. When the voltage at the EN/OVLO pin falls below the threshold, the FET is turned ON again.

The user should choose the resistor divider values appropriately to map the desired input overvoltage level to the OVLO threshold of the part.


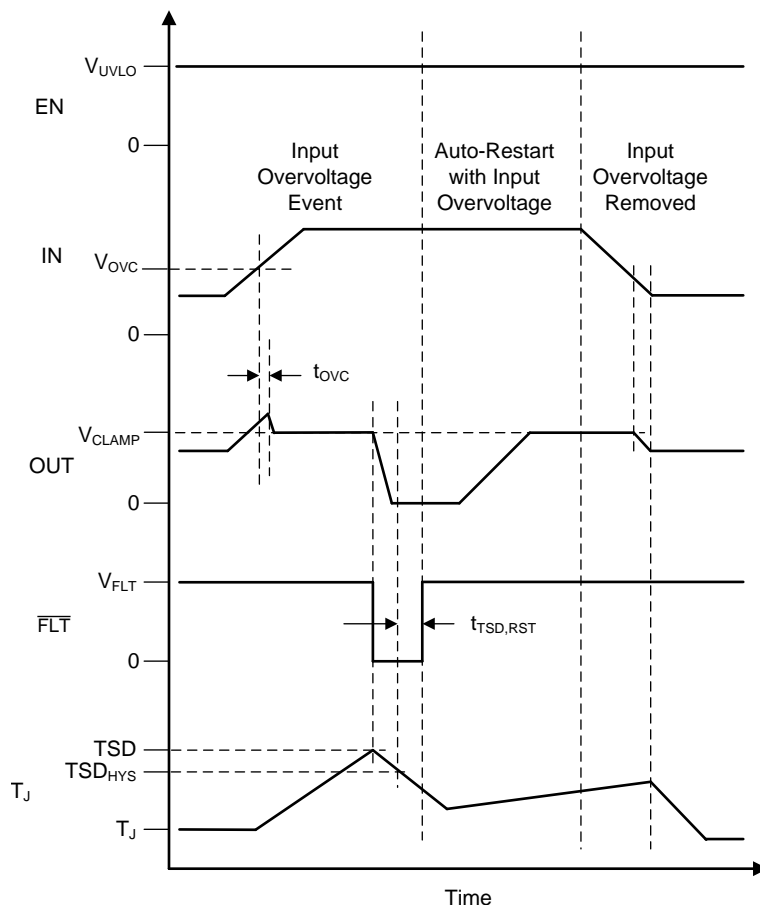


图 48. Overvoltage Lockout

#### 8.3.2.2 Overvoltage Clamp (OVC)

The TPS25952x, TPS25953x, TPS25954x devices provide a mechanism to clamp the output voltage to a predefined level quickly if the input voltage crosses a certain threshold. This ensures the load is not exposed to high voltages on any overvoltage at the input supply, and lowers the dependency on external protection devices (such as TVS/Zener diodes) in this condition. Once the input supply voltage rises above the OVC threshold voltage  $V_{\text{OVC}}$ , the device responds by clamping the voltage to  $V_{\text{CLAMP}}$  within a very short response time  $t_{\text{OVC}}$ . As long as an overvoltage condition is present on the input, the output voltage will be clamped to  $V_{\text{CLAMP}}$ . When the input drops below the output clamp threshold  $V_{\text{OVC}}$ , the clamp releases the output voltage. See 图 49.

During the overvoltage clamp condition, there could be significant heat dissipation in the internal FET depending on the  $V_{\text{IN}} - V_{\text{OUT}}$  voltage drop and the current through the FET leading to a thermal shutdown if the condition persists for an extended period of time. In this case, the device would either stay latched-off or start a auto retry cycle as explained in the [Overtemperature Protection \(OTP\)](#) section.

**Feature Description (接下页)**

**图 49. TPS2595xx Overvoltage Clamp Response (Auto-Retry)**

Multiple device options are offered with different clamping voltage thresholds. See the [Device Comparison Table](#) for list of available voltage clamp options.

### 8.3.3 Inrush Current, Overcurrent and Short Circuit Protection

The TPS2595xx devices incorporates three levels of protection against overcurrent:

- Adjustable slew rate for inrush current control (dVdt).
- Active current limiting ( $I_{LIMIT}$ ) for overcurrent protection.
- A fast short circuit limit ( $I_{SC}$ ) to protect against hard short circuits.

#### 8.3.3.1 Slew Rate and Inrush Current Control (dVdt)

The inrush current during turn on is directly proportional to the load capacitance and rising slew rate. [公式 2](#) can be used to find the slew rate  $SR_{ON}$  required to limit the inrush current  $I_{INRUSH}$  for a given load capacitance  $C_{OUT}$ .

$$SR_{ON} \left( \frac{V}{ms} \right) = \frac{I_{INRUSH} (mA)}{C_{OUT} (\mu F)} \quad (2)$$

For loads requiring a slower rising slew rate, a capacitance can be added to the dVdt pin to adjust the rising slew rate and lower the inrush current during turn on. The required  $C_{dVdt}$  capacitance to produce a given slew rate can be calculated using [公式 3](#).

Feature Description (接下页)

$$C_{dVdt} \text{ (pF)} = \frac{42000}{SR_{ON} \left( \frac{V}{ms} \right)} \tag{3}$$

8.3.3.2 Active Current Limiting

The load current is monitored during start-up and normal operation. When the load current exceeds the current limit trip point  $I_{LIMIT}$  programmed by  $R_{ILM}$  resistor, the device regulates the current to the set limit  $I_{LIMIT}$  within  $t_{LIM}$ . The device exits current limiting when the load current falls below limit. 公式 4 can be used to find the  $R_{ILM}$  value for a desired current limit.

$$R_{ILM} = \frac{2000}{(I_{LIMIT} - 0.04)} \tag{4}$$

In the current limiting state, the output voltage drops resulting in increased power dissipation in the internal FET leading to a thermal shutdown if the condition persists for an extended period of time. In this case, the device either stays latched-off or starts an auto retry cycle as explained in the [Overtemperature Protection \(OTP\)](#) section.

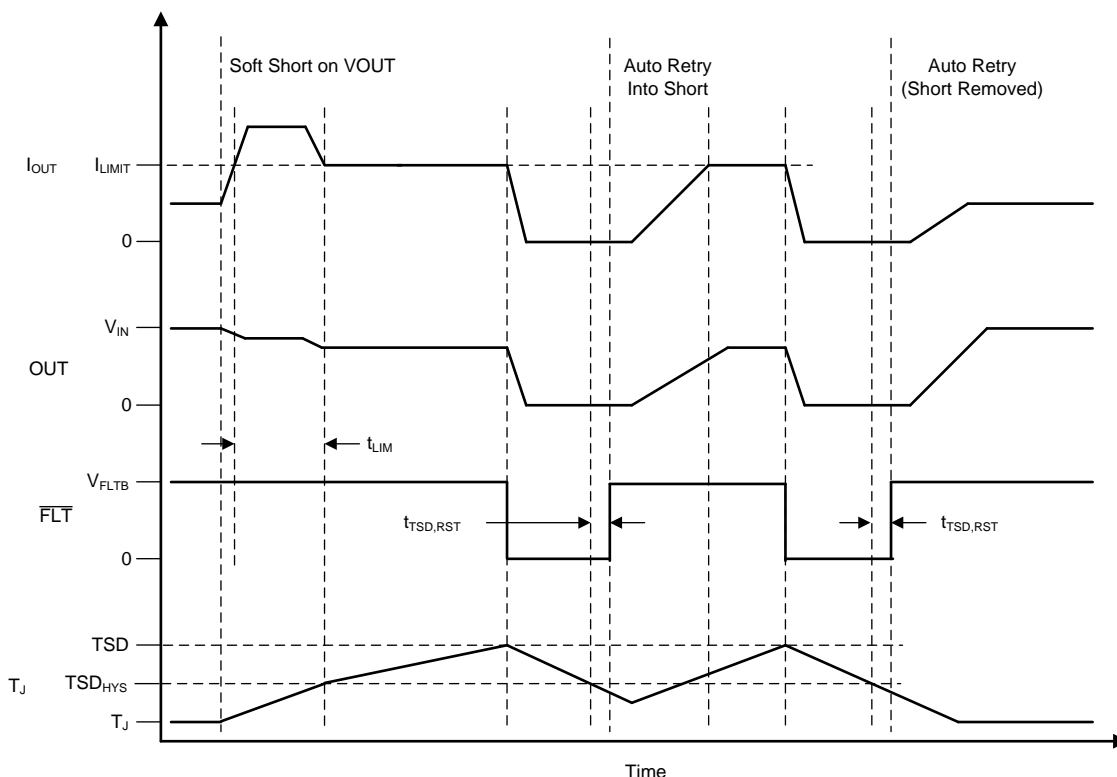
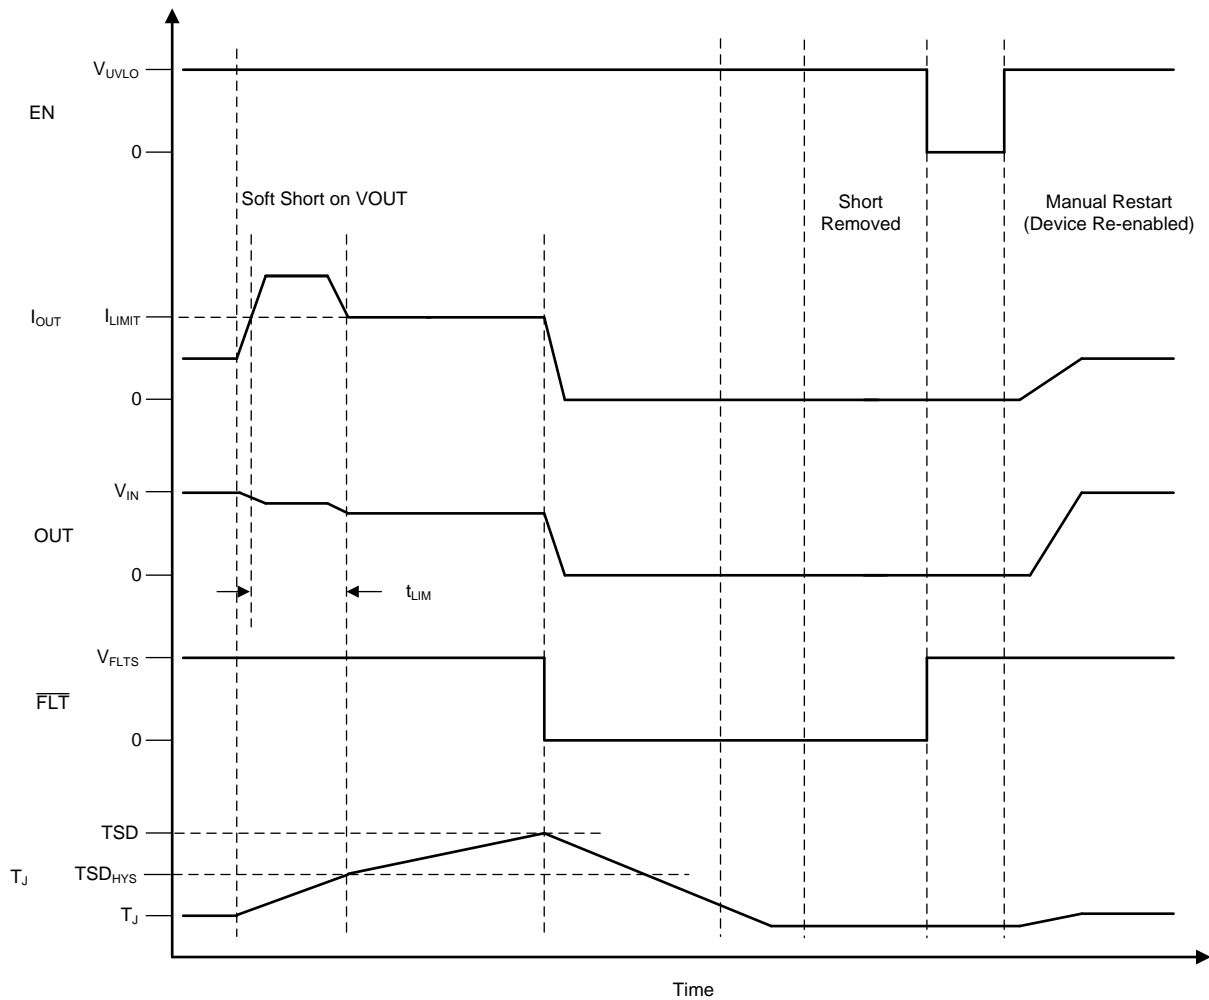


图 50. TPS2595x1, TPS2595x3, TPS2595x5 Overcurrent Response (Auto-Retry)

**Feature Description (接下页)**

**图 51. TPS2595x0 Overcurrent Response (Latch-Off)**
**8.3.3.3 Short Circuit Protection**

The current through the device increases very rapidly during a transient short circuit event. The short circuit threshold  $I_{SC}$  is adjusted based on the selected current limit. When a short circuit is detected, the device quickly limits the current to  $I_{LIMIT}$ . The device stops limiting the current once the load current falls below the programmed  $I_{LIMIT}$  threshold. See [图 52](#).

The output voltage drops in the current limiting state, resulting in increased power dissipation in the internal FET and leads to a thermal shutdown if the condition persists for an extended period of time. In this case, the device either stays latched-off or starts an auto retry cycle as explained in the [Overtemperature Protection \(OTP\)](#) section.

Feature Description (接下页)

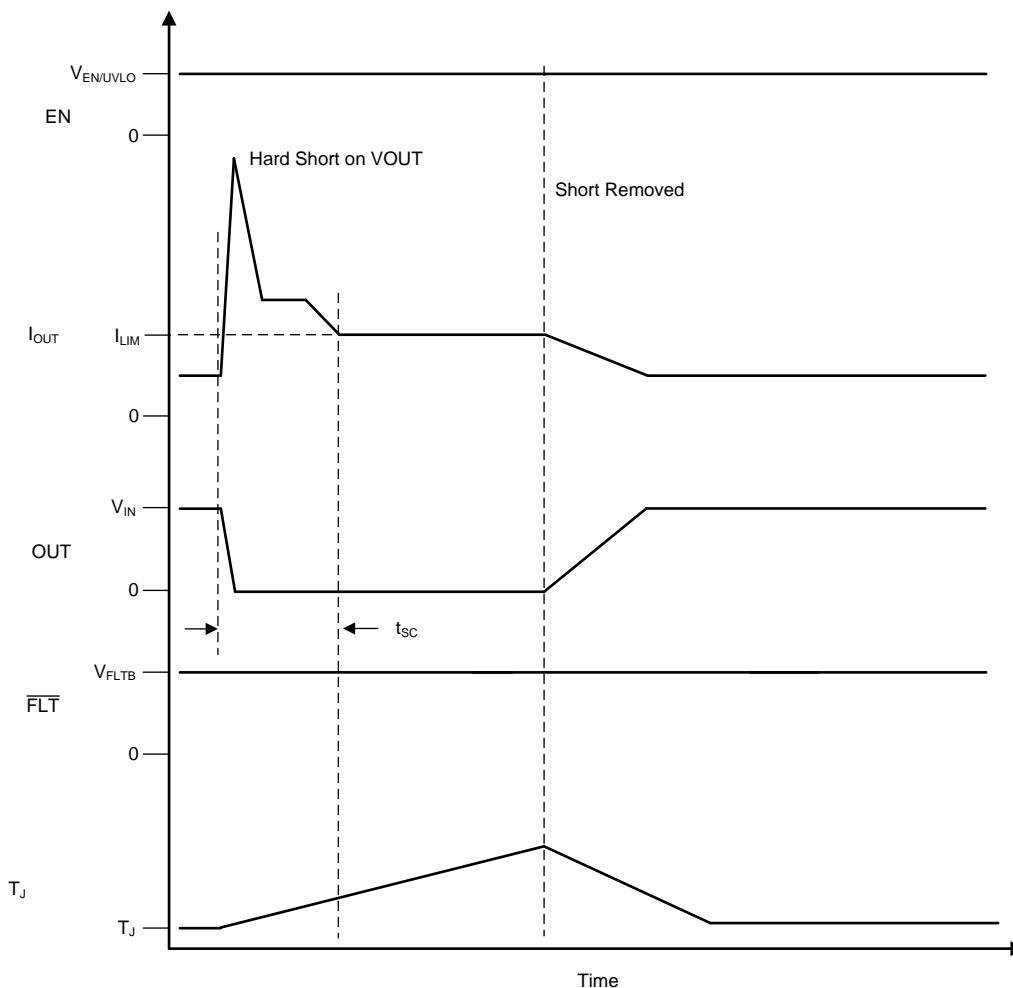


图 52. TPS2595xx Short Circuit Response

8.3.4 Overtemperature Protection (OTP)

Thermal shutdown occurs when the junction temperature  $T_J$  exceeds TSD. When the TPS2595x0 detects a thermal overload, it shuts down and remains latched off until the device is re-enabled or power cycled. When the TPS2595x1, TPS2595x3, TPS2595x5 devices detects a thermal overload, it remains off until the  $T_J$  decreases by  $TSD_{HYS}$  and then waits for an additional delay of  $t_{TSD,RST}$  after which it automatically retries to turn on if it is still enabled. See 表 1.

表 1. TPS2595xx Thermal Shutdown

Device	Enter TSD	Exit TSD
TPS2595x0 (Latch-off)	$T_J \geq TSD$	$T_J < TSD$ and Device Power Cycled or re-enabled using EN/UVLO pin
TPS2595x1, TPS2595x3, TPS2595x5 (Auto-retry)	$T_J \geq TSD$	$T_J < TSD - TSD_{HYS}$ and $t_{TSD,RST}$ Timer Expired

### 8.3.5 Fault Indication ( $\overline{\text{FLT}}$ )

表 2 summarizes the protection response to various fault conditions.

表 2. TPS2595x0, TPS2595x1, TPS2595x3 Fault Summary

EVENT / FAULT	PROTECTION RESPONSE	$\overline{\text{FLT}}$ INDICATION
Overtemperature	Shutdown	Yes
Oversvoltage	Output Voltage Clamp (OVC) (TPS25952x, TPS25953x, TPS25954x only)	No
Oversvoltage	Shutdown (OVLO) (TPS259573 only)	Yes
Undersvoltage	Shutdown (UVP or UVLO)	No
Overcurrent	Current Limiting	No
Short circuit	Current Limiting	No
ILM pin open	Shutdown	No
ILM pin short	Shutdown If $I_{\text{OUT}} > I_{\text{CB}}$	Yes If $I_{\text{OUT}} > I_{\text{CB}}$

When the TPS2595x0, TPS2595x1, TPS2595x3 devices are turned off as a result of a fault as described in the table above, the  $\overline{\text{FLT}}$  pin is pulled low.

All faults will be cleared if the device loses power or if it is re-enabled using the EN/UVLO (or  $\overline{\text{EN}}/\text{OVLO}$ ) pin.

### 8.3.6 Quick Output Discharge (QOD)

Some applications require the output capacitor to be discharged quickly when the eFuse is turned off. This prevents any unpredictable behavior from the downstream devices as the capacitor discharges slowly. The TPS2595x5 device provides a Quick Output Discharge feature that can be enabled by connecting OUT pin to QOD pin. An internal FET provides a fast discharge path for the output capacitor resulting in the OUT voltage falling to 0 V in a short time. The FET initially operates in saturation region and provides a constant current discharge. After the FET enters linear region, it offers a discharge path similar to a resistor.

It is possible to model this as a simple equivalent resistance, which would discharge a given capacitor charged to a given voltage in the same time as the overall discharge circuit. This parameter is specified as the effective QOD resistance  $R_{\text{QOD}}$  for the device. It takes a time equivalent to 5 time constants ( $\tau = R \times C$ ) to discharge a capacitor by 99.3%. For example, with an effective QOD resistance of 19  $\Omega$ , the time taken to discharge a 100- $\mu\text{F}$  capacitor from 5 V to 35 mV can be calculated as in 公式 5.

$$t_{\text{Discharge}} = 5 \times 19 \Omega \times 100 \mu\text{F} = 9.5 \text{ ms} \quad (5)$$




## 8.4 Device Functional Modes

The features of the device depend on the operating mode.

### 8.4.1 Enable and Fault Pin Functional Mode 1: Single Device, Self-Controlled

In this mode of operation, the device is enabled by the  $V_{IN}$  voltage without the need of an external processor to drive the  $\overline{ENABLE}$  pin. The  $\overline{FLT}$  pin is optionally monitored by an external host. See [图 53](#).

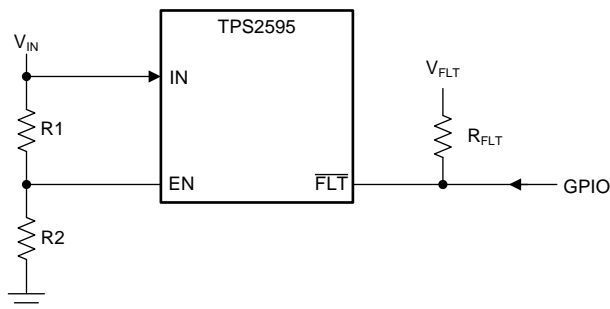


Copyright © 2017, Texas Instruments Incorporated

**图 53. Single Device, Self-Controlled**

### 8.4.2 Enable and Fault Pin Functional Mode 2: Single Device, Host-Controlled

In this mode of operation, the device enable pin is driven by an external host. The pin can be driven directly from a GPIO without the need for any glue logic. The  $\overline{FLT}$  pin is optionally monitored by the host. See [图 54](#).

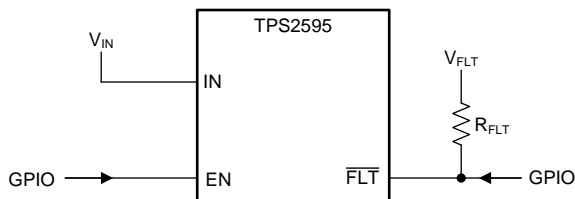

Copyright © 2017, Texas Instruments Incorporated

**图 54. Single Device, Host-Controlled**


### 8.4.3 Enable and Fault Pin Functional Mode 2: Multiple Devices, Self-Controlled

In this mode of operation, the devices are self-controlled (no host present). The EN and  $\overline{FLT}$  pins are shorted together, and connected with up to three total devices as shown in [图 55](#). In this configuration, when any one of the TPS2595xx devices detects a fault, it automatically disables the other TPS2595xx devices in the system.

注

This configuration is only applicable to the Active High Enable variants TPS2595x0, TPS2595x1, TPS2595x5.

Device Functional Modes (接下页)

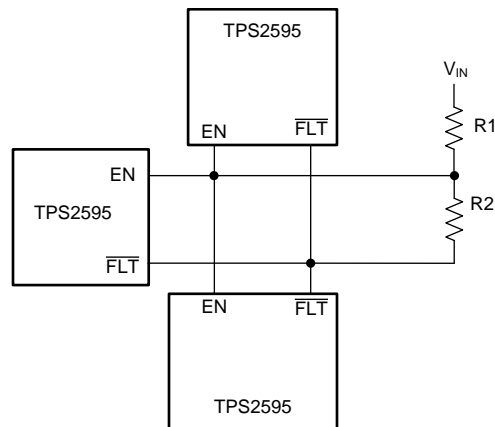

Copyright © 2017, Texas Instruments Incorporated

图 55. Multiple Devices, Self-Controlled

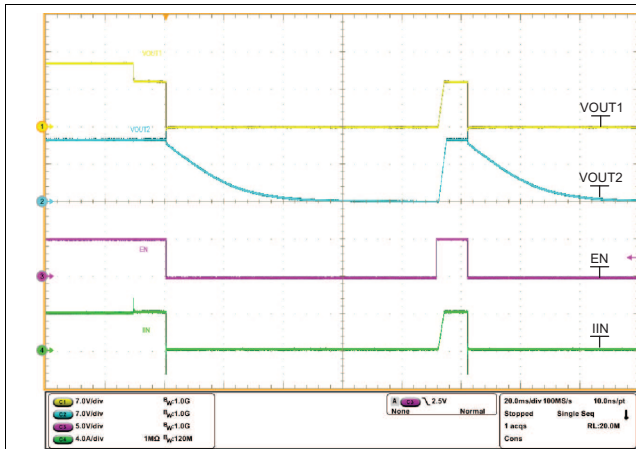


图 56. TPS259541 Self-controlled Mode Response with Overload Fault on OUT1 Followed by Auto-retry with Persistent Fault

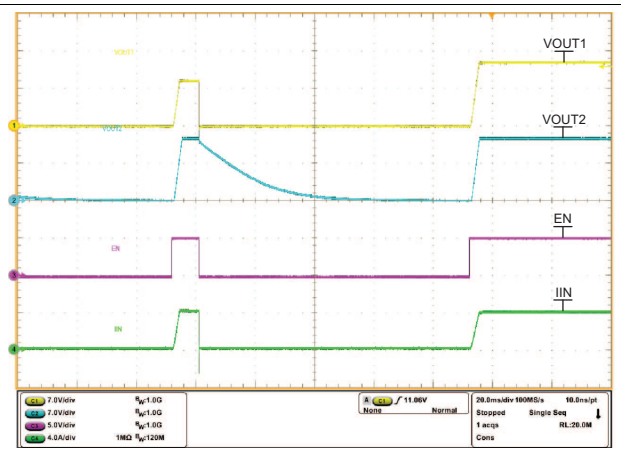


图 57. TPS259541 Self-controlled Mode Response with Overload on OUT1 Followed by Recovery with Fault Removed

## 9 Application and Implementation

### 注


Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

### 9.1 Application Information

The TPS2595xx device is an integrated eFuse that is typically used for hot-swap and power rail protection applications. The device operates from 2.7 V to 18 V with programmable current limit and undervoltage protection. The device aids in controlling the in-rush current and provides precise current limiting during overload conditions for systems such as set-top box, DTVs, gaming consoles, SSDs, HDDs, and smart meters. The device also provides robust protection for multiple faults on the sub-system rail.

The following design procedure can be used to select the supporting component values based on the application requirement. Additionally, a spreadsheet design tool [TPS2595xx Design Calculation Tool](#) is available.

### 9.2 Typical Application

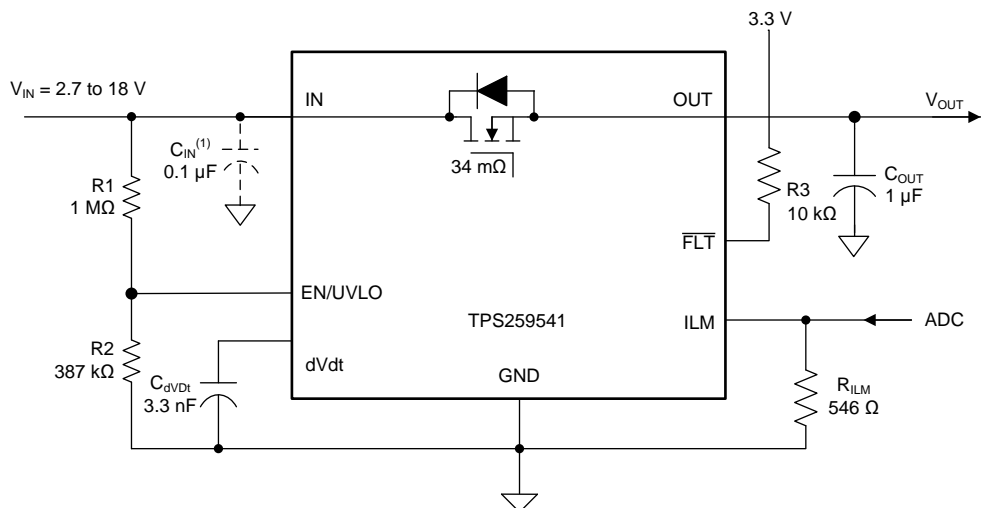

Copyright © 2017, Texas Instruments Incorporated

- (1)  $C_{IN}$  is optional and 0.1  $\mu\text{F}$  is recommended to suppress transients due to the inductance of PCB routing or from input wiring.

图 58. Typical Application Schematic: Simple e-Fuse for Set-Top Boxes

#### 9.2.1 Design Requirements

表 3 lists the TPS25954x design requirements.

表 3. Design Parameters

DESIGN PARAMETER	EXAMPLE VALUE
Input voltage, $V_{IN}$	12 V
Undervoltage lockout set point, $V_{UV}$	4.3 V
Overvoltage protection set point, $V_{OV}$	Default: $V_{OVC} = 13.7\text{ V}$
Load at start-up, $R_{L(SU)}$	4 $\Omega$
Current limit, $I_{LIMIT}$	3.7 A
Load capacitance, $C_{OUT}$	1 $\mu\text{F}$
Maximum ambient temperatures, $T_A$	85°C

## 9.2.2 Detailed Design Procedure

The designer must know the following:

- Normal input operation voltage
- Maximum output capacitance
- Maximum current Limit
- Load during start-up
- Maximum ambient temperature of operation

This design procedure seeks to control the junction temperature of device under both static and transient conditions by proper selection of output ramp-up time and associated support components. The designer can adjust this procedure to fit the application and design criteria.

### 9.2.2.1 Programming the Current-Limit Threshold: $R_{ILM}$ Selection

The  $R_{ILM}$  resistor at the ILM pin sets the over load current limit, this can be set using [公式 6](#).

$$R_{ILM} = \frac{2000}{I_{LIMIT} - 0.04} \quad (6)$$

For  $I_{LIMIT} = 3.7$  A, from [公式 6](#),  $R_{ILM}$  is 546  $\Omega$ , choose closest standard value resistor with 1% tolerance.

### 9.2.2.2 Undervoltage Lockout Set Point

The undervoltage lockout (UVLO) trip point is adjusted using the external voltage divider network of  $R_1$  and  $R_2$  as connected between IN, EN/UVLO and GND pins of the device. The values required for setting the undervoltage are calculated solving [公式 7](#).

$$V_{UV} = \frac{R_1 + R_2}{R_2} \times V_{UVLO(R)} \quad (7)$$

Where  $V_{UVLO(R)}$  is UVLO rising threshold (1.2 V). Because  $R_1$  and  $R_2$  leak the current from input supply  $V_{IN}$ , these resistors must be selected based on the acceptable leakage current from input power supply  $V_{IN}$ .

The current drawn by  $R_1$  and  $R_2$  from the power supply is  $I_{R12} = V_{IN} / (R_1 + R_2)$ .

However, leakage currents due to external active components connected to the resistor string can add error to these calculations. So, the resistor string current,  $I_{R12}$  must be chosen to be 20 times greater than the leakage current expected.

To set the UVLO at  $V_{UVR} = 4.3$  V, select  $R_2 = 387$  k $\Omega$ , and  $R_1 = 1$  M $\Omega$ .

### 9.2.2.3 Setting Output Voltage Ramp Time ( $T_{dVdT}$ )

For a successful design, the junction temperature of device must be kept below the absolute maximum rating during both dynamic (start-up) and steady state conditions. Dynamic power stresses often are an order of magnitude greater than the static stresses, so it is important to determine the right start-up time and in-rush current limit required with system capacitance to avoid thermal shutdown during start-up with and without load.

The required ramp-up capacitor  $C_{dVdT}$  is calculated considering the two possible cases (see [Case 1: Start-Up Without Load. Only Output Capacitance  \$C\_{OUT}\$  Draws Current](#) and [Case 2: Start-Up With Load. Output Capacitance  \$C\_{OUT}\$  and Load Draw Current](#)).

#### 9.2.2.3.1 Case 1: Start-Up Without Load. Only Output Capacitance $C_{OUT}$ Draws Current

During start-up, as the output capacitor charges, the voltage drop as well as the power dissipated across the internal FET decreases. The average power dissipated in the device during start-up is calculated using [公式 9](#).

For TPS2592xx device, the inrush current is determined as shown in [公式 8](#).

$$I_{INRUSH} = C_{OUT} \times \frac{V_{IN}}{T_{dVdT}} \quad (8)$$

Power dissipation during start-up is shown in [公式 9](#).

$$P_{D(INRUSH)} = 0.5 \times V_{IN} \times I_{INRUSH} \quad (9)$$

公式 9 假设负载在输出电压达到其最终值之前不抽取任何电流。

### 9.2.2.3.2 Case 2: Start-Up With Load. Output Capacitance $C_{OUT}$ and Load Draw Current

当负载在导通序列期间抽取电流时，会有额外的功率耗散。考虑在阻性负载启动期间  $R_{L(SU)}$ ，负载电流随输出电压的增加而按比例增加。公式 10 到公式 13 显示了内部 FET 在充电时间  $T_{dvdT}$  期间的平均功率耗散，这是由于阻性负载。

$$P_{D(LOAD)} = \left(\frac{1}{6}\right) \times \frac{V_{IN}^2}{R_{L(SU)}} \quad (10)$$

总功率耗散在设备启动期间是公式 11。

$$P_{D(STARTUP)} = P_{D(INRUSH)} + P_{D(LOAD)} \quad (11)$$

总启动电流由公式 12 给出。

$$I_{STARTUP} = I_{INRUSH} + I_L(t) \quad (12)$$

如果  $I_{STARTUP} > I_{LIMIT}$ ，设备将电流限制为  $I_{LIMIT}$ ，且电流受限的充电时间由公式 13 确定。

$$T_{dvdT(Current-Limited)} = C_{OUT} \times R_{L(SU)} \times \left[ \frac{I_{LIMIT}}{I_{INRUSH}} - 1 + \text{LN} \left( \frac{I_{INRUSH}}{I_{LIMIT} - \frac{V_{IN}}{R_{L(SU)}}} \right) \right] \quad (13)$$

功率耗散，有负载和无负载，对于选定的启动时间，必须不超过图 59 所示的关机限制。

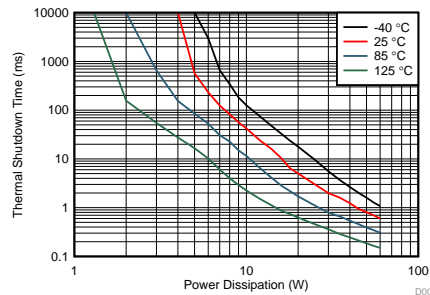


图 59. Thermal Shutdown Limit Plot

对于正在讨论的设计示例，选择斜坡上升电容器  $C_{dvdT} = \text{OPEN}$ 。默认斜坡速率对于  $C_{dvdT} = \text{OPEN}$  是  $38.2 \text{ mV}/\mu\text{s}$ 。以  $38.2 \text{ mV}/\mu\text{s}$  的斜坡速率，对于  $12 \text{ V}$  输入，斜坡上升时间  $T_{dvdT}$  是  $248 \mu\text{s}$ 。

负载电容在斜坡上升期间抽取的浪涌电流  $I_{INRUSH}$  由公式 14 给出。

$$I_{INRUSH} = \frac{1 \mu\text{F} \times 38.2 \text{ mV}}{\mu\text{s}} = 38.2 \text{ mA} \quad (14)$$

浪涌功率耗散使用公式 15 计算。

$$P_{D(INRUSH)} = 0.5 \times 12 \times 38.2 \text{ m} = 229.2 \text{ mW} \quad (15)$$

对于  $229.2 \text{ mW}$  的功率损耗，设备的关机时间必须不小于斜坡上升时间  $T_{dvdT}$ ，以避免在最高工作温度时发生误触发。图 59 显示了在  $T_A = 85^\circ\text{C}$  时，对于  $229.2 \text{ mW}$  的功率，关机时间是无限的。因此，使用  $248 \mu\text{s}$  作为启动时间而无需在输出上加载任何负载是安全的。

The additional power dissipation when a 4 Ω load is present during start-up is calculated using 公式 10.

$$P_{D(Load)} = \frac{12 \times 12}{6 \times 4} = 6 \text{ W} \tag{16}$$

The total device power dissipation during start-up is given in 公式 17.

$$P_{D(STARTUP)} = 6 + 229.2 \text{ m} = 6.229 \text{ W} \tag{17}$$

The 图 59 shows  $T_A = 85^\circ\text{C}$  and the thermal shutdown time for 6.229 W is more than 10 ms, which is well within the acceptable limits to not use an external capacitor  $C_{dVdt}$  with a start-up load of 4 Ω.

When  $C_{OUT}$  is large, there is a need to decrease the power dissipation during start-up. This can be done by increasing the value of the  $C_{dVdt}$  capacitor.

### 9.2.3 Support Component Selection: $C_{IN}$

$C_{IN}$  is a bypass capacitor to help control transient voltages, unit emissions, and local supply noise. Where acceptable, a value in the range from 0.001 μF to 0.1 μF is recommended for  $C_{IN}$ .

### 9.2.4 Application Curves

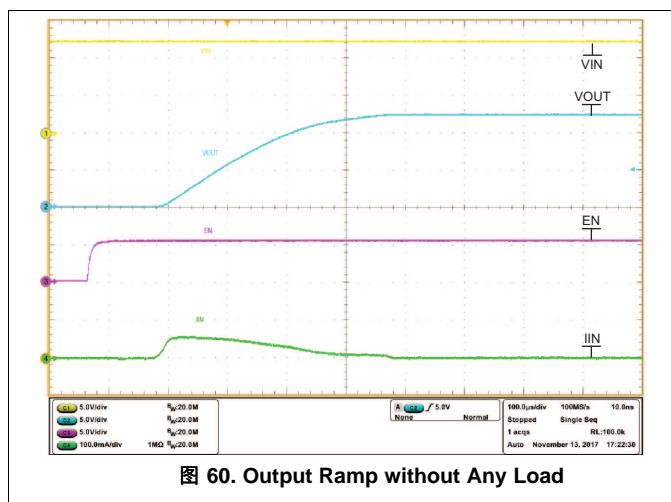


图 60. Output Ramp without Any Load


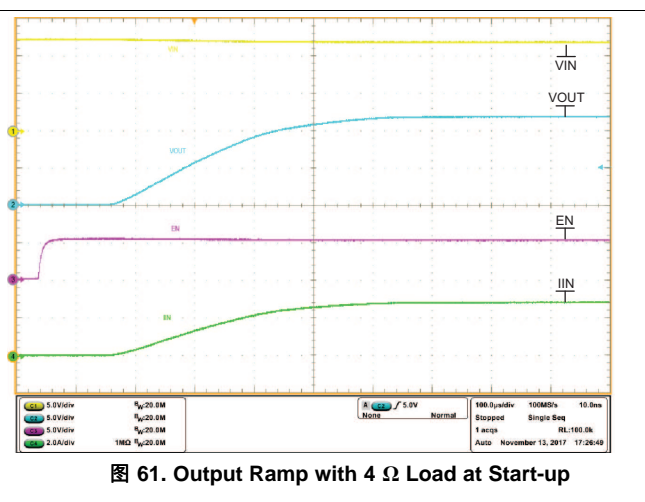


图 61. Output Ramp with 4 Ω Load at Start-up



### 9.2.5 Controlled Power Down (Quick Output Discharge) using TPS2595x5

When the TPS2595x5 device is disabled, the output voltage is left floating and the power-down profile is entirely dictated by the load. In some applications, this can lead to undesired activity because the load is not powered down to a defined state. Controlled output discharge can ensure the load is completely turned off and is not in an undefined operational state. The QOD pin in the TPS2595x5 device can be connected to the OUT pin to facilitate the Quick Output Discharge function, as shown in 图 62. When the TPS2595x5 device is disabled, the QOD pin is pulled low and provides a quick discharge path for the output capacitor. The output voltage discharge rate is dictated by the output capacitor  $C_{OUT}$ , the total discharge path resistance (internal plus external), and the load.

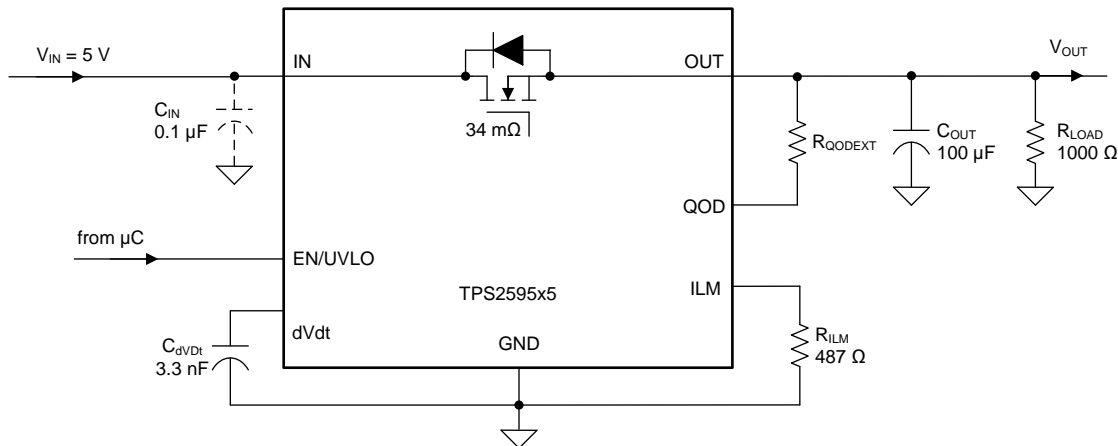


Copyright © 2017, Texas Instruments Incorporated

图 62. Circuit Implementation with Quick Output Discharge Function using TPS2595x5

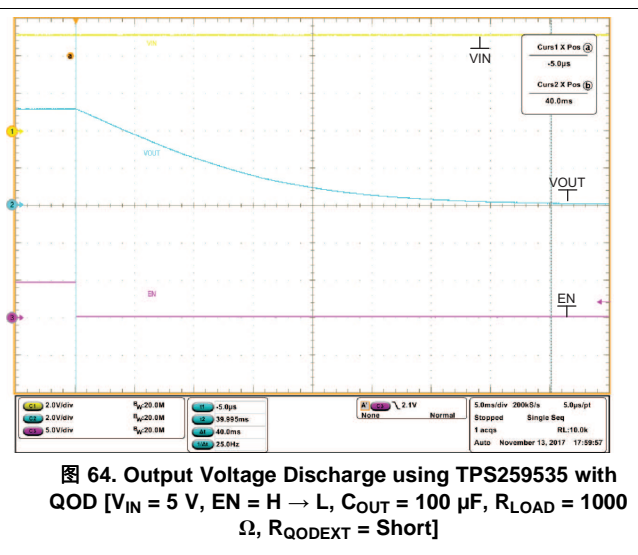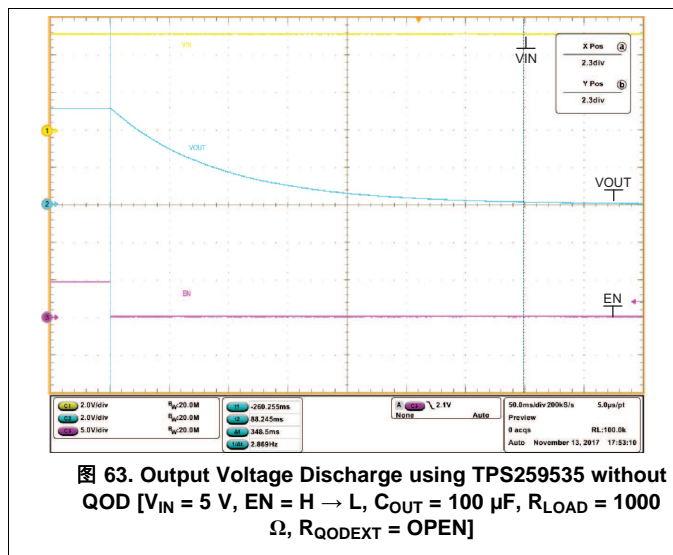

### 9.2.6 Overvoltage Lockout using TPS259573

The TPS259573 device incorporates a circuit to protect the system during overvoltage conditions. A resistor divider connected from the supply to the  $\overline{\text{EN/OVLO}}$  pin to GND (as shown in 图 65) programs the overvoltage threshold. A voltage more than  $V_{\text{OVLO}}$  on the  $\overline{\text{EN/OVLO}}$  pin turns off the internal FET and protects the downstream load. 图 66 shows overvoltage cut-off at the input voltage of 15 V.

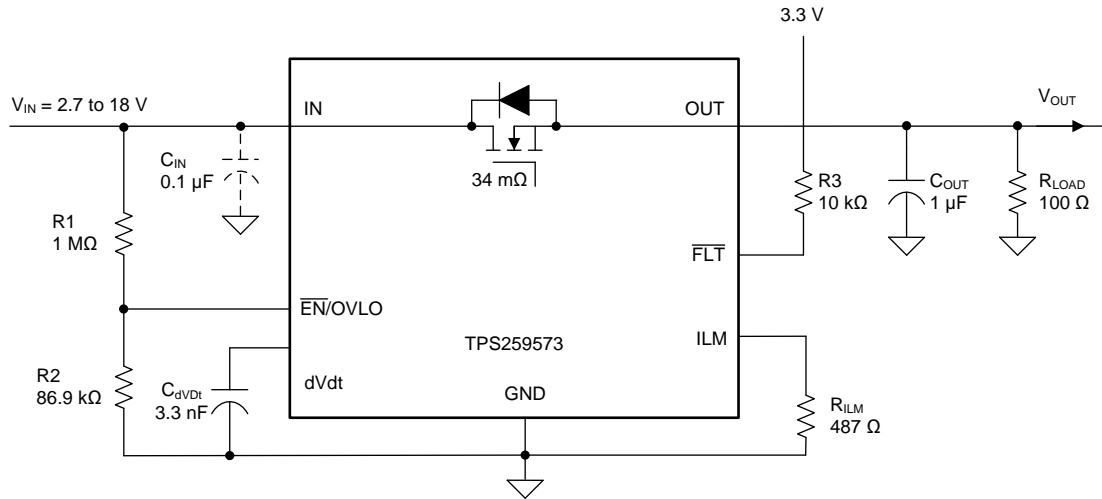

Copyright © 2017, Texas Instruments Incorporated

图 65. Circuit Implementation for Overvoltage Lockout using TPS259573

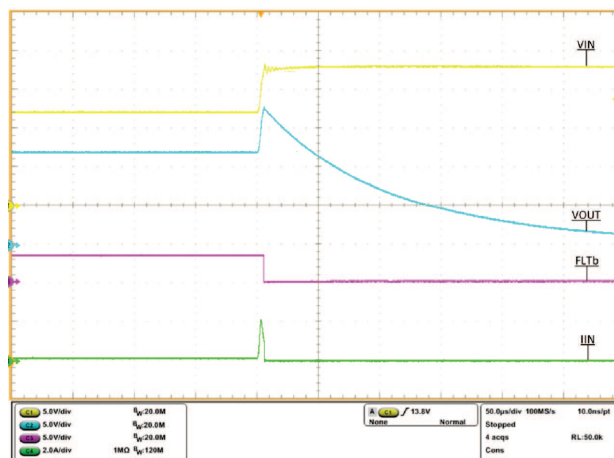


图 66. Overvoltage Lockout Response using TPS259573



## 10 Power Supply Recommendations

The TPS2595xx devices are designed for a supply voltage range of  $2.7\text{ V} \leq V_{IN} \leq 18\text{ V}$ . An input ceramic bypass capacitor higher than  $0.1\text{ }\mu\text{F}$  is recommended if the input supply is located more than a few inches from the device. The power supply must be rated higher than the set current limit to avoid voltage droops during overcurrent and short-circuit conditions.

### 10.1 Transient Protection

In the case of a short circuit and overload current limit when the device interrupts current flow, the input inductance generates a positive voltage spike on the input, and the output inductance generates a negative voltage spike on the output. The peak amplitude of voltage spikes (transients) is dependent on the value of inductance in series to the input or output of the device. Such transients can exceed the absolute maximum ratings of the device if steps are not taken to address the issue. Typical methods for addressing transients include:

- Minimize lead length and inductance into and out of the device.
- Use a large PCB GND plane.
- Use a Schottky diode across the output to absorb negative spikes.
- Use a low-value ceramic capacitor  $C_{IN} = 0.001\text{ }\mu\text{F}$  to  $0.1\text{ }\mu\text{F}$  to absorb the energy and dampen the transients.

The approximate value of input capacitance can be estimated with [公式 18](#):


$$V_{\text{SPIKE (Absolute)}} = V_{(IN)} + I_{(LOAD)} \times \sqrt{\frac{L_{(IN)}}{C_{(IN)}}}$$

where

- $V_{(IN)}$  is the nominal supply voltage
  - $I_{(LOAD)}$  is the load current
  - $L_{(IN)}$  equals the effective inductance seen looking into the source
  - $C_{(IN)}$  is the capacitance present at the input
- (18)

Some applications may require the addition of a Transient Voltage Suppressor (TVS) to prevent transients from exceeding the absolute maximum ratings of the device.

The circuit implementation with optional protection components (a ceramic capacitor, TVS and Schottky diode) is shown in [图 67](#).

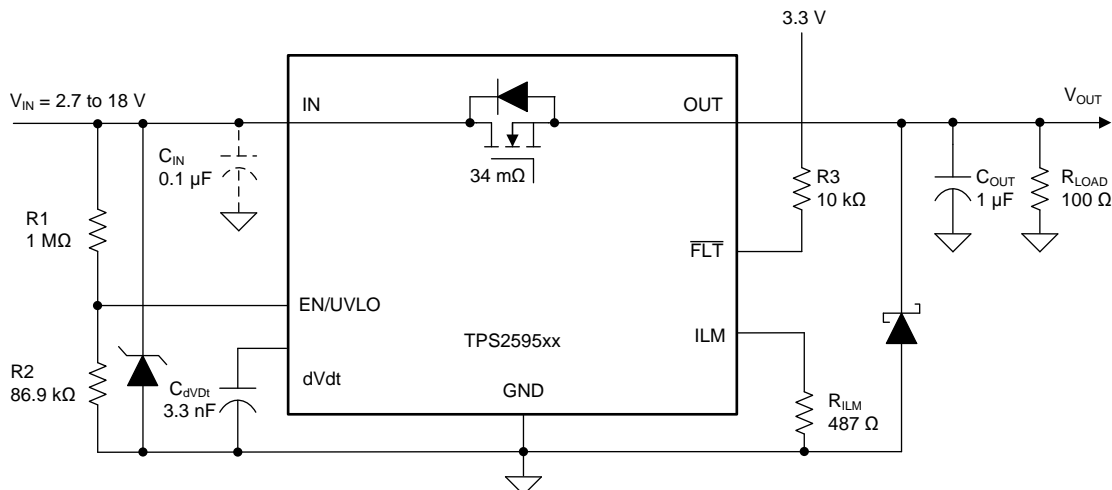

Copyright © 2017, Texas Instruments Incorporated

图 67. Circuit Implementation with Optional Protection Components

## 10.2 Output Short-Circuit Measurements

It is difficult to obtain repeatable and similar short-circuit testing results. The following contribute to variation in results:

- Source bypassing
- Input leads
- Circuit layout
- Component selection
- Output shorting method
- Relative location of the short
- Instrumentation

The actual short exhibits a certain degree of randomness because it microscopically bounces and arcs. Ensure that configuration and methods are used to obtain realistic results. Do not expect to see waveforms exactly like those in this data sheet because every setup is different.


## 11 Layout

### 11.1 Layout Guidelines

- For all applications, a ceramic decoupling capacitor of 0.01  $\mu\text{F}$  or greater is recommended between the IN terminal and GND terminal. For hot-plug applications, where input power-path inductance is negligible, this capacitor can be eliminated or minimized.
- The optimal placement of the decoupling capacitor is closest to the IN and GND terminals of the device. Care must be taken to minimize the loop area formed by the bypass-capacitor connection, the IN terminal, and the GND terminal of the IC. See [Figure 68](#) for a PCB layout example.
- High current-carrying power-path connections must be as short as possible and must be sized to carry at least twice the full-load current.
- The GND terminal must be tied to the PCB ground plane at the terminal of the IC. The PCB ground must be a copper plane or island on the board.
- Locate the following support components close to their connection pins:
  - $R_{ILM}$
  - $C_{dVdT}$
  - Resistors for the EN/UVLO (or  $\overline{\text{EN}}/\text{OVLO}$ ) pin
 Connect the other end of the component to the GND pin of the device with shortest trace length. The trace routing for the  $R_{ILM}$  and  $C_{dVdT}$  components to the device must be as short as possible to reduce parasitic effects on the current limit and soft start timing. These traces must not have any coupling to switching signals on the board.
- Protection devices such as TVS, snubbers, capacitors, or diodes must be placed physically close to the device they are intended to protect. These protection devices must be routed with short traces to reduce inductance. For example, a protection Schottky diode is recommended to address negative transients due to switching of inductive loads, and it must be physically close to the OUT pins.
- Obtaining acceptable performance with alternate layout schemes is possible; [Layout Example](#) has been shown to produce good results and is intended as a guideline.

## 11.2 Layout Example

- Top Layer
- Bottom Layer Ground Plane
- Via to Bottom Ground Plane

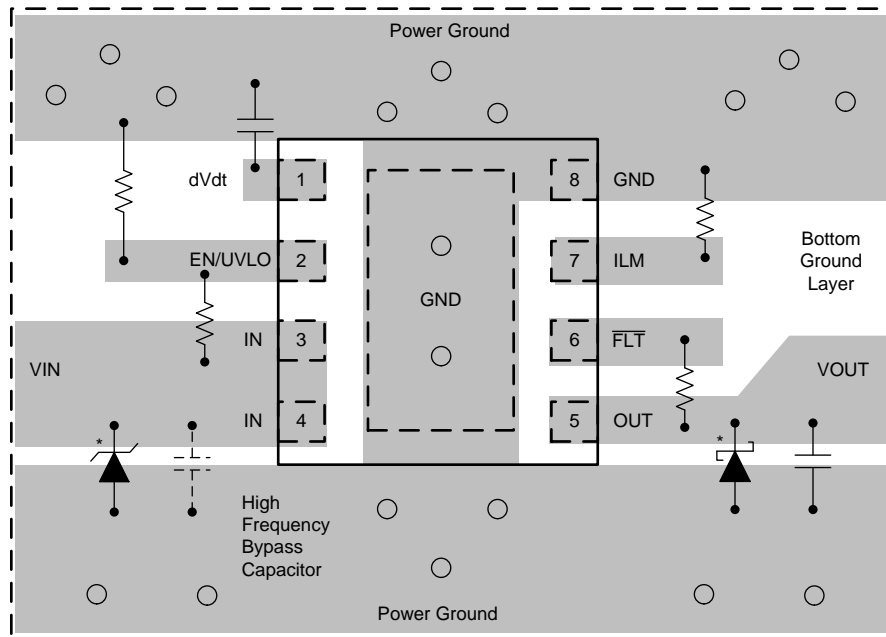

- (1) Optional: Needed only to suppress the transients caused by inductive load switching

图 68. TPS2595xx Layout

## 12 器件和文档支持

### 12.1 文档支持

#### 12.1.1 相关文档

请参阅如下相关文档：

[TPS2595EVM 电子保险丝评估板](#)

[TPS2595xx 设计计算工具](#)

#### 12.1.2 相关链接

下表列出了快速访问链接。类别包括技术文档、支持和社区资源、工具和软件，以及立即购买的快速链接。

表 4. 相关链接

器件	产品文件夹	立即订购	技术文档	工具和软件	支持和社区
TPS259520	<a href="#">单击此处</a>	<a href="#">单击此处</a>	<a href="#">单击此处</a>	<a href="#">单击此处</a>	<a href="#">单击此处</a>
TPS259521	<a href="#">单击此处</a>	<a href="#">单击此处</a>	<a href="#">单击此处</a>	<a href="#">单击此处</a>	<a href="#">单击此处</a>
TPS259530	<a href="#">单击此处</a>	<a href="#">单击此处</a>	<a href="#">单击此处</a>	<a href="#">单击此处</a>	<a href="#">单击此处</a>
TPS259531	<a href="#">单击此处</a>	<a href="#">单击此处</a>	<a href="#">单击此处</a>	<a href="#">单击此处</a>	<a href="#">单击此处</a>
TPS259533	<a href="#">单击此处</a>	<a href="#">单击此处</a>	<a href="#">单击此处</a>	<a href="#">单击此处</a>	<a href="#">单击此处</a>
TPS259540	<a href="#">单击此处</a>	<a href="#">单击此处</a>	<a href="#">单击此处</a>	<a href="#">单击此处</a>	<a href="#">单击此处</a>
TPS259541	<a href="#">单击此处</a>	<a href="#">单击此处</a>	<a href="#">单击此处</a>	<a href="#">单击此处</a>	<a href="#">单击此处</a>
TPS259570	<a href="#">单击此处</a>	<a href="#">单击此处</a>	<a href="#">单击此处</a>	<a href="#">单击此处</a>	<a href="#">单击此处</a>
TPS259571	<a href="#">单击此处</a>	<a href="#">单击此处</a>	<a href="#">单击此处</a>	<a href="#">单击此处</a>	<a href="#">单击此处</a>
TPS259573	<a href="#">单击此处</a>	<a href="#">单击此处</a>	<a href="#">单击此处</a>	<a href="#">单击此处</a>	<a href="#">单击此处</a>
TPS259525	<a href="#">单击此处</a>	<a href="#">单击此处</a>	<a href="#">单击此处</a>	<a href="#">单击此处</a>	<a href="#">单击此处</a>
TPS259535	<a href="#">单击此处</a>	<a href="#">单击此处</a>	<a href="#">单击此处</a>	<a href="#">单击此处</a>	<a href="#">单击此处</a>

### 12.2 接收文档更新通知

如需接收文档更新通知，请访问 [www.ti.com.cn](http://www.ti.com.cn) 网站上的器件产品文件夹。单击右上角的 [通知我](#) 进行注册，即可每周接收产品信息更改摘要。有关更改的详细信息，请查看任何已修订文档中包含的修订历史记录。

### 12.3 社区资源

下列链接提供到 TI 社区资源的连接。链接的内容由各个分销商“按照原样”提供。这些内容并不构成 TI 技术规范，并且不一定反映 TI 的观点；请参阅 TI 的 [《使用条款》](#)。

**TI E2E™ 在线社区** [TI 的工程师对工程师 \(E2E\) 社区](#)。此社区的创建目的在于促进工程师之间的协作。在 [e2e.ti.com](http://e2e.ti.com) 中，您可以咨询问题、分享知识、拓展思路并与同行工程师一道帮助解决问题。

**设计支持** [TI 参考设计支持](#) 可帮助您快速查找有帮助的 E2E 论坛、设计支持工具以及技术支持的联系信息。

### 12.4 商标

E2E is a trademark of Texas Instruments.  
All other trademarks are the property of their respective owners.

### 12.5 静电放电警告



ESD 可能会损坏该集成电路。德州仪器 (TI) 建议通过适当的预防措施处理所有集成电路。如果不遵守正确的处理措施和安装程序，可能会损坏集成电路。

ESD 的损坏小至导致微小的性能降级，大至整个器件故障。精密的集成电路可能更容易受到损坏，这是因为非常细微的参数更改都可能会导致器件与其发布的规格不相符。

### 12.6 术语表

[SLYZ022](#) — TI 术语表。

这份术语表列出并解释术语、缩写和定义。

### 13 机械、封装和可订购信息

以下页面包含机械、封装和可订购信息。这些信息是指定器件的最新可用数据。数据如有变更，恕不另行通知，且不会对此文档进行修订。如需获取此数据表的浏览器版本，请参阅左侧的导航栏。

**PACKAGING INFORMATION**

Orderable part number	Status (1)	Material type (2)	Package   Pins	Package qty   Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
<a href="#">TPS259520DSGR</a>	Active	Production	WSON (DSG)   8	3000   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	ES20
TPS259520DSGR.A	Active	Production	WSON (DSG)   8	3000   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	ES20
TPS259520DSGRG4	Active	Production	WSON (DSG)   8	3000   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	ES20
TPS259520DSGRG4.A	Active	Production	WSON (DSG)   8	3000   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	ES20
<a href="#">TPS259520DSGT</a>	Active	Production	WSON (DSG)   8	250   SMALL T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	ES20
TPS259520DSGT.A	Active	Production	WSON (DSG)   8	250   SMALL T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	ES20
<a href="#">TPS259521DSGR</a>	Active	Production	WSON (DSG)   8	3000   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	ES21
TPS259521DSGR.A	Active	Production	WSON (DSG)   8	3000   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	ES21
<a href="#">TPS259521DSGT</a>	Active	Production	WSON (DSG)   8	250   SMALL T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	ES21
TPS259521DSGT.A	Active	Production	WSON (DSG)   8	250   SMALL T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	ES21
TPS259521DSGTG4	Active	Production	WSON (DSG)   8	250   SMALL T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	ES21
TPS259521DSGTG4.A	Active	Production	WSON (DSG)   8	250   SMALL T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	ES21
<a href="#">TPS259525DSGR</a>	Active	Production	WSON (DSG)   8	3000   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	ES25
TPS259525DSGR.A	Active	Production	WSON (DSG)   8	3000   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	ES25
<a href="#">TPS259525DSGT</a>	Active	Production	WSON (DSG)   8	250   SMALL T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	ES25
TPS259525DSGT.A	Active	Production	WSON (DSG)   8	250   SMALL T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	ES25
<a href="#">TPS259530DSGR</a>	Active	Production	WSON (DSG)   8	3000   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	ES30
TPS259530DSGR.A	Active	Production	WSON (DSG)   8	3000   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	ES30
<a href="#">TPS259530DSGT</a>	Active	Production	WSON (DSG)   8	250   SMALL T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	ES30
TPS259530DSGT.A	Active	Production	WSON (DSG)   8	250   SMALL T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	ES30
<a href="#">TPS259531DSGR</a>	Active	Production	WSON (DSG)   8	3000   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	ES31
TPS259531DSGR.A	Active	Production	WSON (DSG)   8	3000   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	ES31
TPS259531DSGRG4	Active	Production	WSON (DSG)   8	3000   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	ES31
TPS259531DSGRG4.A	Active	Production	WSON (DSG)   8	3000   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	ES31
<a href="#">TPS259531DSGT</a>	Active	Production	WSON (DSG)   8	250   SMALL T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	ES31
TPS259531DSGT.A	Active	Production	WSON (DSG)   8	250   SMALL T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	ES31
<a href="#">TPS259533DSGR</a>	Active	Production	WSON (DSG)   8	3000   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	ES33
TPS259533DSGR.A	Active	Production	WSON (DSG)   8	3000   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	ES33
<a href="#">TPS259533DSGT</a>	Active	Production	WSON (DSG)   8	250   SMALL T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	ES33

Orderable part number	Status (1)	Material type (2)	Package   Pins	Package qty   Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
TPS259533DSGT.A	Active	Production	WSON (DSG)   8	250   SMALL T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	ES33
TPS259533DSGTG4	Active	Production	WSON (DSG)   8	250   SMALL T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	ES33
TPS259533DSGTG4.A	Active	Production	WSON (DSG)   8	250   SMALL T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	ES33
<a href="#">TPS259535DSGR</a>	Active	Production	WSON (DSG)   8	3000   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	ES35
TPS259535DSGR.A	Active	Production	WSON (DSG)   8	3000   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	ES35
<a href="#">TPS259535DSGT</a>	Active	Production	WSON (DSG)   8	250   SMALL T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	ES35
TPS259535DSGT.A	Active	Production	WSON (DSG)   8	250   SMALL T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	ES35
<a href="#">TPS259540DSGR</a>	Active	Production	WSON (DSG)   8	3000   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	ES40
TPS259540DSGR.A	Active	Production	WSON (DSG)   8	3000   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	ES40
TPS259540DSGRG4	Active	Production	WSON (DSG)   8	3000   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	ES40
TPS259540DSGRG4.A	Active	Production	WSON (DSG)   8	3000   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	ES40
<a href="#">TPS259540DSGT</a>	Active	Production	WSON (DSG)   8	250   SMALL T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	ES40
TPS259540DSGT.A	Active	Production	WSON (DSG)   8	250   SMALL T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	ES40
<a href="#">TPS259541DSGR</a>	Active	Production	WSON (DSG)   8	3000   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	ES41
TPS259541DSGR.A	Active	Production	WSON (DSG)   8	3000   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	ES41
TPS259541DSGRG4	Active	Production	WSON (DSG)   8	3000   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	ES41
TPS259541DSGRG4.A	Active	Production	WSON (DSG)   8	3000   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	ES41
<a href="#">TPS259541DSGT</a>	Active	Production	WSON (DSG)   8	250   SMALL T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	ES41
TPS259541DSGT.A	Active	Production	WSON (DSG)   8	250   SMALL T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	ES41
<a href="#">TPS259570DSGR</a>	Active	Production	WSON (DSG)   8	3000   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	ES70
TPS259570DSGR.A	Active	Production	WSON (DSG)   8	3000   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	ES70
TPS259570DSGRG4	Active	Production	WSON (DSG)   8	3000   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	ES70
TPS259570DSGRG4.A	Active	Production	WSON (DSG)   8	3000   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	ES70
<a href="#">TPS259570DSGT</a>	Active	Production	WSON (DSG)   8	250   SMALL T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	ES70
TPS259570DSGT.A	Active	Production	WSON (DSG)   8	250   SMALL T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	ES70
<a href="#">TPS259571DSGR</a>	Active	Production	WSON (DSG)   8	3000   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	ES71
TPS259571DSGR.A	Active	Production	WSON (DSG)   8	3000   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	ES71
TPS259571DSGRG4	Active	Production	WSON (DSG)   8	3000   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	ES71
TPS259571DSGRG4.A	Active	Production	WSON (DSG)   8	3000   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	ES71
<a href="#">TPS259571DSGT</a>	Active	Production	WSON (DSG)   8	250   SMALL T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	ES71
TPS259571DSGT.A	Active	Production	WSON (DSG)   8	250   SMALL T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	ES71

Orderable part number	Status (1)	Material type (2)	Package   Pins	Package qty   Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
<a href="#">TPS259573DSGR</a>	Active	Production	WSON (DSG)   8	3000   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	ES73
TPS259573DSGR.A	Active	Production	WSON (DSG)   8	3000   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	ES73
TPS259573DSGRG4	Active	Production	WSON (DSG)   8	3000   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	ES73
TPS259573DSGRG4.A	Active	Production	WSON (DSG)   8	3000   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	ES73
<a href="#">TPS259573DSGT</a>	Active	Production	WSON (DSG)   8	250   SMALL T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	ES73
TPS259573DSGT.A	Active	Production	WSON (DSG)   8	250   SMALL T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	ES73

(1) **Status:** For more details on status, see our [product life cycle](#).

(2) **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

(3) **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

(4) **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

(5) **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

(6) **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.



## TAPE AND REEL INFORMATION



### QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TPS259520DSGR	WSON	DSG	8	3000	180.0	8.4	2.3	2.3	1.15	4.0	8.0	Q2
TPS259520DSGRG4	WSON	DSG	8	3000	180.0	8.4	2.3	2.3	1.15	4.0	8.0	Q2
TPS259520DSGT	WSON	DSG	8	250	180.0	8.4	2.3	2.3	1.15	4.0	8.0	Q2
TPS259521DSGR	WSON	DSG	8	3000	180.0	8.4	2.3	2.3	1.15	4.0	8.0	Q2
TPS259521DSGT	WSON	DSG	8	250	180.0	8.4	2.3	2.3	1.15	4.0	8.0	Q2
TPS259521DSGTG4	WSON	DSG	8	250	180.0	8.4	2.3	2.3	1.15	4.0	8.0	Q2
TPS259525DSGR	WSON	DSG	8	3000	180.0	8.4	2.3	2.3	1.15	4.0	8.0	Q2
TPS259525DSGT	WSON	DSG	8	250	180.0	8.4	2.3	2.3	1.15	4.0	8.0	Q2
TPS259530DSGR	WSON	DSG	8	3000	180.0	8.4	2.3	2.3	1.15	4.0	8.0	Q2
TPS259530DSGT	WSON	DSG	8	250	180.0	8.4	2.3	2.3	1.15	4.0	8.0	Q2
TPS259531DSGR	WSON	DSG	8	3000	180.0	8.4	2.3	2.3	1.15	4.0	8.0	Q2
TPS259531DSGRG4	WSON	DSG	8	3000	180.0	8.4	2.3	2.3	1.15	4.0	8.0	Q2
TPS259531DSGT	WSON	DSG	8	250	180.0	8.4	2.3	2.3	1.15	4.0	8.0	Q2
TPS259533DSGR	WSON	DSG	8	3000	180.0	8.4	2.3	2.3	1.15	4.0	8.0	Q2
TPS259533DSGT	WSON	DSG	8	250	180.0	8.4	2.3	2.3	1.15	4.0	8.0	Q2
TPS259533DSGTG4	WSON	DSG	8	250	180.0	8.4	2.3	2.3	1.15	4.0	8.0	Q2

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TPS259535DSGR	WSON	DSG	8	3000	180.0	8.4	2.3	2.3	1.15	4.0	8.0	Q2
TPS259535DSGT	WSON	DSG	8	250	180.0	8.4	2.3	2.3	1.15	4.0	8.0	Q2
TPS259540DSGR	WSON	DSG	8	3000	180.0	8.4	2.3	2.3	1.15	4.0	8.0	Q2
TPS259540DSGRG4	WSON	DSG	8	3000	180.0	8.4	2.3	2.3	1.15	4.0	8.0	Q2
TPS259540DSGT	WSON	DSG	8	250	180.0	8.4	2.3	2.3	1.15	4.0	8.0	Q2
TPS259541DSGR	WSON	DSG	8	3000	180.0	8.4	2.3	2.3	1.15	4.0	8.0	Q2
TPS259541DSGRG4	WSON	DSG	8	3000	180.0	8.4	2.3	2.3	1.15	4.0	8.0	Q2
TPS259541DSGT	WSON	DSG	8	250	180.0	8.4	2.3	2.3	1.15	4.0	8.0	Q2
TPS259570DSGR	WSON	DSG	8	3000	180.0	8.4	2.3	2.3	1.15	4.0	8.0	Q2
TPS259570DSGRG4	WSON	DSG	8	3000	180.0	8.4	2.3	2.3	1.15	4.0	8.0	Q2
TPS259570DSGT	WSON	DSG	8	250	180.0	8.4	2.3	2.3	1.15	4.0	8.0	Q2
TPS259571DSGR	WSON	DSG	8	3000	180.0	8.4	2.3	2.3	1.15	4.0	8.0	Q2
TPS259571DSGRG4	WSON	DSG	8	3000	180.0	8.4	2.3	2.3	1.15	4.0	8.0	Q2
TPS259571DSGT	WSON	DSG	8	250	180.0	8.4	2.3	2.3	1.15	4.0	8.0	Q2
TPS259573DSGR	WSON	DSG	8	3000	180.0	8.4	2.3	2.3	1.15	4.0	8.0	Q2
TPS259573DSGRG4	WSON	DSG	8	3000	180.0	8.4	2.3	2.3	1.15	4.0	8.0	Q2
TPS259573DSGT	WSON	DSG	8	250	180.0	8.4	2.3	2.3	1.15	4.0	8.0	Q2

**TAPE AND REEL BOX DIMENSIONS**


\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TPS259520DSGR	WSON	DSG	8	3000	210.0	185.0	35.0
TPS259520DSGRG4	WSON	DSG	8	3000	210.0	185.0	35.0
TPS259520DSGT	WSON	DSG	8	250	210.0	185.0	35.0
TPS259521DSGR	WSON	DSG	8	3000	210.0	185.0	35.0
TPS259521DSGT	WSON	DSG	8	250	210.0	185.0	35.0
TPS259521DSGTG4	WSON	DSG	8	250	210.0	185.0	35.0
TPS259525DSGR	WSON	DSG	8	3000	210.0	185.0	35.0
TPS259525DSGT	WSON	DSG	8	250	210.0	185.0	35.0
TPS259530DSGR	WSON	DSG	8	3000	210.0	185.0	35.0
TPS259530DSGT	WSON	DSG	8	250	210.0	185.0	35.0
TPS259531DSGR	WSON	DSG	8	3000	210.0	185.0	35.0
TPS259531DSGRG4	WSON	DSG	8	3000	210.0	185.0	35.0
TPS259531DSGT	WSON	DSG	8	250	210.0	185.0	35.0
TPS259533DSGR	WSON	DSG	8	3000	210.0	185.0	35.0
TPS259533DSGT	WSON	DSG	8	250	210.0	185.0	35.0
TPS259533DSGTG4	WSON	DSG	8	250	210.0	185.0	35.0
TPS259535DSGR	WSON	DSG	8	3000	210.0	185.0	35.0
TPS259535DSGT	WSON	DSG	8	250	210.0	185.0	35.0

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TPS259540DSGR	WSON	DSG	8	3000	210.0	185.0	35.0
TPS259540DSGRG4	WSON	DSG	8	3000	210.0	185.0	35.0
TPS259540DSGT	WSON	DSG	8	250	210.0	185.0	35.0
TPS259541DSGR	WSON	DSG	8	3000	210.0	185.0	35.0
TPS259541DSGRG4	WSON	DSG	8	3000	210.0	185.0	35.0
TPS259541DSGT	WSON	DSG	8	250	210.0	185.0	35.0
TPS259570DSGR	WSON	DSG	8	3000	210.0	185.0	35.0
TPS259570DSGRG4	WSON	DSG	8	3000	210.0	185.0	35.0
TPS259570DSGT	WSON	DSG	8	250	210.0	185.0	35.0
TPS259571DSGR	WSON	DSG	8	3000	210.0	185.0	35.0
TPS259571DSGRG4	WSON	DSG	8	3000	210.0	185.0	35.0
TPS259571DSGT	WSON	DSG	8	250	210.0	185.0	35.0
TPS259573DSGR	WSON	DSG	8	3000	210.0	185.0	35.0
TPS259573DSGRG4	WSON	DSG	8	3000	210.0	185.0	35.0
TPS259573DSGT	WSON	DSG	8	250	210.0	185.0	35.0

## GENERIC PACKAGE VIEW


**DSG 8**

**WSON - 0.8 mm max height**

2 x 2, 0.5 mm pitch

PLASTIC SMALL OUTLINE - NO LEAD

This image is a representation of the package family, actual package may vary.  
Refer to the product data sheet for package details.

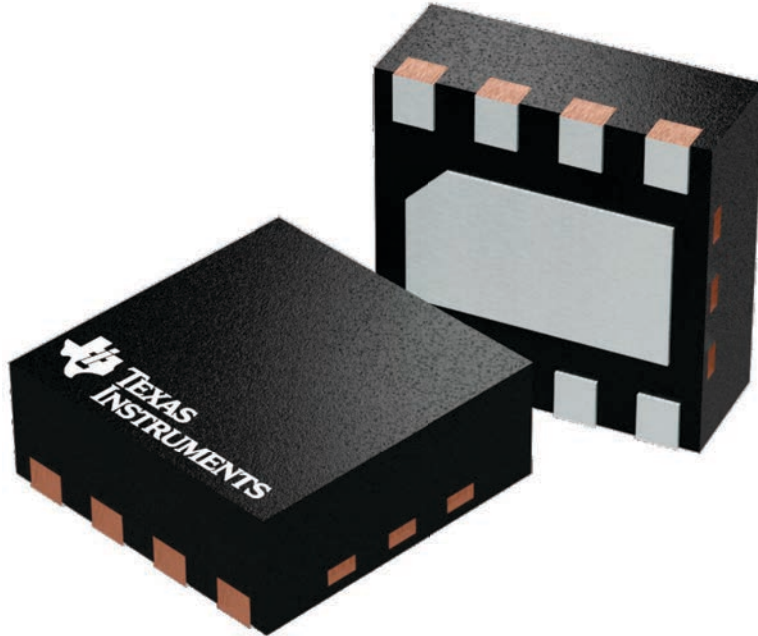

4224783/A

# DSG0008A




# PACKAGE OUTLINE

## WSON - 0.8 mm max height

PLASTIC SMALL OUTLINE - NO LEAD



ALTERNATIVE TERMINAL SHAPE TYPICAL

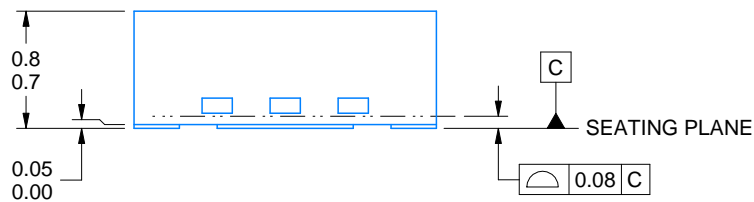

SIDE WALL METAL THICKNESS DIM A	
OPTION 1	OPTION 2
0.1	0.2



4218900/E 08/2022

### NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. The package thermal pad must be soldered to the printed circuit board for thermal and mechanical performance.

# EXAMPLE BOARD LAYOUT


DSG0008A

WSON - 0.8 mm max height

PLASTIC SMALL OUTLINE - NO LEAD



LAND PATTERN EXAMPLE  
SCALE:20X

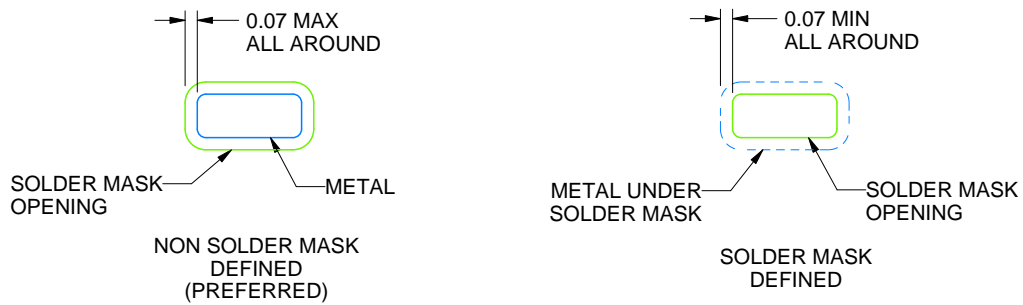

SOLDER MASK DETAILS

4218900/E 08/2022

NOTES: (continued)


4. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 ([www.ti.com/lit/slua271](http://www.ti.com/lit/slua271)).
5. Vias are optional depending on application, refer to device data sheet. If any vias are implemented, refer to their locations shown on this view. It is recommended that vias under paste be filled, plugged or tented.

# EXAMPLE STENCIL DESIGN

DSG0008A

WSON - 0.8 mm max height

PLASTIC SMALL OUTLINE - NO LEAD

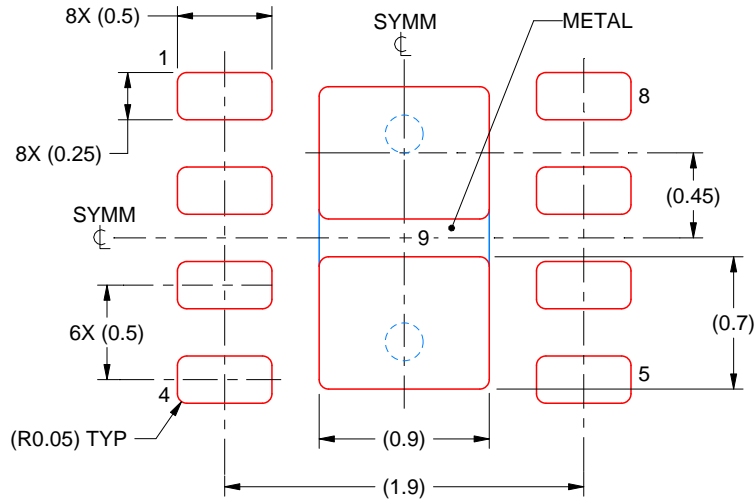

SOLDER PASTE EXAMPLE  
BASED ON 0.125 mm THICK STENCIL

EXPOSED PAD 9:  
87% PRINTED SOLDER COVERAGE BY AREA UNDER PACKAGE  
SCALE:25X

4218900/E 08/2022

NOTES: (continued)

6. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.



## 重要通知和免责声明

TI“按原样”提供技术和可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证没有瑕疵且不做任何明示或暗示的担保，包括但不限于对适销性、与某特定用途的适用性或不侵犯任何第三方知识产权的暗示担保。

这些资源可供使用 TI 产品进行设计的熟练开发人员使用。您将自行承担以下全部责任：(1) 针对您的应用选择合适的 TI 产品，(2) 设计、验证并测试您的应用，(3) 确保您的应用满足相应标准以及任何其他安全、安保法规或其他要求。

这些资源如有变更，恕不另行通知。TI 授权您仅可将这些资源用于研发本资源所述的 TI 产品的相关应用。严禁以其他方式对这些资源进行复制或展示。您无权使用任何其他 TI 知识产权或任何第三方知识产权。对于因您对这些资源的使用而对 TI 及其代表造成的任何索赔、损害、成本、损失和债务，您将全额赔偿，TI 对此概不负责。

TI 提供的产品受 [TI 销售条款](#)、[TI 通用质量指南](#) 或 [ti.com](#) 上其他适用条款或 TI 产品随附的其他适用条款的约束。TI 提供这些资源并不会扩展或以其他方式更改 TI 针对 TI 产品发布的适用的担保或担保免责声明。除非德州仪器 (TI) 明确将某产品指定为定制产品或客户特定产品，否则其产品均为按确定价格收入目录的标准通用器件。

TI 反对并拒绝您可能提出的任何其他或不同的条款。

版权所有 © 2025，德州仪器 (TI) 公司

最后更新日期：2025 年 10 月