



# **1.5 Gbps 2x2 LVDS Crosspoint Switch**

## **DS10CP152 Evaluation Kit**

### ***USER MANUAL***

**Part Number: DS10CP152EVK NOPB**

For the latest documents concerning these products and evaluation kit, visit [lvds.national.com](http://lvds.national.com).  
Schematics and gerber files are also available at [lvds.national.com](http://lvds.national.com).

## Table of Contents

Table of Contents .....	2
Overview .....	3
Description.....	4
Evaluation.....	5
Switch Configuration Truth Tables .....	6
Typical Performance .....	7

## Overview

The DS10CP152EVK is an evaluation kit designed for demonstrating performance of the DS10CP152, a 1.5 Gbps 2x2 LVDS Crosspoint Switch. The evaluation kit is comprised of the DS10CP152 with its associated input and output SMA connectors and jumpers to manually configure the switch.

The purpose of this document is to familiarize the user with the DS10CP152EVK, to suggest test setup procedures and instrumentation to test the device optimally, and to guide the user through some typical measurements that demonstrate the performance of the DS10CP152 in typical applications.


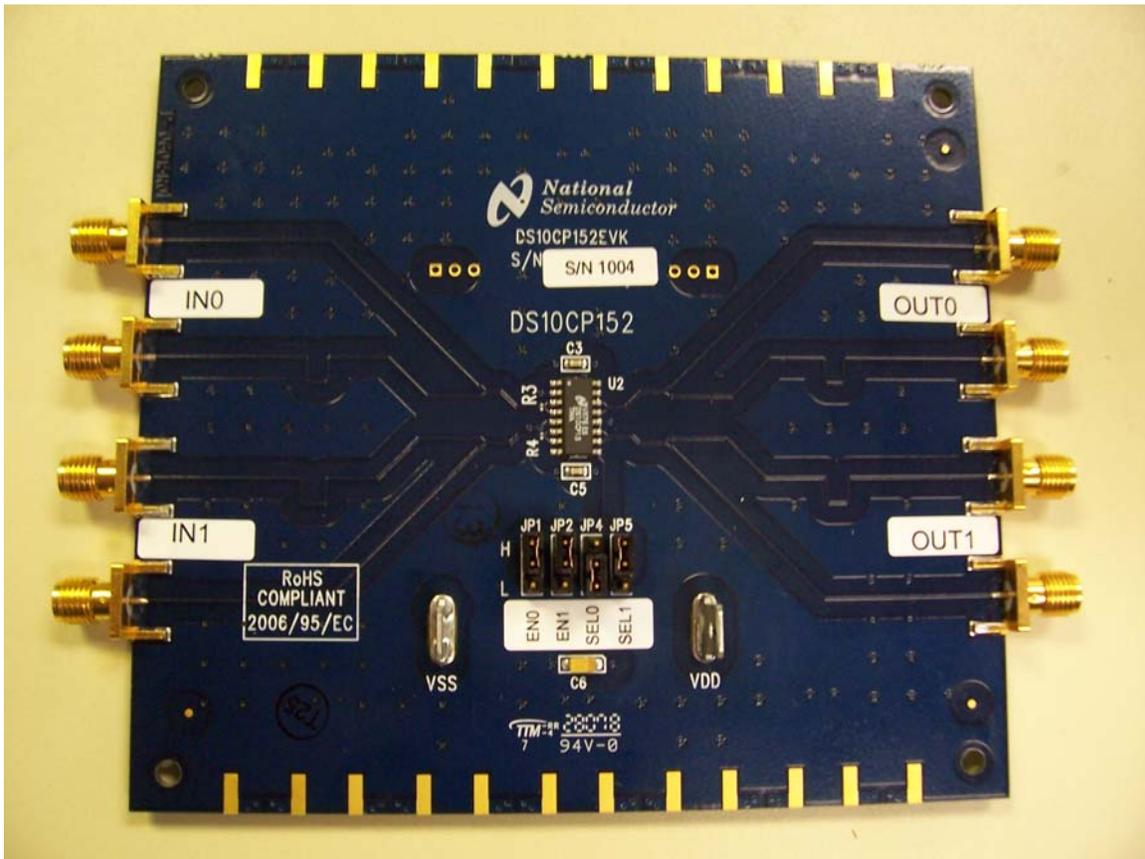


Figure 1. Photo of the DS10CP152EVK

## Description

Figure 2 shows the top layer drawing of the PCB with the silkscreen annotations. The 4.5 by 4.0 inch, four-layer PCB is designed to evaluate the functions of the DS10CP152.

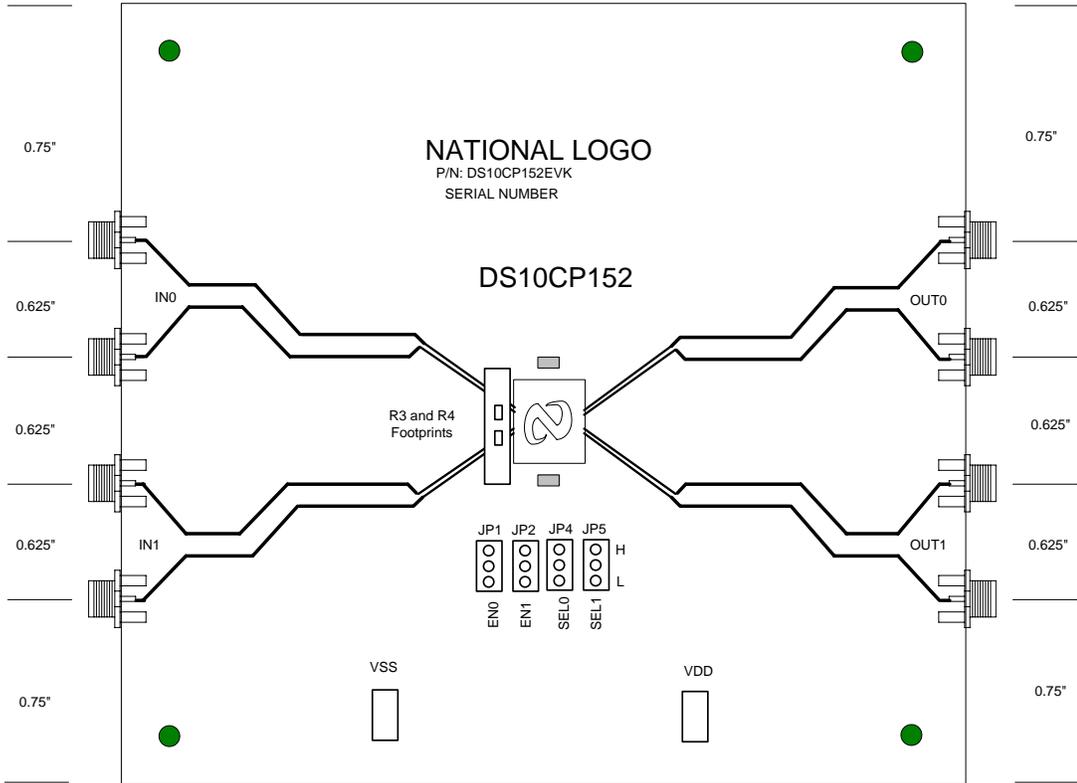


4.5" x 4.0" PCB

**Figure 2.** Top Layer Floor Plan of the DS10CP152EVK

## Evaluation

This section provides recommended test setup procedure for the device evaluation. Figure 3 depicts a typical setup and instrumentation you may use for the device evaluation.

1. Configure the test setup as shown in Figure 3.
2. Set and enable the desired INn to OUTn drivers by selecting SEL0, SEL1, EN0 and EN1 according to Tables 1 – 2.
3. Apply + supply (3.3V typical) to the VDD and – supply (ground) to the VSS connectors.
4. Connect a signal source (signal generator, data source, or an LVDS driver) to the desired INn inputs on the board and adjust the signal parameters (VOH, VOL, VCM) so that they comply with the device input recommendations.
5. Connect an oscilloscope to the selected OUTn outputs and view the output signals with an oscilloscope with the analog bandwidth of at least 3 GHz.

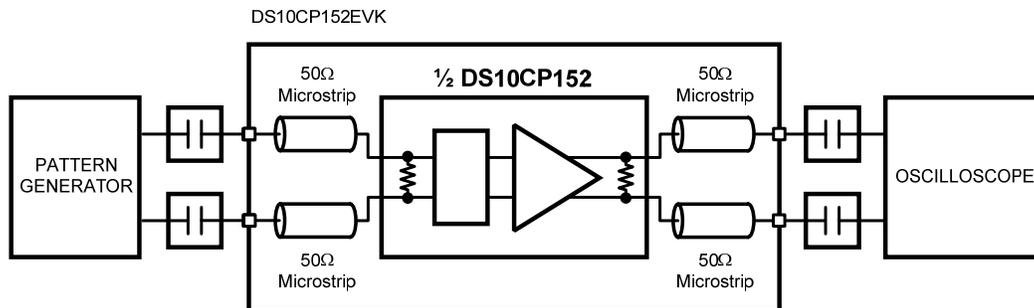

**Figure 3.** DS10CP152 Test Setup Example

## Switch Configuration Truth Tables

<b>SEL1</b>	<b>SEL0</b>	<b>OUT1</b>	<b>OUT0</b>
0	0	IN0	IN0
0	1	IN0	IN1
1	0	IN1	IN0
1	1	IN1	IN1

**Table 1.** Switch Configuration Truth Table

<b>EN1</b>	<b>EN0</b>	<b>OUT1</b>	<b>OUT0</b>
0	0	Disabled	Disabled
0	1	Disabled	Enabled
1	0	Enabled	Disabled
1	1	Enabled	Enabled

**Table 2.** Output Enable Truth Table

## Typical Performance

This section of the User Manual shows a typical eye diagram you can expect to see when evaluating the DS10CP152EVK.





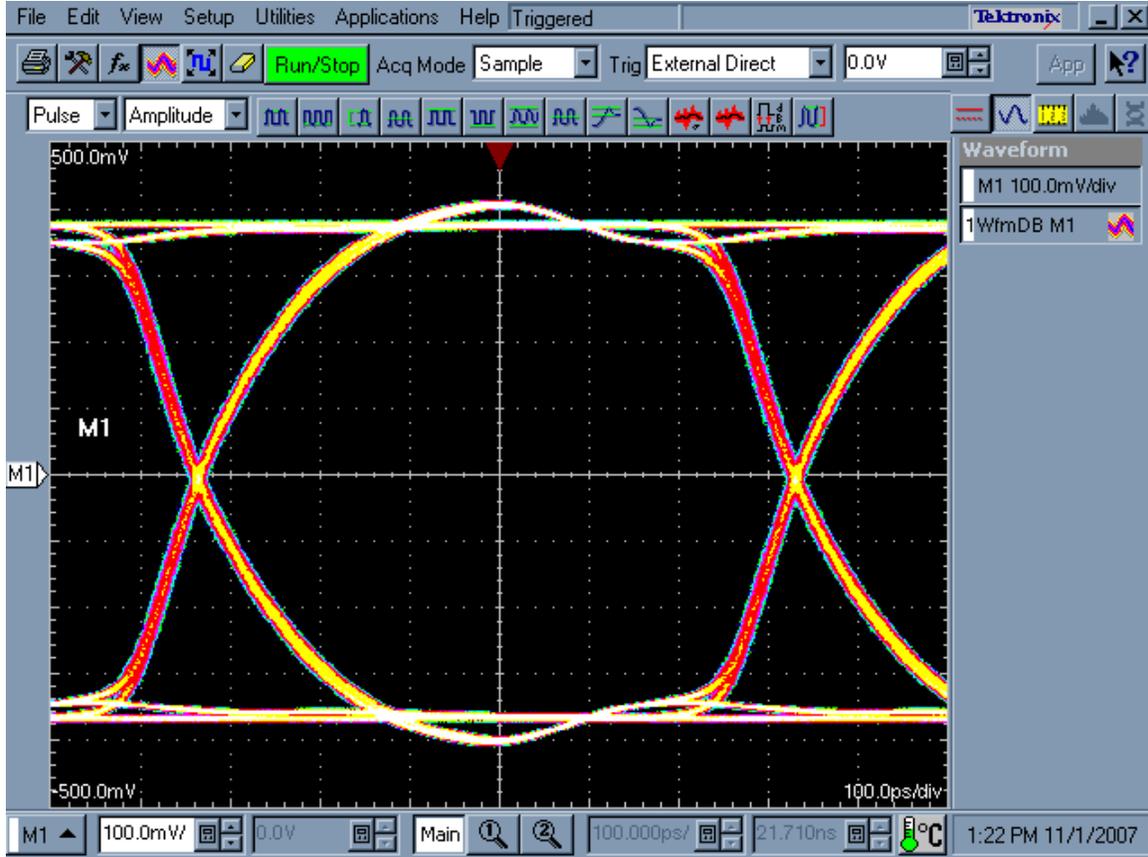


Figure 4. DS10CP152 1.5 Gbps NRZ PRBS-7 Output Eye Diagram

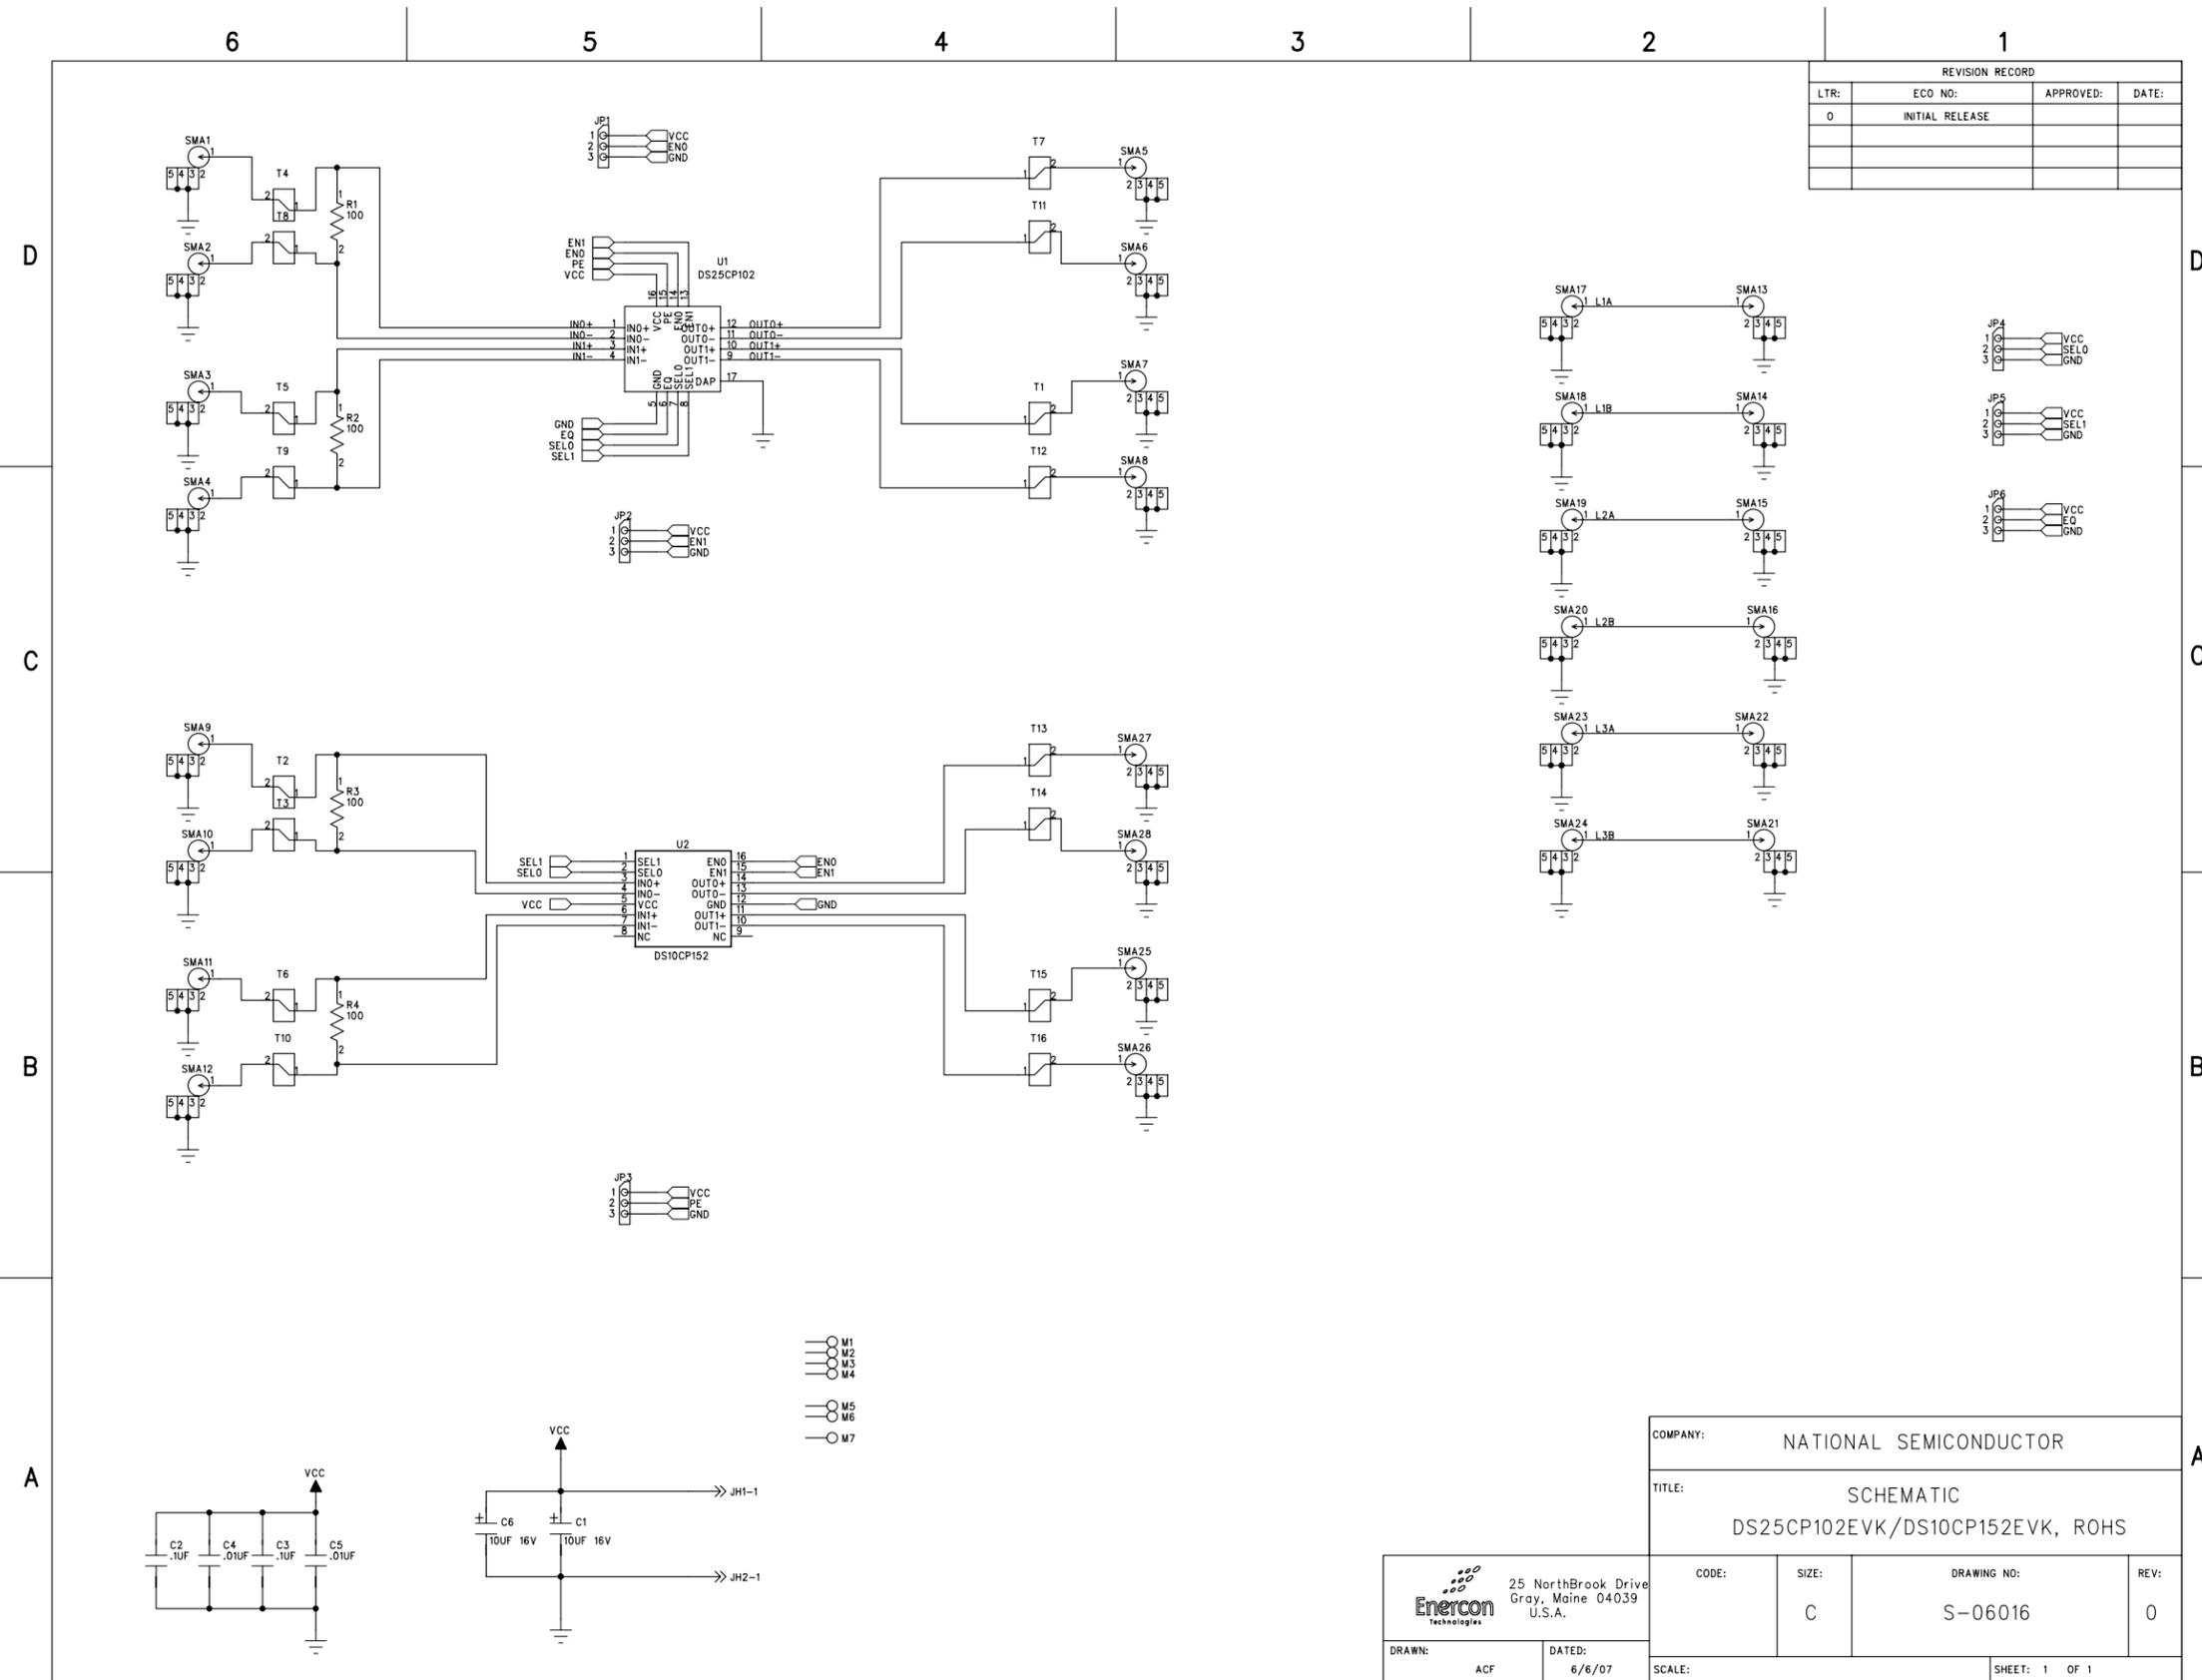

REVISION RECORD			
LTR:	ECO NO:	APPROVED:	DATE:
0	INITIAL RELEASE		



COMPANY: NATIONAL SEMICONDUCTOR

TITLE: SCHEMATIC  
DS25CP102EVK/DS10CP152EVK, ROHS

 25 NorthBrook Drive Gray, Maine 04039 U.S.A.	CODE:	SIZE:	DRAWING NO:	REV:
		C	S-06016	0
DRAWN: ACF	DATED: 6/6/07	SCALE:	SHEET: 1 OF 1	

**ENERCON - BILL OF MATERIALS**

TITLE:

**NATIONAL SEMICONDUCTOR  
PCBA, DS10CP152EVK, ROHS**PL Number: Rev: Rev By:  
Z3103-01 0Rev Date:  
6/7/2007PL Status:  
ReleasedMain Product:  
PCBA, DS10CP152EVK

Responsible Eng/Mgr:

Creator:  
Arlene FoxCreation Date:  
6/7/2007


Item	Part Type	Part Number/Value	Mfg	NoSub	Description	Qty	SMT	Ref Des	Notes	Rev
1	PCB	P-06015R0			DS25CP102: 4.00x4.50x.060in, 8 layer	1			Bd: (101.60x 114.30mm) Panel: (4.50x 8.10in) ( 114.30x205.74mm) 2 bds/panel	0
2										
3	IC	DS10CP102M-8	NAT		1.5 Gbps lvds Crosspoint Switch, SOIC16, Pb-Free	1	X	U2	Customer Supplied	0
4										
5	CAP	06035C103KAT	AVX		.01µF, 50V, ±10%, 0603, Ceramic, X7R, Pb-Free	1	X	C5		0
	<ALT>	C0603C103K5RAC	KEMET		.01µF, 50V, ±10%, 0603, Ceramic, X7R, Pb-Free					
	<ALT>	ECJ-1VB1H103K	PANA		.01µF, 50V, ±10%, 0603, Ceramic, X7R, Pb-Free					
6	CAP	0603YC104KAT	AVX		.1µF, 16V, ±10%, 0603, Ceramic, X7R, Pb- Free	1	X	C3		0
	<ALT>	C0603C104K4RAC	KEMET		.1µF, 16V, ±10%, 0603, Ceramic, X7R, Pb- Free					
	<ALT>	ECJ-1VB1C104K	PANA		.1µF, 16V, ±10%, 0603, Ceramic, X7R, Pb- Free					
7	CAP	TAJA106K016	AVX		10µF, 16V, ±10%, A-Case, Tantalum, Pb- Free	1	X	C6		0
	<ALT>	T491A106K016AT	KEMET		10µF, 16V, ±10%, A-Case, Tantalum, Pb- Free					
8										
9	CONN	1287	KEYSTONE		Faston, Male, .250", Pb-Free	2		JH1-2	VDD, VSS, Mount On U2 Side	0
10	CONN	142-0701-851	EMERSON		SMA, Jack Receptacle, 50 OHM, Pb-Free	8		SMA 9,10,11,12,25,26 ,27,28	Mount On U2 Side	0
11	CONN	TSW-103-07-G-S	SAMTEC		Header, 3p, Male, .100"sp, Gold, Pb-Free	4		JP1,2,4,5	Mount On U2 Side	0
12										
13	STENCL	T-06020R0	ENERCON		STENCIL FABRICATION, BOT, DS25CP102/DS10CP152EVK	1				0


<b>ENERCON - BILL OF MATERIALS</b>		TITLE: NATIONAL SEMICONDUCTOR PCBA, DS10CP152EVK, ROHS			PL Number: Z3103-01 0	Rev: Rev By: 0	Rev Date: 6/7/2007	PL Status: Released
Main Product: PCBA, DS10CP152EVK					Responsible Eng/Mgr:	Creator: Arlene Fox	Creation Date: 6/7/2007	

Item	Part Type	Part Number/Value	Mfg	NoSub	Description	Qty	SMT	Ref Des	Notes	Rev
14										
15	REF	C-06017R0	ENERCON		FABRICATION DWG, DS25CP102/DS10CP152EVK					0
16	REF	C-06018R0	ENERCON		PALLET DWG, DS25CP102/DS10CP152EVK					0
17	REF	S-06016R0	ENERCON		SCHEMATIC, DS25CP102/DS10CP152EVK					0
18										

Notes:

DO NOT STUFF:  
R1,2  
C1,2,4  
SMA1-8,13-24  
JP3,6

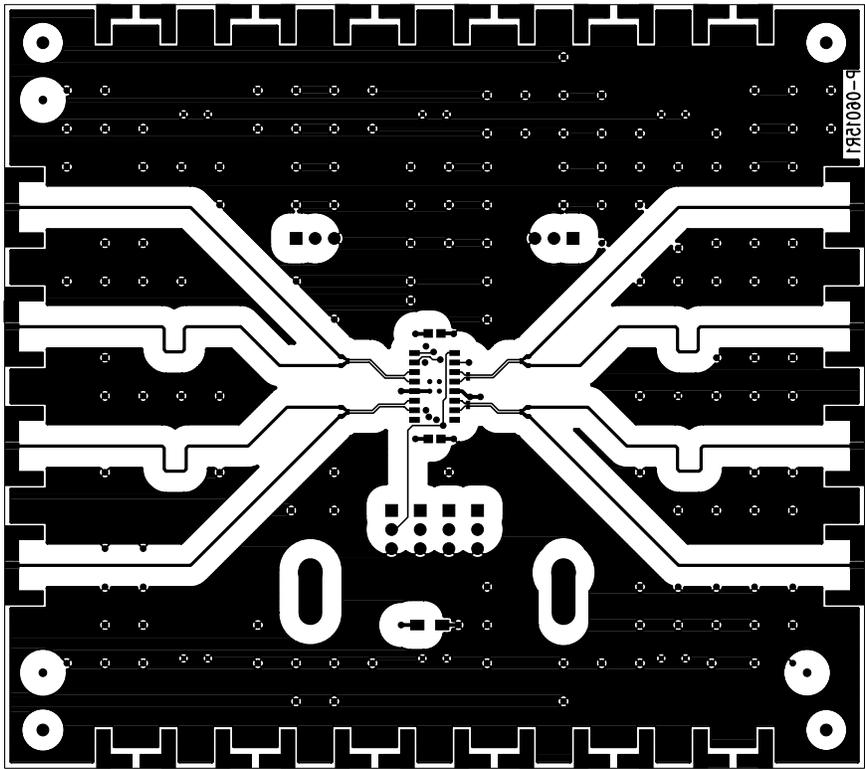

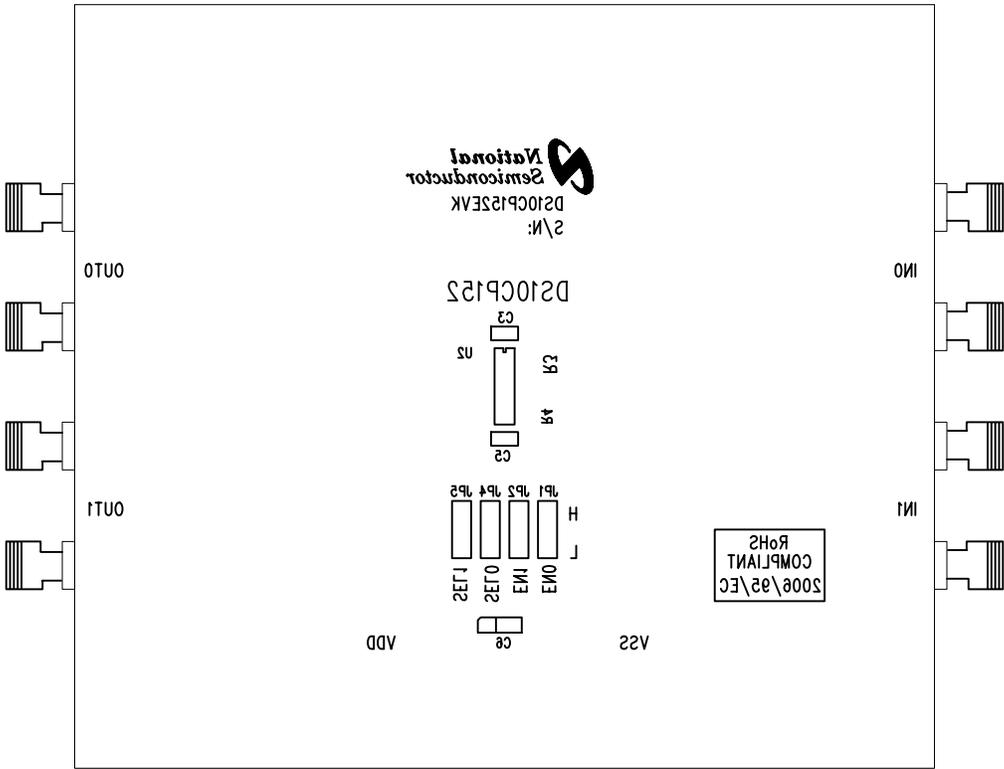

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

### Products

Audio	<a href="http://www.ti.com/audio">www.ti.com/audio</a>
Amplifiers	<a href="http://amplifier.ti.com">amplifier.ti.com</a>
Data Converters	<a href="http://dataconverter.ti.com">dataconverter.ti.com</a>
DLP® Products	<a href="http://www.dlp.com">www.dlp.com</a>
DSP	<a href="http://dsp.ti.com">dsp.ti.com</a>
Clocks and Timers	<a href="http://www.ti.com/clocks">www.ti.com/clocks</a>
Interface	<a href="http://interface.ti.com">interface.ti.com</a>
Logic	<a href="http://logic.ti.com">logic.ti.com</a>
Power Mgmt	<a href="http://power.ti.com">power.ti.com</a>
Microcontrollers	<a href="http://microcontroller.ti.com">microcontroller.ti.com</a>
RFID	<a href="http://www.ti-rfid.com">www.ti-rfid.com</a>
OMAP Mobile Processors	<a href="http://www.ti.com/omap">www.ti.com/omap</a>
Wireless Connectivity	<a href="http://www.ti.com/wirelessconnectivity">www.ti.com/wirelessconnectivity</a>

### Applications

Automotive and Transportation	<a href="http://www.ti.com/automotive">www.ti.com/automotive</a>
Communications and Telecom	<a href="http://www.ti.com/communications">www.ti.com/communications</a>
Computers and Peripherals	<a href="http://www.ti.com/computers">www.ti.com/computers</a>
Consumer Electronics	<a href="http://www.ti.com/consumer-apps">www.ti.com/consumer-apps</a>
Energy and Lighting	<a href="http://www.ti.com/energy">www.ti.com/energy</a>
Industrial	<a href="http://www.ti.com/industrial">www.ti.com/industrial</a>
Medical	<a href="http://www.ti.com/medical">www.ti.com/medical</a>
Security	<a href="http://www.ti.com/security">www.ti.com/security</a>
Space, Avionics and Defense	<a href="http://www.ti.com/space-avionics-defense">www.ti.com/space-avionics-defense</a>
Video and Imaging	<a href="http://www.ti.com/video">www.ti.com/video</a>

TI E2E Community Home Page

[e2e.ti.com](http://e2e.ti.com)

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2012, Texas Instruments Incorporated