

**Test Data
For PMP9481
08/19/2014**



Table of Contents

1. Design Specifications	3
2. Circuit Description and PCB details	3
3. PMP9481 Board Photos	4
4. Thermal Data	5
5. Efficiency	6
5.1 Efficiency Chart	6
5.2 Efficiency Data	7
6 Waveforms	8
6.1 Load Transient Response	8
6.2 Startup	11
6.3 Output Voltage Ripple and Switch Node Voltage	17
7. Frequency Response	20
8. Conducted Emissions	21

1. Design Specifications

Vin Minimum	6.5VDC
Vin Maximum	20VDC
Vout	12VDC
Iout	0.25A
Approximate Switching Frequency	500KHz


2. Circuit Description and PCB details

PMP9481 is a conducted EMI optimized (CISPR 25)3W SEPIC Converter for Wide Range Vin automotive application using the LM5001 regulator IC. The design accepts an input voltage of 6.5Vin to 20Vin and provides an output of 12Vout capable of supplying 0.25A of current to the load. It features a small size and is an inexpensive and more efficient solution to using boost converters and linear regulators.


The Board dimension of PMP9481 PCB is 75mm * 40mm. Four layer PCB was used for the design.

3. PMP9481 Board Photos

Board Dimensions: 75mm x 40mm

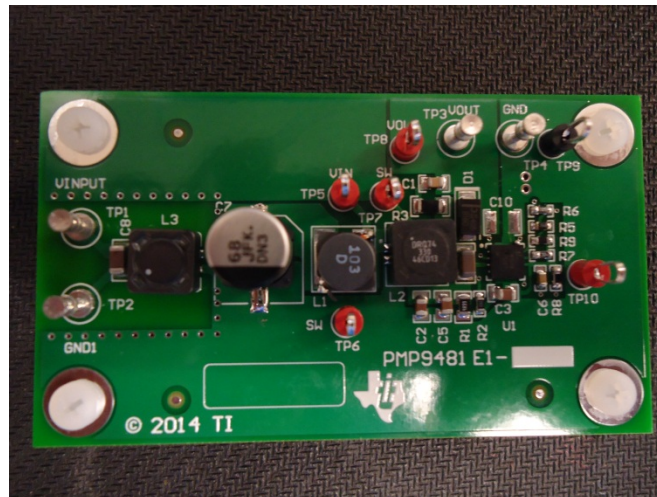


Board Photo (Top)

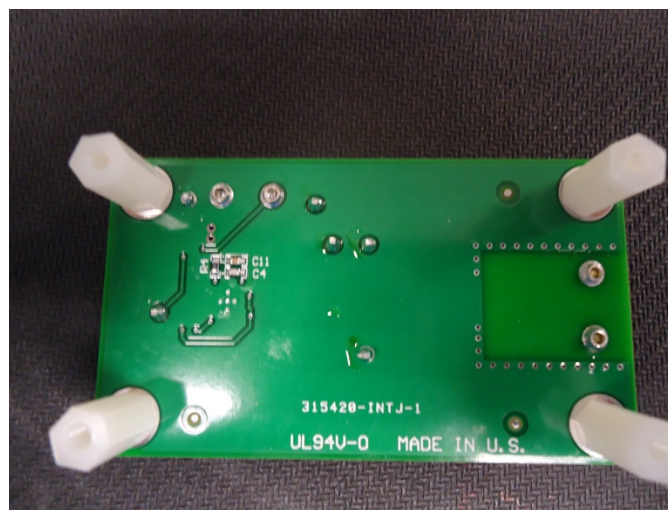


Board Photo (Bottom)

4. Thermal Data

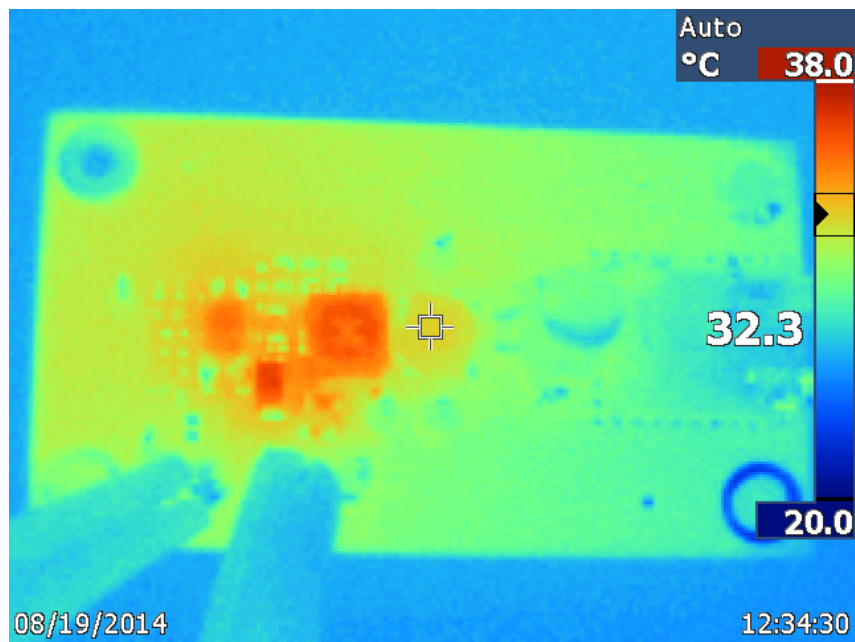


IR thermal image taken at steady state with 12Vin and 250mA load (no airflow)

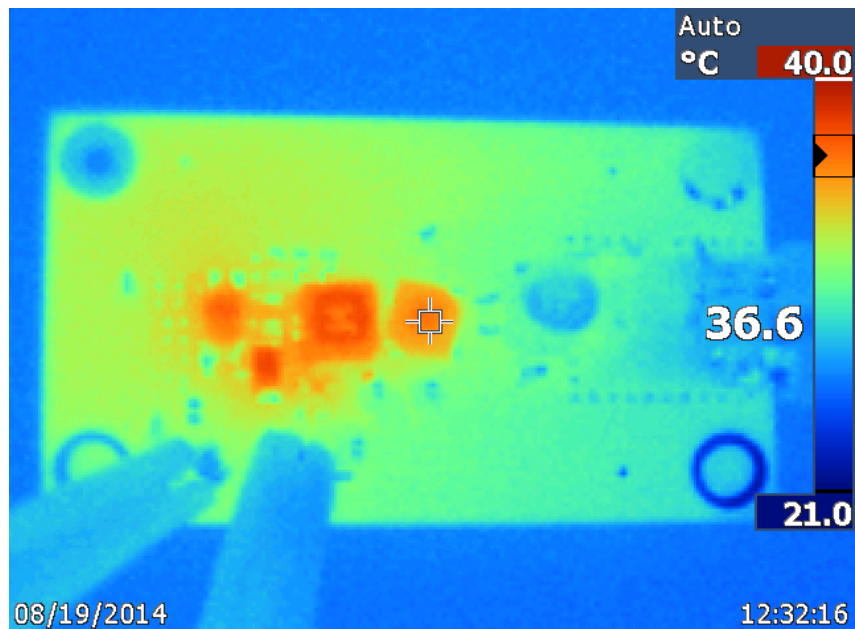

IR thermal image taken at steady state with 6.5Vin and 250mA load (no airflow)

5. Efficiency

5.1 Efficiency Chart

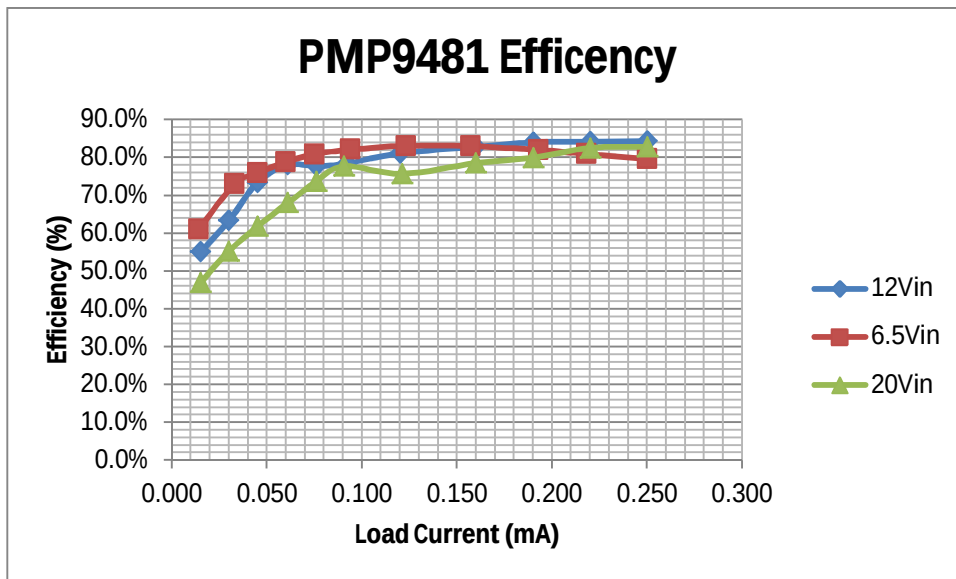

5.2 Efficiency Data


Vin	Iin	Iout	Vout	Pout	Losses	Efficiency
12.05	0.027	0.015	11.908	0.18	0.146	55.1%
12.00	0.047	0.030	11.908	0.36	0.207	63.3%
11.96	0.061	0.045	11.908	0.54	0.194	73.4%
11.92	0.078	0.061	11.908	0.73	0.204	78.1%
11.87	0.098	0.076	11.908	0.91	0.258	77.8%
11.83	0.118	0.092	11.908	1.10	0.300	78.5%
12.06	0.146	0.120	11.908	1.43	0.331	81.2%
12.04	0.191	0.160	11.908	1.91	0.394	82.9%
12.02	0.224	0.190	11.908	2.26	0.430	84.0%
12.01	0.259	0.220	11.908	2.62	0.491	84.2%
12.00	0.294	0.250	11.908	2.98	0.550	84.4%

Vin	Iin	Iout	Vout	Pout	Losses	Efficiency
6.66	0.041	0.014	11.908	0.17	0.106	61.1%
6.56	0.082	0.033	11.908	0.39	0.145	73.1%
6.72	0.105	0.045	11.908	0.54	0.170	75.9%
6.71	0.135	0.060	11.908	0.71	0.191	78.9%
6.69	0.165	0.075	11.908	0.89	0.211	80.9%
6.68	0.204	0.094	11.908	1.12	0.243	82.1%
6.65	0.265	0.123	11.908	1.46	0.298	83.1%
6.62	0.340	0.157	11.908	1.87	0.381	83.1%
6.59	0.425	0.193	11.908	2.30	0.503	82.0%
6.57	0.488	0.218	11.908	2.60	0.608	81.0%
6.53	0.572	0.250	11.908	2.98	0.758	79.7%

Vin	Iin	Iout	Vout	Pout	Losses	Efficiency
20.02	0.019	0.015	11.908	0.18	0.202	47.0%
20.19	0.032	0.030	11.908	0.36	0.289	55.3%
20.16	0.043	0.045	11.908	0.54	0.331	61.8%
20.14	0.053	0.061	11.908	0.73	0.341	68.1%
20.12	0.061	0.076	11.908	0.91	0.322	73.7%
20.09	0.069	0.091	11.908	1.08	0.309	77.7%
20.03	0.095	0.121	11.908	1.44	0.462	75.7%
20.21	0.120	0.160	11.908	1.91	0.520	78.6%
20.20	0.140	0.190	11.908	2.26	0.565	80.0%
20.20	0.157	0.220	11.908	2.62	0.552	82.6%
20.19	0.178	0.250	11.908	2.98	0.617	82.8%

6 Waveforms

6.1 Load Transient Response

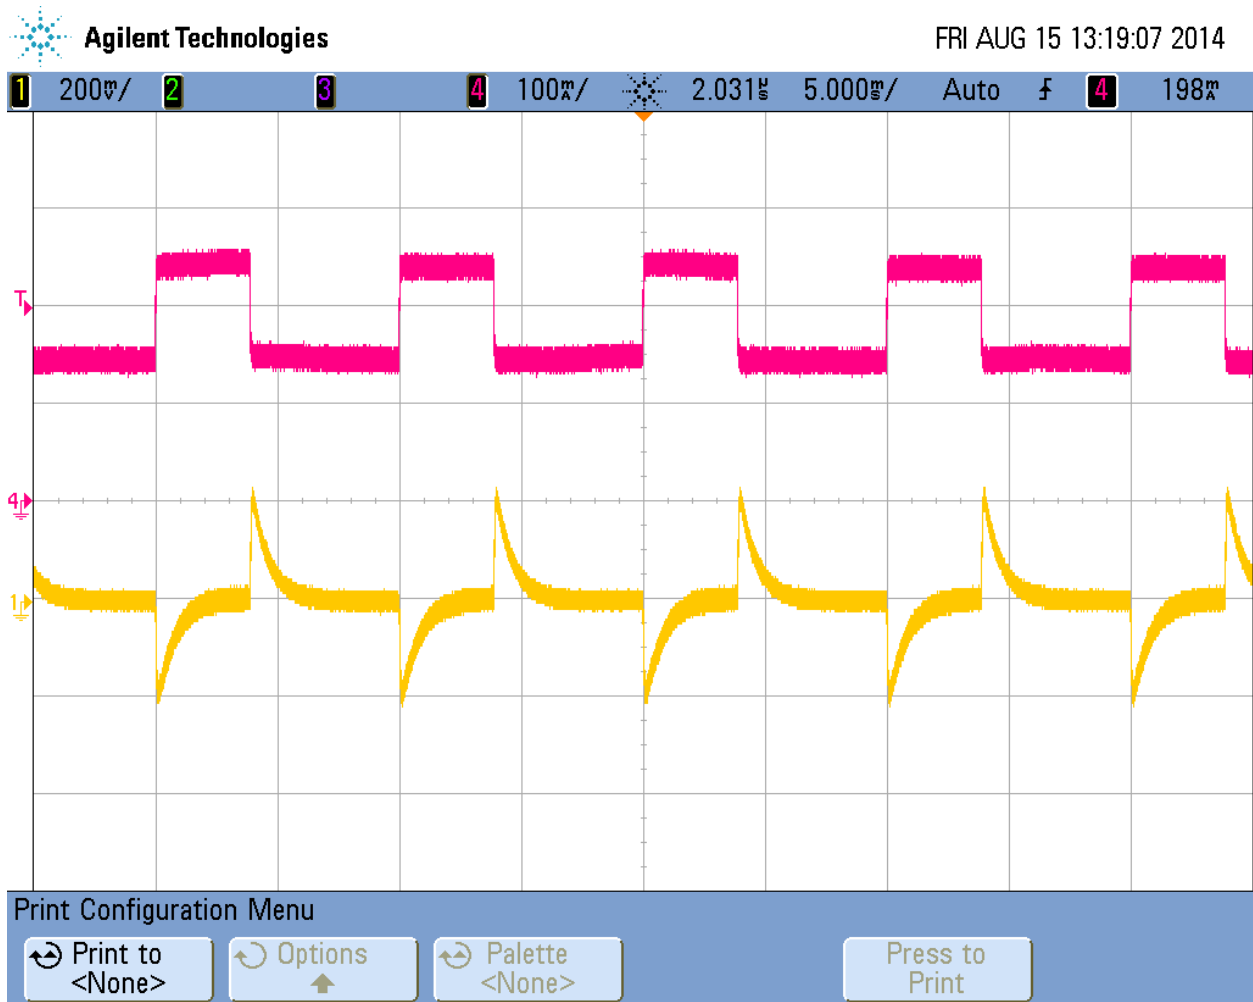

Load Transient Response at 6.5V_{in} and 60%-to-100% (150mA-to-250mA) Load Step

Ch1 – Vout (AC coupled)


Ch4- Iout



Load Transient Response at 12Vin and 60%-to-100% (150mA-to-250mA) Load Step

Ch1 – Vout (AC coupled)

Ch4- Iout

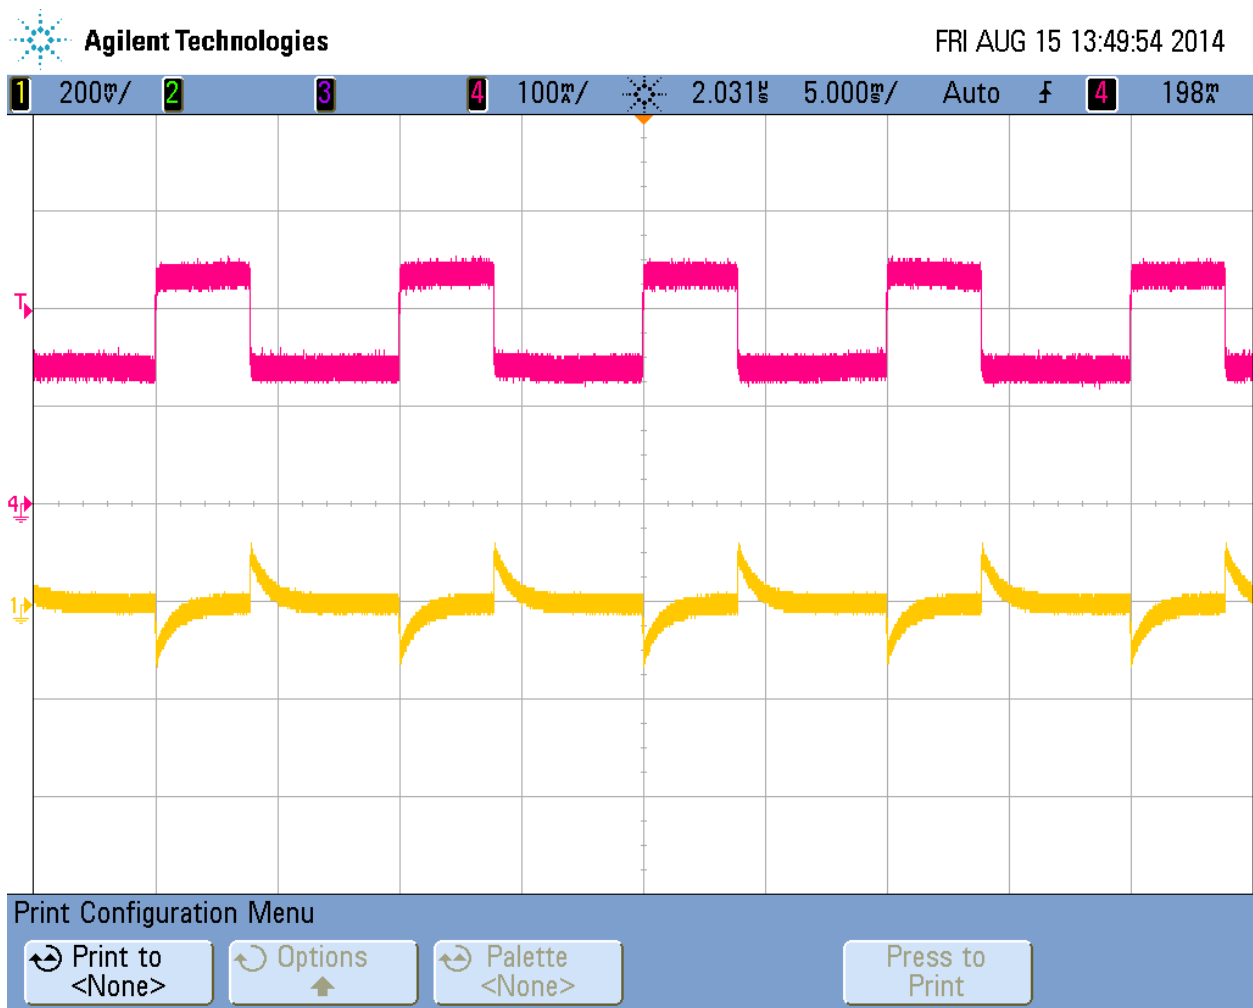


Load Transient Response at 20V_{in} and 60%-to-100% (150mA-to-250mA) Load Step

Ch1 – Vout (AC coupled)

Ch4- Iout


6.2 Startup

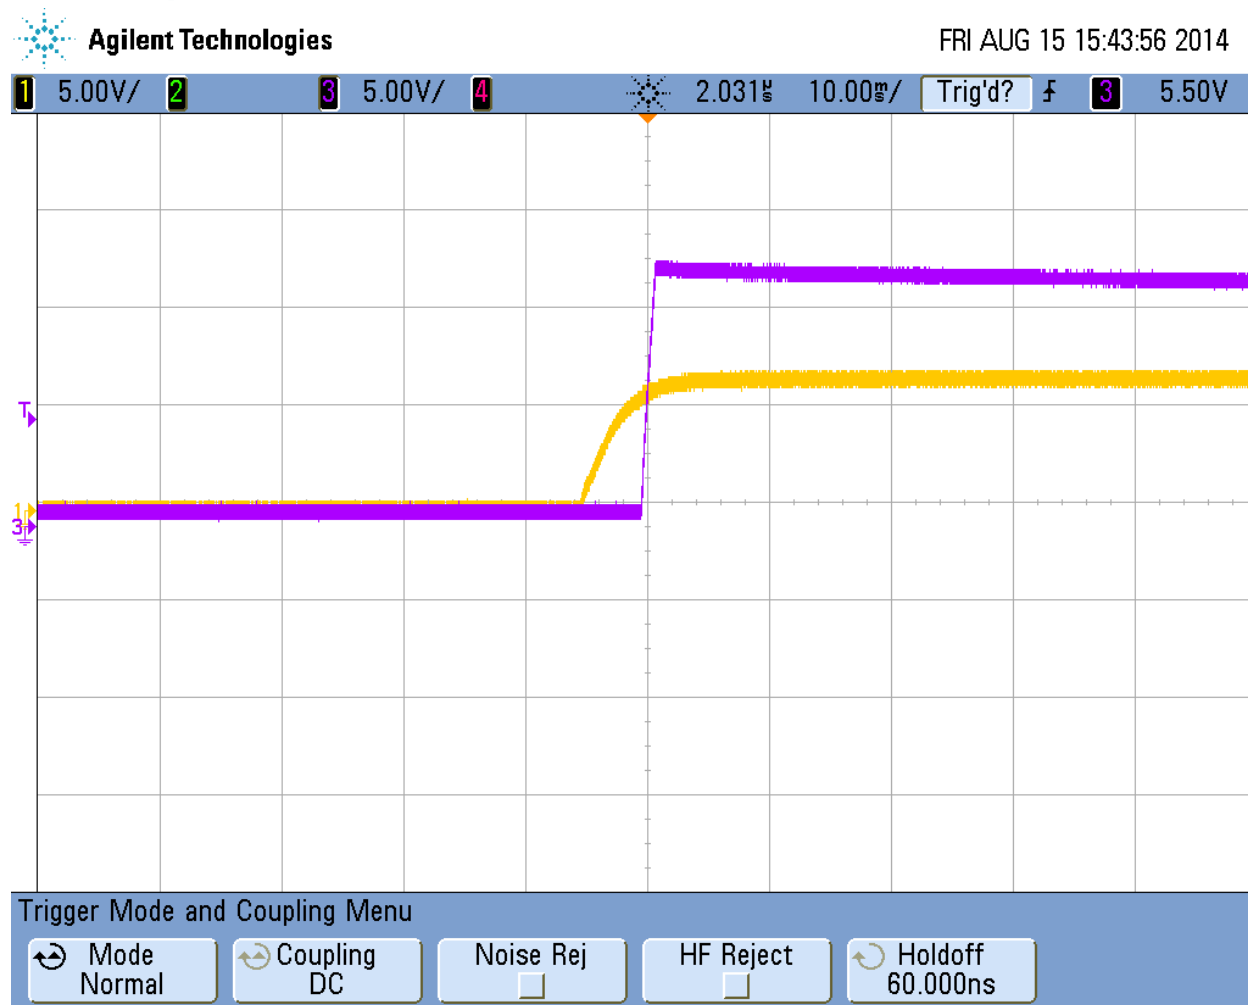

Startup into No Load at 6.5Vin

Ch1-Vin


Ch3-Vout

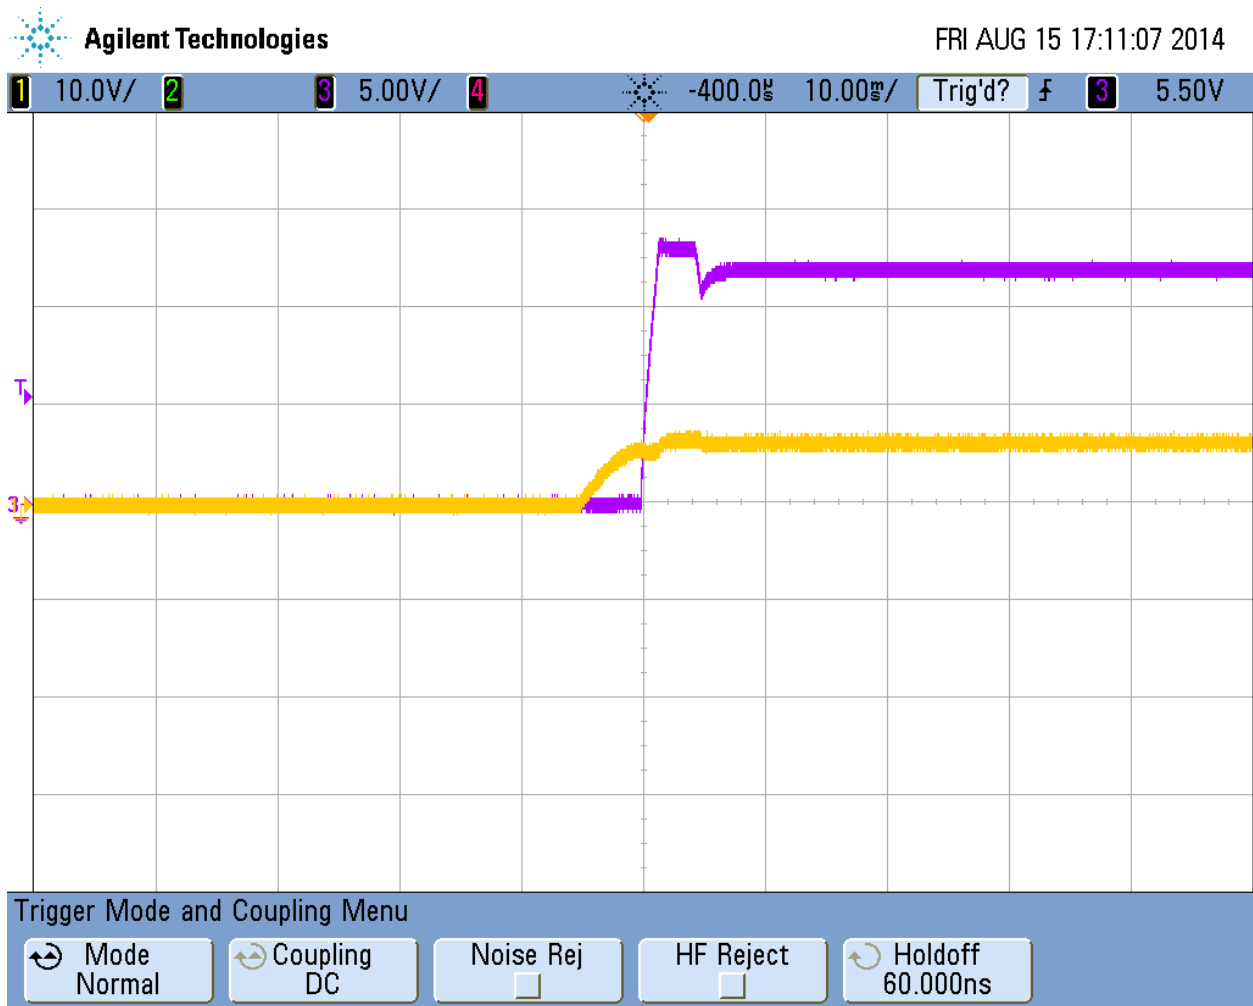

Startup into Full (250mA) Load at 6.5Vin

Ch1-Vin


Ch3-Vout

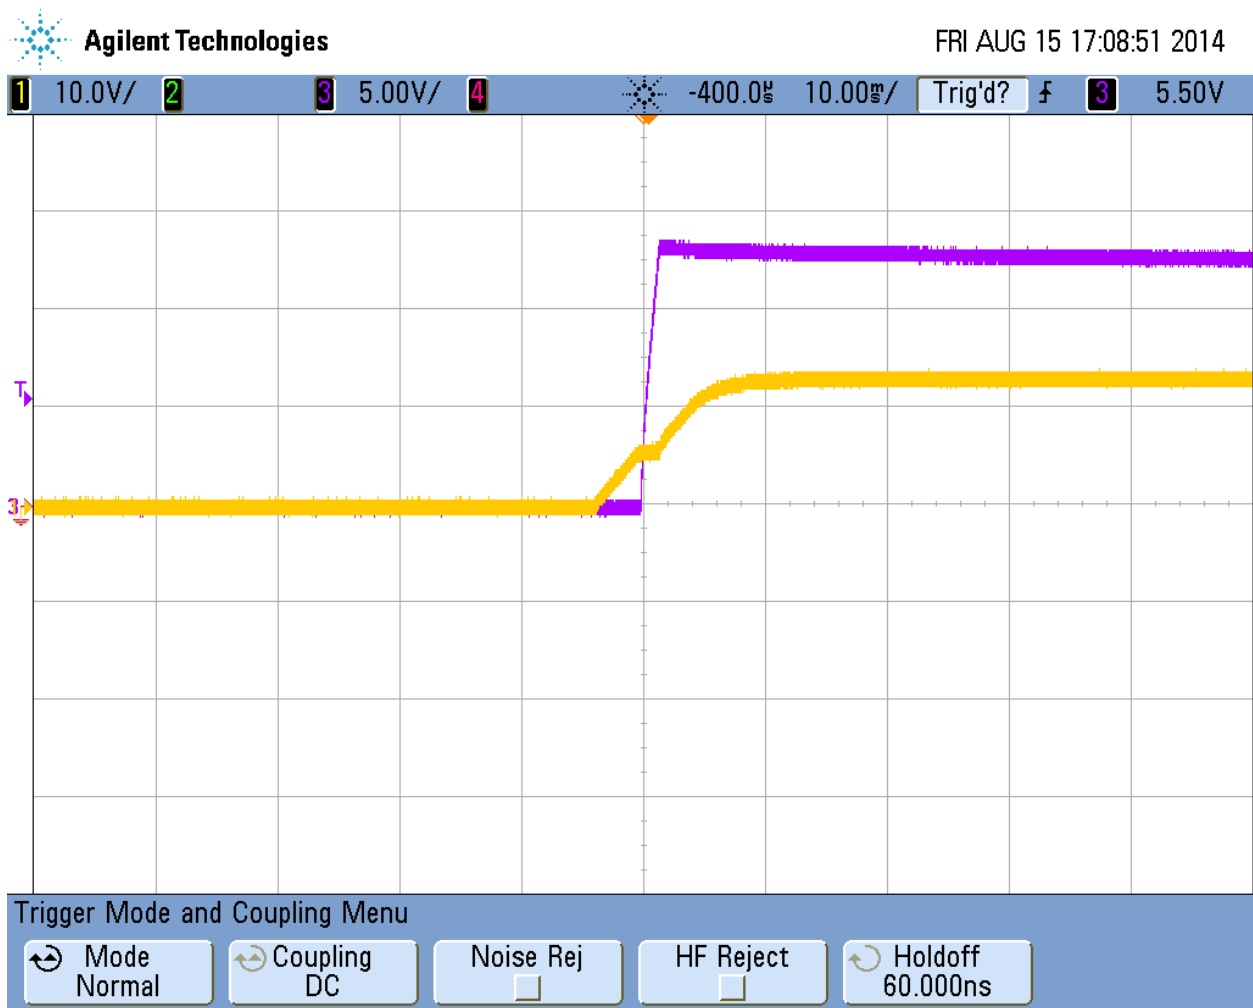

Startup into No Load at 12Vin

Ch1-Vin


Ch3-Vout

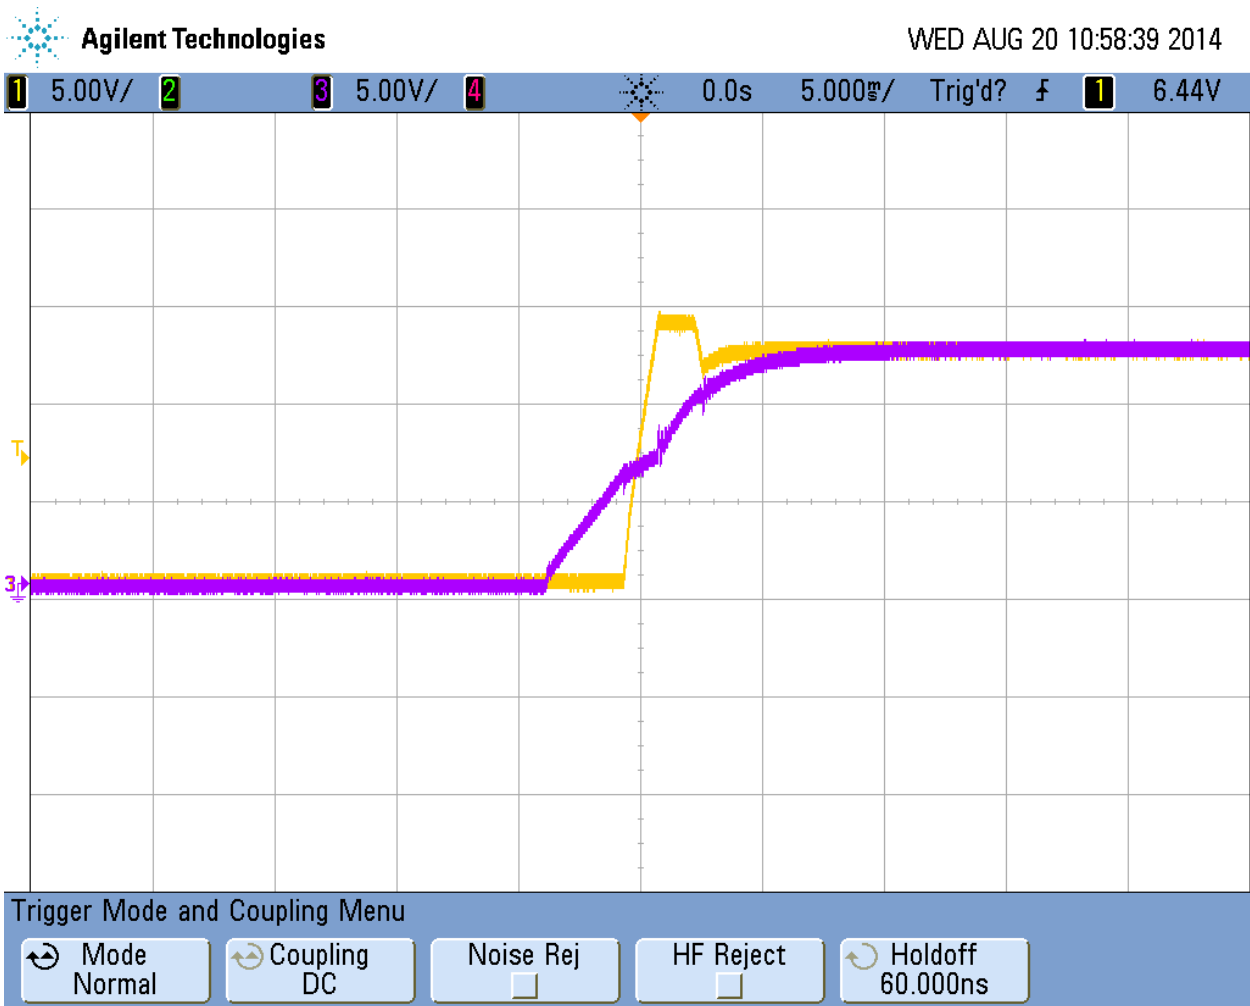

Startup into Full (250mA) Load at 12Vin

Ch1-Vout


Ch3-Vin

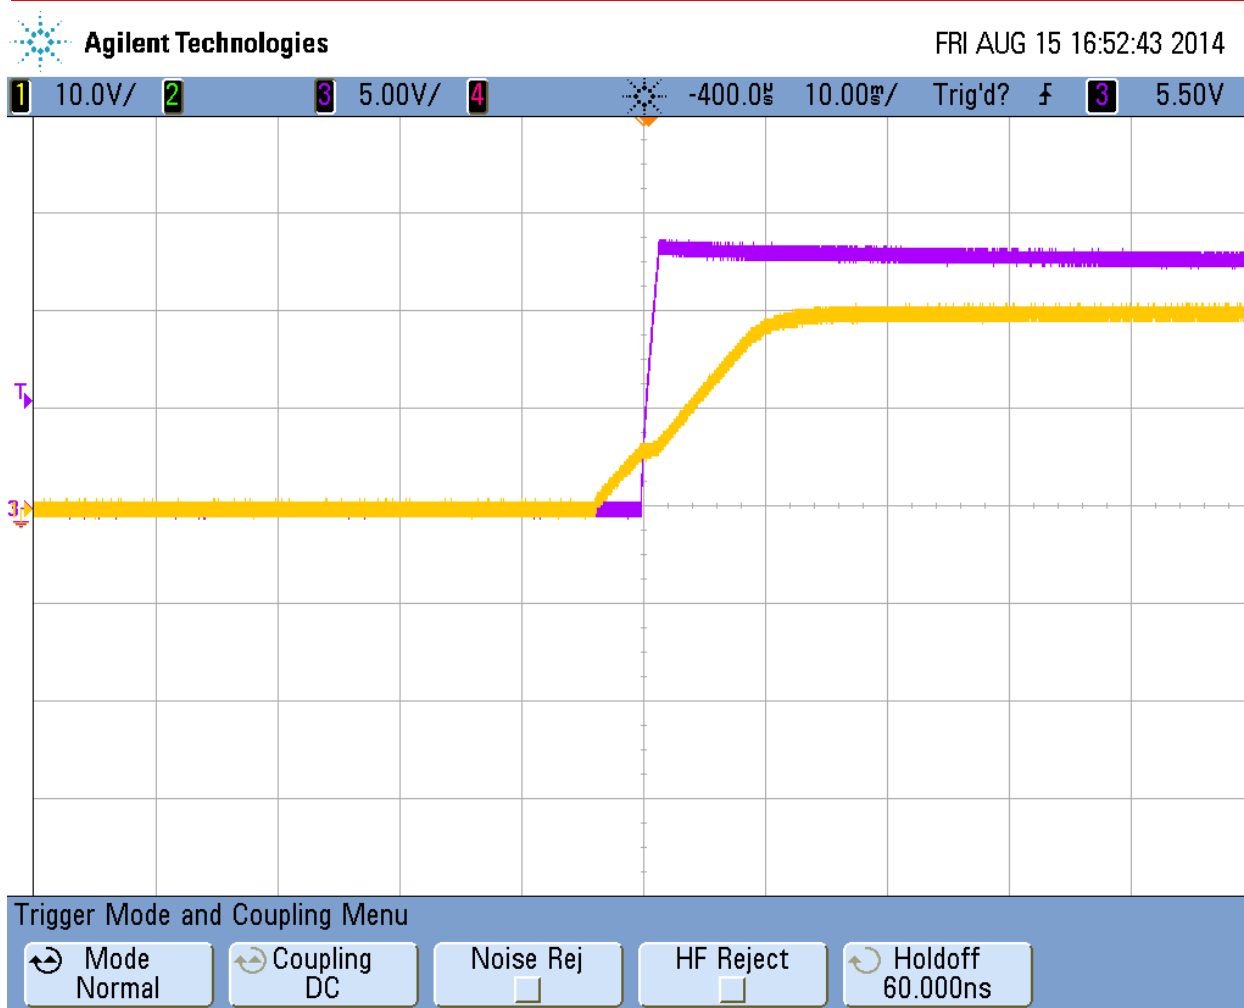

Startup into No Load at 20 Vin

Ch1-Vin

Ch3-Vout

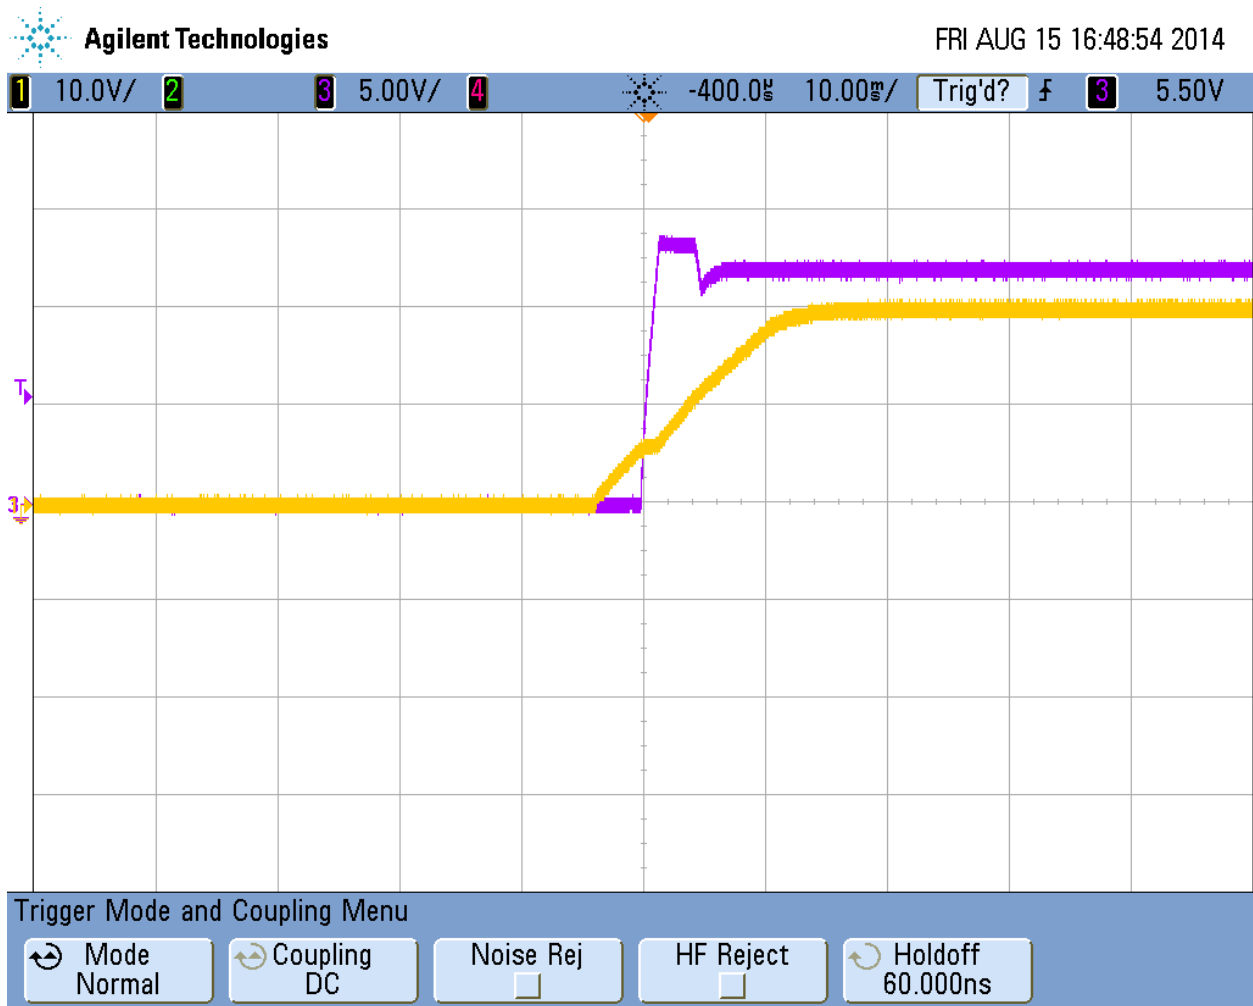


Startup into Full (250mA) Load at 20Vin

Ch1-Vin

Ch3-Vout


6.3 Output Voltage Ripple and Switch Node Voltage

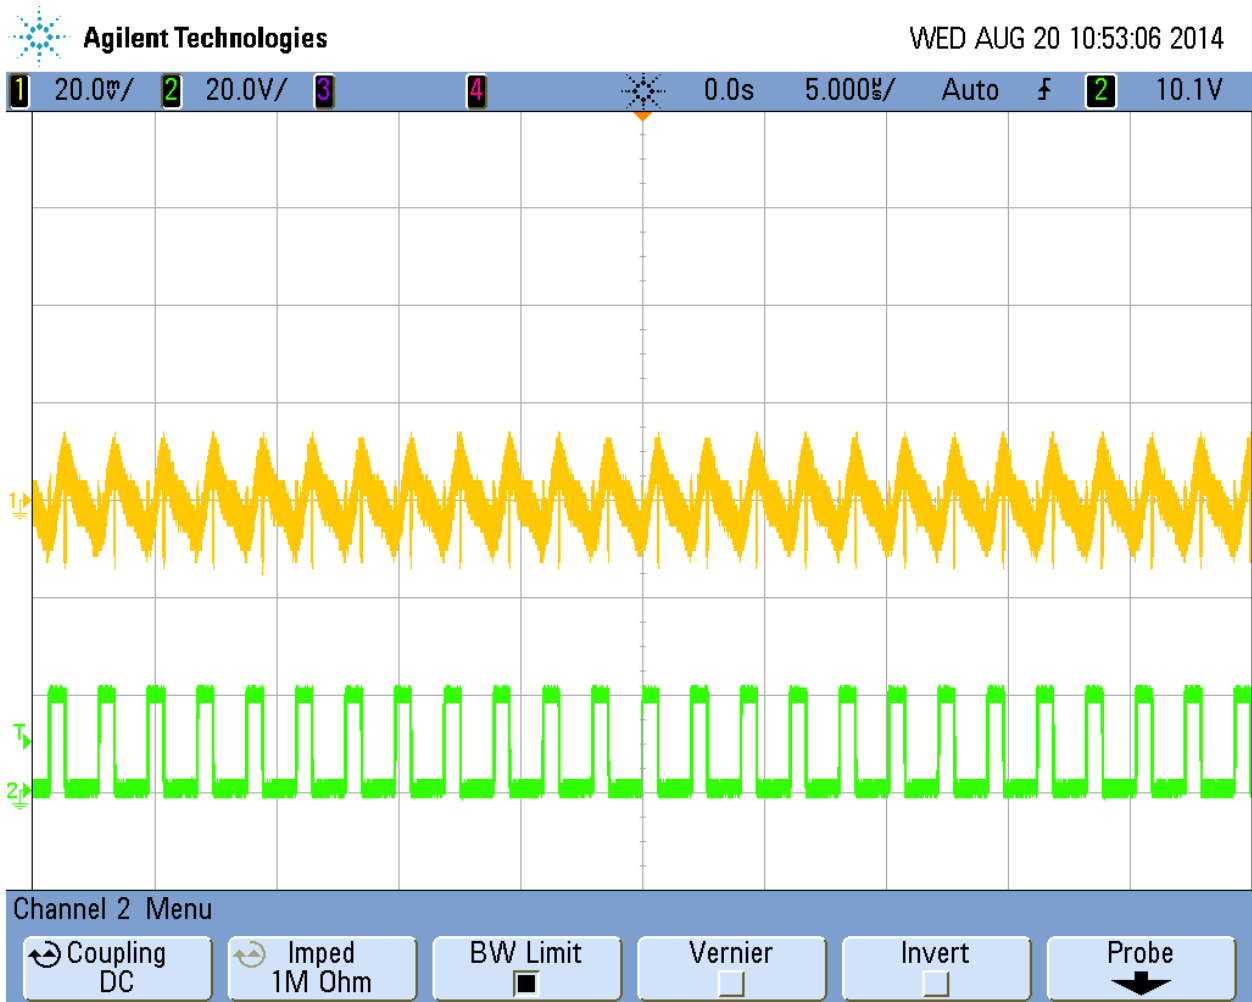

Switch Node Voltage and Output Voltage Ripple at 6.5Vin and Full (250mA) Load (Vripple < 20mVp-p)

Ch1-Vout (AC Coupled)


Ch2-Switching Waveform

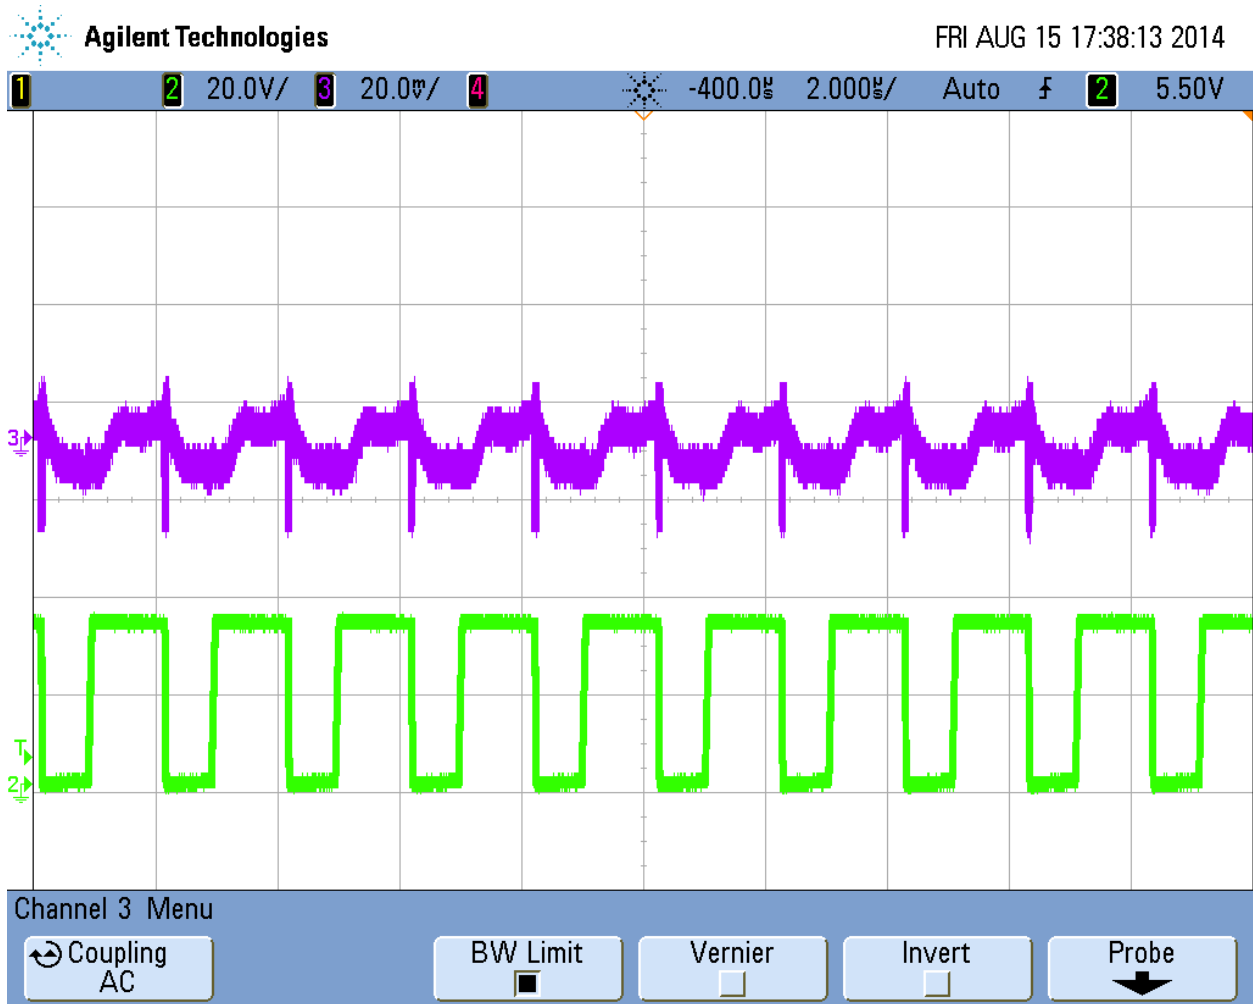

Switch Node Voltage and Output Voltage Ripple at 12Vin and Full (250mA) Load (Vripple < 20mVp-p)

Ch1-Vout (AC Coupled)


Ch2-Switching Waveform

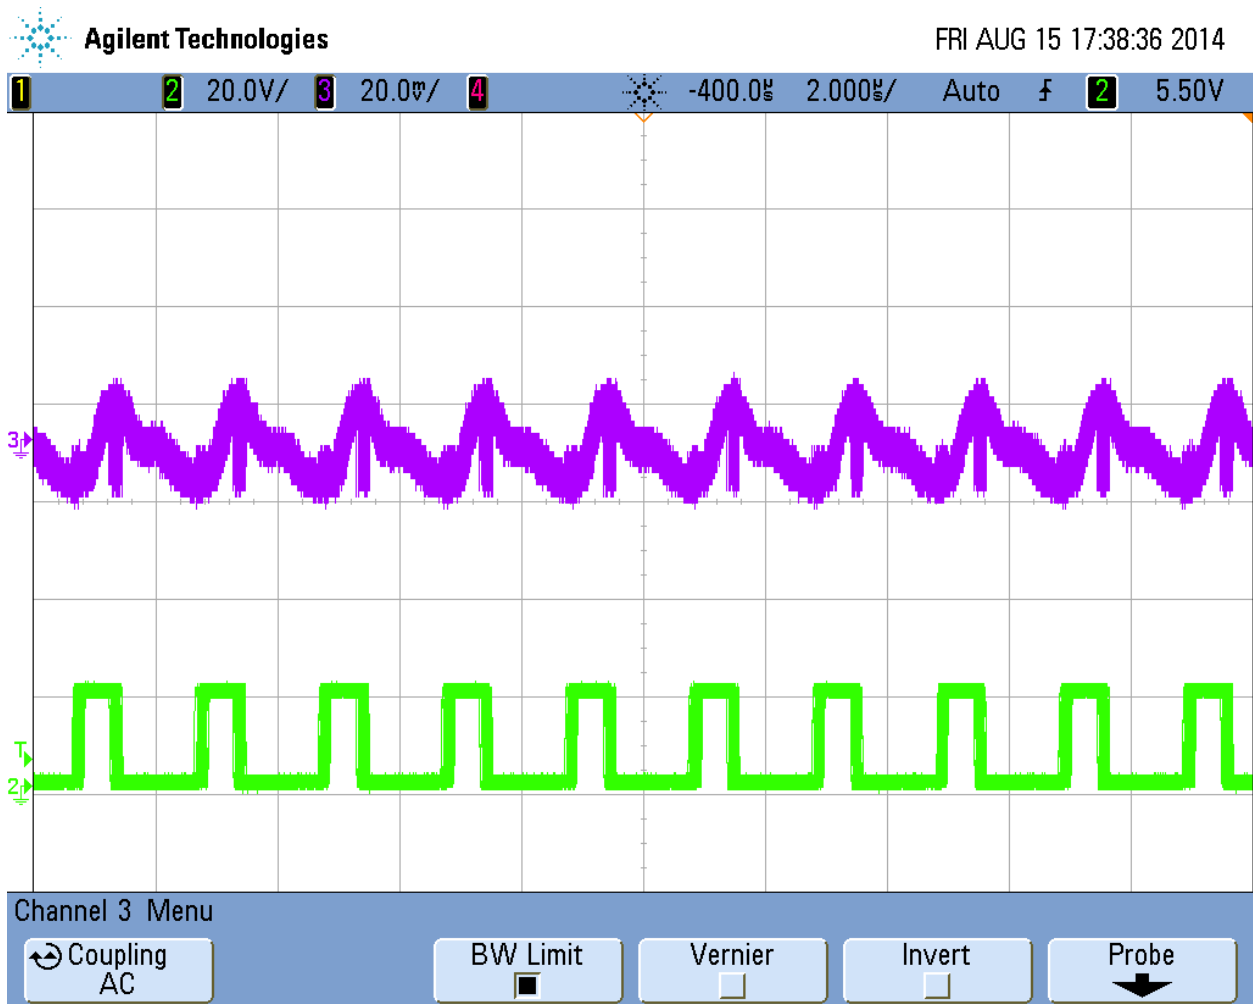


Switch Node Voltage and Output Voltage Ripple at 20V_{in} and Full (250mA) Load (V_{ripple} < 20mV_{p-p})

7. Frequency Response

The output was loaded with 250mA .For gain/phase plot 1 , the input was 9V and for gain/phase plot 2 , the input was 12V

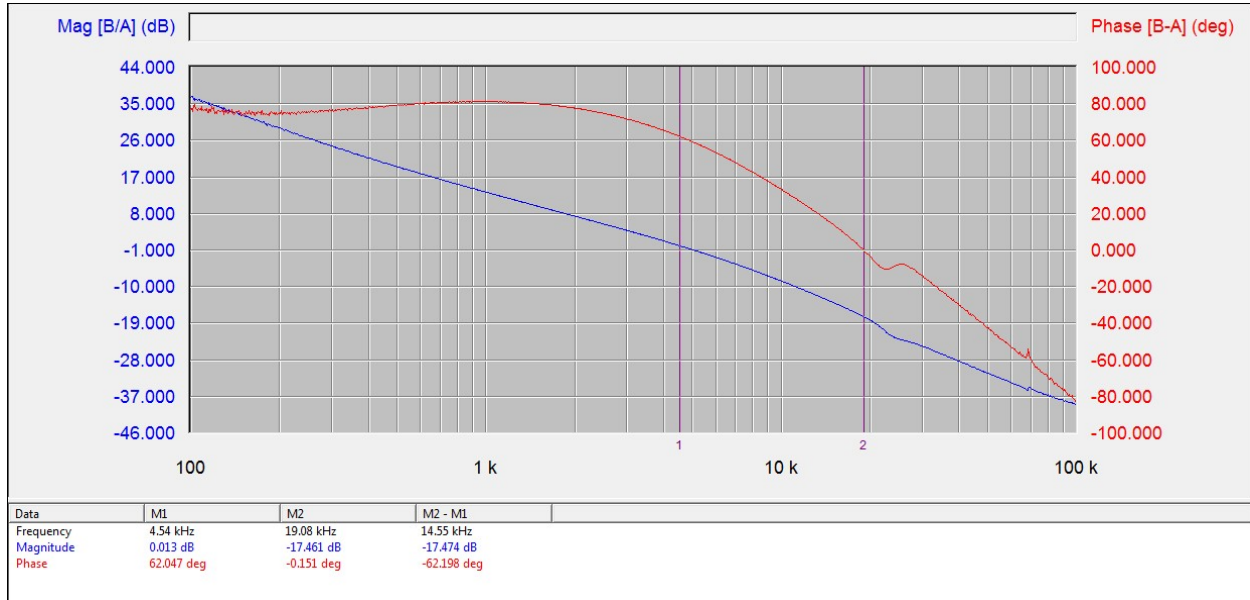

Gain/Phase plot 1 at Vin =9V ,Vout =12V@250mA

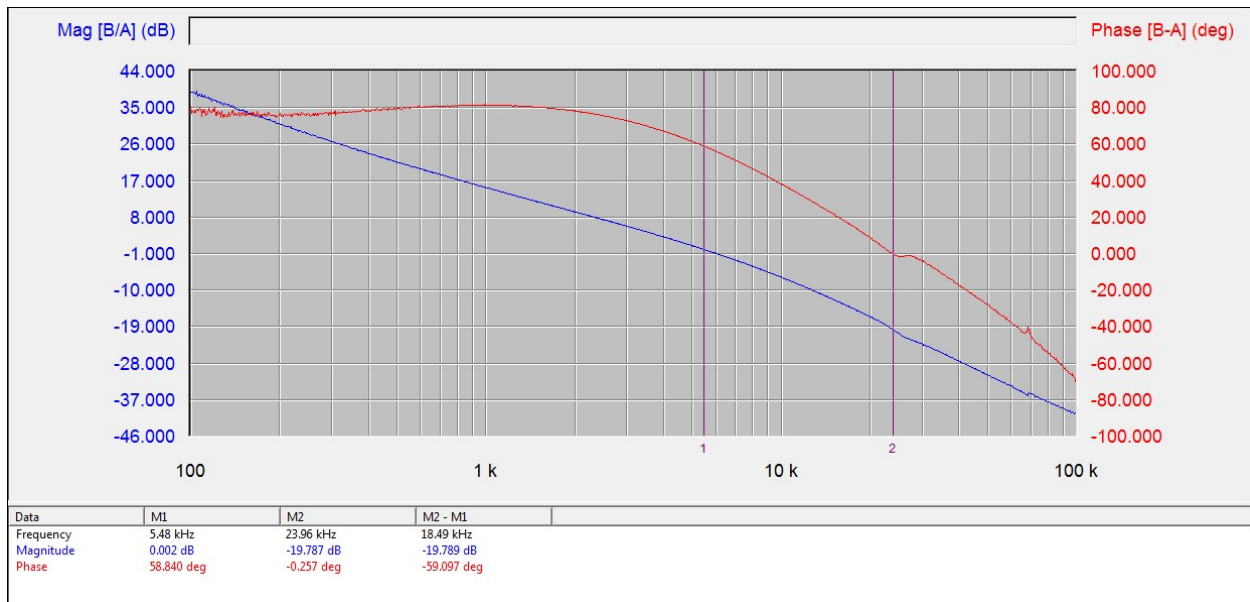


Gain/Phase plot 2 at Vin=12V, Vout =12V@250mA


8. Conducted Emissions

The conducted emissions is tested followed the of CISPR 25 standards. The frequency band examined spans from 150 kHz to 108 MHz covering the AM, FM radio bands, VHF band, and TV band specified in the CISPR 25.

The test results are shown in below two Figures. The first Figure show the test result using peak detector as well as Average detector measurement upto 30MHz , and the second Figure show the test result using average detector as well as Peak Detector measurement from 30MHz to 108MHz. The limit lines shown in red are the Class 5 limits for conducted disturbances specified in the CISPR 25; the yellow(Peak Detector measurement) and blue(Average detector measurement) traces is the test result. It can be seen that the power supply operates quietly and the noise is below the stringent Class 5 limits too.

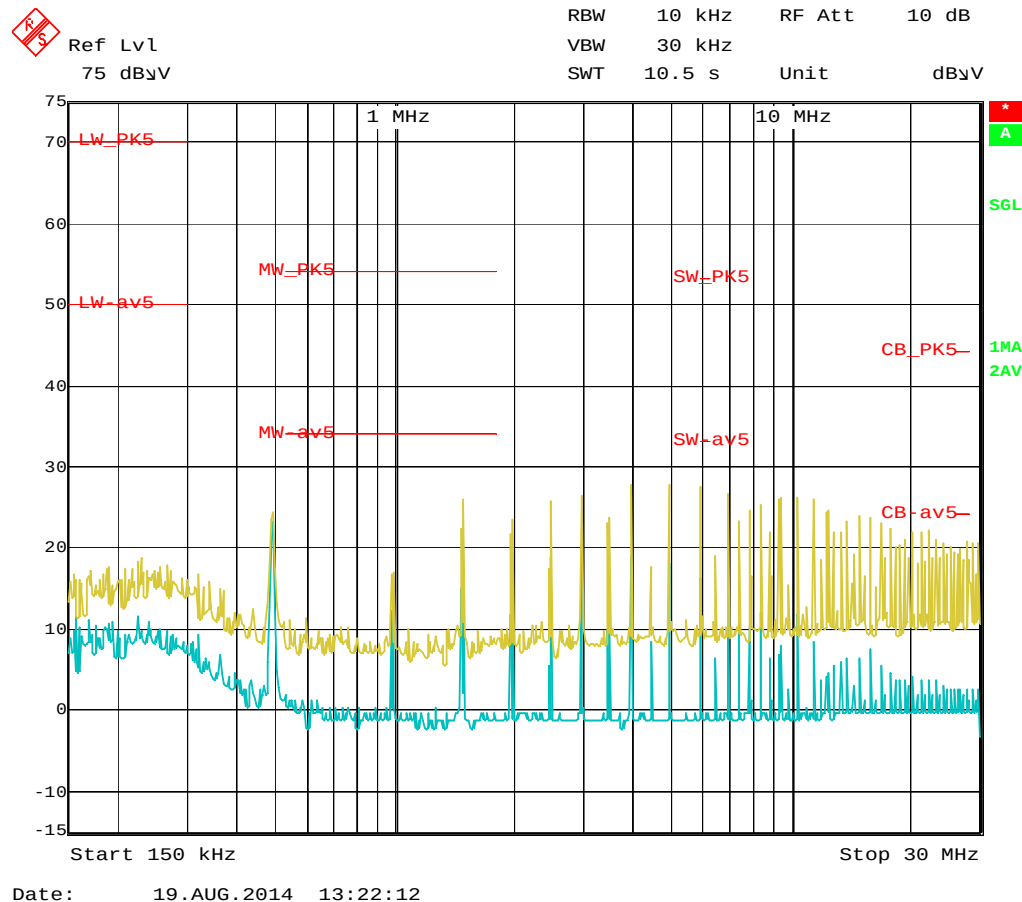

Test result – Upto 30MHz Conducted Emission

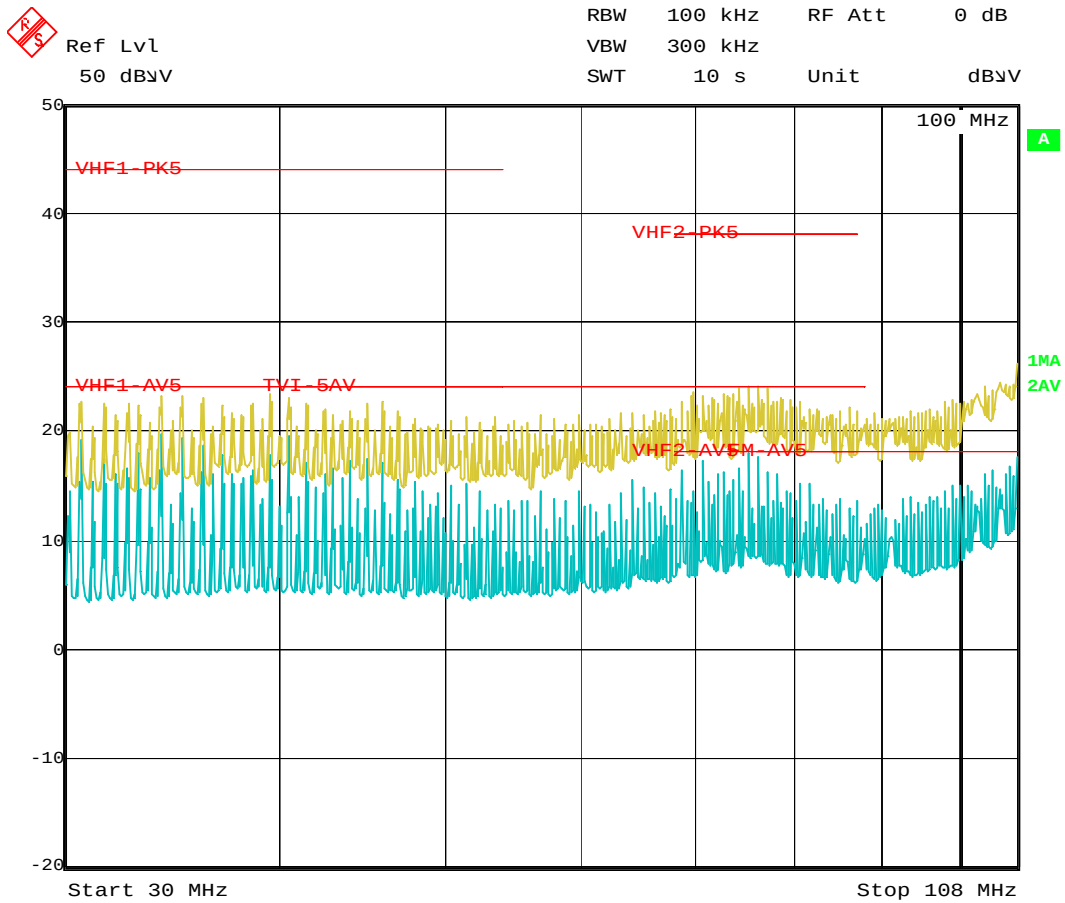

Date: 19.AUG.2014 13:26:47

Test result -30MHz to 108MHz Conducted Emission

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale (<https://www.ti.com/legal/termsofsale.html>) or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2021, Texas Instruments Incorporated