

TI Designs: PMP20249

适用于汽车类双路 USB 充电器且符合 CISPR 25 4 类标准的参考设计



说明

PMP20249 是适用于汽车 USB 充电器系统并具有双路 12.5W 输出的 EMI 优化型设计。

资源

[PMP20249](#)

设计文件夹

[LMS3655-Q1](#)

产品文件夹

[LMS3635-Q1](#)

产品文件夹

[TPS2549-Q1](#)

产品文件夹




咨询我们的 E2E 专家

特性


- 适用于 USB 充电器系统的宽输入电压前端电源
- 具有正负过压保护功能的脱离电池运行模式
- 通过了 CISPR 25 4 类传导 EMI 测试
- 开关频率：所有转换器的开关频率均在调幅频带 (400kHz) 以外
- 所有器件均符合 AEC-Q100 标准
- 支持 6V 至 18V 的宽输入电压范围

应用

- 汽车 USB 充电器系统
- 汽车娱乐信息系统

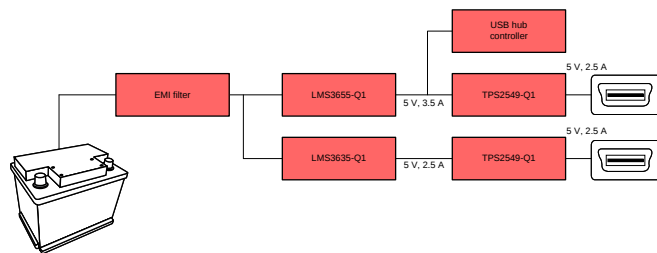

Copyright © 2017, Texas Instruments Incorporated

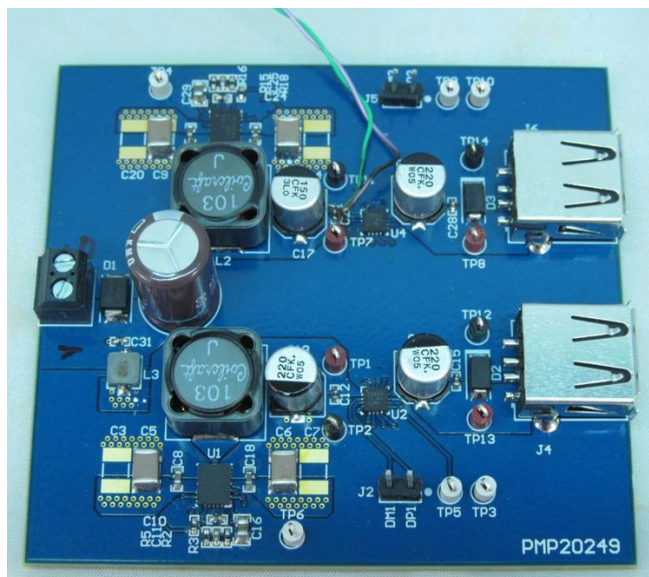

该 TI 参考设计末尾的重要声明表述了授权使用、知识产权问题和其他重要的免责声明和信息。

1 System Description

PMP20249 is an EMI-optimized design for dual-automotive USB charger system using the LMS3635 and LMS3655 regulators (400-kHz fully-integrated, synchronous buck for automotive applications) and the TPS2549 USB switch (TPS2549-Q1 automotive USB charging port controller with integrated power switch and cable compensation). The design accepts an input voltage range of 6 V_{in} to 18 V_{in} and regulates two outputs of 5 V at 2.5 A for dual-USB ports. This highly efficient design features an inexpensive solution and small-size customized for an automotive USB charger application. A four-layer PCB was used for this design.

The design is divided into four major blocks:

- Front-end protection: Front-end protection against positive and negative pulses (ISO7630 pulse 1, 2a, 3a/b) through TVS.
- EMI filter: Differential filter for conducted EMI suppression.
- Low-EMI front-end DC-DC converters: LMS3655-Q1 and LMS3635-Q1 are switching, synchronous 5.5-A and 3.5-A buck regulators, and in this design the devices are used as front-end DC-DC converters. These 400-kHz parts are automotive optimized and have low EMI. The device comes in an automotive-qualified HotRod™ QFN package with wettable flanks, which reduces parasitic inductance and resistance while increasing efficiency, minimizing switch node ringing, and dramatically lowering EMI. The spread spectrum feature is a factory option which further reduces EMI. This feature eliminates peak emissions at specific frequencies by spreading emissions across a wider range of frequencies.
- Downstream USB charging-port controller and power switch: TPS2549-Q1 maintains 5 V at the USB port during heavy charging currents.


1.1 Key System Specifications

表 1. Key System Specifications

PARAMETER	SPECIFICATIONS	DETAILS
V _{in} minimum	6 V	1 节
V _{in} maximum	18 V	1 节
V _{in} nominal	12 V (automotive design)	1 节
V _{out} 1	5 V	1 节
I _{out} 1	2.5 A	1 节
V _{out} 2	5 V	1 节
I _{out} 2	2.5 A	1 节
Approximate switching frequency	400 kHz	1 节
ISO pulse test	Transient voltage suppressor (TVS) diode used for protection	1 节
EMI	Passed CISPR25 class 4 limits	节 3.2.2.6

2 System Overview

2.1 Block Diagram

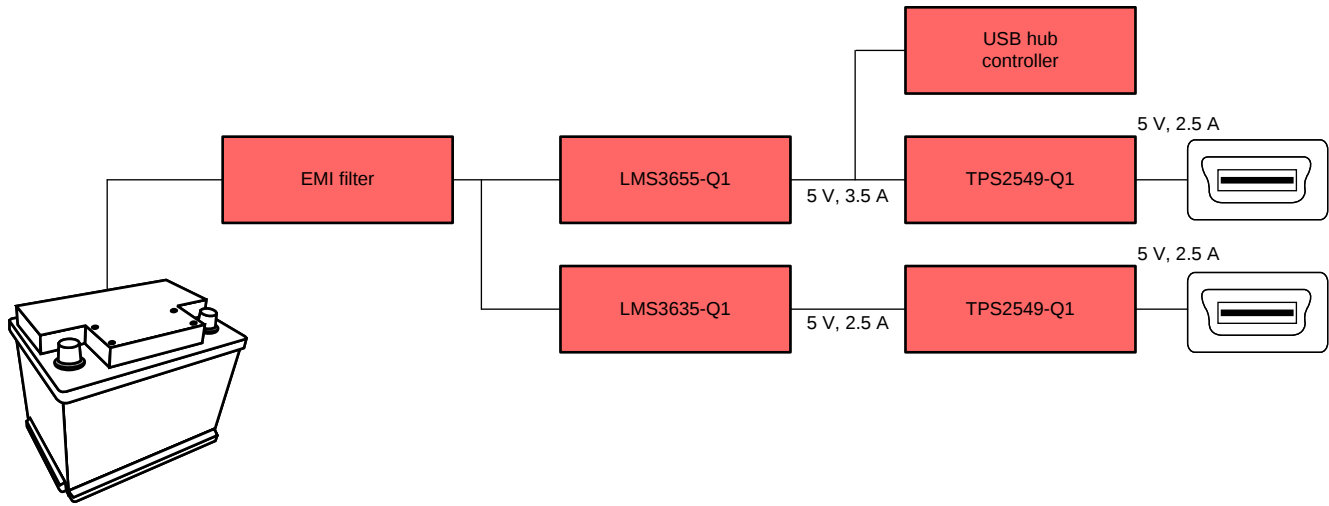

Copyright © 2017, Texas Instruments Incorporated

图 1. PMP20249 Block Diagram

2.2 Design Considerations

The dual-USB charger has multiple protections at the front end of the design. TVSs are used to clamp or filter bidirectional, high-voltage electrical fast transients and maintain operation during positive pulses. These pulses include clamped load dump (up to 38 V) and other transients outlined in ISO 7637-2:2004. An EMI filter is included in the front end, and the design is compliant with the stringent CISPR 25 class 4 automotive EMI standard.

The operating frequency for all the synchronous buck converters (LMS3635 and LMS3655) is 400 kHz. These devices have a low-unloaded current consumption, which eliminates the need for an external back-up LDO. The low-shutdown current and high-maximum operating voltage of the LMS36X5 also allows the elimination of an external load switch. If the target application is non-automotive, then the designer can consider using the commercial version LMS3655 for this system design.

The power switch (TPS2549) has a current-sense output that is able to control the upstream supply. Consequently, the output is regulated at a constant 5-V output even with heavy charging currents. For design calculations and layout examples, refer to the datasheet of the devices used.

- *LMS3635/55-Q1, 3.5-A /5.5-A, 36-V Synchronous, 400-kHz, Step-Down Converter*[\[2\]](#)
- *LMS3655 5.5-A, 36-V Synchronous, 400-kHz DC-DC Step-Down Converter*[\[3\]](#)

2.3 Highlighted Products

2.3.1 LMS36X5-Q1

- Synchronous buck converter
- Qualified for automotive applications (AEC-Q100 qualified)
- Wide-operating input voltage: 3.5 V to 36 V (with transient to 42 V)
- Spread spectrum option available, which helps in EMI compliance
- 400-kHz fixed switching frequency, which avoids AM band
- Low-quiescent current: 15 μ A
- -40°C to 150°C junction temperature range
- Adjustable, 3.3-V, or 5-V output
- Maximum current load: 3.5 A for LMS3635-Q1, 5.5 A for LMS3655-Q1
- 4 mm $\times$ 5 mm, 0.5-mm pitch VQFN package with wettable flanks

2.3.2 TPS2549-Q1

- USB port controller and power switch with cable compensation
- Qualified for automotive applications (AEC-Q100 qualified)
- Input voltage range of 4.5 V to 5.5 V
- 3.2-A continuous output current
- Compliant with CISPR25 class 5 conducted emissions

3 Hardware, Testing Requirements, and Test Results

3.1 Required Hardware

3.1.1 Hardware

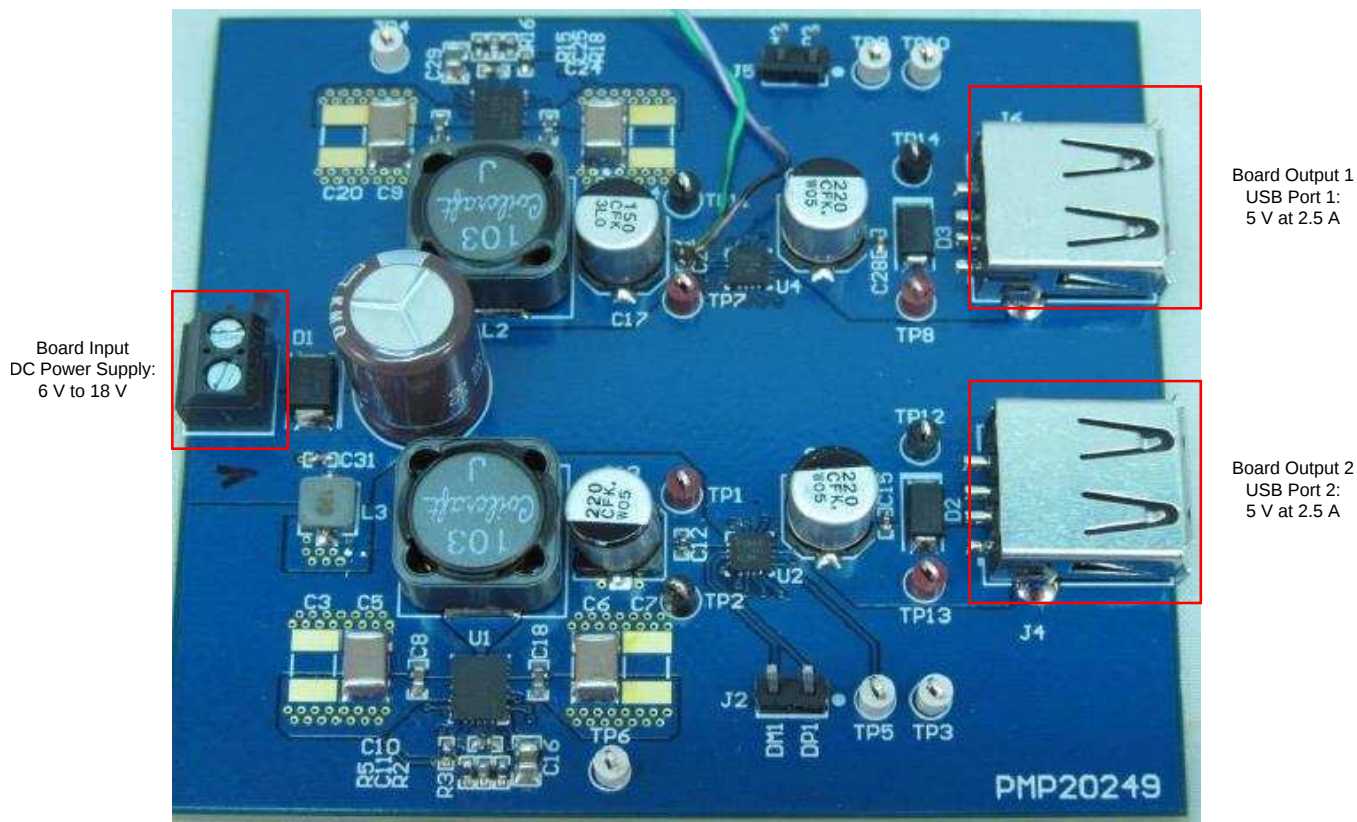


图 2. PMP20249 Board Setup

1. Connect a DC power supply to the board input as identified in 图 2.
2. In order to imitate the typical load of a USB output, connect an electronic or resistive load to the dual output test points, as shown in 节 3.1.1.1. Each 5-V output is rated to a maximum current of 2.5 A.
3. Begin evaluating the performance of PMP20249 through the appropriate test points and headers, as described in 节 3.1.1.1.

3.1.1.1 Evaluation Headers and Test Points

表 2. Evaluation Headers and Test Points

COMPONENT DESIGNATOR	PIN NUMBER	SIGNAL
DATA HOST CONTROLLER HEADER CONNECTIONS		
J2	1	Hub DP1
	2	Hub DM1
J5	1	Hub DP2
	2	Hub DM2
BOARD TEST POINTS		
TP1	1	LMS3635A-Q1 output (U1)
TP2	1	GND
TP3	1	TPS2549 fault pin (U2)
TP4	1	LMS3635A-Q1 SYNC pin (U3)
TP5	1	TPS2549 status pin (U2)
TP6	1	LMS3635A-Q1 SYNC pin (U1)
TP7	1	LMS3635A-Q1 output (U3)
TP8	1	TPS2549 output (U4)
TP9	1	TPS2549 status pin (U4)
TP10	1	TPS2549 fault pin (U4)
TP11	1	GND
TP12	1	GND
TP13	1	TPS2549 output (U2)
TP14	1	GND

3.2 Testing and Results

3.2.1 Test Setup

3.2.1.1 Thermal Data

IR thermal image was taken at steady state with 12 V_{in} and all outputs at full load (no airflow).

3.2.2 Test Results

3.2.2.1 Thermal Data

图 3 shows the IR thermal image of the thermal data testing.

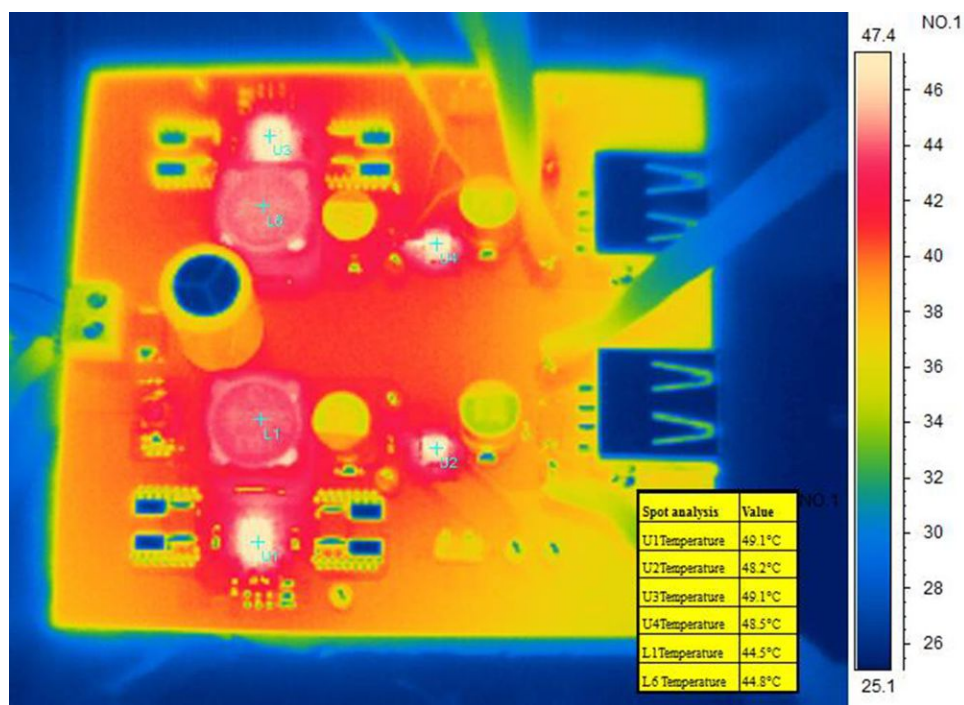


图 3. IR Thermal Image

3.2.2.2 Efficiency Data

图 4 shows the graph of the converter efficiency and power loss verse load current with a 12-V input. The black trace is the LMS3655 efficiency loaded up to 3.5 A before the USB switch. The red trace is for the LMS3655 efficiency loaded up to 2.5 A after the USB switch. These plots were taken with each output individually loaded. The corresponding power-loss measurements are in green and blue traces.

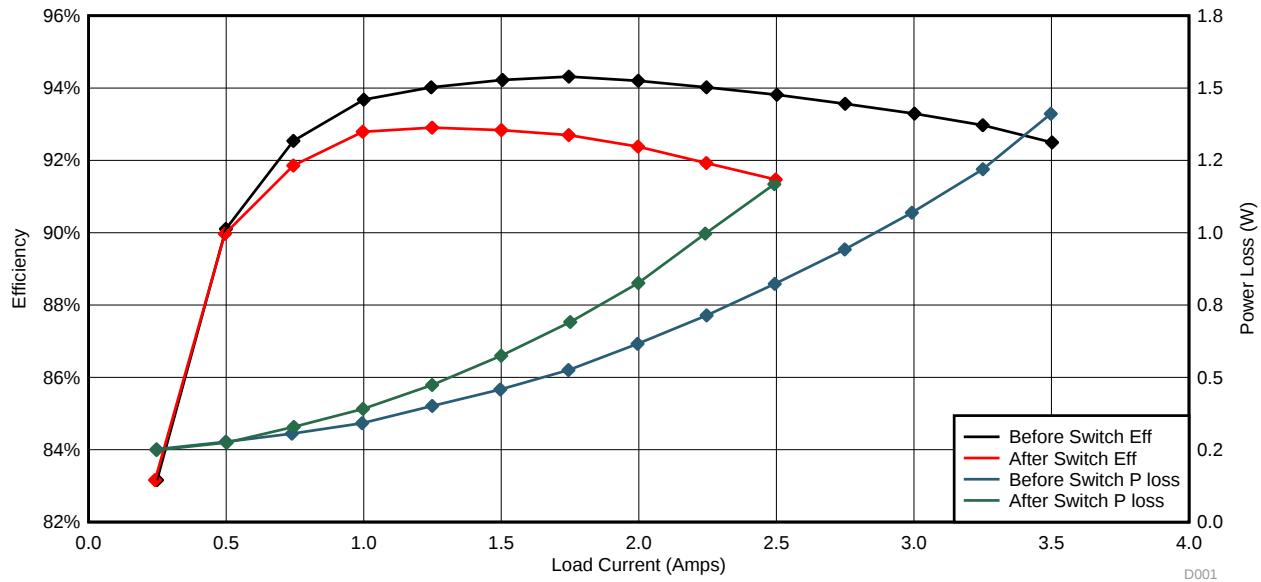


图 4. Efficiency and Power Loss Versus Load Current

表 3. System's Efficiency Data When Output is at Full Load (3.5 A) - Before Switch

Iout (A)	Vout (V)	Vin (V)	Iin (A)	Pin (W)	Pout (W)	LOSSES (W)	EFFICIENCY (%)
0.000	5.030	12.20	0.020	0.2240	0.00	0.24	0.00
0.250	5.028	12.18	0.124	1.5103	1.26	0.25	83.2
0.500	5.026	12.17	0.229	2.7869	2.51	0.27	90.2
0.750	5.024	12.15	0.335	4.0703	3.77	0.30	92.6
1.000	5.022	12.13	0.442	5.3615	5.02	0.34	93.7
1.250	5.019	12.11	0.551	6.6726	6.27	0.40	94.0
1.500	5.017	12.10	0.660	7.9860	7.53	0.46	94.2
1.750	5.014	12.08	0.770	9.3016	8.77	0.53	94.3
2.000	5.011	12.06	0.882	10.6369	10.02	0.61	94.2
2.250	5.007	12.04	0.995	11.9798	11.27	0.71	94.0
2.500	5.003	12.02	1.109	13.3302	12.51	0.82	93.8
2.750	4.999	12.00	1.224	14.6880	13.75	0.94	93.6
3.000	4.994	11.98	1.340	16.0532	14.98	1.07	93.3
3.250	4.988	11.96	1.458	17.4377	16.21	1.23	93.0
3.500	4.982	11.95	1.577	18.8452	17.44	1.41	92.5

表 4. System's Efficiency Data When Output is at Full Load (2.5 A) - After Switch

Iout (A)	Vout (V)	Vin (V)	Iin (A)	Pin (W)	Pout (W)	LOSSES (W)	EFFICIENCY (%)
0.000	5.026	12.20	0.020	0.224	0.00	0.24	0.00
0.250	5.033	12.18	0.124	1.510	1.26	0.25	83.3
0.500	5.042	12.17	0.230	2.799	2.52	0.28	90.1
0.750	5.049	12.15	0.339	4.119	3.79	0.33	91.9
1.000	5.057	12.13	0.449	5.446	5.06	0.39	92.9
1.250	5.064	12.11	0.562	6.806	6.33	0.48	93.0
1.500	5.071	12.10	0.677	8.185	7.61	0.58	92.9
1.750	5.078	12.08	0.793	9.580	8.89	0.69	92.8
2.000	5.084	12.06	0.912	10.999	10.17	0.83	92.4
2.250	5.089	12.04	1.034	12.449	11.45	1.00	92.0
2.500	5.094	12.02	1.157	13.907	12.74	1.17	91.6

3.2.2.3 Start Up

图 5 显示了启动波形，具有 12-V 输入和 5-V 输出加载到 0 A。粉色波形是开关后的输出，黄色波形是开关前的输出，蓝色波形是输入电压。

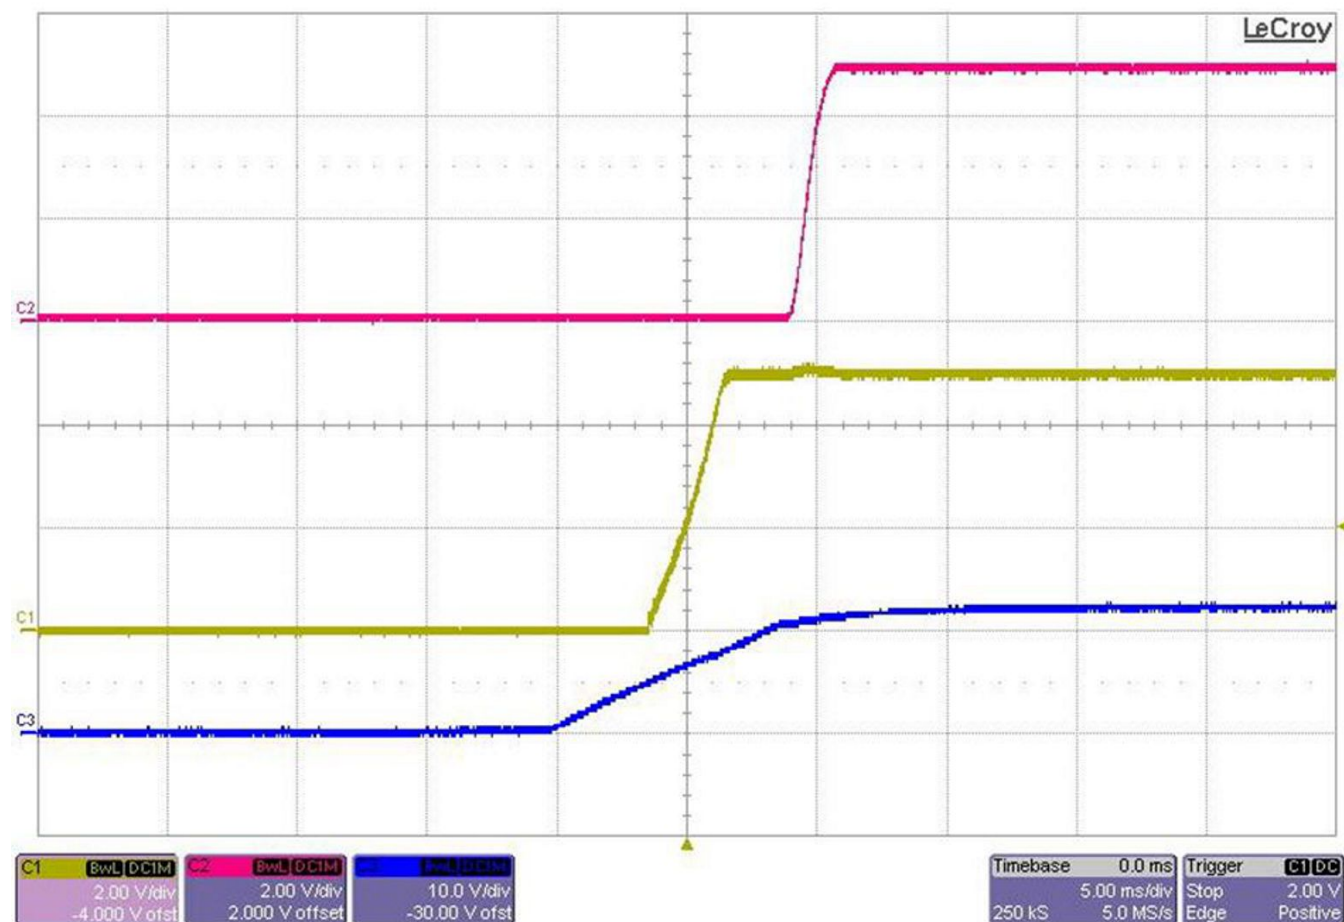


图 5. Start-Up Waveform: Vin = 12 V, Vout = 5 V, Iload = 0 A

3.2.2.4 Load Transient

The load transient waveforms monitor the output voltage and the load current. The output voltage trace is channel one (yellow), and this channel is AC coupled. The shift in the voltage level is due to the cable compensation network. Channel four (green) monitors the load current. The following figures show the load transient response with 12.2 Vin.

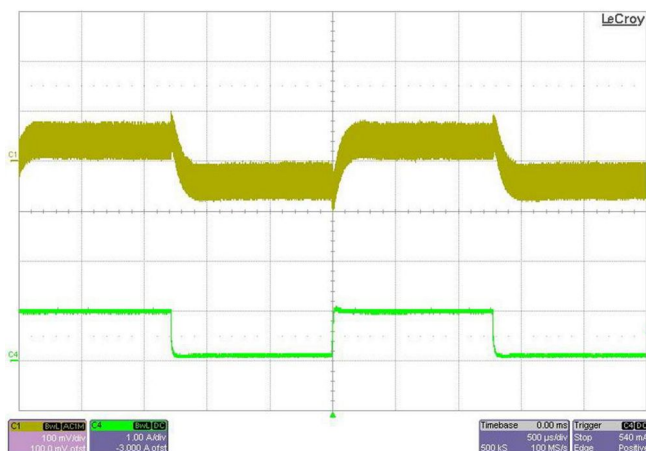


图 6. Load Transient of 1 A to 8 mA

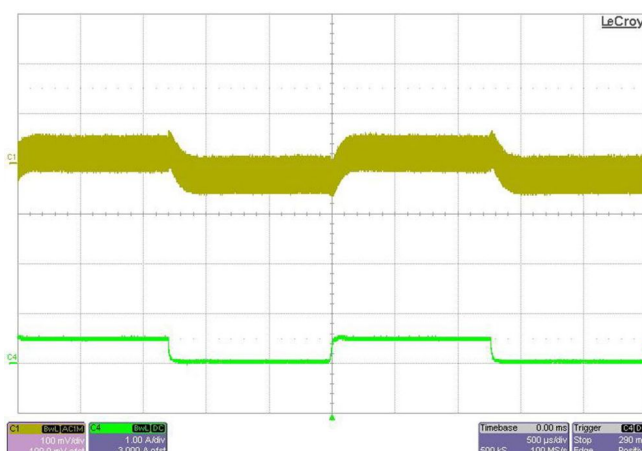


图 7. Load Transient of .5 A to 0 A

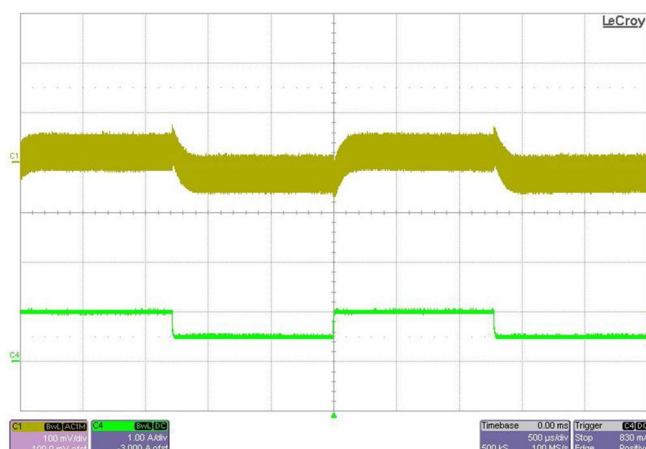


图 8. Load Transient of 1 A to .5 A

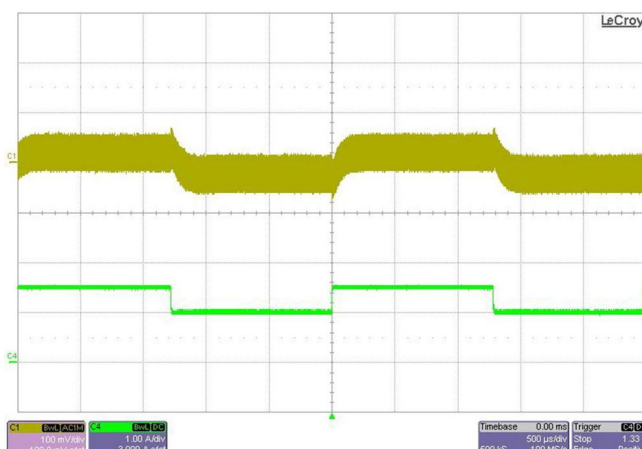


图 9. Load Transient of 1.5 A to 1 A

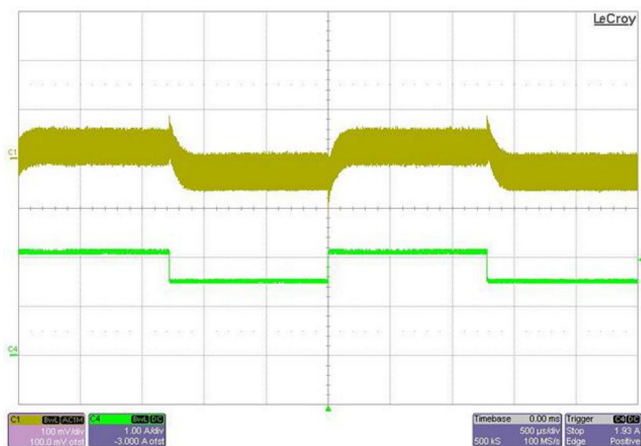


图 10. Load Transient of 2.1 A to 1.5 A

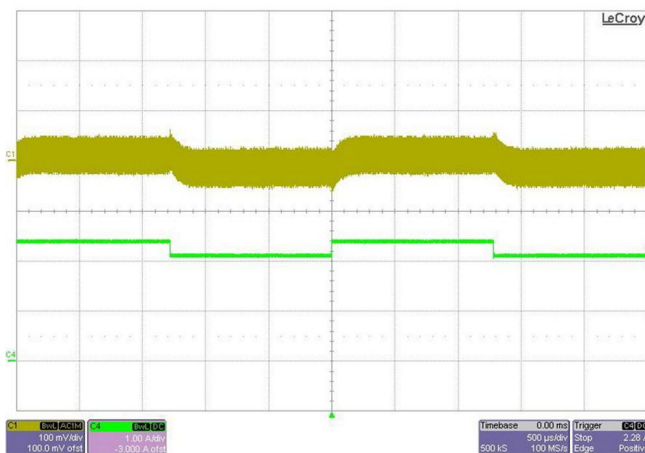


图 11. Load Transient of 2.4 A to 2.1 A

3.2.2.5 Switch Node Voltage

图 12 shows the switch-node voltage. The input voltage is 12.2 V, and the 5-V output is loaded to 2.5 A.

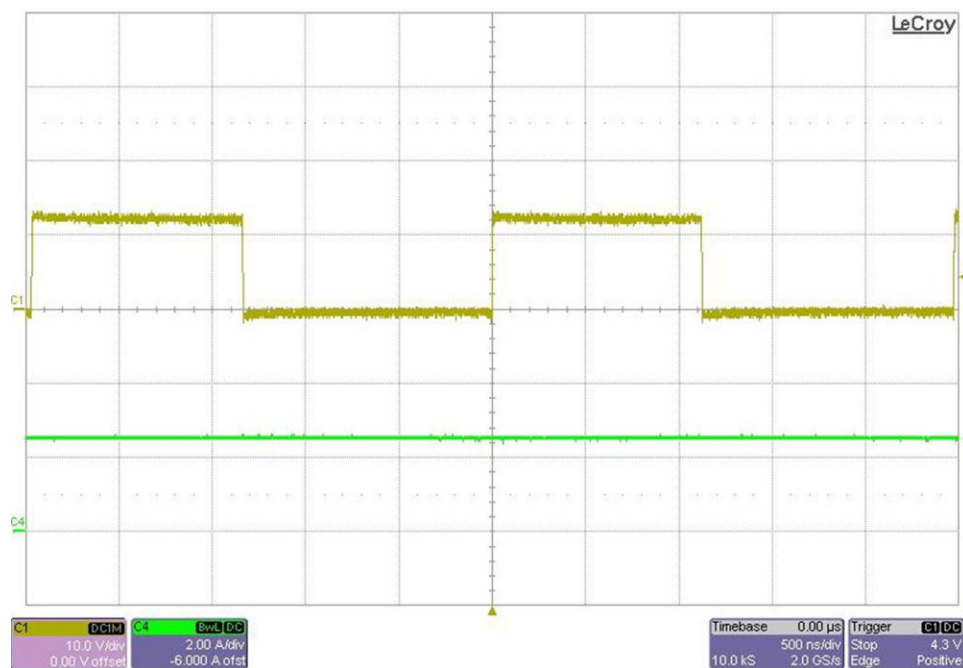


图 12. Switch Node Waveform (Channel One (Yellow) Trace: Switch Node; Channel Four (Green) Trace: Vout)

图 13 和 图 14 提供开关节点的上升和下降沿的放大视图。

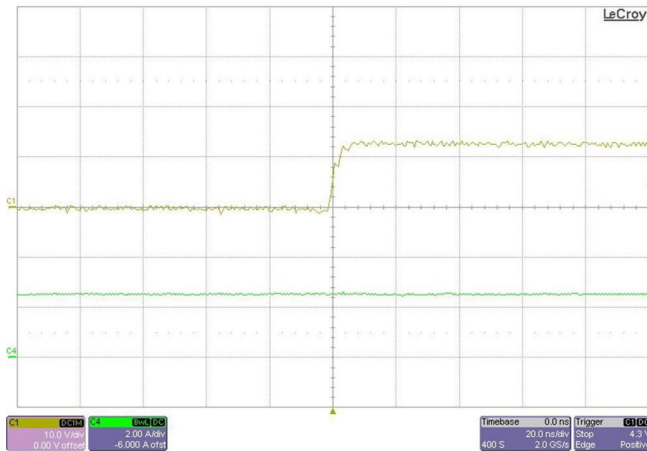


图 13. Rising Edge Switch Node Waveform (Channel One (Yellow) Trace: Switch Node; Channel Four (Green) Trace: Vout)

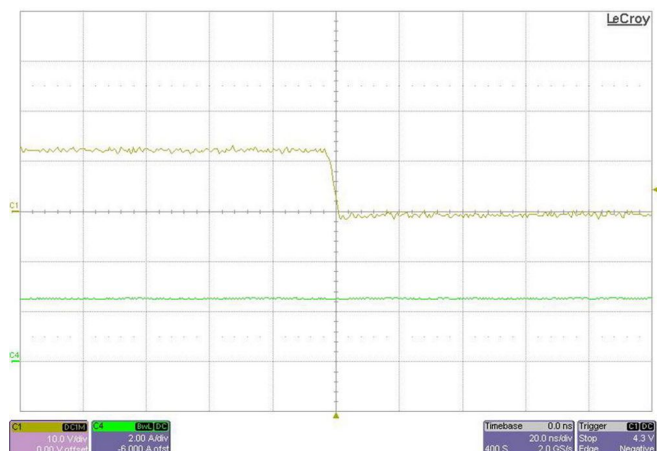


图 14. Falling Edge Switch Node Waveform (Channel One (Yellow) Trace: Switch Node; Channel Four (Green) Trace: Vout)

3.2.2.6 Conducted Emissions

The conducted emissions are tested to the CISPR 25 class 4 standards. The CISPR 25 class 4 compliance was achieved without a common-mode choke or shielding. The frequency band examined spans from 150 kHz to 108 MHz covering the AM, FM radio bands, VHF band, and TV band specified in the CISPR 25.

The test results are shown below in 图 15 和 图 16. 图 15 显示峰值检测器测量从 150 kHz 到 30 MHz，而 图 16 显示峰值检测器测量对于严格的 FM 频段。可以看出，电源运行非常安静，噪声远低于严格的 class 4 限值。

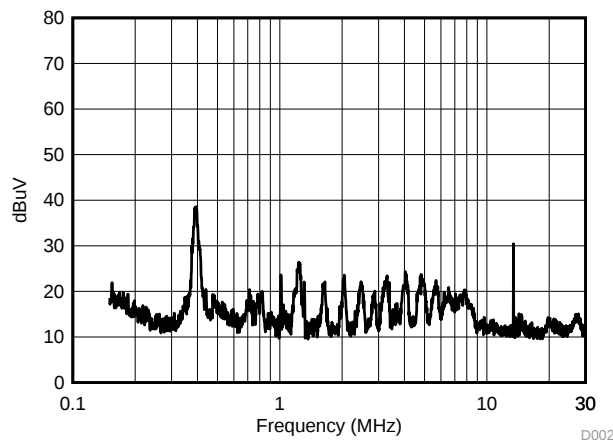


图 15. Up to 30-MHz Conducted Emission - Peak Detection

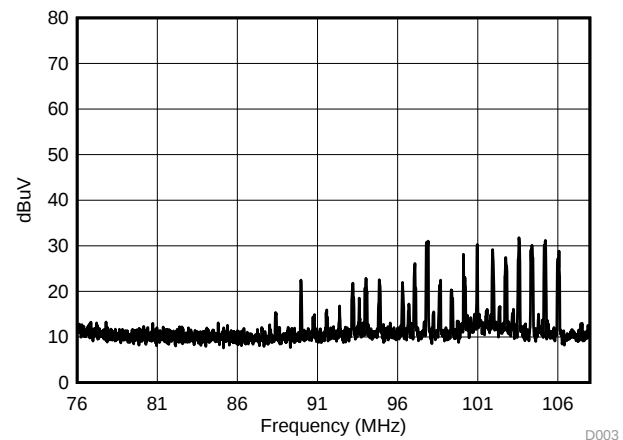


图 16. 30-MHz to 108-MHz Conducted Emission - Peak Detection

4 Design Files

4.1 Schematics

To download the schematics, see the design files at [PMP20249](#).

4.2 Bill of Materials

To download the bill of materials (BOM), see the design files at [PMP20249](#).

4.3 PCB Layout Recommendations

4.3.1 Layout Prints

To download the layer plots, see the design files at [PMP20249](#).

4.4 Altium Project

To download the Altium project files, see the design files at [PMP20249](#).

4.5 Gerber Files

To download the Gerber files, see the design files at [PMP20249](#).

4.6 Assembly Drawings

To download the assembly drawings, see the design files at [PMP20249](#).

5 Related Documentation

1. Texas Instruments, [PMP20249 - CISPR 25 Class 4 Rated Design for Dual Automotive USB Charger Reference Design](#), TI Design (TIDUCU2)
2. Texas Instruments, [LMS3635/55-Q1, 3.5-A /5.5-A, 36-V Synchronous, 400-kHz, Step-Down Converter](#), LMS3655-Q1, LMS3635-Q1 Datasheet (SNAS714)
3. Texas Instruments, [LMS3655 5.5-A, 36-V Synchronous, 400-kHz DC-DC Step-Down Converter](#), TPS2549-Q1 Datasheet (SNAS744)

5.1 商标

HotRod is a trademark of Texas Instruments Incorporated.
All other trademarks are the property of their respective owners.

重要声明和免责声明

TI 提供技术和可靠性数据（包括数据表）、设计资源（包括参考设计）、应用或其他设计建议、网络工具、安全信息和其他资源，不保证没有瑕疵且不做任何明示或暗示的担保，包括但不限于对适销性、某特定用途方面的适用性或不侵犯任何第三方知识产权的暗示担保。

这些资源可供使用 TI 产品进行设计的熟练开发人员使用。您将自行承担以下全部责任：(1) 针对您的应用选择合适的 TI 产品，(2) 设计、验证并测试您的应用，(3) 确保您的应用满足相应标准以及任何其他安全、安保或其他要求。这些资源如有变更，恕不另行通知。TI 授权您仅可将这些资源用于研发本资源所述的 TI 产品的应用。严禁对这些资源进行其他复制或展示。您无权使用任何其他 TI 知识产权或任何第三方知识产权。您应全额赔偿因在这些资源的使用中对 TI 及其代表造成的任何索赔、损害、成本、损失和债务，TI 对此概不负责。

TI 提供的产品受 TI 的销售条款 (<https://www.ti.com.cn/zh-cn/legal/termsofsale.html>) 或 [ti.com.cn](https://www.ti.com.cn) 上其他适用条款/TI 产品随附的其他适用条款的约束。TI 提供这些资源并不会扩展或以其他方式更改 TI 针对 TI 产品发布的适用的担保或担保免责声明。

邮寄地址：上海市浦东新区世纪大道 1568 号中建大厦 32 楼，邮政编码：200122
Copyright © 2021 德州仪器半导体技术（上海）有限公司