

CTIA Report (RP_2402.000_tot)

Test Information:

Test Method:	Radiated Power Passive Antenna
Test Condition:	FS: Free Space
Frequency:	2402.000 MHz
Test Time:	Start: 24.10.2013 15:02:20; Stop: 24.10.2013 15:28:50
Cal Data Hor:	43.41 dB (Range Calibration RadPower Hor Eval 200 to 6000)
Cal Data Ver:	45.79 dB (Range Calibration RadPower Ver Eval 400 to 6000)

OTA Evaluation Results:

Total Radiated Power	-1.06 dBm
Peak EIRP	3.40 dBm
Directivity	4.46 dBi
Efficiency	-1.06 dB
Efficiency	78.34 %
Gain	3.40 dBi
NHPRP 45°	-2.27 dBm
NHPRP 45° / TRP	-1.21 dB
NHPRP 45° / TRP	75.64 %
NHPRP 30°	-3.99 dBm
NHPRP 30° / TRP	-2.93 dB
NHPRP 30° / TRP	50.96 %
NHPRP 22.5°	-5.29 dBm
NHPRP 22.5° / TRP	-4.23 dB
NHPRP 22.5° / TRP	37.75 %
UHRP	-4.81 dBm
UHRP / TRP	-3.75 dB
UHRP / TRP	42.14 %
LHRP	-3.44 dBm
LHRP / TRP	-2.38 dB
LHRP / TRP	57.86 %
Front/Back Ratio	6.85
PhiBW	231.9 deg
PhiBW Up	124.0 deg
PhiBW Down	107.9 deg
ThetaBW	55.4 deg
ThetaBW Up	21.8 deg
ThetaBW Down	33.6 deg
Boresight Phi	75 deg
Boresight Theta	135 deg
Maximum Power	3.40 dBm
Minimum Power	-15.42 dBm
Average Power	-1.95 dBm
Max/Min Ratio	18.81 dB
Max/Avg Ratio	5.35 dB
Min/Avg Ratio	-13.47 dB
Best Single Value	2.22 dBm
Best Position	Phi = 90 deg; Theta = 135 deg; Pol = Hor

RP_2402.000_tot

Azimuth (deg)	Elevation 0 deg (dB)	Elevation 15 deg (dB)	Elevation 30 deg (dB)	Elevation 45 deg (dB)	Elevation 60 deg (dB)	Elevation 75 deg (dB)	Elevation 90 deg (dB)	Elevation 105 deg (dB)
0.00	-6.45	-6.74	-3.64	-1.43	-0.10	-0.44	-3.23	-14.23
15.00	-7.63	-6.94	-3.54	-1.87	-0.02	-0.42	-3.37	-9.55
30.00	-8.50	-7.53	-3.59	-2.26	0.01	-0.26	-2.00	-4.10
45.00	-8.65	-7.88	-3.82	-2.62	-0.24	-0.06	-0.79	-1.03
60.00	-8.09	-7.58	-4.22	-2.93	-0.68	0.05	-0.46	0.46
75.00	-7.27	-6.90	-4.86	-3.33	-1.41	-0.30	-1.07	0.86
90.00	-6.78	-6.62	-5.39	-3.76	-2.19	-0.95	-2.27	0.48
105.00	-6.87	-6.40	-5.75	-3.95	-2.75	-1.61	-2.86	-0.57
120.00	-7.63	-6.44	-5.58	-3.81	-2.82	-1.69	-2.46	-1.49
135.00	-8.42	-6.81	-5.07	-3.43	-2.35	-1.43	-1.78	-1.76
150.00	-8.98	-7.34	-4.62	-3.05	-1.64	-1.02	-1.56	-1.99
165.00	-8.95	-7.69	-4.22	-2.93	-0.98	-0.56	-1.64	-2.54
180.00	-8.53	-7.51	-4.04	-3.19	-0.60	-0.22	-1.60	-2.99
195.00	-7.77	-6.95	-4.17	-3.26	-0.47	-0.07	-1.51	-2.77
210.00	-7.25	-6.31	-4.49	-3.40	-0.41	-0.09	-1.49	-2.39
225.00	-6.93	-5.75	-5.03	-3.51	-0.62	-0.22	-1.54	-2.31
240.00	-6.83	-5.41	-5.59	-3.53	-0.94	-0.58	-1.56	-2.51
255.00	-6.88	-5.56	-5.77	-3.45	-1.28	-0.94	-1.22	-2.47
270.00	-6.78	-5.82	-5.83	-3.28	-1.27	-1.20	-0.64	-1.88
285.00	-6.60	-5.88	-5.54	-2.87	-1.14	-0.98	0.02	-0.88
300.00	-6.21	-6.02	-5.17	-2.26	-0.94	-0.43	0.35	-0.46
315.00	-5.90	-5.87	-4.74	-1.51	-0.57	-0.13	0.02	-0.76
330.00	-5.74	-5.68	-4.13	-1.01	-0.29	-0.18	-0.92	-2.28
345.00	-5.77	-6.18	-3.51	-1.27	-0.07	-0.31	-1.75	-5.43
360.00	-6.45	-6.74	-3.64	-1.43	-0.10	-0.44	-3.23	-14.23

(continuation of the "RP_2402.000_tot" table from column 9 ...)

Azimuth (deg)	Elevation 120 deg (dB)	Elevation 135 deg (dB)	Elevation 150 deg (dB)	Elevation 165 deg (dB)	Elevation 180 deg (dB)
0.00	-2.48	1.47	1.27	-1.78	-6.08
15.00	-0.41	1.65	1.09	-1.51	-6.50
30.00	1.09	2.11	1.31	-1.33	-6.20
45.00	2.22	2.81	1.68	-1.25	-6.12
60.00	2.92	3.29	1.98	-1.34	-6.24
75.00	3.16	3.40	2.05	-1.57	-6.39
90.00	2.97	3.18	1.63	-2.00	-6.47
105.00	2.45	2.59	0.87	-2.60	-6.90
120.00	1.75	1.76	-0.12	-3.30	-7.32
135.00	1.16	0.94	-1.19	-3.89	-7.99
150.00	1.00	0.71	-1.85	-4.35	-8.81
165.00	0.85	0.87	-1.98	-4.43	-9.66
180.00	0.44	0.91	-2.02	-4.46	-10.65
195.00	-0.07	0.57	-2.14	-4.53	-11.40
210.00	-0.49	-0.10	-2.30	-4.87	-12.14
225.00	-0.84	-0.92	-2.60	-5.39	-12.75
240.00	-1.38	-1.80	-2.98	-6.04	-13.66
255.00	-1.75	-2.53	-3.05	-6.89	-14.76
270.00	-1.58	-2.63	-2.79	-7.18	-15.33
285.00	-0.93	-1.98	-2.13	-6.63	-15.42
300.00	-0.47	-0.98	-1.28	-5.06	-14.19
315.00	-0.68	-0.17	-0.49	-3.66	-12.51
330.00	-1.56	0.53	0.17	-2.78	-10.29
345.00	-2.07	0.58	0.60	-2.26	-8.86
360.00	-2.48	1.47	1.27	-1.78	-6.08

RP_2402.000_hor

Azimuth (deg)	Elevation 0 deg (dB)	Elevation 15 deg (dB)	Elevation 30 deg (dB)	Elevation 45 deg (dB)	Elevation 60 deg (dB)	Elevation 75 deg (dB)	Elevation 90 deg (dB)	Elevation 105 deg (dB)
0.0	-10.15	-7.82	-3.81	-1.47	-0.16	-0.59	-3.37	-14.92
15.0	-9.49	-7.67	-3.66	-2.10	-0.43	-1.03	-4.64	-13.49
30.0	-9.03	-8.12	-4.25	-3.21	-1.14	-1.93	-5.92	-10.71
45.0	-9.11	-9.32	-5.40	-4.80	-2.34	-3.22	-7.35	-8.46

Azimuth (deg)	Elevation 0 deg (dB)	Elevation 15 deg (dB)	Elevation 30 deg (dB)	Elevation 45 deg (dB)	Elevation 60 deg (dB)	Elevation 75 deg (dB)	Elevation 90 deg (dB)	Elevation 105 deg (dB)
60.0	-9.97	-10.88	-6.86	-6.34	-3.64	-4.45	-8.68	-5.85
75.0	-11.35	-12.54	-8.14	-7.18	-4.38	-4.83	-8.48	-3.77
90.0	-13.84	-13.45	-8.85	-7.07	-4.34	-4.01	-6.49	-2.58
105.0	-17.73	-12.98	-8.56	-6.12	-3.77	-3.02	-4.30	-2.15
120.0	-22.86	-11.89	-7.42	-4.95	-3.16	-2.08	-2.84	-2.10
135.0	-17.60	-10.50	-6.24	-4.06	-2.43	-1.52	-1.97	-1.97
150.0	-13.28	-9.73	-5.38	-3.43	-1.68	-1.06	-1.72	-2.11
165.0	-10.62	-8.85	-4.81	-3.21	-1.04	-0.59	-1.71	-2.60
180.0	-9.16	-8.11	-4.53	-3.46	-0.73	-0.27	-1.65	-3.08
195.0	-8.36	-7.63	-4.62	-3.53	-0.71	-0.17	-1.67	-3.17
210.0	-8.21	-7.46	-4.96	-3.57	-0.72	-0.26	-1.78	-3.07
225.0	-8.43	-7.61	-5.64	-3.57	-0.86	-0.40	-1.85	-2.95
240.0	-9.24	-8.26	-6.38	-3.68	-1.00	-0.70	-1.82	-2.90
255.0	-11.02	-9.57	-7.06	-4.08	-1.42	-1.06	-1.84	-2.95
270.0	-13.40	-11.78	-8.00	-4.73	-1.98	-1.70	-2.16	-3.36
285.0	-17.01	-14.12	-9.00	-5.40	-2.72	-2.27	-2.72	-4.16
300.0	-22.04	-14.20	-9.29	-4.89	-2.94	-2.17	-3.20	-5.65
315.0	-19.30	-12.06	-7.96	-3.44	-2.17	-1.66	-3.39	-7.34
330.0	-14.96	-9.96	-6.02	-2.14	-1.10	-1.06	-3.34	-9.40
345.0	-12.43	-9.35	-4.65	-1.78	-0.40	-0.60	-3.30	-10.85
360.0	-10.15	-7.82	-3.81	-1.47	-0.16	-0.59	-3.37	-14.92

(continuation of the "RP_2402.000_hor" table from column 9 ...)

Azimuth (deg)	Elevation 120 deg (dB)	Elevation 135 deg (dB)	Elevation 150 deg (dB)	Elevation 165 deg (dB)	Elevation 180 deg (dB)
0.0	-2.54	1.38	0.67	-2.07	-7.57
15.0	-1.26	1.19	0.13	-1.88	-9.22
30.0	-0.89	1.01	0.12	-1.87	-9.52
45.0	-0.39	1.40	0.47	-2.02	-10.40
60.0	0.49	1.94	0.80	-2.29	-12.03
75.0	1.32	2.19	0.92	-2.70	-14.36
90.0	1.81	2.22	0.63	-3.20	-17.47
105.0	1.90	1.96	0.11	-3.77	-21.79
120.0	1.54	1.47	-0.57	-4.32	-21.49
135.0	1.07	0.88	-1.36	-4.63	-17.96
150.0	0.93	0.67	-1.96	-4.82	-16.41
165.0	0.82	0.83	-2.12	-4.71	-15.84
180.0	0.40	0.87	-2.11	-4.68	-15.60
195.0	-0.17	0.47	-2.20	-4.83	-15.50
210.0	-0.70	-0.28	-2.50	-5.36	-15.46
225.0	-1.05	-1.14	-2.91	-6.14	-15.76
240.0	-1.47	-1.99	-3.31	-7.04	-16.57
255.0	-1.91	-2.61	-3.36	-7.64	-17.49
270.0	-2.46	-2.82	-3.16	-7.47	-17.39
285.0	-3.00	-2.65	-2.66	-6.81	-16.35
300.0	-3.41	-2.02	-1.99	-5.46	-15.05
315.0	-3.68	-1.16	-1.17	-4.18	-13.71
330.0	-3.65	-0.08	-0.38	-3.19	-12.00
345.0	-3.20	0.29	0.20	-2.52	-10.42
360.0	-2.54	1.38	0.67	-2.07	-7.57

RP_2402.000_ver


Azimuth (deg)	Elevation 0 deg (dB)	Elevation 15 deg (dB)	Elevation 30 deg (dB)	Elevation 45 deg (dB)	Elevation 60 deg (dB)	Elevation 75 deg (dB)	Elevation 90 deg (dB)	Elevation 105 deg (dB)
0.0	-8.86	-13.31	-17.92	-22.58	-19.17	-14.86	-18.06	-22.58
15.0	-12.20	-15.01	-19.18	-14.79	-10.40	-9.22	-9.34	-11.80
30.0	-17.93	-16.52	-12.13	-9.31	-6.35	-5.23	-4.26	-5.17
45.0	-18.67	-13.39	-8.98	-6.66	-4.40	-2.93	-1.88	-1.89
60.0	-12.64	-10.33	-7.64	-5.57	-3.74	-1.85	-1.17	-0.70
75.0	-9.41	-8.28	-7.61	-5.63	-4.46	-2.18	-1.94	-0.98
90.0	-7.73	-7.64	-8.00	-6.49	-6.27	-3.90	-4.33	-2.48
105.0	-7.24	-7.48	-8.98	-8.00	-9.55	-7.17	-8.36	-5.71
120.0	-7.76	-7.90	-10.20	-10.18	-14.00	-12.36	-13.29	-10.32
135.0	-8.98	-9.23	-11.32	-12.17	-19.45	-18.41	-15.53	-14.97

Azimuth (deg)	Elevation 0 deg (dB)	Elevation 15 deg (dB)	Elevation 30 deg (dB)	Elevation 45 deg (dB)	Elevation 60 deg (dB)	Elevation 75 deg (dB)	Elevation 90 deg (dB)	Elevation 105 deg (dB)
150.0	-11.00	-11.08	-12.57	-13.88	-22.51	-21.90	-16.02	-17.69
165.0	-13.90	-14.02	-13.18	-15.02	-19.66	-21.07	-19.44	-21.08
180.0	-17.23	-16.43	-13.77	-15.36	-15.89	-19.80	-21.34	-20.04
195.0	-16.77	-15.37	-14.23	-15.54	-13.15	-16.61	-15.89	-13.32
210.0	-14.31	-12.65	-14.40	-17.46	-12.03	-14.27	-13.36	-10.80
225.0	-12.26	-10.34	-13.83	-21.82	-13.22	-14.08	-13.10	-10.98
240.0	-10.53	-8.59	-13.35	-18.32	-19.79	-16.33	-13.94	-13.19
255.0	-9.00	-7.75	-11.66	-12.20	-16.38	-16.59	-9.99	-12.26
270.0	-7.85	-7.09	-9.90	-8.74	-9.49	-10.82	-5.94	-7.26
285.0	-7.01	-6.59	-8.15	-6.42	-6.31	-6.90	-3.27	-3.64
300.0	-6.33	-6.73	-7.30	-5.69	-5.27	-5.25	-2.18	-2.02
315.0	-6.10	-7.06	-7.54	-5.96	-5.70	-5.40	-2.62	-1.84
330.0	-6.29	-7.70	-8.65	-7.42	-7.99	-7.51	-4.61	-3.21
345.0	-6.82	-9.05	-9.87	-10.75	-11.49	-12.20	-6.98	-6.90
360.0	-8.86	-13.31	-17.92	-22.58	-19.17	-14.86	-18.06	-22.58


(continuation of the "RP_2402.000_ver" table from column 9 ...)

Azimuth (deg)	Elevation 120 deg (dB)	Elevation 135 deg (dB)	Elevation 150 deg (dB)	Elevation 165 deg (dB)	Elevation 180 deg (dB)
0.0	-20.79	-15.12	-7.65	-13.70	-11.44
15.0	-7.92	-8.33	-5.94	-12.39	-9.83
30.0	-3.28	-4.39	-4.91	-10.60	-8.91
45.0	-1.24	-2.77	-4.46	-9.17	-8.14
60.0	-0.76	-2.43	-4.26	-8.43	-7.57
75.0	-1.44	-2.78	-4.36	-7.96	-7.15
90.0	-3.33	-3.86	-5.20	-8.18	-6.83
105.0	-6.80	-6.16	-7.03	-8.89	-7.05
120.0	-11.62	-10.15	-10.20	-10.09	-7.49
135.0	-15.93	-17.73	-15.23	-11.89	-8.45
150.0	-17.22	-19.78	-17.80	-14.24	-9.64
165.0	-20.36	-19.11	-16.76	-16.44	-10.86
180.0	-20.77	-19.87	-18.78	-17.54	-12.33
195.0	-16.54	-15.83	-20.82	-16.33	-13.53
210.0	-13.93	-14.05	-15.90	-14.60	-14.86
225.0	-14.16	-14.06	-14.18	-13.38	-15.76
240.0	-18.34	-15.41	-14.40	-12.92	-16.78
255.0	-16.23	-19.63	-14.77	-14.87	-18.08
270.0	-8.95	-16.43	-13.63	-19.10	-19.55
285.0	-5.15	-10.43	-11.48	-20.56	-22.58
300.0	-3.56	-7.66	-9.51	-15.58	-21.66
315.0	-3.70	-7.09	-8.86	-13.15	-18.71
330.0	-5.74	-8.26	-9.11	-13.18	-15.18
345.0	-8.48	-11.31	-10.00	-14.51	-14.08
360.0	-20.79	-15.12	-7.65	-13.70	-11.44


Theta = 0, Phi = 0

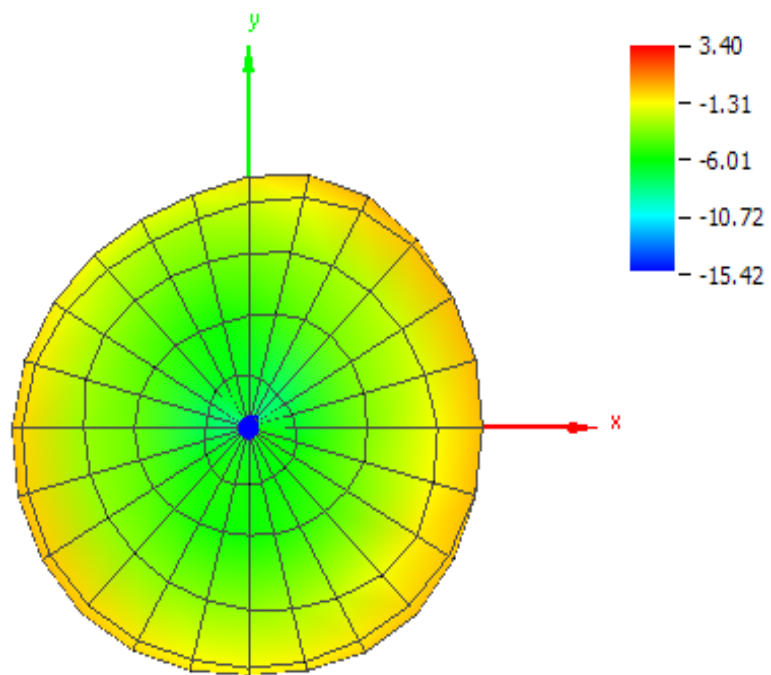


Theta = 180, Phi = 0

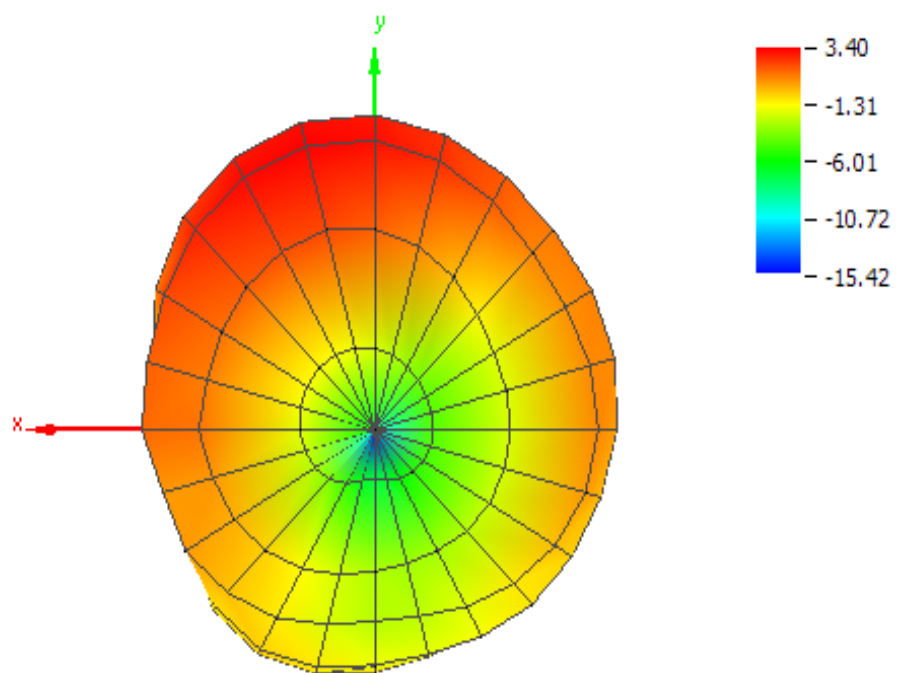


Theta = 90, Phi = 0

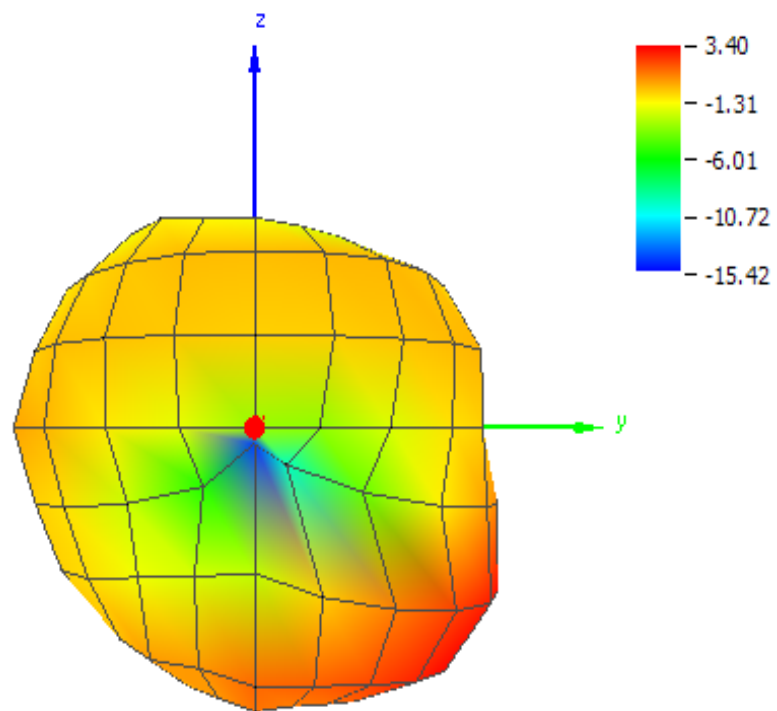

Theta = 90, Phi = 180

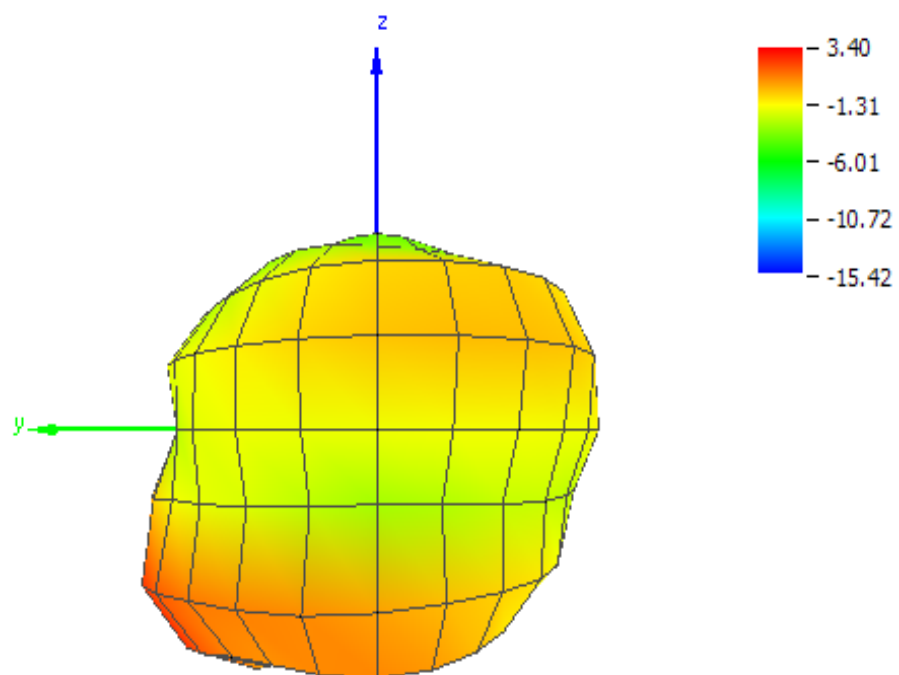

Theta = 90, Phi = 270

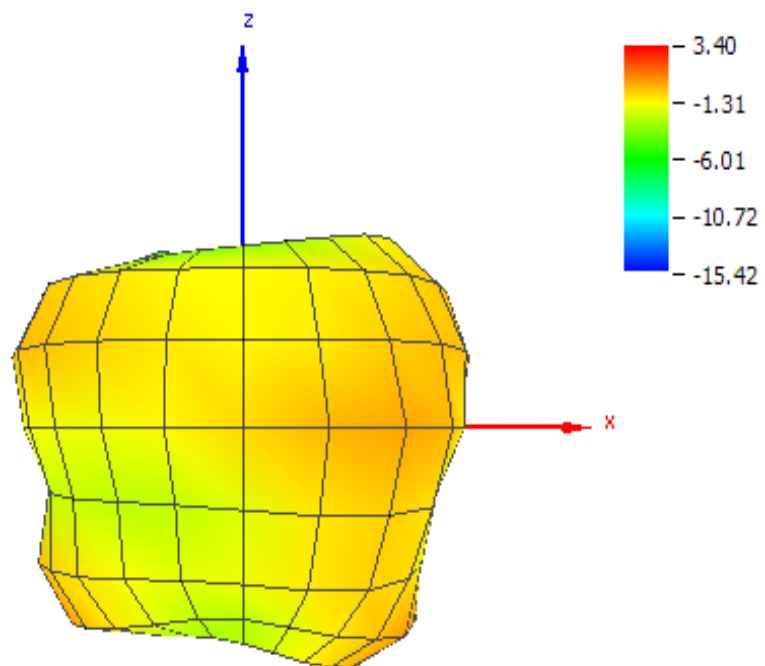

Theta = 90, Phi = 90

