DS90LV032AQML 3V LVDS Quad CMOS Differential Line Receiver

Check for Samples: DS90LV032AQML

FEATURES

- **Low chip to chip skew**
- **Low differential skew**
- **High impedance LVDS inputs with power-off**
- **Low power dissipation**
- **Accepts small swing (330 mV) differential signal levels.**
- **Compatible with ANSI/TIA/EIA-644**
- **Operating temperature range (-55°C to +85°C)**
- **Pin compatible with DS90C032A and DS26C32A.**
- **Typical Rise/Fall time is 350pS.**

DESCRIPTION

The DS90LV032A is a quad CMOS differential line receiver designed for applications requiring ultra low power dissipation and high data rates.

The DS90LV032A accepts low voltage (350 mV typical) differential input signals and translates them to 3V CMOS output levels. The receiver supports a TRI-STATE® function that may be used to multiplex outputs.

The DS90LV032A and companion LVDS line driver (eg. DS90LV031A) provide a new alternative to high power PECL/ECL devices for high speed point-to-point interface applications.

In addition, the DS90LV032A provides power-off high impedance LVDS inputs. This feature assures minimal loading effect on the LVDS bus lines when V_{CC} is not present.

Connection Diagram

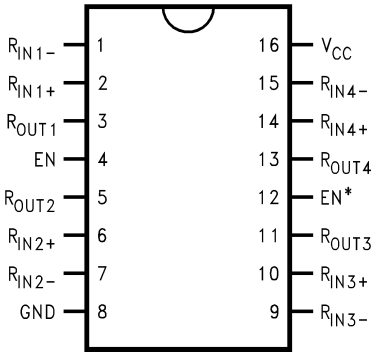

Figure 1. NAD0016A and NAC0016A Packages

Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

TRI-STATE is a registered trademark of Texas Instruments.
All other trademarks are the property of their respective owners.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of the Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

Copyright © 2011–2013, Texas Instruments Incorporated

Functional Diagram

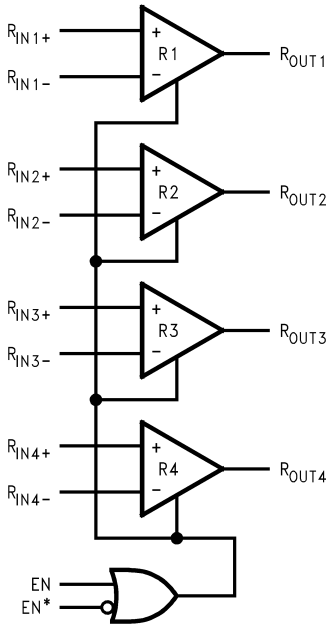

Figure 2.

Truth Table

ENABLES		INPUTS	OUTPUT
En	**En***	**$R_{I+} - R_{I-}$**	**R_O**
L	H	X	Z
All other combinations of enable inputs		$V_{ID} \geq 0.1V$	H
		$V_{ID} \leq -0.1V$	L
		Full Fail-safe Open/Short or Terminated	H

These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

Copyright © 2011–2013, Texas Instruments Incorporated

Absolute Maximum Ratings (1)

Supply Voltage (V_{CC})	−0.3V to +4V
Input Voltage (R_I+, R_I−)	−0.3V to +3.9V
Enable Input Voltage (En, En*)	−0.3V to (V_{CC} + 0.3V)
Output Voltage (R_O)	−0.3V to (V_{CC} + 0.3V)
Storage Temperature Range	−65°C ≤ T_A ≤ +150°C
Lead Temperature Range (Soldering 4 sec.)	+260°C
Maximum Package Power Dissipation @ +25°C (2)	
NAD0016A Package	845 mW
NAC0016A Package	845 mW
Thermal Resistance	
θ_{JA}	
NAD0016A Package	148°C/W
NAC0016A Package	148°C/W
θ_{JC}	
NAD0016A Package	21°C/W
NAC0016A Package	21°C/W
Maximum Junction Temperature	+150°C
ESD Rating (3)	4.5 KV

(1) "Absolute Maximum Ratings" indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is functional, but do not ensure specific performance limits. For ensured specifications and test conditions, see the Electrical Characteristics. The ensured specifications apply only for the test conditions listed. Some performance characteristics may degrade when the device is not operated under the listed test conditions.
(2) Derate @ 6.8mW/°C
(3) Human body model, 1.5 kΩ in series with 100 pF.

Recommended Operating Conditions

	Min	Max	Unit
Supply Voltage (V_{CC})	+3.15	+3.45	V
Receiver Input Voltage	Gnd	+3.0	V
Operating Free Air Temperature (T_A)	−55	+85	°C

Quality Conformance Inspection

Mil-Std-883, Method 5005 - Group A

Subgroup	Description	Temp °C
1	Static tests at	+25
2	Static tests at	+125
3	Static tests at	-55
4	Dynamic tests at	+25
5	Dynamic tests at	+125
6	Dynamic tests at	-55
7	Functional tests at	+25
8A	Functional tests at	+125
8B	Functional tests at	-55
9	Switching tests at	+25
10	Switching tests at	+125
11	Switching tests at	-55
12	Settling time at	+25
13	Settling time at	+125
14	Settling time at	-55

Copyright © 2011–2013, Texas Instruments Incorporated

DS90LV032A Electrical Characteristics DC Parameters

The following conditions apply, unless otherwise specified.
Over supply voltage range of 3.15V to 3.45V and operating temperature of −55°C to +85°C.

Symbol	Parameter	Conditions	Notes	Min	Max	Units	Sub-groups
V_{TL}	Differential Input Low Threshold	V_{CM} = +1.2V	(1)	-100		mV	1, 2, 3
V_{Th}	Differential Input High Threshold	V_{CM} = +1.2V	(1)		100	mV	1, 2, 3
VCMR	Common Mode Voltage Range	V_{ID} = 200mV peak to peak	(1), (2)	0.1	2.3	V	1, 2, 3
I_I	Input Current	V_{CC} = 3.45V or 0V, V_I = 2.8V or 0V			±10	µA	1, 2, 3
		V_{CC} = 0V, V_I = 3.45V			±20	µA	1, 2, 3
V_{OH}	Output High Voltage	I_{OH} = -0.4 mA, V_{ID} = 200mV		2.7		V	1, 2, 3
		I_{OH} = -0.4 mA, Inputs Open		2.7		V	1, 2, 3
V_{OL}	Output Low Voltage	I_{OL} = 2 mA, V_{ID} = -200mV			0.25	V	1, 2, 3
I_{OS}	Output Short Circuit Current	Enabled, V_O = 0V	(3)	-15	-120	mA	1, 2, 3
I_{OZ}	Output TRI-STATE Current	Disabled, V_O = 0V or V_{CC}			±10	µA	1, 2, 3
V_{IH}	Input High Voltage		(4)	2.0	V_{CC}	V	1, 2, 3
V_{IL}	Input Low Voltage		(4)	Gnd	0.8	V	1, 2, 3
I_L	Input Current	V_I = V_{CC} or 0V, Other Input = V_{CC} or Gnd			±10	µA	1, 2, 3
V_{CI}	Input Clamp Voltage	I_{CI} = -18mA			-1.5	V	1, 2, 3
I_{CC}	No Load Supply Current Receivers Enabled	En, En* = V_{CC} or Gnd, Inputs Open			15	mA	1, 2, 3
		En, En* = 2.4 or 0.5, Inputs Open			15	mA	1, 2, 3
I_{CCZ}	No Load Supply Current Receivers Disabled	En = Gnd, En* = V_{CC} , Inputs Open			5.0	mA	1, 2, 3

(1) Tested during V_{OH}/V_{OL} tests by applying appropriate voltage levels to the input pins of the device under test.
(2) The VCMR range is reduced for larger V_{ID}. Example: if V_{ID} = 400mV, the VCMR is 0.2V to 2.2V. The fail-safe condition with inputs shorted is valid over a common-mode range of 0V to 2.3V. A V_{ID} up to V_{CC} − 0V may be applied to the R_{IN+}/ R_{I-} inputs with the Common-Mode voltage set to V_{CC}/2. Propagation delay and Differential Pulse skew decrease when V_{ID} is increased from 200mV to 400mV. Skew specifications apply for 200mV ≤ V_{ID} ≤ 800mV over the common-mode range .
(3) Output short circuit current (I_{OS}) is specified as magnitude only, minus sign indicates direction only. Only one output should be shorted at a time, do not exceed maximum junction temperature.
(4) Tested during I_{OZ} tests by applying appropriate threshold voltage levels to the En and En* pins.

Copyright © 2011–2013, Texas Instruments Incorporated

DS90LV032A Electrical Characteristics AC Parameters

The following conditions apply, unless otherwise specified.

AC: V_{CC} = 3.15 / 3.3 / 3.45V, C_L = 20pF

Symbol	Parameter	Conditions	Notes	Min	Max	Units	Sub-groups
t_{PHLD}	Differential Propagation Delay High to Low	V_{ID} = 200mV, Input pulse = 1.1V to 1.3V, V_I = 1.2V (0V differential) to V_O = 1/2 V_{CC}	Figure 3 and Figure 4	0.5	3.5	ns	9, 10, 11
t_{PLHD}	Differential Propagation Delay Low to High	V_{ID} = 200mV, Input pulse = 1.1V to 1.3V, V_I = 1.2V (0V differential) to V_O = 1/2 V_{CC}	Figure 3 and Figure 4	0.5	3.5	ns	9, 10, 11
t_{SkD}	Differential Skew $\|t_{PHLD} - t_{PLHD}\|$	C_L = 20pF, V_{ID} = 200mV	Figure 3 and Figure 4		1.5	ns	9, 10, 11
t_{Sk1}	Channel to Channel Skew	C_L = 20pF, V_{ID} = 200mV	(1)		1.75	ns	9, 10, 11
t_{Sk2}	Chip to Chip Skew	C_L = 20pF, V_{ID} = 200mV	(2)		3.0	ns	9, 10, 11
t_{PLZ}	Disable Time Low to Z	Input pulse = 0V to 3.0V, V_I = 1.5V, V_O = V_{OL}+0.5V, R_L= 1kΩ.	Figure 5 and Figure 6		12	ns	9, 10, 11
t_{PHZ}	Disable Time High to Z	Input pulse = 0V to 3.0V, V_I = 1.5V, V_O = V_{OH}-0.5V, R_L = 1kΩ.	Figure 5 and Figure 6		12	ns	9, 10, 11
t_{PZH}	Enable Time Z to High	Input pulse = 0V to 3.0V, V_I = 1.5V, V_O = 50%, R_L = 1kΩ.	Figure 5 and Figure 6		20	ns	9, 10, 11
t_{PZL}	Enable Time Z to Low	Input pulse = 0V to 3.0V, V_I = 1.5V, V_O = 50%, R_L = 1kΩ.	Figure 5 and Figure 6		20	ns	9, 10, 11

(1) Channel-to-Channel Skew, is defined as the difference between the propagation delay of one channel and that of the others on the same chip with any event on the inputs.

(2) Chip to chip Skew is defined as the difference between the minimum and maximum specified differential propagation delays.

PARAMETER MEASUREMENT INFORMATION

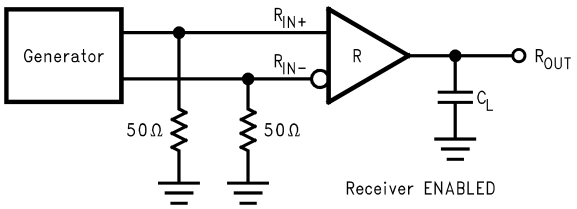

Figure 3. Receiver Propagation Delay and Transition Time Test Circuit

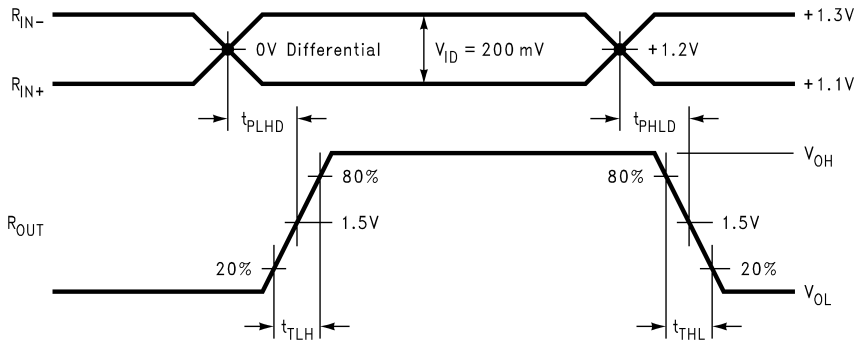

Figure 4. Receiver Propagation Delay and Transition Time Waveforms

Copyright © 2011–2013, Texas Instruments Incorporated

PARAMETER MEASUREMENT INFORMATION (continued)

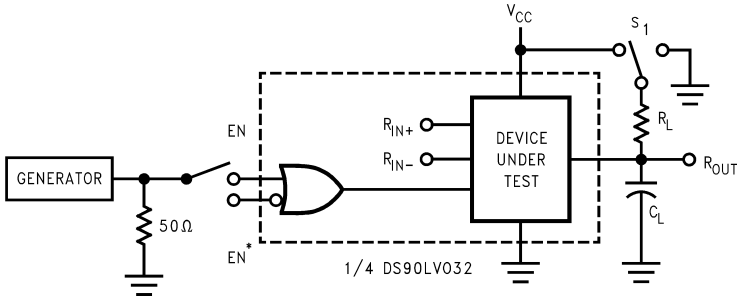

C_L includes load and test jig capacitance.
$S_1 = V_{CC}$ for t_{PZL}, and t_{PLZ} measurements.
S_1 = Gnd for t_{PZH} and t_{PHZ} measurements.

Figure 5. Receiver TRI-STATE Delay Test Circuit

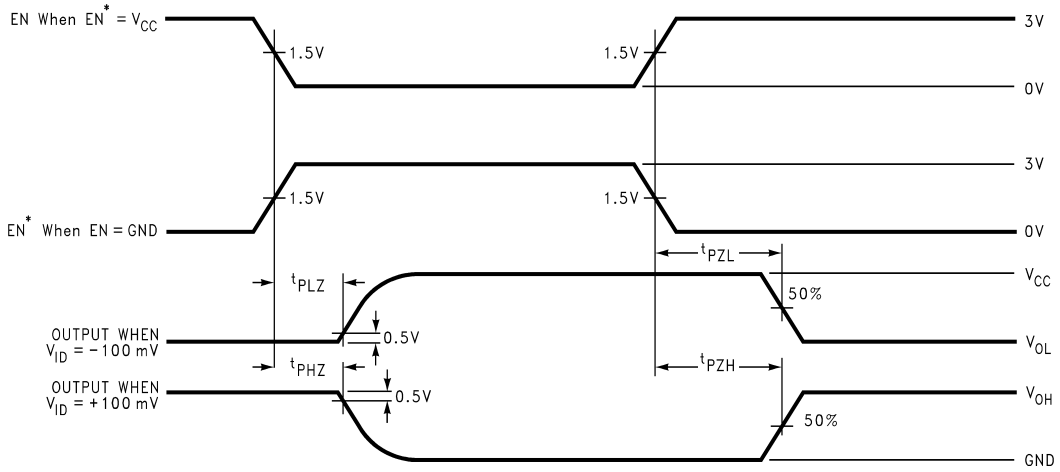

Figure 6. Receiver TRI-STATE Delay Waveforms

Copyright © 2011–2013, Texas Instruments Incorporated

Typical Performance Characteristics

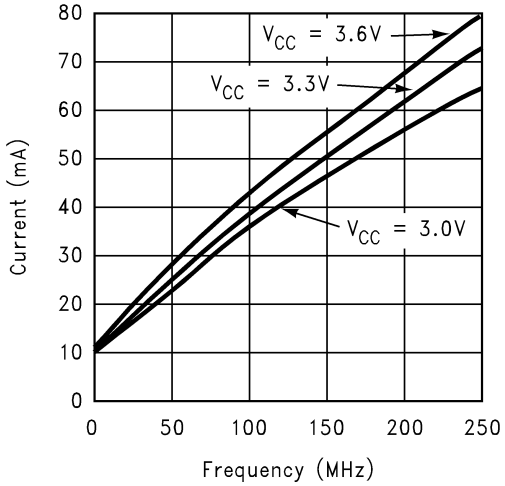

Figure 7. I_{CC} vs Frequency, four channels switching

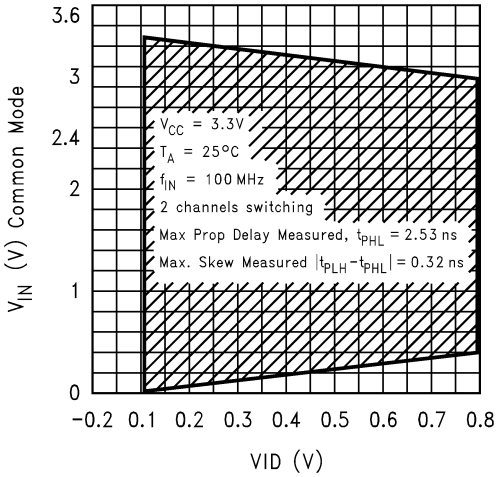

Figure 8. Typical Common-Mode Range variation with respect to amplitude of differential input

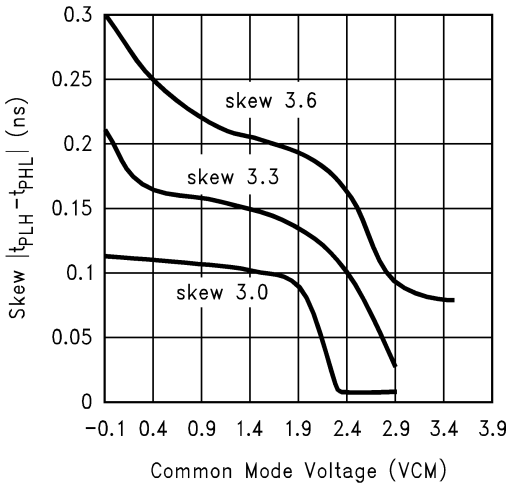

Figure 9. Typical Pulse Skew variation versus common-mode voltage

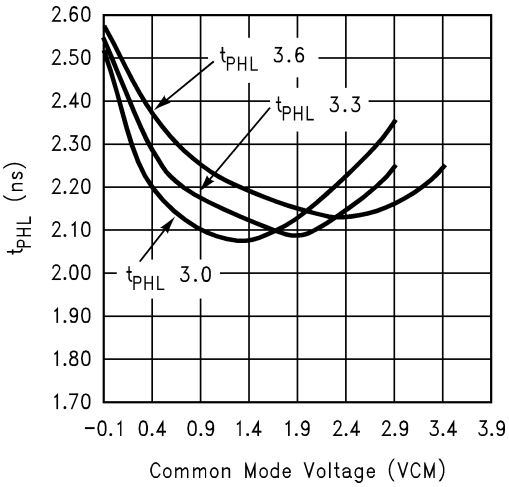

Figure 10. Variation in High to Low Propagation Delay versus V_{CM}

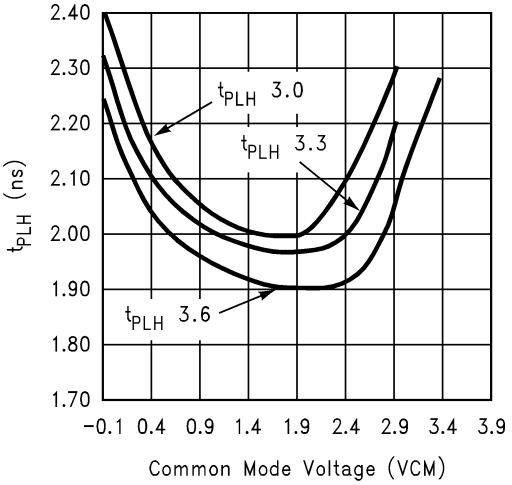

Figure 11. Variation in Low to High Propagation Delay versus V_{CM}

Copyright © 2011–2013, Texas Instruments Incorporated

TYPICAL APPLICATION

Balanced System

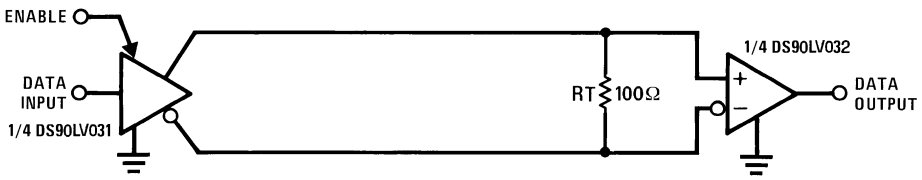

Figure 12. Point-to-Point Application

APPLICATION INFORMATION

General application guidelines and hints for LVDS drivers and receivers may be found in the LVDS Owner's Manual at http://www.ti.com/ww/en/analog/interface/lvds.shtml

LVDS drivers and receivers are intended to be primarily used in an uncomplicated point-to-point configuration as is shown in Figure 12. This configuration provides a clean signaling environment for the fast edge rates of the drivers . The receiver is connected to the driver through a balanced media which may be a standard twisted pair cable, a parallel pair cable, or simply PCB traces. Typically the characteristic impedance of the media is in the range of 100Ω. A termination resistor of 100Ω should be selected to match the media, and is located as close to the receiver input pins as possible. The termination resistor converts the driver output (current mode) into a voltage that is detected by the receiver. Other configurations are possible such as a multi-receiver configuration, but the effects of a mid-stream connector(s), cable stub(s), and other impedance discontinuities as well as ground shifting, noise margin limits, and total termination loading must be taken into account.

The DS90LV032A differential line receiver is capable of detecting signals as low as 100 mV, over a ±1V common-mode range centered around +1.2V. This is related to the driver offset voltage which is typically +1.2V. The driven signal is centered around this voltage and may shift ±1V around this center point. The ±1V shifting may be the result of a ground potential difference between the driver's ground reference and the receiver's ground reference, the common-mode effects of coupled noise, or a combination of the two. Both receiver input pins have a recommended operating input voltage range of 0V to +2.4V (measured from each pin to ground), exceeding these limits may turn on the ESD protection circuitry which will clamp the bus voltages.

POWER DECOUPLING RECOMMENDATIONS

Bypass capacitors must be used on power pins. High frequency ceramic (surface mount is recommended) 0.1µF in parallel with 0.01µF, in parallel with 0.001µF at the power supply pin as well as scattered capacitors over the printed circuit board. Multiple vias should be used to connect the decoupling capacitors to the power planes A 10µF (35V) or greater solid tantalum capacitor should be connected at the power entry point on the printed circuit board.

PC BOARD CONSIDERATIONS

Use at least 4 PCB layers (top to bottom); LVDS signals, ground, power, TTL signals.

Isolate TTL signals from LVDS signals, otherwise the TTL may couple onto the LVDS lines. It is best to put TTL and LVDS signals on different layers which are isolated by a power/ground plane(s).

Keep drivers and receivers as close to the (LVDS port side) connectors as possible.

DIFFERENTIAL TRACES

Use controlled impedance traces which match the differential impedance of your transmission medium (ie. cable) and termination resistor. Run the differential pair trace lines as close together as possible as soon as they leave the IC (stubs should be < 10mm long). This will help eliminate reflections and ensure noise is coupled as common-mode. Lab experiments show that differential signals which are 1mm apart radiate far less noise than traces 3mm apart since magnetic field cancellation is much better with the closer traces. Plus, noise induced on the differential lines is much more likely to appear as common-mode which is rejected by the receiver.

Copyright © 2011–2013, Texas Instruments Incorporated

Match electrical lengths between traces to reduce skew. Skew between the signals of a pair means a phase difference between signals which destroys the magnetic field cancellation benefits of differential signals and EMI will result. (Note the velocity of propagation, v = c/Er where c (the speed of light) = 0.2997mm/ps or 0.0118 in/ps). Do not rely solely on the autoroute function for differential traces. Carefully review dimensions to match differential impedance and provide isolation for the differential lines. Minimize the number of vias and other discontinuities on the line.

Avoid 90° turns (these cause impedance discontinuities). Use arcs or 45° bevels.

Within a pair of traces, the distance between the two traces should be minimized to maintain common-mode rejection of the receivers. On the printed circuit board, this distance should remain constant to avoid discontinuities in differential impedance. Minor violations at connection points are allowable.

TERMINATION

Use a resistor which best matches the differential impedance of your transmission line. The resistor should be between 90Ω and 130Ω. Remember that the current mode outputs need the termination resistor to generate the differential voltage. LVDS will not work without resistor termination. Typically, connect a single resistor across the pair at the receiver end.

Surface mount 1% to 2% resistors are best. PCB stubs, component lead, and the distance from the termination to the receiver inputs should be minimized. The distance between the termination resistor and the receiver should be <10mm (12mm MAX)

PROBING LVDS TRANSMISSION LINES

Always use high impedance (> 100kΩ), low capacitance (< 2 pF) scope probes with a wide bandwidth (1 GHz) scope. Improper probing will give deceiving results.

CABLES AND CONNECTORS, GENERAL COMMENTS

When choosing cable and connectors for LVDS it is important to remember:

Use controlled impedance media. The cables and connectors you use should have a matched differential impedance of about 100Ω. They should not introduce major impedance discontinuities.

Balanced cables (e.g. twisted pair) are usually better than unbalanced cables (ribbon cable, simple coax.) for noise reduction and signal quality. Balanced cables tend to generate less EMI due to field canceling effects and also tend to pick up electromagnetic radiation as common-mode (not differential mode) noise which is rejected by the receiver. For cable distances < 0.5M, most cables can be made to work effectively. For distances 0.5M ≤ d ≤ 10M, CAT 3 (category 3) twisted pair cable works well, is readily available and relatively inexpensive.

FAIL-SAFE FEATURE

The LVDS receiver is a high gain, high speed device that amplifies a small differential signal (20mV) to CMOS logic levels. Due to the high gain and tight threshold of the receiver, care should be taken to prevent noise from appearing as a valid signal.

The receiver's internal fail-safe circuitry is designed to source/sink a small amount of current, providing fail-safe protection (a stable known state of HIGH output voltage) for floating, terminated or shorted receiver inputs.

1. **Open Input Pins.** The DS90LV032A is a quad receiver device, and if an application requires only 1, 2 or 3 receivers, the unused channel(s) inputs should be left OPEN. Do not tie unused receiver inputs to ground or any other voltages. The input is biased by internal high value pull up and pull down resistors to set the output to a HIGH state. This internal circuitry will ensure a HIGH, stable output state for open inputs.
2. **Terminated Input.** If the driver is disconnected (cable unplugged), or if the driver is in a TRI-STATE or power-off condition, the receiver output will again be in a HIGH state, even with the end of cable 100Ω termination resistor across the input pins. The unplugged cable can become a floating antenna which can pick up noise. If the cable picks up more than 10mV of differential noise, the receiver may see the noise as a valid signal and switch. To insure that any noise is seen as common-mode and not differential, a balanced interconnect should be used. Twisted pair cable will offer better balance than flat ribbon cable.

Copyright © 2011–2013, Texas Instruments Incorporated

3. **Shorted Inputs.** If a fault condition occurs that shorts the receiver inputs together, thus resulting in a 0V differential input voltage, the receiver output will remain in a HIGH state. Shorted input fail-safe is not supported across the common-mode range of the device (GND to 2.4V). It is only supported with inputs shorted and no external common-mode voltage applied.

External lower value pull up and pull down resistors (for a stronger bias) may be used to boost fail-safe in the presence of higher noise levels. The pull up and pull down resistors should be in the 5kΩ to 15kΩ range to minimize loading and waveform distortion to the driver. The common-mode bias point should be set to approximately 1.2V (less than 1.75V) to be compatible with the internal circuitry.

The footprint of the DS90LV032A is the same as the industry standard 26LS32 Quad Differential (RS-422) Receiver.

PIN DESCRIPTIONS

Pin No.	Name	Description
2, 6, 10, 14	R_{I+}	Non-inverting receiver input pin
1, 7, 9, 15	R_{I-}	Inverting receiver input pin
3, 5, 11, 13	R_O	Receiver output pin
4	En	Active high enable pin, OR-ed with En*
12	En*	Active low enable pin, OR-ed with En
16	V_{CC}	Power supply pin, +3.3V ± 0.3V
8	Gnd	Ground pin

Copyright © 2011–2013, Texas Instruments Incorporated

REVISION HISTORY

Changes from Original (April 2013) to Revision A	Page
• Changed layout of National Data Sheet to TI format	10

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package | Pins	Package qty | Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
5962-9865201QFA	Active	Production	CFP (NAD) | 16	19 | TUBE	No	Call TI	Call TI	-55 to 85	(DS90LV031AW, DS90 LV032AW) -QML Q (5962-98651, 5962-98652) 01QFA ACO 01QFA >T
DS90LV032AW-MLS	Active	Production	CFP (NAD) | 16	19 | TUBE	No	Call TI	Call TI	-55 to 85	DS90LV032AW-MLS ACO MLS >T
DS90LV032AW-QML	Active	Production	CFP (NAD) | 16	19 | TUBE	No	Call TI	Call TI	-55 to 85	(DS90LV031AW, DS90 LV032AW) -QML Q (5962-98651, 5962-98652) 01QFA ACO 01QFA >T

(1) **Status:** For more details on status, see our product life cycle.

(2) **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

(3) **RoHS values:** Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

(4) **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

(5) **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

(6) **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

OTHER QUALIFIED VERSIONS OF DS90LV032AQML, DS90LV032AQML-SP :

- Military : DS90LV032AQML
- Space : DS90LV032AQML-SP

NOTE: Qualified Version Definitions:

- Military - QML certified for Military and Defense Applications
- Space - Radiation tolerant, ceramic packaging and qualified for use in Space-based application

TUBE

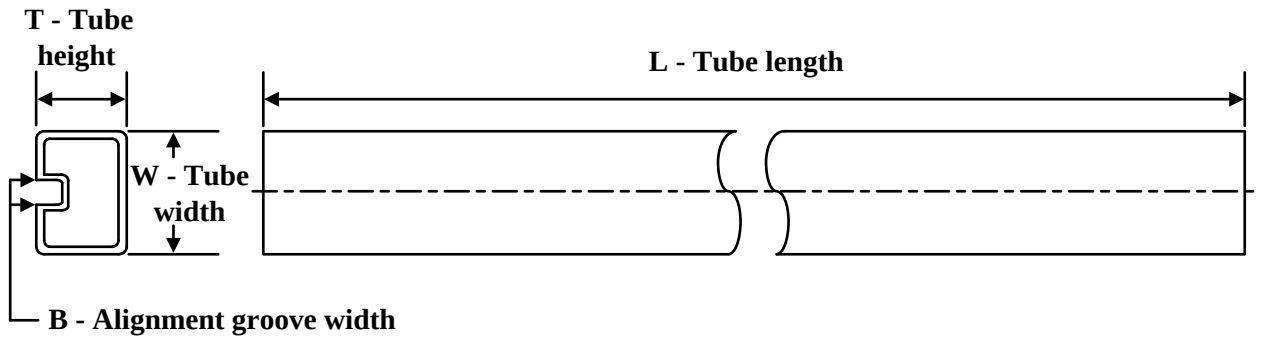

*All dimensions are nominal

Device	Package Name	Package Type	Pins	SPQ	L (mm)	W (mm)	T (µm)	B (mm)
5962-9865201QFA	NAD	CFP	16	19	502	23	9398	9.78
DS90LV032AW-MLS	NAD	CFP	16	19	502	23	9398	9.78
DS90LV032AW-QML	NAD	CFP	16	19	502	23	9398	9.78

NAD0016A

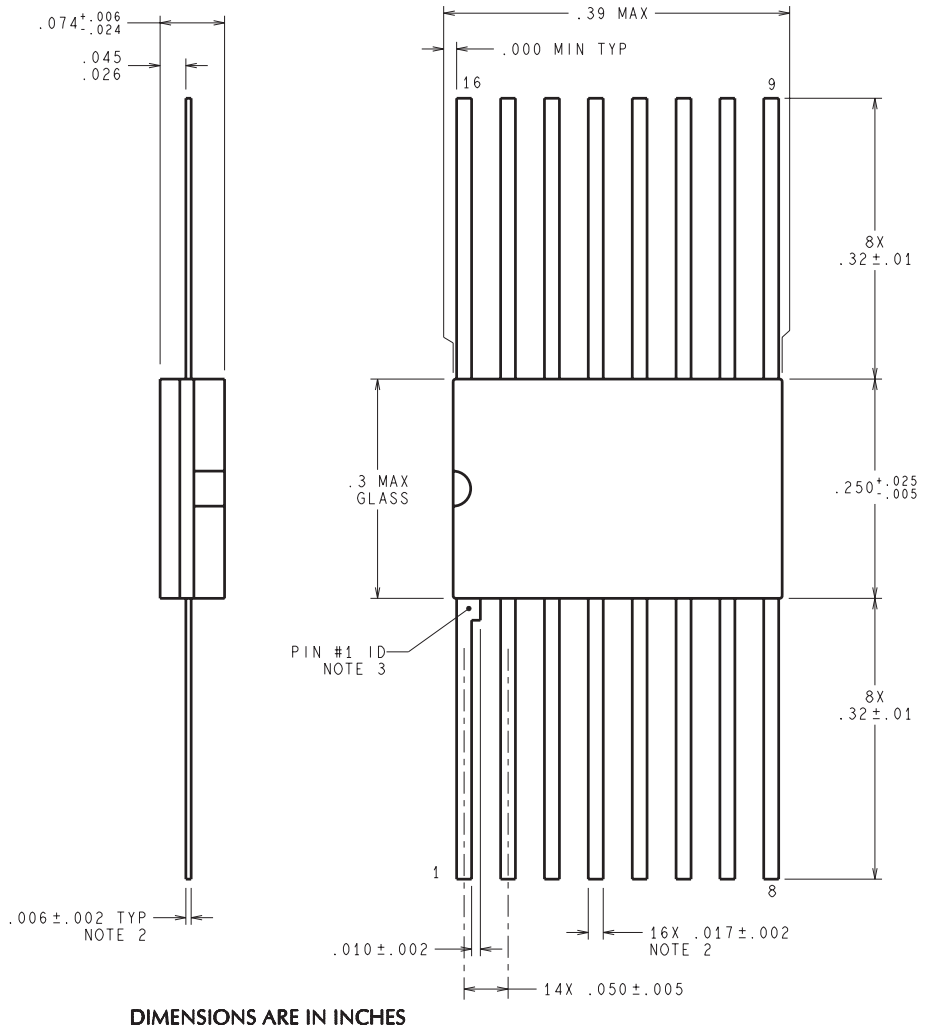

DIMENSIONS ARE IN INCHES

W16A (Rev T)

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES “AS IS” AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI’s products are provided subject to TI’s Terms of Sale, TI’s General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI’s provision of these resources does not expand or otherwise alter TI’s applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2026, Texas Instruments Incorporated

Last updated 10/2025