

TL3474, TL3474A High-Slew-Rate, Single-Supply Operational Amplifiers

1 Features

- Low offset: 3mV (max) for A-grade
- Wide gain-bandwidth product: 4.5MHz
- Wide-range single-supply operation: 4V to 36V
- Wide input common-mode range includes ground (V_{CC-})
- Output short-circuit protection
- Alternative to MC33074/A and MC34074/A

2 Applications

- [Multiplexed data-acquisition systems](#)
- [Test and measurement equipment](#)
- [ADC driver amplifiers](#)
- [SAR ADC reference buffers](#)
- [Programmable logic controllers](#)
- [Low-side current sensing](#)


3 Description

Quality, low-cost, bipolar fabrication with remarkable design concepts is employed for the TL3474 and TL3474A operational amplifiers. These devices offer 4.5MHz of gain-bandwidth product. Although the TL3474 and TL3474A can be operated from split supplies, these devices are designed for single-supply operation because the common-mode input voltage range includes ground potential (V_{CC-}). These devices exhibit high input resistance, low input offset voltage, and high gain. The low-cost TL3474 is a good alternative to the MC34074/A and MC33074/A operational amplifiers.

Package Information

PART NUMBER	PACKAGE ⁽¹⁾	PACKAGE SIZE ⁽²⁾
TL3474	D (SOIC, 14)	8.65mm × 6.00mm
	PW (TSSOP, 14)	5.00mm × 6.40mm
	N (PDIP, 14)	19.30mm × 9.40mm

- (1) For more information, see [Mechanical, Packaging, and Orderable Information](#).
- (2) The package size (length × width) is a nominal value and includes pins, where applicable.




Symbol (Each Amplifier)



Table of Contents

1 Features	1	5.6 Old Die to New Die Transition	9
2 Applications	1	6 Device and Documentation Support	10
3 Description	1	6.1 Receiving Notification of Documentation Updates....	10
4 Pin Configuration and Functions	3	6.2 Support Resources.....	10
5 Specifications	4	6.3 Trademarks.....	10
5.1 Absolute Maximum Ratings.....	4	6.4 Electrostatic Discharge Caution.....	10
5.2 Recommended Operating Conditions.....	4	6.5 Glossary.....	10
5.3 Electrical Characteristics.....	5	7 Revision History	10
5.4 Operating Characteristics.....	6	8 Mechanical, Packaging, and Orderable Information..	11
5.5 Typical Characteristics.....	7		

4 Pin Configuration and Functions

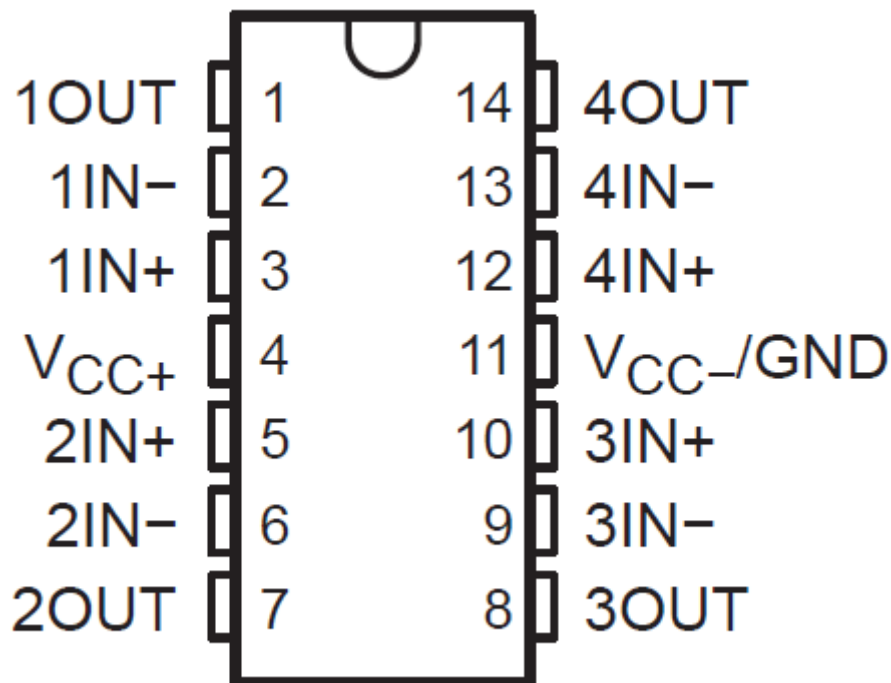

**Figure 4-1. D, N, or PW Package
Top View**

Table 4-1. Pin Functions: TL3474

PIN		TYPE ⁽¹⁾	DESCRIPTION
NAME	NO.		
1OUT	1	O	Output channel 1
1IN-	2	I	Inverting input channel 1
1IN+	3	I	Non inverting input channel 1
VCC+	4	—	Positive Input supply voltage
2IN+	5	I	Non inverting input channel 2
2IN-	6	I	Inverting input channel 2
2OUT	7	O	Output channel 2
3OUT	8	O	Output channel 3
3IN-	9	I	Inverting input channel 3
3IN+	10	I	Non inverting input channel 3
VCC- / GND	11	—	Negative Input supply voltage or Ground
4IN+	12	I	Non inverting input channel 4
4IN-	13	I	Inverting input channel 4
4OUT	14	O	Output channel 4

(1) I = input and O = output

5 Specifications

5.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)⁽¹⁾

			MIN	MAX	UNIT
	Supply voltage ⁽²⁾	V _{CC+}		18	V
		V _{CC-}		-18	
V _{ID}	Differential input voltage ⁽³⁾		-36	36	V
V _I	Input voltage	Any input	V _{CC-}	V _{CC+}	
I _I	Input current	Each input	-1	1	mA
I _O	Output current		-80	80	mA
	Total current into V _{CC+}			80	mA
	Total current out of V _{CC-}			80	mA
	Duration of short-circuit current at (or below) 25°C ⁽⁴⁾			Unlimited	
θ _{JA}	Package thermal impedance ^{(5) (6)}	D package		86	°C/W
		N package		80	
		PW package		113	
T _J	Operating virtual junction temperature			150	°C
	Lead temperature 1.6mm (1/16 inch) from case for 10 seconds			260	°C
T _{stg}	Storage temperature		-65	150	°C

- (1) Operation outside the *Absolute Maximum Ratings* may cause permanent device damage. *Absolute Maximum Ratings* do not imply functional operation of the device at these or any other conditions beyond those listed under *Recommended Operating Conditions*. If used outside the *Recommended Operating Conditions* but within the *Absolute Maximum Ratings*, the device may not be fully functional, and this may affect device reliability, functionality, performance, and shorten the device lifetime.
- (2) All voltage values, except differential voltages, are with respect to the midpoint between V_{CC+} and V_{CC-}/GND.
- (3) Differential voltages are at the noninverting input with respect to the inverting input. Excessive input current can flow when the input is less than V_{CC-} - 0.3V.
- (4) The output can be shorted to either supply. Limit temperature and supply voltages so that the maximum dissipation rating is not exceeded.
- (5) Maximum power dissipation is a function of T_{J(max)}, θ_{JA}, and T_A. The maximum allowable power dissipation at any allowable ambient temperature is P_D = (T_{J(max)} - T_A)/θ_{JA}. Operating at the absolute maximum T_J of 150°C can affect reliability.
- (6) The package thermal impedance is calculated in accordance with JE5D 51-7.

5.2 Recommended Operating Conditions

			MIN	MAX	UNIT
V _{CC±}	Supply voltage		4	36	V
V _{IC}	Common-mode input voltage	V _{CC} = 5V	0	2.8	V
		V _{CC±} = ±15V	-15	12.8	
T _A	Operating free-air temperature	TL3474C, TL3474AC	0	70	°C
		TL3474I, TL3474AI	-40	105	

5.3 Electrical Characteristics

at specified free-air temperature, $V_{CC\pm} = \pm 15V$ (unless otherwise noted)

PARAMETER		TEST CONDITIONS		T _A	TL3474			TL3474A			UNIT
					MIN	TYP ⁽¹⁾	MAX	MIN	TYP†	MAX	
V _{IO}	Input offset voltage	V _{IC} = 0, V _O = 0, R _S = 50Ω	V _{CC} = 5V	25°C	1.5 10		1.5 3		mV		
			V _{CC} = ±15V	25°C	1.0 10		1.0 3				
				Full range ⁽²⁾	12		5				
a _{VIO}	Temperature coefficient of input offset voltage		V _{CC} = ±15V	Full range ⁽²⁾	10		10		μV/°C		
I _{IO}	Input offset current		V _{CC} = ±15V	25°C	0.01 75		0.01 75		nA		
				Full range ⁽²⁾	300		0.01				
I _{IB}	Input bias current		V _{CC} = ±15V	25°C	0.01 500		0.01 500		nA		
				Full range ⁽²⁾	700		0.01				
V _{ICR}	Common-mode input voltage range	R _S = 50Ω	25°C	-15 to 12.8		-15 to 12.8		V			
			Full range ⁽²⁾	-15 to 12.8		-15 to 12.8					
V _{OH}	High-level output voltage	V _{CC+} = 5V, V _{CC-} = 0,		25°C	3.7 4.8		3.7 4.8		V		
		R _L = 2kΩ									
		R _L = 10kΩ		25°C	13.6 14.8		13.6 14.8				
		R _L = 2kΩ		Full range ⁽²⁾	13.4		13.4				
V _{OL}	Low-level output voltage	V _{CC+} = 5V, V _{CC-} = 0,		25°C	0.005 0.3		0.005 0.3		V		
		R _L = 2kΩ									
		R _L = 10kΩ		25°C	-14.8 -14.3		-14.8 -14.3				
		R _L = 2kΩ		Full range ⁽²⁾	-13.5		-13.5				
A _{VD}	Large-signal differential voltage amplification	V _O = ±10V, R _L = 2kΩ		25°C	25 100		25 100		V/mV		
				Full range ⁽²⁾	20		20				
I _{OS}	Short-circuit output current	Source: V _{ID} = 1V, V _O = 0	25°C	-10 -75		-10 -75		mA			
		Sink: V _{ID} = -1V, V _O = 0		20 75		20 27					
CMRR	Common-mode rejection ratio	V _{IC} = V _{ICR} (min), R _S = 50Ω	25°C	65 97		80 97		dB			
k _{SVR}	Supply-voltage rejection ratio (ΔV _{CC±} /ΔV _{IO})	V _{CC±} = ±13.5V to ±16.5V,		25°C	70 97		70 97		dB		
		R _S = 100Ω									
I _{CC}	Supply current (per channel)	V _O = 0	No load	25°C	0.56 4.5		0.56 4.5		mA		
				Full range ⁽²⁾	5.5		5.5				
		V _{CC+} = 5V, V _O = 2.5V		25°C	4.5		4.5				
		V _{CC-} = 0, No load									

(1) All typical values are at $T_A = 25^\circ C$.

(2) Full range is $0^\circ C$ to $70^\circ C$ for the TL3474C, TL3474AC devices and $-40^\circ C$ to $105^\circ C$ for the TL3474I, TL3474AI devices.

5.4 Operating Characteristics

 $V_{CC\pm} = \pm 15V$, $T_A = 25^\circ C$

PARAMETER		TEST CONDITIONS		TL3474			TL3474A			UNIT
				MIN	TYP	MAX	MIN	TYP	MAX	
SR+	Positive slew rate	$V_I = -10V$ to $10V$,	$A_V = 1$	8	10		8	10		V/ μs
SR–	Negative slew rate	$R_L = 2k\Omega$, $C_L = 300pF$	$A_V = -1$		13			13		
	Small Signal Slew-Rate	$V_I = -0.1V$ to $0.1V$			0.5			0.5		V/ μs
t_s	Settling time	$A_{VD} = -1$, $10V$ step	To 0.1%		2			2		μs
			To 0.01%		2.5			2.5		
V_n	Equivalent input noise voltage	$f = 1kHz$,	$R_S = 100\Omega$		10.8			10.8		nV/ $\sqrt{Hz}$
I_n	Equivalent input noise current	$f = 1kHz$			2			2		fA/ $\sqrt{Hz}$
THD	Total harmonic distortion	$V_{O(PP)} = 2V$ to $20V$, $R_L = 2k\Omega$, $A_{VD} = 10$, $f = 10kHz$			0.02			0.02		%
GBW	Gain-bandwidth product	$f = 100kHz$			4.5			4.5		MHz
BW	Power bandwidth	$V_{O(PP)} = 20V$, $R_L = 2k\Omega$, $A_{VD} = 1$, THD = 5.0%			85			85		kHz
ϕ_m	Phase margin	$R_L = 2k\Omega$,	$C_L = 0$		70			70		deg
		$R_L = 2k\Omega$,	$C_L = 300pF$		50			50		
	Gain margin	$R_L = 2k\Omega$,	$C_L = 0$		12			12		dB
		$R_L = 2k\Omega$,	$C_L = 300pF$		4			4		
r_i	Differential input resistance	$V_{IC} = 0$			540			540		G Ω
C_i	Input capacitance	$V_{IC} = 0$			10			10		pF
	Channel separation	$f = 10kHz$			101			101		dB
z_o	Open-loop output impedance	$f = 1MHz$,	$A_V = 1$		525			525		Ω

5.5 Typical Characteristics

$T_A = 25^\circ\text{C}$ (unless otherwise noted)

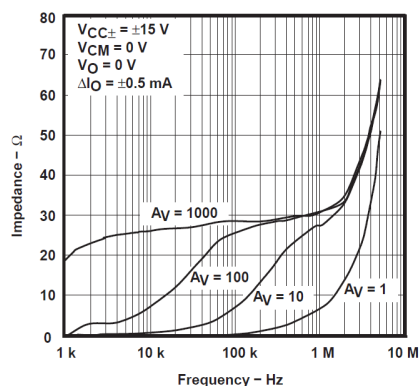


Figure 5-1. Output Impedance vs Frequency, Old Die

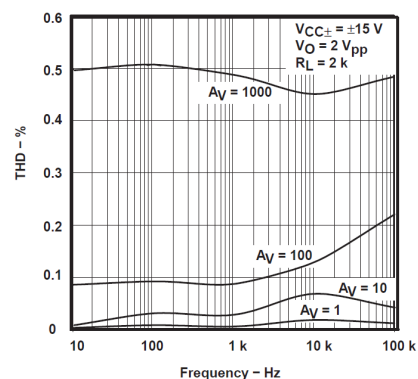


Figure 5-2. Total Harmonic Distortion vs Frequency, Old Die

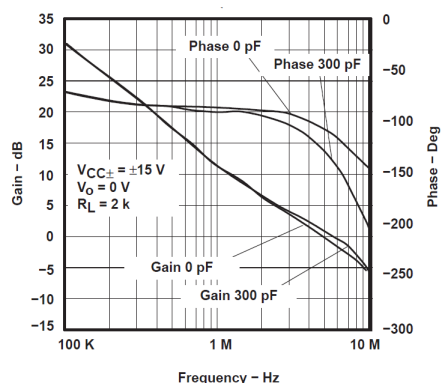


Figure 5-3. Gain and Phase vs Frequency, Old Die

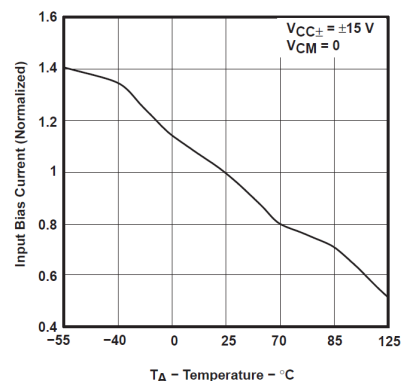


Figure 5-4. Normalized Input Bias Current vs Temperature, Old Die

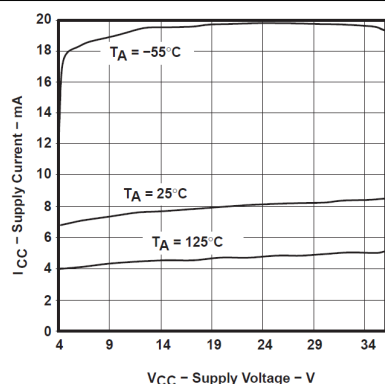


Figure 5-5. Supply Current vs Supply Voltage, Old Die

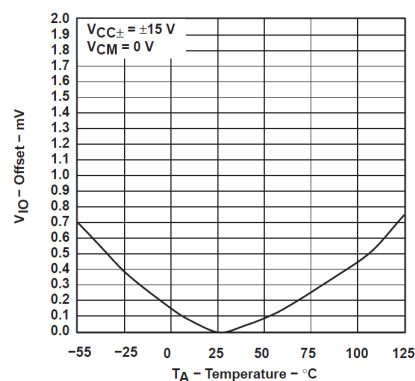


Figure 5-6. Offset Voltage Drift vs Temperature, Old Die

5.5 Typical Characteristics (continued)

$T_A = 25^\circ\text{C}$ (unless otherwise noted)

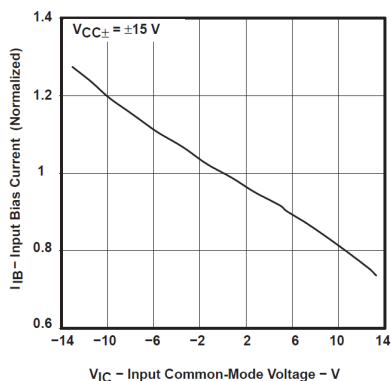


Figure 5-7. Normalized Input Bias Current vs Input Common-Mode Voltage, Old Die

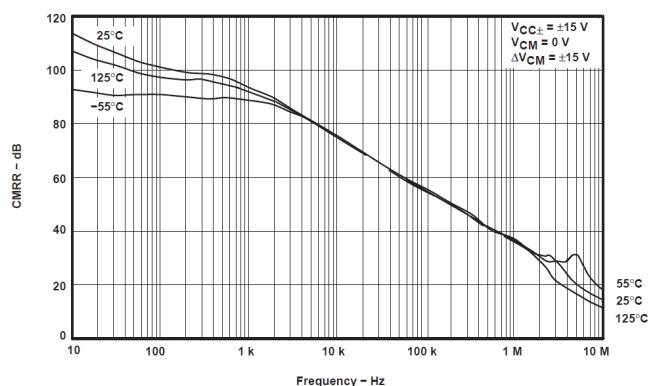


Figure 5-8. Common-Mode Rejection vs Frequency, Old Die

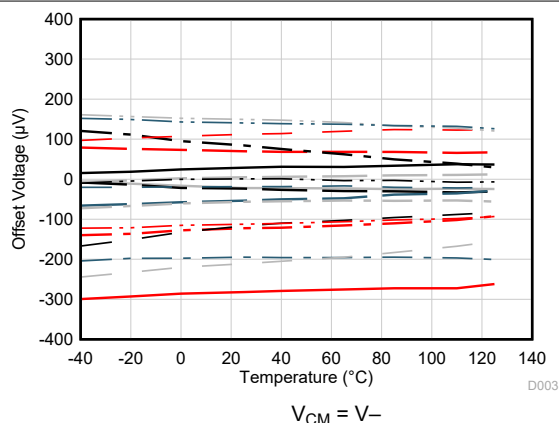


Figure 5-9. Offset Voltage vs Temperature, New Die

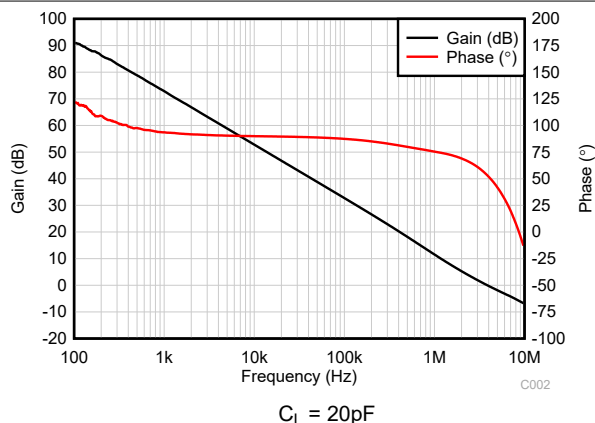


Figure 5-10. Open-Loop Gain and Phase vs Frequency, New Die

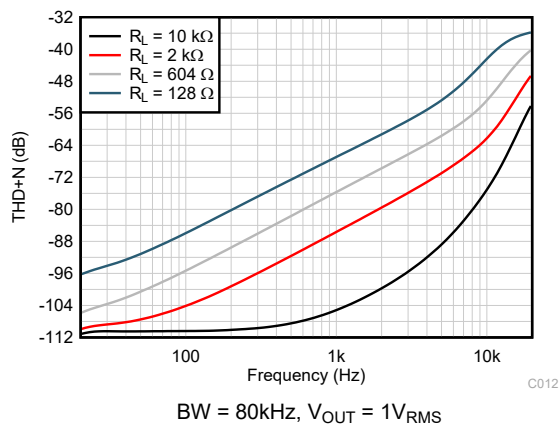


Figure 5-11. THD+N Ratio vs Frequency, New Die

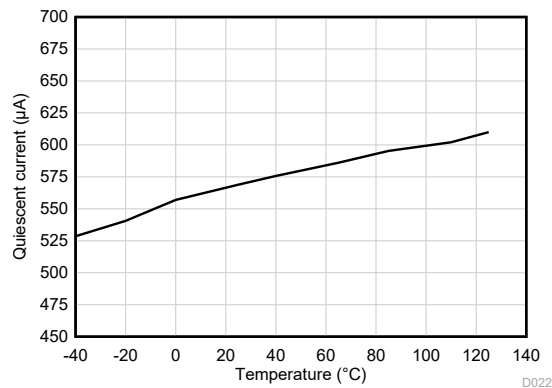


Figure 5-12. Quiescent Current vs Temperature, New Die

5.5 Typical Characteristics (continued)

$T_A = 25^\circ\text{C}$ (unless otherwise noted)

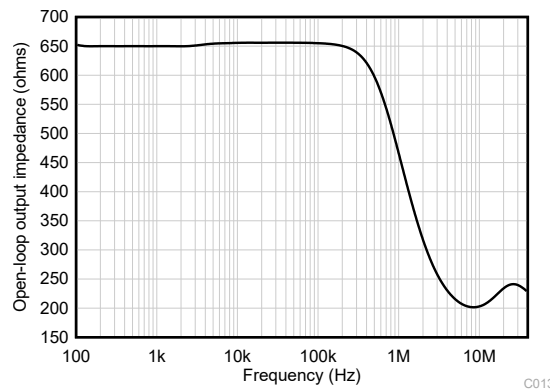


Figure 5-13. Open-Loop Output Impedance vs Frequency, New Die

5.6 Old Die to New Die Transition

As of the publication of revision C of this datasheet, Texas Instruments has moved manufacturing of the die for TL3474 to a modern fabrication site. The two different die are referred to in this document as “old” (previous fabrication site) and “new” die (current fabrication site). The die origin can be separated from the “Chip Source Origin” (CSO) parameter in the shipping information. The old die CSO is “SHE”, for the new die the CSO is “RFB”. The old die information is maintained in this datasheet for comparison purposes, but all new manufacturing has moved to the new die.

6 Device and Documentation Support

TI offers an extensive line of development tools. Tools and software to evaluate the performance of the device, generate code, and develop designs are listed below.

6.1 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. Click on *Notifications* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

6.2 Support Resources

TI E2E™ support forums are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

6.3 Trademarks

TI E2E™ is a trademark of Texas Instruments.

All trademarks are the property of their respective owners.

6.4 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

6.5 Glossary

[TI Glossary](#) This glossary lists and explains terms, acronyms, and definitions.

7 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

Changes from Revision B (July 2003) to Revision C (June 2026)	Page
• Changed datasheet structure and organization. Added, updated, or renamed the following sections: Features, Applications, Description, Absolute Maximum Ratings, Recommended Operating Conditions, Old Die to New Die Transition, Device and Documentation Support; Mechanical, Packaging, and Ordering Information.....	1
• Updated the numbering format for tables, figures, and cross-references throughout the document.....	1
• Changed Wide gain bandwidth product from 4MHz to 4.5MHz.....	1
• Deleted High slew rate: 13V/μs.....	1
• Deleted Fast settling time 1.1μs to 0.1%.....	1
• Deleted Low total harmonic distortion 0.02%.....	1
• Deleted Large-capacitance drive capability: 10,000 pF.....	1
• Updated the <i>Packaging Information</i> table in the <i>Description</i> section.....	1
• Changed Input offset current typical value for TL3474A max from 6nA to 0.01nA.....	5
• Changed Input bias current typical value for TL3474A max from 100nA to 0.01nA.....	5
• Changed High level output voltage typical values from 4V to 4.8V and 14V to 14.8V.....	5
• Changed Low level output voltage typical value from 0.1V to 0.005V.....	5
• Changed Supply current typical value from 3.5mA to 0.56mA.....	5
• Changed Short-circuit output current typical values from –34mA to –75mA and from 27mA to 75mA.....	5
• Deleted Supply current typical values at full range and VCC 5V conditions.....	5
• Changed Setting time from 1.1μs to 2μs.....	6
• Changed Equivalent input noise voltage from 49nV/√Hz to 10.8nV/√Hz	6

• Changed Equivalent input noise Current from $0.22\text{pA}/\sqrt{\text{Hz}}$ to $2\text{fA}/\sqrt{\text{Hz}}$	6
• Changed Gain-bandwidth product from 4MHz to 4.5MHz.....	6
• Changed Power bandwidth from 160kHz to 85kHz	6
• Changed Input capacitance from 2.5pF to 10pF	6
• Changed Open-loop output impedance from 20Ω to 525Ω	6
• Added Small Signal Slew-Rate $0.5\text{V}/\mu\text{s}$	6
• Added Figure 5-9 through Figure 5-13	7

8 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package Pins	Package qty Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
TL3474ACD	Obsolete	Production	SOIC (D) 14	-	-	Call TI	Call TI	0 to 70	TL3474A
TL3474ACDR	Active	Production	SOIC (D) 14	2500 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	0 to 70	TL3474A
TL3474ACDR.A	Active	Production	SOIC (D) 14	2500 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	0 to 70	TL3474A
TL3474ACN	Active	Production	PDIP (N) 14	25 TUBE	Yes	NIPDAU	N/A for Pkg Type	0 to 70	TL3474ACN
TL3474ACN.A	Active	Production	PDIP (N) 14	25 TUBE	Yes	NIPDAU	N/A for Pkg Type	0 to 70	TL3474ACN
TL3474ACPW	Obsolete	Production	TSSOP (PW) 14	-	-	Call TI	Call TI	0 to 70	T3474A
TL3474ACPWR	Active	Production	TSSOP (PW) 14	2000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	0 to 70	T3474A
TL3474ACPWR.A	Active	Production	TSSOP (PW) 14	2000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	0 to 70	T3474A
TL3474AID	Obsolete	Production	SOIC (D) 14	-	-	Call TI	Call TI	-40 to 105	TL3474AI
TL3474AIDR	Active	Production	SOIC (D) 14	2500 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 105	TL3474AI
TL3474AIDR.A	Active	Production	SOIC (D) 14	2500 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 105	TL3474AI
TL3474AIDRG4	Active	Production	SOIC (D) 14	2500 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 105	TL3474AI
TL3474AIDRG4.A	Active	Production	SOIC (D) 14	2500 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 105	TL3474AI
TL3474AIN	Active	Production	PDIP (N) 14	25 TUBE	Yes	NIPDAU	N/A for Pkg Type	-40 to 105	TL3474AIN
TL3474AIN.A	Active	Production	PDIP (N) 14	25 TUBE	Yes	NIPDAU	N/A for Pkg Type	-40 to 105	TL3474AIN
TL3474AIPWR	Active	Production	TSSOP (PW) 14	2000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 105	Z3474A
TL3474AIPWR.A	Active	Production	TSSOP (PW) 14	2000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 105	Z3474A
TL3474CD	Obsolete	Production	SOIC (D) 14	-	-	Call TI	Call TI	0 to 70	TL3474C
TL3474CDR	Active	Production	SOIC (D) 14	2500 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	0 to 70	TL3474C
TL3474CDR.A	Active	Production	SOIC (D) 14	2500 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	0 to 70	TL3474C
TL3474CN	Active	Production	PDIP (N) 14	25 TUBE	Yes	NIPDAU	N/A for Pkg Type	0 to 70	TL3474CN
TL3474CN.A	Active	Production	PDIP (N) 14	25 TUBE	Yes	NIPDAU	N/A for Pkg Type	0 to 70	TL3474CN
TL3474CPW	Obsolete	Production	TSSOP (PW) 14	-	-	Call TI	Call TI	0 to 70	T3474
TL3474CPWR	Active	Production	TSSOP (PW) 14	2000 LARGE T&R	Yes	NIPDAU SN	Level-1-260C-UNLIM	0 to 70	T3474
TL3474CPWR.A	Active	Production	TSSOP (PW) 14	2000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	0 to 70	T3474
TL3474ID	Obsolete	Production	SOIC (D) 14	-	-	Call TI	Call TI	-40 to 105	TL3474I
TL3474IDR	Active	Production	SOIC (D) 14	2500 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 105	TL3474I
TL3474IDR.A	Active	Production	SOIC (D) 14	2500 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 105	TL3474I
TL3474IN	Active	Production	PDIP (N) 14	25 TUBE	Yes	NIPDAU	N/A for Pkg Type	-40 to 105	TL3474IN

Orderable part number	Status (1)	Material type (2)	Package Pins	Package qty Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
TL3474IN.A	Active	Production	PDIP (N) 14	25 TUBE	Yes	NIPDAU	N/A for Pkg Type	-40 to 105	TL3474IN
TL3474IPW	Obsolete	Production	TSSOP (PW) 14	-	-	Call TI	Call TI	-40 to 105	Z3474
TL3474IPWR	Active	Production	TSSOP (PW) 14	2000 LARGE T&R	Yes	NIPDAU SN	Level-1-260C-UNLIM	-40 to 105	Z3474
TL3474IPWR.A	Active	Production	TSSOP (PW) 14	2000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 105	Z3474

⁽¹⁾ **Status:** For more details on status, see our [product life cycle](#).

⁽²⁾ **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

⁽³⁾ **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

⁽⁴⁾ **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

⁽⁵⁾ **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.


⁽⁶⁾ **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer:The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.


TAPE AND REEL INFORMATION

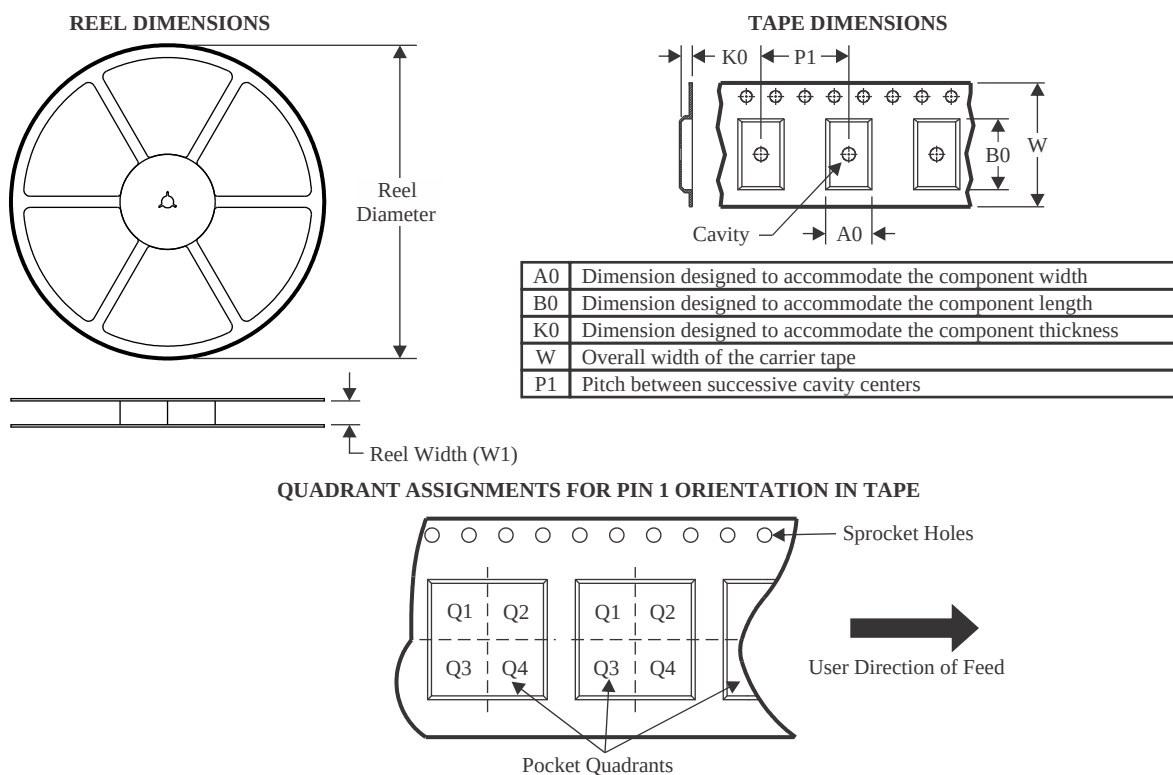

*All dimensions are nominal


Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TL3474ACDR	SOIC	D	14	2500	330.0	16.4	6.5	9.0	2.1	8.0	16.0	Q1
TL3474ACPWR	TSSOP	PW	14	2000	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1
TL3474ACPWR	TSSOP	PW	14	2000	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1
TL3474AIDR	SOIC	D	14	2500	330.0	16.4	6.5	9.0	2.1	8.0	16.0	Q1
TL3474AIDRG4	SOIC	D	14	2500	330.0	16.4	6.5	9.0	2.1	8.0	16.0	Q1
TL3474AIPWR	TSSOP	PW	14	2000	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1
TL3474AIPWR	TSSOP	PW	14	2000	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1
TL3474CDR	SOIC	D	14	2500	330.0	16.4	6.5	9.0	2.1	8.0	16.0	Q1
TL3474CPWR	TSSOP	PW	14	2000	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1
TL3474IDR	SOIC	D	14	2500	330.0	16.4	6.5	9.0	2.1	8.0	16.0	Q1
TL3474IPWR	TSSOP	PW	14	2000	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1
TL3474IPWR	TSSOP	PW	14	2000	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1
TL3474IPWR	TSSOP	PW	14	2000	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1

TAPE AND REEL BOX DIMENSIONS

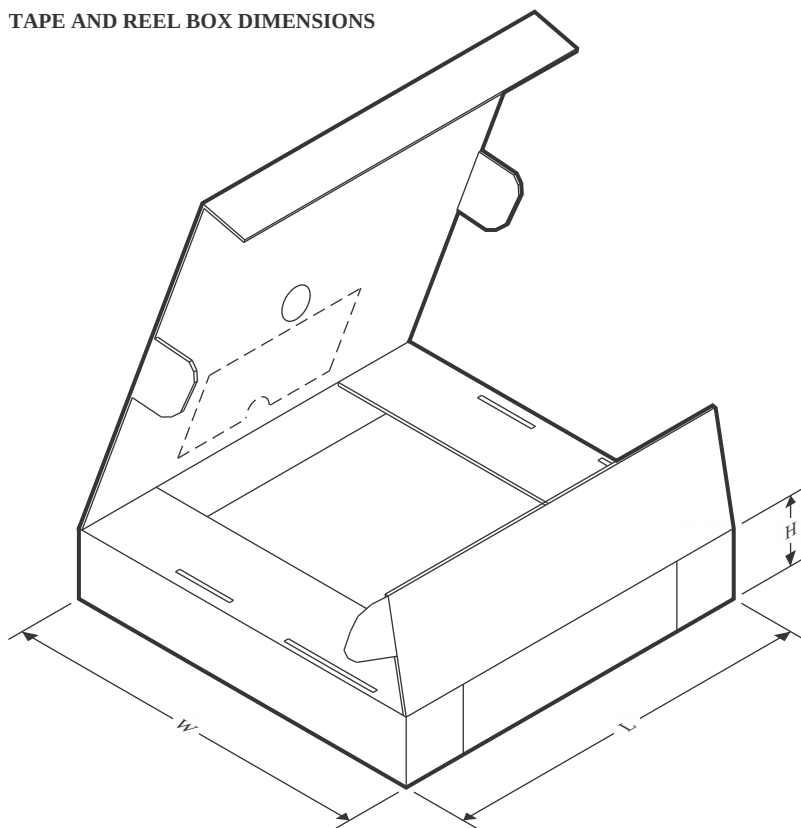


*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TL3474ACDR	SOIC	D	14	2500	340.5	336.1	32.0
TL3474ACPWR	TSSOP	PW	14	2000	353.0	353.0	32.0
TL3474ACPWR	TSSOP	PW	14	2000	353.0	353.0	32.0
TL3474AIDR	SOIC	D	14	2500	353.0	353.0	32.0
TL3474AIDRG4	SOIC	D	14	2500	353.0	353.0	32.0
TL3474AIPWR	TSSOP	PW	14	2000	353.0	353.0	32.0
TL3474AIPWR	TSSOP	PW	14	2000	353.0	353.0	32.0
TL3474CDR	SOIC	D	14	2500	353.0	353.0	32.0
TL3474CPWR	TSSOP	PW	14	2000	356.0	356.0	35.0
TL3474IDR	SOIC	D	14	2500	353.0	353.0	32.0
TL3474IPWR	TSSOP	PW	14	2000	353.0	353.0	32.0
TL3474IPWR	TSSOP	PW	14	2000	353.0	353.0	32.0
TL3474IPWR	TSSOP	PW	14	2000	356.0	356.0	35.0

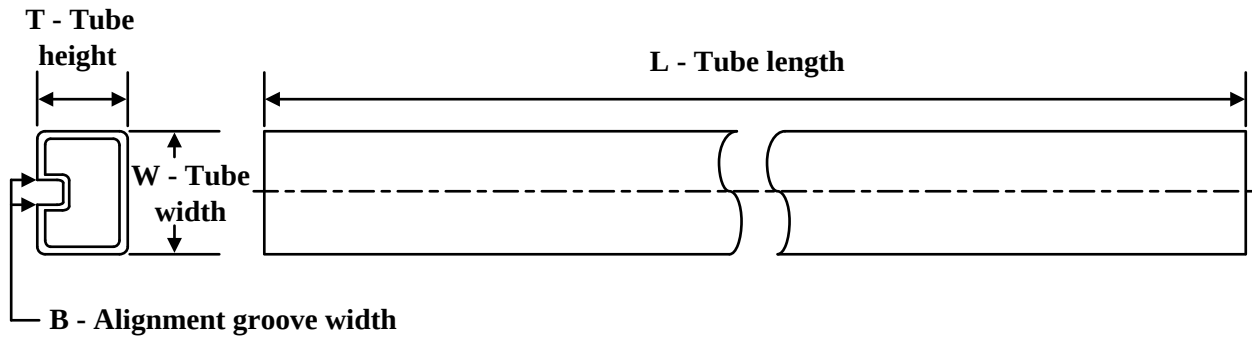
TUBE


*All dimensions are nominal

Device	Package Name	Package Type	Pins	SPQ	L (mm)	W (mm)	T (μm)	B (mm)
TL3474ACN	N	PDIP	14	25	506	13.97	11230	4.32
TL3474ACN.A	N	PDIP	14	25	506	13.97	11230	4.32
TL3474AIN	N	PDIP	14	25	506	13.97	11230	4.32
TL3474AIN.A	N	PDIP	14	25	506	13.97	11230	4.32
TL3474CN	N	PDIP	14	25	506	13.97	11230	4.32
TL3474CN.A	N	PDIP	14	25	506	13.97	11230	4.32
TL3474IN	N	PDIP	14	25	506	13.97	11230	4.32
TL3474IN.A	N	PDIP	14	25	506	13.97	11230	4.32

D0014A**PACKAGE OUTLINE****SOIC - 1.75 mm max height**

SMALL OUTLINE INTEGRATED CIRCUIT

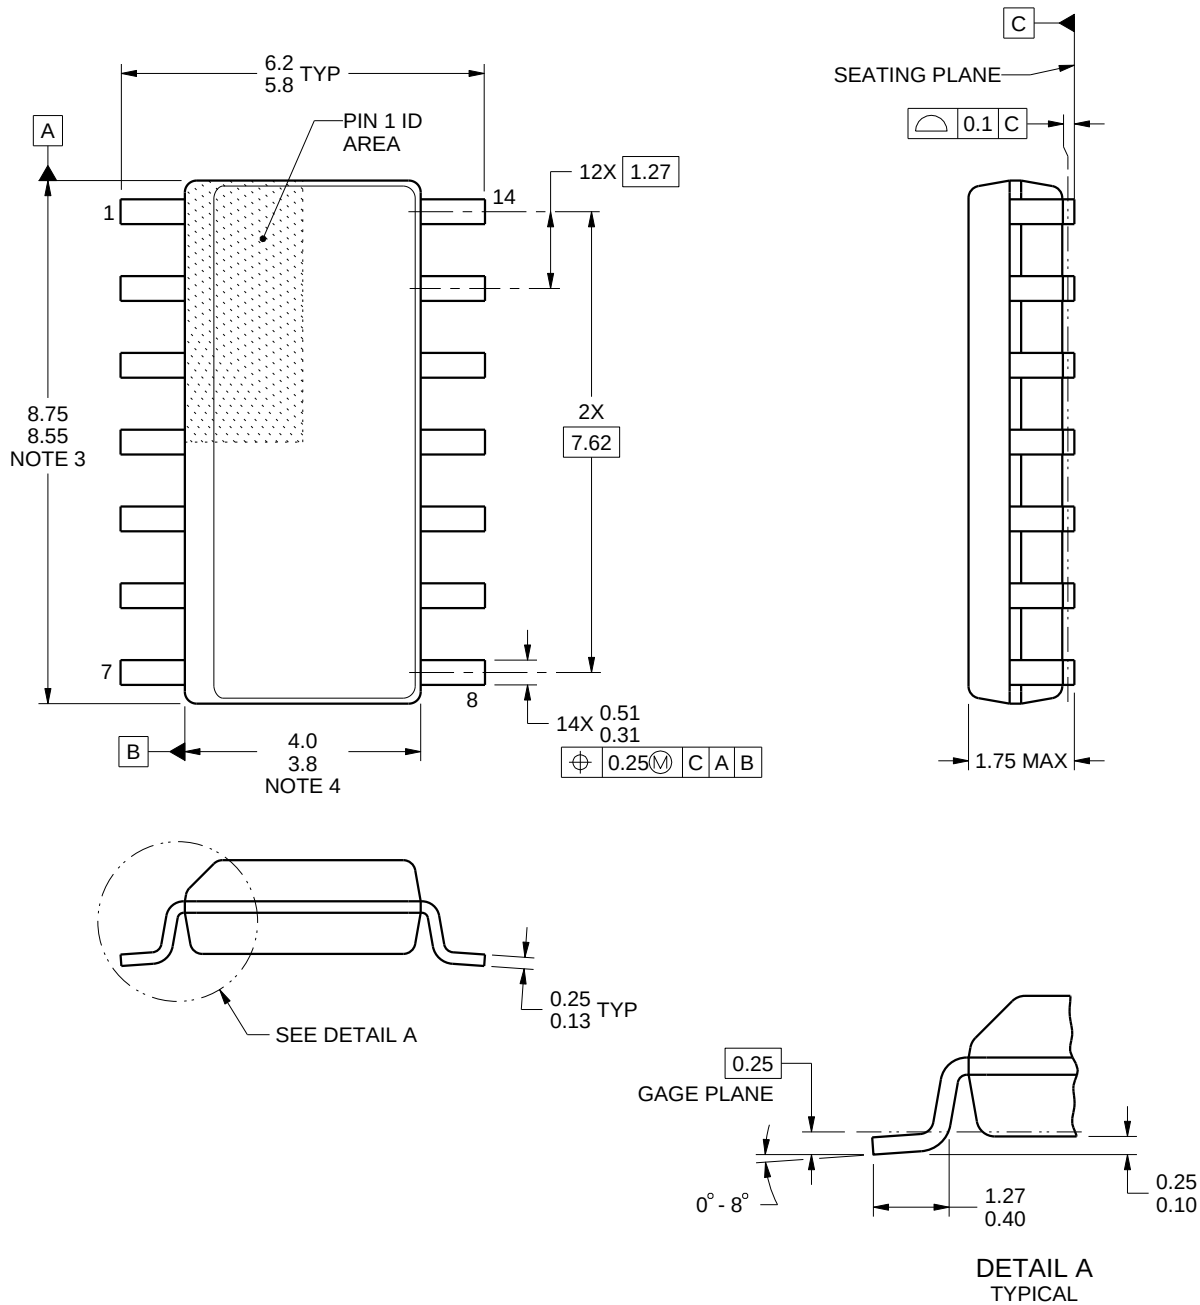

4220718/A 09/2016

NOTES:


1. All linear dimensions are in millimeters. Dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm, per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.43 mm, per side.
5. Reference JEDEC registration MS-012, variation AB.

EXAMPLE BOARD LAYOUT



D0014A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT

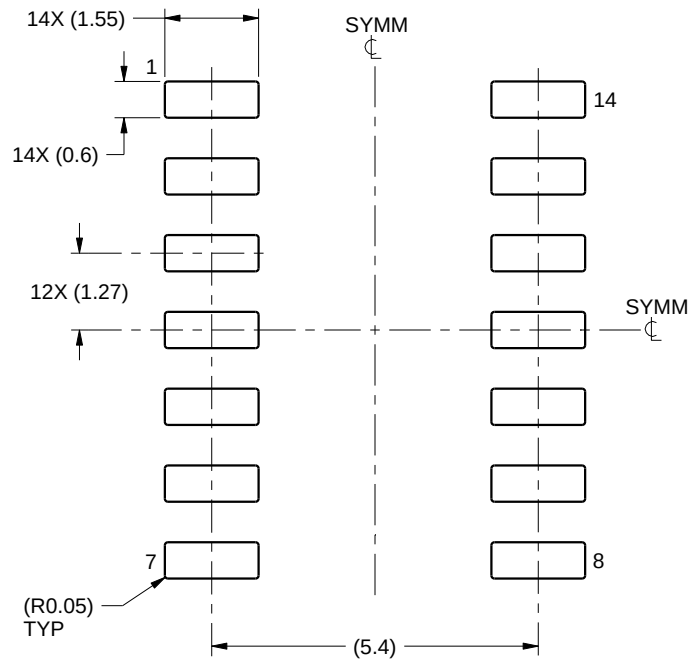

LAND PATTERN EXAMPLE
SCALE:8X

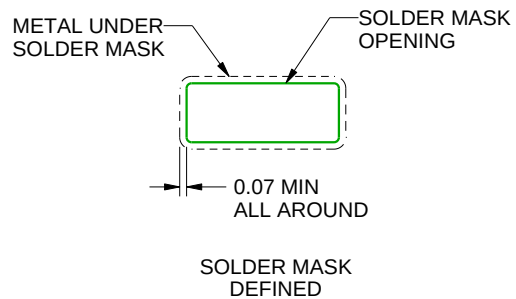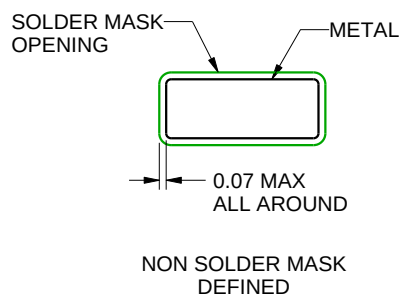

SOLDER MASK DETAILS

4220718/A 09/2016

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.


7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

EXAMPLE STENCIL DESIGN

D0014A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT

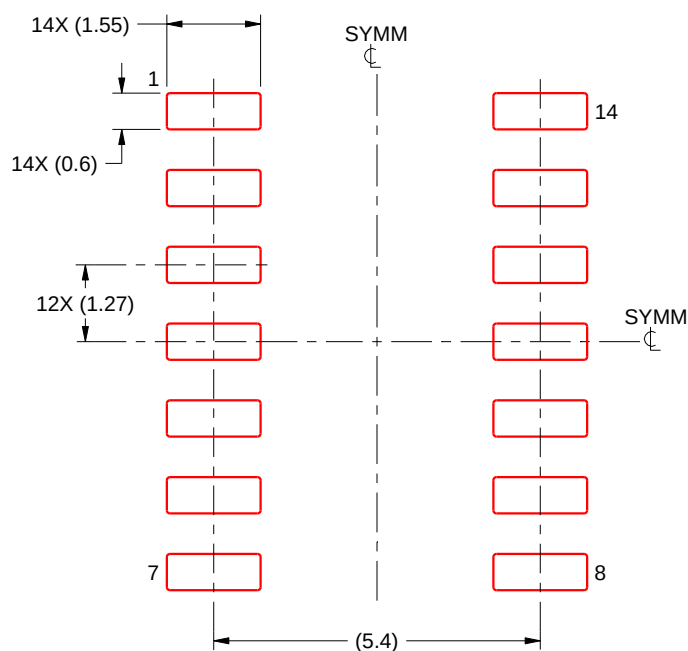

SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL
SCALE:8X

4220718/A 09/2016


NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.


N (R-PDIP-T**)

16 PINS SHOWN

PLASTIC DUAL-IN-LINE PACKAGE

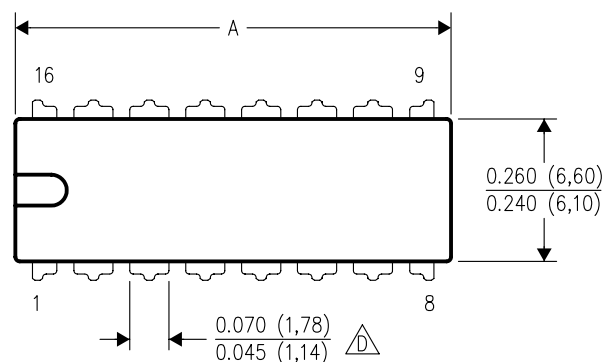



PINS ** DIM	14	16	18	20
A MAX	0.775 (19,69)	0.775 (19,69)	0.920 (23,37)	1.060 (26,92)
A MIN	0.745 (18,92)	0.745 (18,92)	0.850 (21,59)	0.940 (23,88)
MS-001 VARIATION	AA	BB	AC	AD

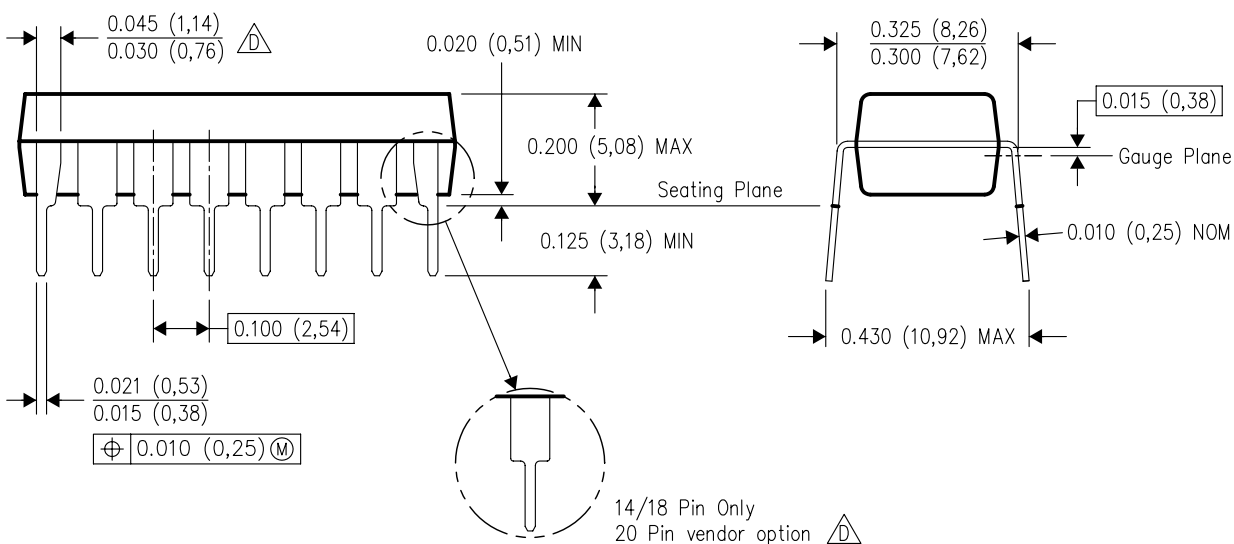

4040049/E 12/2002

NOTES:

- A. All linear dimensions are in inches (millimeters).
B. This drawing is subject to change without notice.
-  Falls within JEDEC MS-001, except 18 and 20 pin minimum body length (Dim A).
 The 20 pin end lead shoulder width is a vendor option, either half or full width.

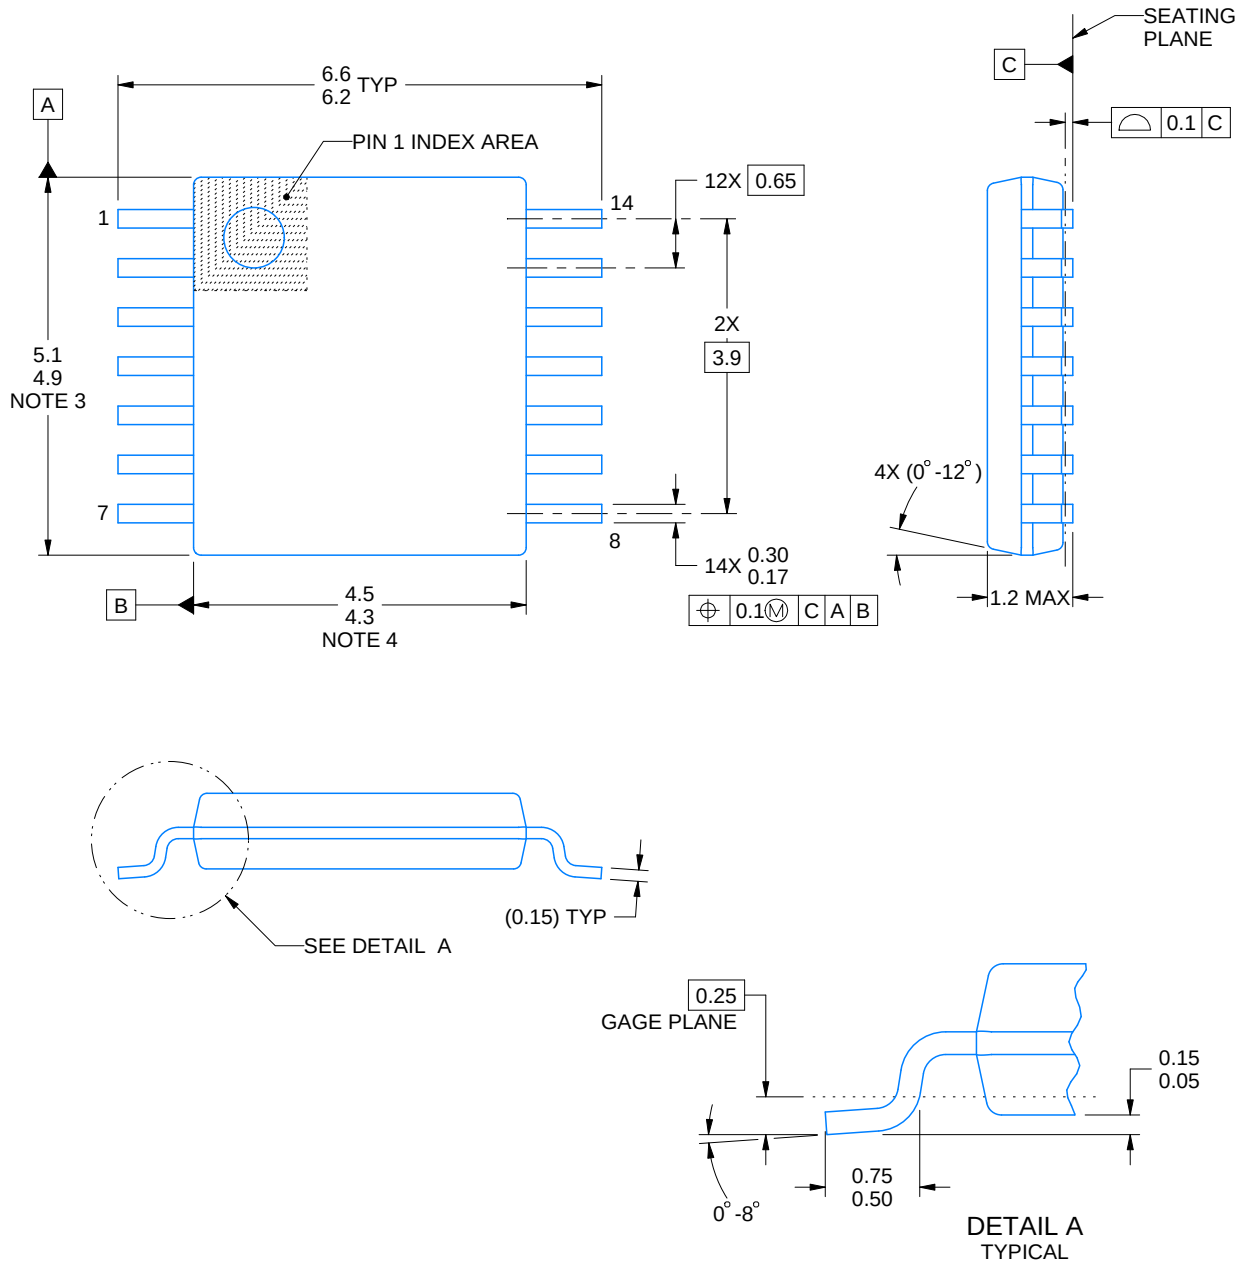

4220202/B 12/2023

NOTES:


1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
5. Reference JEDEC registration MO-153.

EXAMPLE BOARD LAYOUT



PW0014A

TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE

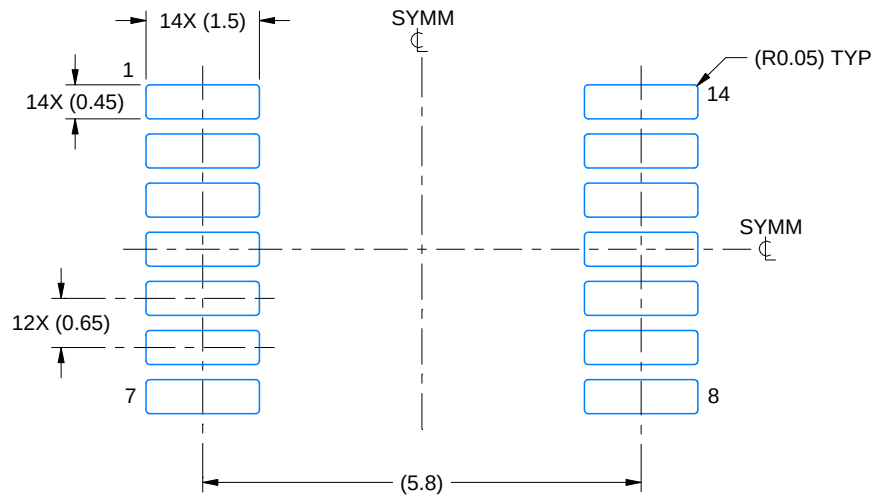

LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE: 10X

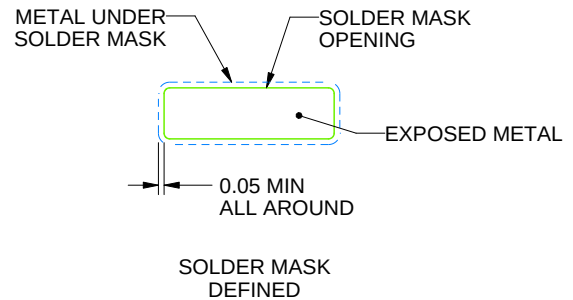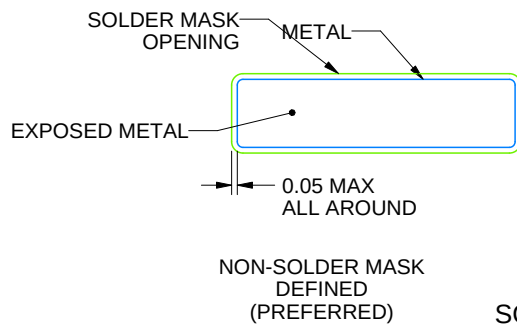

SOLDER MASK DETAILS

4220202/B 12/2023

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.


7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

EXAMPLE STENCIL DESIGN

PW0014A

TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE

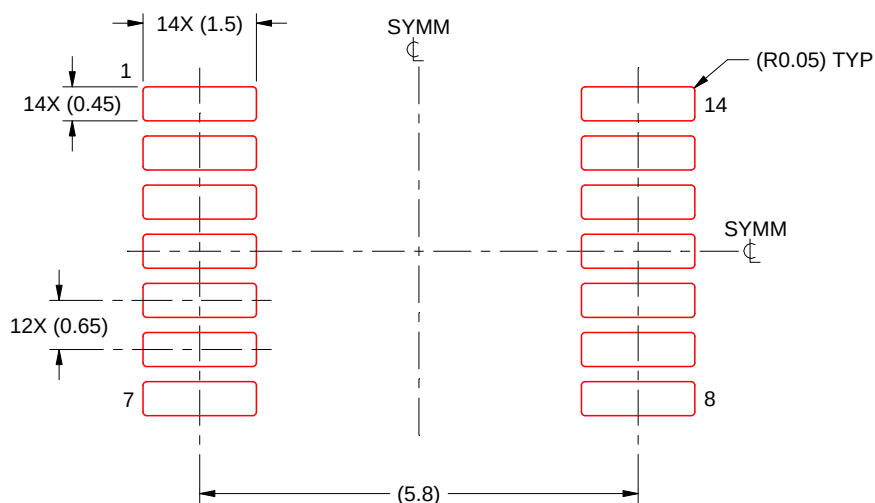

SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL
SCALE: 10X

4220202/B 12/2023

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#), [TI's General Quality Guidelines](#), or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2026, Texas Instruments Incorporated

Last updated 10/2025