



Z21 ■Install label in silkscreened box after final wash. Text shall be 8 pt font. Text shall be per the Label Table in the PDF schematic.
Z22 ■These assemblies are ESD sensitive, ESD precautions shall be observed.
Z23 ■These assemblies must be clean and free from flux and all contaminants. Use of no clean flux is not acceptable.
Z24 ■These assemblies must comply with workmanship standards IPC-A-610 Class 2, unless otherwise specified.

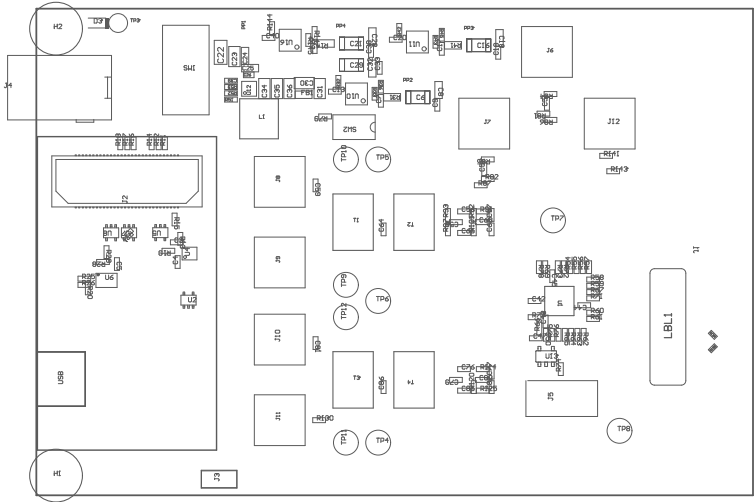

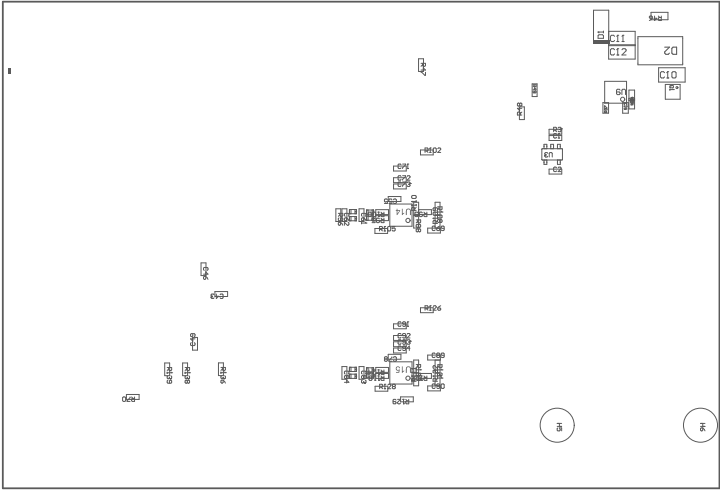

COMPONENTS MARKED 'DNP' SHOULD NOT BE POPULATED.
ASSEMBLY VARIANT: 001

PCB VIEWED FROM BOTTOM SIDE	BOARD #: ADC3910D125	REV: E2	SUN REV: Not in version control
	TID #: N/A		
PLOT NAME = Bottom Assembly Drawing	GENERATED : 3/13/2023 12:17:22 PM	TEXAS INSTRUMENTS	