

🕳 Order

Now



BQ25882

ZHCSJ56C-FEBRUARY 2018-REVISED SEPTEMBER 2019

# 适用于 USB 输入的 BQ25882 I<sup>2</sup>C 控制型 2 节 2A 升压模式电池充电器

Technical

Documents

## 1 特性

- 。 高效的 2A、1.5MHz 开关模式升压充电器
  - 在 7.6V 电池、充电电流为 1A 的情况下,充电 效率为 92.5%
  - 针对 USB 输入和 2 节锂离子电池输出进行了优化
  - 用于轻负载运行的可选低功耗 PFM 模式(具有 无声选项)
- USB On-the-Go (OTG),可调输出电压范围为 4.5V 至 5.5V
  - 具有高达 2A 输出的降压转换器
  - 在 5V、1A 输出的情况下,效率为 94.5%
  - 精确的恒定电流 (CC) 限制
  - 输出短路保护
  - 用于轻负载运行的可选低功耗 PFM 模式(具有 无声选项)
- 单输入,支持 USB 输入适配器
  - 支持 3.9V 至 6.2V 的输入电压范围,绝对最大 输入电压额定值为 20V
  - 输入电流限制(500mA 至 3.3A,精度为 100-mA),支持 USB2.0、USB3.0标准适配器
  - 通过高达 5.5V 的输入电压限制进行最大功率跟踪
  - 自动检测 USB SDP、CDP、DCP 以及非标准 适配器
- 输入电流优化器 (ICO),无需过载适配器即可最大限度地提高输入功率
- 采用 15mΩ 电池放电 MOSFET,具有较高的电池 放电效率
- 集成 ADC,用于系统监视(总线电压和电流、电池 电压、充电电流、系统电压以及 NTC 和裸片温 度)
- 窄 VDC (NVDC) 电源路径管理
  - 无需电池或深度放电的电池即可瞬时启动
  - 电池充电模式下实现理想的二极管运行
- 灵活的自主和 I<sup>2</sup>C 模式,可实现最优系统性能

• 高集成度包括所有 MOSFET、电流检测和环路补偿

Support &

Community

22

- 高精度
  - ±0.4% 充电电压调节

🥭 Tools &

Software

- ±7.5% 充电电流调节
- ±7.5% 输入电流调节
- 安全
  - 在充电和 OTG 降压模式下的电池温度检测
  - 热调节和热关断
- 2 应用
- 无线扬声器
- 数码相机 (DSC、DVC)
- 移动打印机
- 平板电脑
- 电子销售终端 (ePOS)
- 便携式电子设备

## 3 说明


BQ25882 是高度集成的 2A 开关模式电池充电管理和 系统电源路径管理器件,适用于两节锂离子电池和锂聚 合物电池。具有充电和系统设置的 I<sup>2</sup>C 串行接口使得此 器件成为真正的灵活解决方案。

### 器件信息<sup>(1)</sup>

器件型号	封装	封装尺寸(标称值)
BQ25882	DSBGA (25)	2.10 x 2.10 mm <sup>2</sup>

(1) 如需了解所有可用封装,请参阅数据表末尾的可订购产品附录。

简化原理图



## 目录

9

1	特性	
2	应用	
3	说明	
4	修订	历史记录
5	Dev	ice Comparison Table 3
6		Configuration and Functions 4
7	Spe	cifications
	7.1	Absolute Maximum Ratings 6
	7.2	ESD Ratings6
	7.3	Recommended Operating Conditions 6
	7.4	Thermal Information 7
	7.5	Electrical Characteristics7
	7.6	Timing Requirements 11
	7.7	Typical Characteristics 13
8	Deta	ailed Description 16
	8.1	Overview 16
	8.2	Functional Block Diagram 16
	8.3	Feature Description 17

## 4 修订历史记录

注: 之前版本的页码可能与当前版本有所不同。

Changes from Revision B (December 2018) to Revision C	Page				
Added Device Comparison Table section					
Changes from Revision A (August 2018) to Revision B	Page				
• 己删除 bq25880 references from Functional Block Diagram	17				
• 已添加 ADC is enabled to list of conditions to enable buck operation in Buck Mode Operation from Battery (OT section					
Changes from Original (February 2018) to Revision A	Page				

# 已更改 将"预告信息"更改为"生产数据"......1



8.5 Register Maps ...... 35

12.3 接收文档更新通知 ...... 77 12.6 静电放电警告...... 77 

www.ti.com.cn




## 5 Device Comparison Table

			•	
PRT NUMBER	BQ25882	BQ25883	BQ25886	BQ25887
VBUS Operating Range	3.9 to 6.2 V	3.9 to 6.2 V	4.3 to 6.2 V	3.9 to 6.2 V
USB Detection	D+/D-	D+/D-	D+/D-	PSEL
Power Path	Yes	Yes	Yes	No
Cell Balancing	No	No	No	Yes
OTG	Up to 2 A	Up to 2 A	Up to 2 A	No OTG
16 bit ADC	Yes	Yes	No	Yes
Control Interface	I2C	I2C	Standalone	I2C
Status Pin	/PG	STAT, /PG	STAS, /PG	STAT, /PG
Package	2.1x2.1 WCSP-25	4x4 QFN-24	4x4 QFN-24	4x4 QFN-24

## Table 1. Device Comparison



## 6 Pin Configuration and Functions

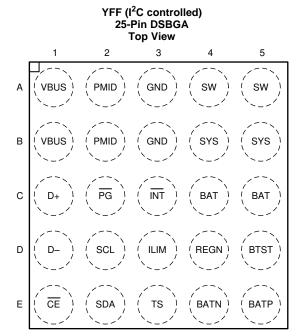

Top View = Xray through a soldered down part with A1 starting in upper left corner

#### **Pin Functions**

	PIN					
NAME	NO.	- I/O	DESCRIPTION			
BAT C4 C5		Р	Battery Power Connection – The internal BATFET is connected between SYS and BAT. Connect a			
			10µF ceramic capacitor closely to the BAT pin and GND.			
BATN	E4	AI	Negative Battery Sense Terminal - Kelvin connect as close as possible to negative battery terminal			
BATP	E5	AI	Positive Battery Sense Terminal - Kelvin connect as close as possible to positive battery terminal			
BTST	D5	Ρ	<b>PWM High-side Driver Supply</b> – Internally, BTST is connected to the cathode of the boot-strap diode. Connect a $0.047\mu$ F bootstrap capacitor from SW to BTST.			
CE	E1	DI	Active Low Charge Enable Pin – Battery charging is enabled when EN_CHG bit is 1 and $\overline{CE}$ pin is LOW. $\overline{CE}$ pin must be pulled HIGH or LOW, do not leave floating.			
D+	C1	AIO	tive USB data line – D+/D– based USB host/charging port detection. The detection includes data act detection (DCD) and secondary detection in BC1.2.			
D-	D1	AIO	<b>gative USB data line –</b> D+/D– based USB host/charging port detection. The detection includes a contact detection (DCD) and secondary detection in BC1.2.			
	A3		One of the second			
GND	B3		Ground Return			
ILIM	D3	AI	<b>Input Current Limit</b> – ILIM pin sets the maximum input current and can be used to monitor input current. IINDPM loop regulates ILIM pin voltage at 0.8 V. When ILIM pin is less than 0.8 V, the input current limit can be calculated by IIN = KILIM x VILIM / ( $R_{ILIM} \times 0.8$ V). A resistor connected from ILIM pin to ground sets the current limit as IINMAX = KILIM / $R_{ILIM}$ . The actual input current limit is the lower limit set by ILIM pin (when EN_ILIM bit is HIGH) or IINDPM register bits. Input current limit less than 500mA is not supported on ILIM pin. The ILIM pin function can be disabled when EN_ILIM bit is 0.			
INT	C3	DO	<b><u>Open Drain Active Low Interrupt Output</u></b> – Connect /INT to the logic rail via a 10-k $\Omega$ resistor. The INT pin sends active low, 256-µs pulse to the host to report charger device status and fault.			
PG	C2	DO	<b>Open Drain Active Low Power Good Indicator</b> – Connect to the pull up rail via $10-k\Omega$ resistor. LOW indicates a good input source if the input voltage is within VVBUS_OP, and can provide more than IPOORSRC.			
DIALD	A2	Р	Blocking MOSFET Connection – Given the total input capacitance, place 1µF on VBUS, and the rest			
PMID	B2	P	on PMID, as close to the IC as possible. Typical value: 10µF ceramic capacitor			



## Pin Functions (continued)

F	PIN	1/0	DESCRIPTION	
NAME	NO.	1/0	DESCRIPTION	
REGN	D4	Ρ	<b>Gate Drive Supply</b> – Bias supply for internal MOSFETs driver and IC. Bypass REGN to GND with a $4.7\mu$ F ceramic capacitor.	
SCL	D2	DI	<b>I2C Interface Clock</b> – Connect SCL to the logic rail through a 10-k $\Omega$ resistor.	
SDA	E2	DIO	<b>C Interface Data –</b> Connect SDA to the logic rail through a 10-k $\Omega$ resistor.	
A4		<b>D</b>		
SW	A5	P	Inductor Connection – Connect to the switched side of the external inductor.	
	B4		System Connection – The internal BATFET is connected between SYS and BAT. When the battery	
SYS	B5	P	falls below the minimum system voltage, switch-mode converter keeps SYS above the minimum system voltage. Connect a 44µF ceramic capacitor closely to the SYS pin and GND.	
TS	E3	AI AI AI Second AI AI A Resistor All AI A Resistor All AI A Resistor All AI A Resistor All AI AI A Resistor All AI A RESISTANCE ALL ALL ALL ALL ALL ALL ALL ALL ALL AL		
VBUS	A1	P	Input Supply – VBUS is connected to the external DC supply. Bypass VBUS to GND with at least 1µF	
VDUS	B1 P		ceramic capacitor, placed as close to the IC as possible.	

#### **Specifications** 7

## 7.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted)<sup>(1)</sup>

		MIN	MAX	UNIT
	VBUS (converter not switching)	-0.3	20	V
	PMID (converter not switching)	-0.3	8.5	V
	BAT, SYS (converter not switching)	-0.3	12	V
	SW	-0.6 <sup>(2)</sup>	13	V
	BTST	-0.3	19	V
Voltage Range (with respect to GND unless otherwise specified)	BATP	-0.3	12	V
	BAT <u>N,</u> REGN, SDA, SCL, <del>INT</del> , <del>CE</del> , TS, D+, D–, <del>PG</del>	-0.3	6	V
	ILIM	-0.3	5	V
	BTST to SW	-0.3	6	V
	SYS to BAT	-0.3	8.5	V
Output Sink Current	INT, PG		6	mA
Junction Temperature, T <sub>J</sub>		-40	150	°C
Storage temperature, T <sub>stg</sub>		-40	150	°C

(1) Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. These are stress ratings only, which do not imply functional operation of the device at these or any other conditions beyond those indicated under Recommended Operating Conditions. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

(2) -2V for 50ns

## 7.2 ESD Ratings

			VALUE	UNIT
		Human body model (HBM), per ANSI/ESDA/JEDEC JS-001 <sup>(1)</sup>	±2000	V
V <sub>(ESD)</sub>	Electrostatic discharge	Charged device model (CDM), per JEDEC specification JESD22-C101 $^{\left( 2\right) }$	±250	V

JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process. JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process. (1)

(2)

## 7.3 Recommended Operating Conditions

over operating free-air temperature range (unless otherwise noted)

		MIN	NOM MAX	UNIT
V <sub>VBUS</sub>	Input voltage	3.9	6.2	V
I <sub>VBUS</sub>	Average input current (VBUS)		3.3	А
I <sub>BAT</sub>	Average charge current (BAT)		2.2	А
V <sub>BAT</sub>	Battery voltage (BATP - BATN)		9.2 <sup>(1)</sup>	V
I <sub>BAT_RMS</sub>	RMS discharging current with internal MOSFET		4	А
I <sub>BAT_PK</sub>	Peak discharging current with internal MOSFET		8	А
T <sub>A</sub>	Operating free-air temperature	-40	85	°C

The inherent switching noise voltage spikes should not exceed the absolute maximum rating on SW pins. A tight layout minimizes (1)switching noise.



### 7.4 Thermal Information

over operating free-air temperature range (unless otherwise noted)

		BQ25882	
	THERMAL METRIC <sup>(1)</sup>	YFF (DSBGA)	UNIT
		25-BALL	
$R_{\Theta JA}$	Junction-to-ambient thermal resistance (EVM <sup>(2)</sup> )	24	°C/W
$R_{\ThetaJA}$	Junction-to-ambient thermal resistance (JEDEC <sup>(1)</sup> )	64.4	°C/W
R <sub>@JC(top)</sub>	Junction-to-case (top) thermal resistance	0.4	°C/W
$R_{\Theta JB}$	Junction-to-board thermal resistance	14.8	°C/W
ΨЈТ	Junction-to-top characterization parameter	0.2	°C/W
ΨЈВ	Junction-to-board characterization parameter	14.9	°C/W
R <sub>@JC(bot)</sub>	Junction-to-case (bottom) thermal resistance	N/A	°C/W

(1) For more information about traditional and new thermal metrics, see the Semiconductor and IC Package Thermal Metrics application report.

(2) Measured on 35µm thick copper, 4-layer board.

### 7.5 Electrical Characteristics

 $V_{VBUS_UVLOZ} < V_{VBUS} < V_{VBUS_OV}$ ,  $T_J = -40^{\circ}C$  to+125°C, and  $T_J = 25^{\circ}C$  for typical values (unless otherwise noted)

	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
QUIESCENT CUP	RRENTS	· · · · · · · · · · · · · · · · · · ·				ł
	Battery discharge current (BATP,	VBAT = 9 V, No VBUS, SCL, SDA = 0 V or 1.8 V, ADC Disabled, $T_J = 25^{\circ}C$		11.5	14	μA
IBAT	BAT, SYS)	VBAT = 9 V, No VBUS, SCL, SDA = 0 V or 1.8 V, ADC Disabled, $T_J < 85^{\circ}C$		11.5	20	μA
h	Input supply current (VBUS) in HIZ	VBUS = 5 V, High-Z Mode, no battery, ADC Disabled, $T_J = 25^{\circ}C$		30	35	μA
IVBUS_HIZ		VBUS = 5 V, High-Z Mode, no battery, ADC Disabled, $T_J < 85^{\circ}C$		30	40	μA
	Input outpoly outport ()/DLIC)	VBUS = 5 V, $V_{BAT}$ = 7.6 V, converter not switching		1.5	3	mA
I <sub>VBUS</sub>	Input supply current (VBUS)	VBUS = 5 V, $V_{BAT}$ = 7.6 V, converter switching, $I_{SYS}$ = 0A		3		mA
I <sub>BAT_OTG</sub>	Battery discharge current in OTG mode	VBAT = 8.4 V, OTG Buck Mode, $I_{VBUS}$ = 0A, converter switching		3		mA
VBUS/VBAT POV	VER UP					
V <sub>VBUS_OP</sub>	VBUS operating range		3.9		6.2	V
V <sub>VBUS_UVLOZ</sub>	VBUS rising for active I2C, no battery	VBUS rising		3.3	3.6	V
V <sub>VBUS_PRESENT</sub>		VBUS rising		3.65	3.9	V
	VBUS over-voltage rising threshold	VBUS rising	6.2		6.6	V
V <sub>VBUS_OV</sub>	VBUS over-voltage falling threshold	VBUS falling	5.9		6.4	V
V <sub>BAT_UVLOZ</sub>	Battery for active I2C	VBAT rising	3.7	4.0	4.335	V
VPOORSRC	Bad adapter detection threshold			3.7		V
IPOORSRC	Bad adapter detection current source			15		mA
POWER-PATH						
V <sub>SYS</sub>	Typical System Regulation Voltage	ISYS = 0A, VBAT = 8.80 V > SYS_MIN[3:0], Charge Disabled (EN_CHG = 0). Offset above VBAT		100		mV
V <sub>SYS</sub>	Typical System Regulation Voltage	ISYS = 0A, VBAT < SYS_MIN[3:0], Charge Disabled (EN_CHG = 0). Offset above SYS_MIN		200		mV
V <sub>SYS_MIN</sub>	System Regulation Voltage	VBAT < SYS_MIN[3:0] = 1010, Charge Disabled (EN_CHG = 0)	7	7.2		V
P(01)	Blocking MOSFET on-resistance	$T_J = 25^{\circ}C$		25	36	mΩ
R <sub>ON_QBLK</sub> (Q1)	between VBUS and PMID (QB)	$T_{J} = -40^{\circ}C - 125^{\circ}C$		25	52	mΩ

Copyright © 2018–2019, Texas Instruments Incorporated

## **Electrical Characteristics (continued)**

 $V_{VBUS\_UVLOZ} < V_{VBUS} < V_{VBUS\_OV}$ ,  $T_J = -40^{\circ}C$  to+125°C, and  $T_J = 25^{\circ}C$  for typical values (unless otherwise noted)

	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
	High-side switching MOSFET on-	$T_J = 25^{\circ}C$		30	40	mΩ
R <sub>ON_QHS</sub> (Q2)	resistance between SW and SYS (Q2)	T <sub>J</sub> = – 40°C - 125°C		30	55	mΩ
- ()	Low-side switching MOSFET on-	$T_{\rm J} = 25^{\circ}{\rm C}$		40	59	mΩ
R <sub>ON_QLS</sub> (Q3)	resistance between SW and GND (Q3)	$T_{\rm J} = -40^{\circ}\text{C} - 125^{\circ}\text{C}$		40	80	mΩ
BATTERY CHAR	GER					
V <sub>REG_RANGE</sub>	Typical charge voltage regulation range		6.8		9.2	V
V <sub>REG_STEP</sub>	Typical charge voltage step			10		mV
		VREG = 8.40 V, T <sub>J</sub> = - 40°C - 85°C	8.3664	8.4	8.4336	V
V <sub>REG_ACC</sub>	Charge voltage accuracy	VREG = 8.70 V, T <sub>J</sub> = - 40°C - 85°C	8.6652	8.7	8.7348	V
-		VREG = 8.80 V, T <sub>J</sub> = - 40°C - 85°C	8.7648	8.8	8.8352	V
I <sub>CHG_RANGE</sub>	Charge current regulation range		0		2200	mA
I <sub>CHG_STEP</sub>	Charge current regulation step			50		mA
		ICHG = 250 mA, VBAT = 6.2 V or 7.6 V, T <sub>J</sub> = $-20^{\circ}$ C $-85^{\circ}$ C	-25		25	%
I <sub>CHG_ACC</sub>	Fast Charge current regulation accuracy	$\label{eq:ICHG} \begin{array}{l} \mbox{ICHG} = 500 \mbox{ mA}, \mbox{VBAT} = 6.2 \mbox{ V or } 7.6 \mbox{ V}, \\ \mbox{T}_{J} = -20^{\circ}\mbox{C} - 85^{\circ}\mbox{C} \end{array}$	-10		10	%
		ICHG = 1000 mA, VBAT = 6.2 V or 7.6 V, $T_J = -20^{\circ}C - 85^{\circ}C$	-7.5		7.5	%
IPRECHG_RANGE	Precharge current range		50		800	mA
IPRECHG_STEP	Typical precharge current step			50		mA
I <sub>PRECHG_ACC</sub>	Precharge current accuracy	VBAT = 5.2 V, IPRECHG = 200 mA, $T_J = -20^{\circ}C - 85^{\circ}C$	-20		20	%
I <sub>TERM_RANGE</sub>	Termination current range		50		800	mA
ITERM_STEP	Typical termination current step			50		mA
	T	ICHG = 1.5A, ITERM = 50 mA, $T_J = -40^{\circ}C - 85^{\circ}C$	-40		40	%
ITERM_ACC	Termination current accuracy	ICHG = 1.5A, ITERM = 150 mA, $T_J = -40^{\circ}C - 85^{\circ}C$	-20		20	%
V <sub>BAT_SHORT</sub>	Short Battery Voltage rising threshold to start pre-charging	VBAT rising	4.1	4.4	4.7	V
V <sub>BAT_SHORT_HYS</sub>	Short Battery Voltage falling threshold to stop pre-charging	VBAT falling	3.7	4.0	4.3	V
I <sub>BAT_SHORT</sub>	Short Battery Voltage trickle charging current	VBAT < 4.4 V		100		mA
V <sub>BAT_LOWV</sub>	VBAT LOWV Rising threshold to start fast-charging	VBAT rising, VBATLOW = 6.0 V	5.7	6	6.3	V
BAT_LOWV	VBAT LOWV Falling threshold to stop fast-charging	VBAT falling, VBATLOW = 6.0 V	5.3	5.6	5.9	V
Varaus	Recharge threshold below V <sub>REG</sub>	VBAT falling, VRECHG[1:0] = 01		200		mV
V <sub>RECHG</sub>	Recharge intestion below VREG	VBAT falling, VRECHG[1:0] = 10		300		mV
	MOSFET on-resistance between	$T_J = 25^{\circ}C$		15	18	mΩ
R <sub>ON_QBAT</sub> (Q4)	SYS and BAT (Q4)	$T_{J} = -40^{\circ}C - 125^{\circ}C$		15	26	mΩ
R <sub>BATP</sub>	BATP Input resistance	VBAT = 8 V, VBUS = 5 V, EN_HIZ = 1, ADC Disabled		2.7		MΩ
R <sub>BATN</sub>	BATN Input resistance	VBAT = 8 V, VBUS = 5 V, EN_HIZ = 1, ADC Disabled		2.7		MΩ
INPUT VOLTAGE	/ CURRENT REGULATION	·				
VINDPM_RANGE	Input voltage regulation range		3.9		5.5	V



## **Electrical Characteristics (continued)**

 $V_{VBUS UVLOZ} < V_{VBUS} < V_{VBUS OV}$ ,  $T_J = -40^{\circ}$ C to+125°C, and  $T_J = 25^{\circ}$ C for typical values (unless otherwise noted)

	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
VINDPM_STEP	Input voltage regulation step			100		mV
		VINDPM = 3.9 V	3.783	3.9	4.017	V
VINDPM	Input voltage limit	VINDPM = 4.4 V	4.268	4.4	4.532	V
IINDPM RANGE	Input current regulation range		500		3300	mA
IINDPM STEP	Input current regulation step			100		mA
		IINDPM = 500 mA	445	470	500	mA
		IINDPM = 900 mA	765	832.5	900	mA
INDPM_ACC	Input current regulation limit	IINDPM = 2500 mA	2125	2312.5	2500	mA
		IINDPM = 3000 mA	2550	2775	3000	mA
K <sub>ILIM</sub>		$I_{INMAX} = K_{ILIM}/R_{ILIM}$ , Input Current regulation by ILIM pin = 1.5A	1000	1085	1170	Αx Ω
D+/D- DETECTIC	DN					
V <sub>D+D600MVSRC</sub>	D+/D- Voltage Source (600 mV)		500	600	700	mV
I <sub>D+_10UASRC</sub>	D+ Current Source (10 µA)		7	10	14	μA
ID+D100UASNK	D+/D- Current Sink (100 µA)		50	100	150	μA
V <sub>D+D0P325</sub>	D+/D- Comparator Threshold for Secondary Detection		250		400	mV
V <sub>D+_0P8</sub>	D+Comparator Threshold for Data Contact Detection				800	mV
R <sub>D19K</sub>	D- Resistor to Ground (19 kΩ)		14.25		24.8	kΩ
V <sub>D+D1P2</sub>	D+/D- Threshold for Non-standard adapter		1.05		1.35	V
V <sub>D+D2P0</sub>	D+/D- Threshold for Non-standard adapter		1.85		2.15	V
V <sub>D+D2P8</sub>	D+/D- Threshold for Non-standard adapter		2.55		2.85	V
I <sub>D+DLKG</sub>	D+/D- Leakage Current	HiZ	-1		1	μA
BATTERY OVER	-VOLTAGE PROTECTION					
V	Battery over-voltage rising threshold	VBAT rising, as percentage of VREG	103	104	105	%
V <sub>BAT_OVP</sub>	Battery over-voltage falling threshold	VBAT falling, as percentage of VREG	101	102	103	%
THERMAL REGU	JLATION AND THERMAL SHUTDOWN					
T <sub>REG</sub>	Junction temperature regulation accuracy	TREG = 120°C		120		°C
	Thermal Shutdown Rising threshold	Temperature Increasing		150		°C
T <sub>SHUT</sub>	Thermal Shutdown Falling threshold	Temperature Decreasing		120		°C
JEITA THERMIS	TOR COMPARATOR (BOOST MODE)					
V <sub>T1</sub>	T1 (0°C) threshold, Charge suspended below this temperature.	As Percentage to REGN	72.75	73.25	73.75	%
V <sub>T1_HYS</sub>	Charge re-enabled to ICHG/2 and VREG above this temperature	As Percentage to REGN		1.3		%
V <sub>T2</sub>	T2 (10°C) threshold, Charge back to ICHG/2 and VREG below this temperature	As Percentage to REGN	67.75	68.25	68.75	%
V <sub>T2_HYS</sub>	Charge back to ICHG and VREG above this temperature	As Percentage to REGN		1.3		%
V <sub>T3</sub>	T3 (45°C) threshold, Charge back to ICHG and 8.1 V above this temperature.	As Percentage to REGN	44.25	44.75	45.25	%
V <sub>T3_HYS</sub>	Charge back to ICHG and VREG below this temperature	As Percentage to REGN		1		%

## **Electrical Characteristics (continued)**

 $V_{VBUS_UVLOZ} < V_{VBUS} < V_{VBUS_OV}$ ,  $T_J = -40^{\circ}$ C to+125°C, and  $T_J = 25^{\circ}$ C for typical values (unless otherwise noted)

	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
V <sub>T5</sub>	T5 (60°C) threshold, charge suspended above this temperature.	As Percentage to REGN	33.875	34.375	34.875	%
$V_{T5\_HYS}$	Charge back to ICHG and 8.1 V below this temperature	As Percentage to REGN		1.3		%
COLD/HOT THE	ERMISTOR COMPARATOR (OTG BUCK	MODE)				
V <sub>BCOLD0</sub>	Cold Temperature Threshold 0, TS pin Voltage Rising Threshold	As Percentage to REGN, BCOLD = 0 (Approx. – 10°C w/ 103AT)	76.5	77	77.5	%
V <sub>BCOLD0_HYS</sub>	Cold Temperature Threshold 0, TS pin Voltage Falling Threshold	As Percentage to REGN		1		%
V <sub>BCOLD1</sub>	Cold Temperature Threshold 1, TS pin Voltage Rising Threshold	As Percentage to REGN, BCOLD = 1 (Approx. – 20°C w/ 103AT)	79.5	80	80.5	%
V <sub>BCOLD1_HYS</sub>	Cold Temperature Threshold 1, TS pin Voltage Falling Threshold	As Percentage to REGN		1		%
V <sub>BHOT0</sub>	Hot Temperature Threshold 0, TS pin Voltage Falling Threshold	As Percentage to REGN, BHOT[1:0] = 01 (Approx. 55°C w/ 103AT)	37.25	37.75	38.25	%
V <sub>BHOT0_HYS</sub>	Hot Temperature Threshold 0, TS pin Voltage Rising Threshold	As Percentage to REGN		3		%
V <sub>BHOT1</sub>	Hot Temperature Threshold 1, TS pin Voltage falling Threshold	As Percentage to REGN, BHOT[1:0] = 00 (Approx. 60°C w/ 103AT)	33.875	34.375	34.875	%
V <sub>BHOT1_HYS</sub>	Hot Temperature Threshold 1, TS pin Voltage rising Threshold	As Percentage to REGN		3		%
V <sub>BHOT2</sub>	Hot Temperature Threshold 2, TS pin Voltage falling Threshold	As Percentage to REGN, BHOT[1:0] = 10 (Approx. 65°C w/ 103AT)	30.75	31.25	31.75	%
V <sub>BHOT1_HY2</sub>	Hot Temperature Threshold 2, TS pin Voltage rising Threshold	As Percentage to REGN		3		%
BOOST MODE	CONVERTER	•	1			
F <sub>SW</sub>	PWM switching frequency	Oscillator frequency	1.35	1.5	1.65	MHz
OTG BUCK MO	DE CONVERTER					
V <sub>OTG_BAT</sub>	Battery voltage exiting OTG mode	BAT falling	5.85	6	6.15	V
V <sub>OTG_RANGE</sub>	Typical OTG Buck mode voltage regulation range		4.5		5.5	V
V <sub>OTG_STEP</sub>	Typical OTG Buck mode voltage regulation step			100		mV
V <sub>OTG_ACC</sub>	OTG Buck mode voltage regulation accuracy	IVBUS = 0A, OTG_VLIM = 5 V	-3		3	%
I <sub>OTG_RANGE</sub>	Typical OTG Buck mode current regulation range		0.5		2	А
I <sub>OTG_STEP</sub>	Typical OTG Buck mode current regulation step			100		mA
I <sub>OTG_ACC</sub>	OTG Buck mode current regulation accuracy	OTG_ILIM = 1A	-15	-7.5	0.05	%
V <sub>OTG_OVP</sub>	OTG Buck mode over-voltage threshold		5.8	6		V
REGN LDO						
V <sub>REGN</sub>	REGN LDO output voltage	$V_{VBUS} = 5 V, I_{REGN} = 20 mA$	4.7	4.8		V
I <sub>REGN</sub>	REGN LDO current limit	V <sub>VBUS</sub> = 5 V, V <sub>REGN</sub> = 3.8 V	50			mA
	al Converter (ADC)	•				
	× /	ADC_SAMPLE[1:0] = 00		24		ms
		$ADC_SAMPLE[1:0] = 01$		12		ms
t <sub>ADC_CONV</sub>	Conversion time, each measurement	ADC_SAMPLE[1:0] = 10		6		ms
			1	5		



### BQ25882 ZHCSJ56C – FEBRUARY 2018 – REVISED SEPTEMBER 2019

www.ti.com.cn

## **Electrical Characteristics (continued)**

	, $T_J = -40^{\circ}C$ to+125°C, and $T_J = 25^{\circ}C$ for typical values (unless	a the annual and a set a sh
$V_{1} = V_{2} = V_{1} = V_{2} = V_{2$	$-1$ $-20^{\circ}$ $10+125^{\circ}$ and $1$ $-25^{\circ}$ for typical values (unless	otherwise noted)

	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
		ADC_SAMPLE[1:0] = 00	14	15		bits
		ADC_SAMPLE[1:0] = 01	13	14		bits
ADCRES	Effective resolution	ADC_SAMPLE[1:0] = 10	12	13		bits
		ADC_SAMPLE[1:0] = 11	10	11		bits
ADC MEASUREM	ENT RANGES AND LSB					
IBUS_ADC_RANGE	ADC BUS current range		0		4	Α
IBUS_ADC_LSB	ADC BUS current LSB			1		mA
IBAT_ADC_RANGE	ADC BAT current range		0		4	Α
IBAT_ADC_LSB	ADC BAT current LSB			1		mA
V <sub>BUS_ADC_RANGE</sub>	ADC BUS voltage range		0		6.5	V
V <sub>BUS_ADC_LSB</sub>	ADC BUS voltage LSB			1		mV
V <sub>SYS_ADC_RANGE</sub>	ADC SYS voltage range		0		10	V
V <sub>SYS_ADC_LSB</sub>	ADC SYS voltage LSB			1		mV
V <sub>BAT_ADC_RANGE</sub>	ADC BAT voltage range		0		10	V
V <sub>BAT_ADC_LSB</sub>	ADC BAT voltage LSB			1		mV
V <sub>TS_ADC_RANGE</sub>	ADC TS voltage range		20		80	%
V <sub>TS_ADC_LSB</sub>	ADC TS voltage LSB			0.098		%
V <sub>TDIE_ADC_RANGE</sub>	ADC Die temperature range		0		150	°C
V <sub>TDIE_ADC_LSB</sub>	ADC Die temperature LSB			1		°C
I2C INTERFACE (	SCL, SDA)	1	F			
V <sub>IH</sub>	Input high threshold level, SDA and SCL	Pull-up rail 1.8 V	1.3			V
V <sub>IL</sub>	Input low threshold level	Pull-up rail 1.8 V			0.4	V
V <sub>OL</sub>	Output low threshold level	Sink current = 5 mA			0.4	V
I <sub>BIAS</sub>	High level leakage current	Pull-up rail 1.8 V			1	μA
LOGIC I/O PIN (/C	E, PSEL)	1	F			
V <sub>IH</sub>	Input high threshold level		1.3			V
V <sub>IL</sub>	Input low threshold level				0.4	V
I <sub>IN_BIAS</sub>	High level leakage current	Pull-up rail 1.8 V			1	μA
LOGIC O PIN (/IN	Γ, /PG, STAT)	•				
V <sub>OL</sub>	Output low threshold level	Sink current = 5 mA			0.4	V
I <sub>OUT_BIAS</sub>	High level leakage current	Pull-up rail 1.8 V			1	μA

## 7.6 Timing Requirements

	PARAMETER	TEST CONDITIONS	MIN	NOM	MAX	UNIT	
VBUS/BAT POW	BUS/BAT POWER UP						
t <sub>VBUS_OV</sub>	VBUS OVP reaction time	VBUS rising above $V_{\text{BUS}\_\text{OV}}$ threshold to converter turn off		200		ns	
t <sub>POORSRC</sub>	Bad adapter detection duration			30		ms	
BATTERY CHAR	RGER						
t <sub>TERM_DGL</sub>	Deglitch time for charge termination	Charge current falling below I <sub>TERM</sub>		250		ms	
t <sub>RECGH_DGL</sub>	Deglitch time for recharge threshold	BAT voltage falling below VRECHG = 100 mV		250		ms	
t <sub>BAT_OVP_DGL</sub>	Deglitch time for battery over-voltage to disable charge			1		μs	
t <sub>TOP_OFF</sub>	Typical Top-Off Timer Accuracy	TOP_OFF_TIMER[1:0] = 30 min	24	30	36	min	
t <sub>SAFETY</sub>	Charge Safety Timer Accuracy	CHG_TIMER[1:0] = 12 hours	10.8	12	13.2	hr	

Copyright © 2018–2019, Texas Instruments Incorporated


## **Timing Requirements (continued)**

	PARAMETER	TEST CONDITIONS	MIN	NOM	MAX	UNIT
<b>I2C INTERF</b>	ACE					
f <sub>SCL</sub>	SCL clock frequency				1000	kHZ
DIGITAL CL	OCK AND WATCHDOG TIMER					
f <sub>LPDIG</sub>	Digital low power clock	REGN LDO disabled	18	30	45	kHZ
f <sub>DIG</sub>	Digital clock	REGN LDO enabled	1.35	1.5	1.65	MHz
t <sub>WDT</sub>	Watchdog Reset time	WATCHDOG[1:0] = 160 s, REGN LDO disabled	100	160		sec
t <sub>WDT</sub>	Watchdog Reset time	WATCHDOG[1:0] = 160 s, REGN LDO enabled	136	160		sec



### 7.7 Typical Characteristics


 $C_{VBUS} = 1\mu F$ ,  $C_{PMID} = 10\mu F$ ,  $C_{SYS} = 44\mu F$ ,  $C_{BAT} = 10\mu F$ , L = 1uH (DFE252012F-1R0) (unless otherwise specified)

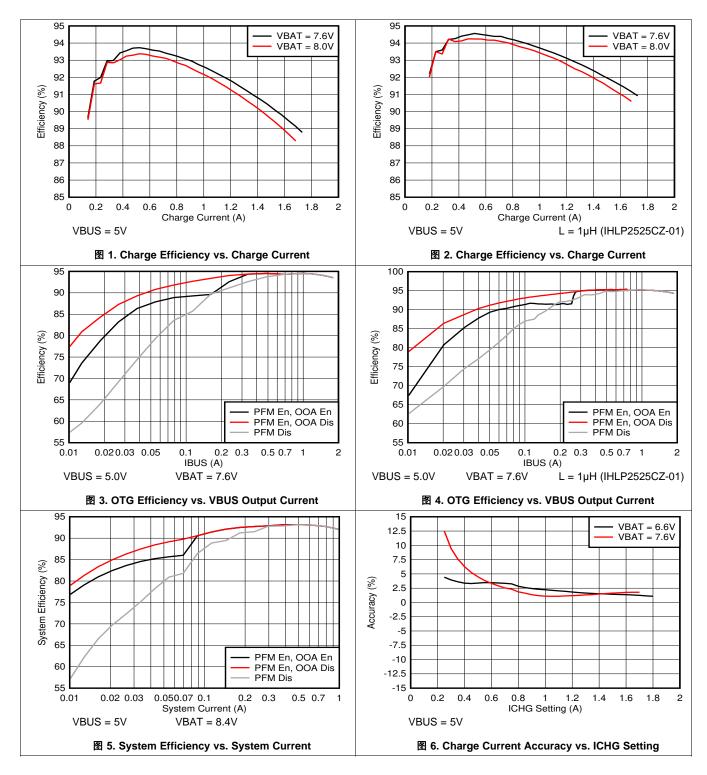



## Typical Characteristics (接下页)


 $C_{VBUS} = 1\mu F$ ,  $C_{PMID} = 10\mu F$ ,  $C_{SYS} = 44\mu F$ ,  $C_{BAT} = 10\mu F$ , L = 1uH (DFE252012F-1R0) (unless otherwise specified)

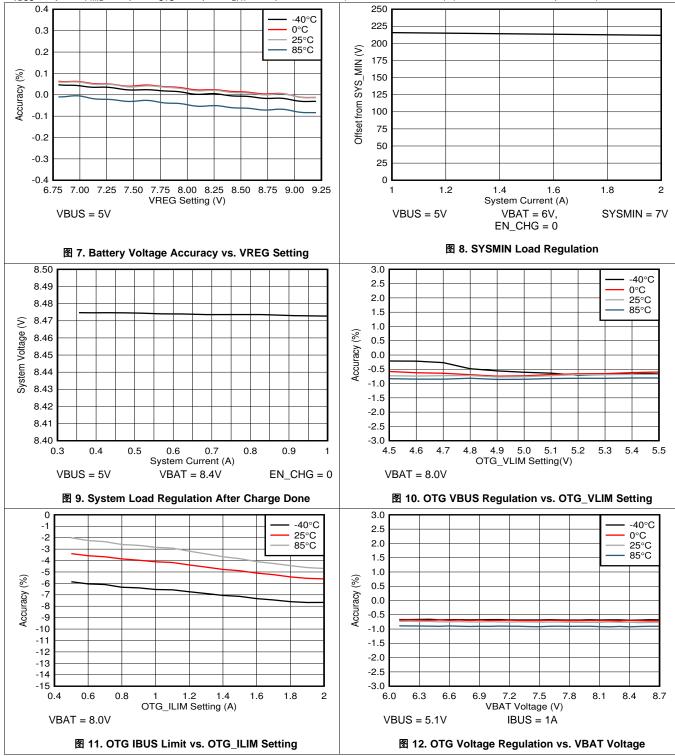



## Typical Characteristics (接下页)

C<sub>VBUS</sub> = 1µF, C<sub>PMID</sub>= 10µF, C<sub>SYS</sub> = 44µF, C<sub>BAT</sub> = 10µF, L = 1uH (DFE252012F-1R0) (unless otherwise specified)

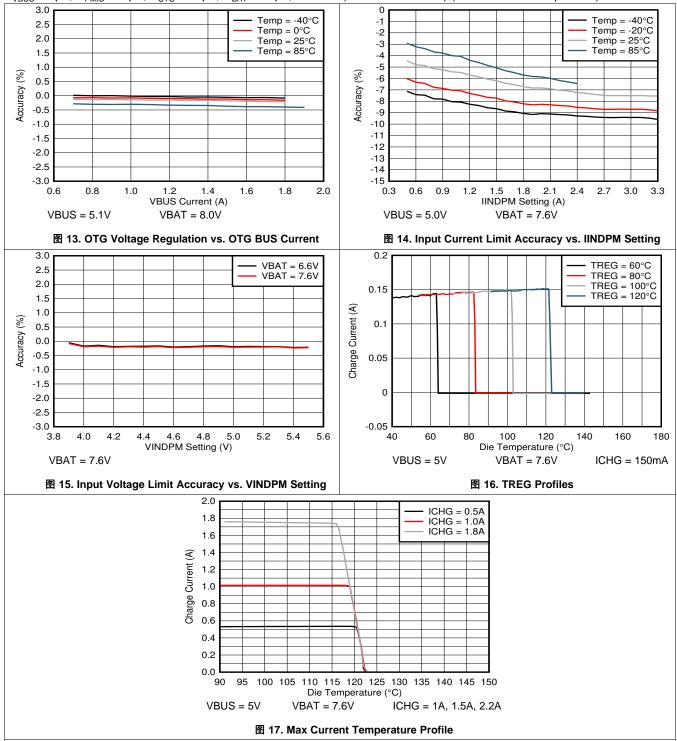

BQ25882 ZHCSJ56C – FEBRUARY 2018 – REVISED SEPTEMBER 2019




www.ti.com.cn

## 8 Detailed Description

### 8.1 Overview

The device is a highly integrated 2-A switch-mode battery charger for dual cell Li-Ion and Li-polymer battery. It integrates the input blocking FET (Q1, QBLK), high-side switching FET (Q2, QHS), low-side switching FET (Q3, QLS), and battery FET (Q4, QBAT). The device also integrates the boot-strap diode for high-side gate drive.

## 8.2 Functional Block Diagram

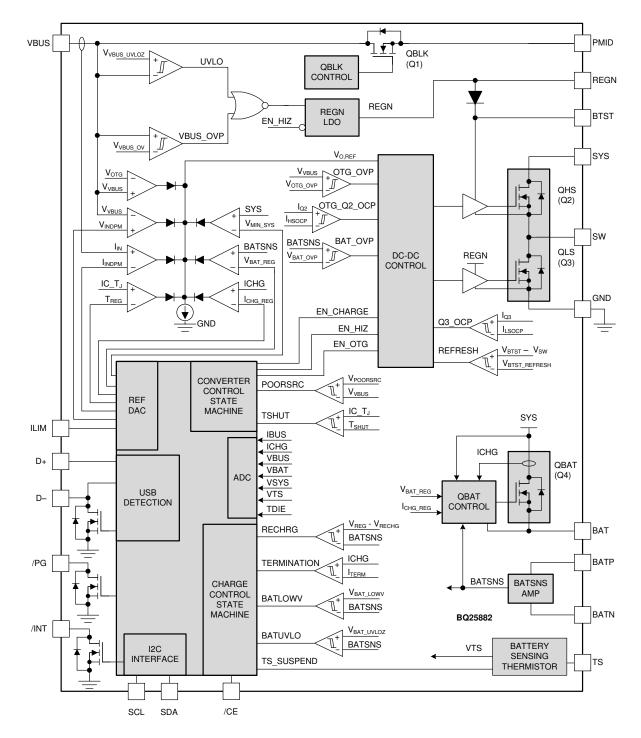



### 8.3 Feature Description

#### 8.3.1 Device Power-On-Reset

The internal bias circuits are powered from either VBAT or VBUS. When VBUS rises above  $V_{VBUS_UVLOZ}$  or BAT rises above  $V_{BAT_UVLOZ}$ , the BATFET driver is active. I<sup>2</sup>C interface is ready for communication and all the registers are reset to default value. The host can access all the registers after POR.

#### 8.3.2 Device Power Up from Battery without Input Source

If only battery is present and the voltage is above UVLO threshold ( $V_{BAT_UVLOZ}$ ), the BATFET turns on and connects battery to system. The REGN LDO stays off to minimize the quiescent current. The low  $R_{DS(ON)}$  of BATFET and the low quiescent current on BAT minimize the conduction loss and maximize the battery run time. The device always monitors discharge current through BATFET (Supplement Mode).

#### 8.3.3 Device Power Up from Input Source

When an input source is plugged in, the device checks the input source voltage to turn on REGN LDO and all the bias circuits. It detects and sets the input current limit before the boost converter is started. The power up sequence from input source is as listed:

- 1. Poor Source Qualification
- Input Source Type Detection based on D+/D- to set default Input Current Limit (IINDPM) register and input source type
- 3. Power Up REGN LDO
- 4. Converter Power-up

#### 8.3.3.1 Poor Source Qualification

After valid VBUS is plugged in, the device checks the current capability of the input source. The input source has to meet the following requirements in order to start the boost converter.

- 1. VBUS voltage below V<sub>VBUS\_OVP</sub>
- 2. VBUS voltage above V<sub>POORSRC</sub> when pulling I<sub>POORSRC</sub>

If VBUS\_OVP is detected (condition 1 above), the device automatically retries detection once the over-voltage fault goes away. If a poor source is detected (condition 2 above), the device repeats poor source qualification routine every 2 seconds. After 7 consecutive failures, the device sets EN\_HIZ = 1, and goes to HIZ mode. The battery powers up the system when the device is in HIZ. Adapter re-plugin and/or EN\_HIZ bit toggle is required to restart device operation. The EN\_HIZ bit is cleared automatically when the adapter is plugged in.

#### 8.3.3.2 Input Source Type Detection

After the input source is qualified, the charger device runs Input Source Type Detection when AUTO\_INDET\_EN bit is set.

The BQ25882 follows the USB Battery Charging Specification 1.2 (BC1.2) to detect input source (SDP/CDP/DCP) and non-standard adapter through USB D+/D- lines. After input source type detection, the following registers and pins are changed:

- 1. Input Current Limit (IINDPM) register is changed to set current limit
- Input Voltage Limit (VINDPM) register is changed to set default limit (if EN\_VINDPM\_RST = 1, otherwise VINDPM value remains unchanged)
- 3. VBUS\_STAT bits change to reflect the detected source
- 4. INT pin pulses to notify the host
- 5. PG pin is pulled LOW, and PG\_STAT bit is set to '1'

After detection is completed, the host can over-write IINDPM or VINDPM registers to change the input current, or input voltage limit if needed. The charger input current is always limited by the lower of IINDPM register or ILIM pin at all-times regardless of Input Current Optimizer (ICO) setting.

## Feature Description (接下页)

When AUTO\_INDET\_EN is disabled, the Input Source Type Detection is bypassed, and the Input Current Limit (IINDPM) register remains unchanged from previous value. When EN\_VINDPM\_RST is disabled, the Input Voltage Limit (VINDPM) register remains unchanged from previous value.

#### 8.3.3.2.1 D+/D- Detection Sets Input Current Limit

The BQ25882 contains a D+/D- based input source detection to program the input current limit. The D+/D- detection has three major steps: Data Contact Detect (DCD), Primary Detection, and Secondary Detection.

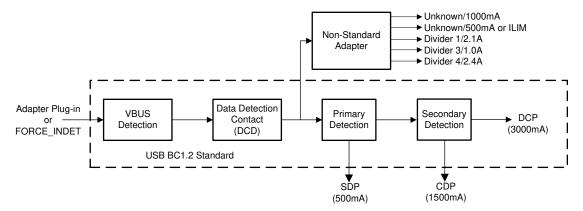


图 18	. D+/D–	Detection	Flow
------	---------	-----------	------

表 2. Non-Standard	Adapter	Detection
-------------------	---------	-----------

NON-STANDARD ADAPTER	D+ THRESHOLD	D- THRESHOLD	INPUT CURRENT LIMIT
Divider 1	$V_{D+}$ within $V_{D+D{2P8}}$	$V_{D-}$ within $V_{D+D{2P0}}$	2.1 A
Divider 3	$V_{D+}$ within $V_{D+D{2P0}}$	$V_{D-}$ within $V_{D+D{2P8}}$	1 A
Divider 4	$V_{D+}$ within $V_{D+D{2P8}}$	$V_{D-}$ within $V_{D+D{2P8}}$	2.4 A
Unknown 2	$VD+ = 1 M\Omega$ to 0 V	VD- = 3.3 V	1.0 A

After the Input Source Type Detection is done, an INT pulse is asserted to the host. In addition, the following registers including Input Current Limit register (IINDPM), and VBUS\_STAT are updated as below:

D+/D- DETECTION	INPUT CURRENT LIMIT (IINDPM)	VBUS_STAT
USB SDP (USB500)	500 mA	001
USB CDP	1.5 A	010
USB DCP	3.0 A	011
Divider 3	1 A	110
Divider 1	2.1 A	110
Divider 4	2.4 A	110
Unknown 5-V Adapter (1)	500 mA	101
Unknown 5-V Adapter (2)	1000 mA	101

#### 8.3.3.2.2 Force Input Current Limit Detection

In host mode, the host can force the device to run Input Current Limit Detection by setting FORCE\_INDET bit. After the detection is completed, FORCE\_INDET bit returns to 0 by itself and Input Result is updated. After the detection is completed, the input current limit (IINDPM), and the VBUS\_STAT bits may be changed by the device due to the detection result.



### 8.3.3.3 Power up REGN Regulator (LDO)

The REGN LDO supplies internal bias circuits as well as the HSFET and LSFET gate drive. The LDO also provides bias rail to TS external resistors. The pull-up rail of /PG can be connected to REGN as well. The REGN is enabled when all the below conditions are valid.

- 1. VBUS above  $V_{VBUS \ UVLOZ}$  in boost mode or VBUS below  $V_{VBUS \ UVLOZ}$  in buck mode
- 2. Poor Source Qualification detects a valid input source
- 3. Input Source Type Detection completes and sets appropriate input current limit
- 4. After 220 ms delay is complete

If one of the above conditions is not valid, the device is in high impedance mode (HIZ) with REGN LDO off. The device draws less than IVBUS\_HIZ from VBUS during HIZ state. The battery powers up the system when the device is in HIZ.

#### 8.3.3.4 Converter Power Up

After the input current limit is set, the PG pin is pulled LOW, the PG\_STAT and VBUS\_STAT bits are changed, and the converter is enabled, allowing the HSFET and LSFET to start switching. If battery charging is disabled, BATFET turns off. Otherwise, BATFET stays on to charge the battery. The device provides soft-start when system rail is ramped up.

Before charging begins, the battery discharge source (IBAT\_DISCHG) is enabled automatically to detect the presence of battery. The host can enable IBAT\_DISCHG via the EN\_BAT\_DISCHG bit at any point during operation, including in Battery Only or HIZ modes.

As a battery charger, the device deploys a highly efficient 1.5-MHz step-up switching regulator. The fixed frequency oscillator keeps tight control of the switching frequency under all conditions of input voltage, battery voltage, charge current and temperature, simplifying filter design.

In order to improve light-load efficiency, the device switches to PFM control at light load when battery is below minimum system voltage setting or charging is disabled. During the PFM operation, the switching duty cycle is set by the ratio of SYS and VBUS. PFM operation may be disabled by the host using the PFM\_DIS bit. PFM operation also includes an out-of-audio (OOA) feature to prevent the converter from switching within the audible range (< 20 kHz) at no load conditions. This feature may be disabled by the host using the PFM\_OOA\_DIS bit.

#### 8.3.4 Input Current Optimizer (ICO)

The device provides innovative Input Current Optimizer (ICO) to identify maximum power point without overloading the input source. The algorithm automatically identifies maximum input current limit of a power source without staying in VINDPM to avoid input source overload.

This feature is enabled by default (EN\_ICO=1) and can be disabled by setting EN\_ICO bit to 0. After DCP type input source is detected based on the procedures describe above (Input Source Type Detection), the algorithm runs automatically when EN\_ICO bit is set. The algorithm can also be forced to execute by setting FORCE\_ICO bit regardless of input source type detected (EN\_ICO = 1 is required for FORCE\_ICO to work).

DEVICE	INPUT SOURCE	INPUT CURRENT LIMIT (IINDPM)	AUTOMATIC START ICO ALGORITHM WHEN EN_ICO = 1
	USB SDP (USB500)	500mA	Disable
	USB CDP	1.5A	Disable
	USB DCP	3.0A	Enable
	Divider 3	1A	Disable
BQ25882 (D+/D–)	Divider 1	2.1A	Disable
	Divider 4	2.4A	Disable
	Unknown 5V Adapter (1)	500mA	Disable
	Unknown 5V Adapter (2)	1000mA	Disable

#### 表 4. Input Current Optimizer Automatic Operation



The actual input current limit used by the Dynamic Power Management is reported in ICO\_ILIM register while Input Current Optimizer is enabled ( $EN_ICO = 1$ ) or set by IINDPM register when the algorithm is disabled ( $EN_ICO = 0$ ). In addition, the current limit is clamped by ILIM pin unless  $EN_ILIM$  bit is 0 to disable ILIM pin function.

When the algorithm is enabled, it runs continuously to adjust input current limit of Dynamic Power Management (IINDPM) using ICO\_ILIM register until ICO\_STAT[1:0] and ICO\_FLAG bits are set (the ICO\_FLAG bit indicates any change in ICO\_STAT[1:0] bits). The algorithm operates depending on battery voltage:

- 1. When battery voltage is below SYS\_MIN, the algorithm starts ICO\_ILIM register with IINDPM which is the maximum input current limit allowed by system
- 2. When battery voltage is above SYS\_MIN, the algorithm starts ICO\_ILIM register with 500 mA which is the minimum input current limit to minimize adapter overload

When optimal input current is identified, the ICO\_STAT[1:0] and ICO\_FLAG bits are set to indicate input current limit in ICO\_ILIM register would not be changed until the algorithm is forced to run by the following event (these events also reset the ICO\_STAT[1:0] bits to '01'):

- 1. A new input source is plugged-in, or EN\_HIZ bit is toggled
- 2. IINDPM register is changed
- 3. VINDPM register is changed
- 4. FORCE\_ICO bit is set to 1
- 5. VBUS\_OVP event

### 8.3.5 Buck Mode Operation from Battery (OTG)

The device supports buck converter operation to deliver power from the battery to other portable devices through USB port. The buck mode output current rating meets the USB On-The-Go 500-mA (OTG\_ILIM bits = 000) output requirement. The maximum output current is up to 2.0 A. The buck operation can be enabled if the following conditions are valid:

- 1. BAT above  $V_{OTG\_BAT}$
- 2. VBUS less than  $V_{VBUS\_PRESENT}$
- 3. ADC is enabled
- 4. Buck mode operation is enabled  $(EN_OTG = 1)$
- 5. Voltage at TS (thermistor) pin is within range configured by Buck Mode Temperature Monitor as configured by BHOT and BCOLD register bits

In buck mode, the device employs 1.5-MHz step-down switching regulator based on system requirements. During buck mode, the status register VBUS\_STAT bits are set to 111, the VBUS output is 5.1 V by default (selectable via OTG\_VLIM register bits) and the output current can reach up to 2.0 A, selected via I<sup>2</sup>C (OTG\_ILIM bits). The buck output is maintained when BAT is above  $V_{OTG_BAT}$  threshold, and VBUS is above  $V_{VBUS_{PRESENT}}$  threshold.

In order to improve light-load efficiency, the device switches to PFM control at light load. During the PFM operation, the switching duty cycle is set by the ratio of SYS and VBUS. PFM operation may be disabled by the host using the PFM\_DIS bit. PFM operation also includes an out-of-audio (OOA) feature to prevent the converter from switching within the audible range (< 20 kHz) at no load conditions. This feature may be disabled by the host using the PFM\_OOA\_DIS bit.

#### 8.3.6 Power Path Management

The device accommodates a wide range of input sources from USB, to wall adapter, to power bank. The device provides automatic power path selection to supply the system (SYS) from input source (VBUS), battery (BAT), or both.

#### 8.3.6.1 Narrow VDC Architecture

The device deploys Narrow VDC architecture (NVDC) with BATFET separating system from battery. The minimum system voltage is set by SYS\_MIN bits. Even with a fully depleted battery, the system is regulated above the minimum system voltage (default 7.0 V).



When the battery is below minimum system voltage setting, the BATFET operates in linear mode (LDO mode), and the system is typically 200 mV above the minimum system voltage setting. As the battery voltage rises above the minimum system voltage, BATFET is fully on and the voltage difference between the system and battery is the  $V_{DS}$  of BATFET.

When the battery charging is disabled and VBAT is above minimum system voltage setting or charging is terminated, the system is always regulated at typically 100 mV above battery voltage. The status register VSYS\_STAT bit goes high when the system is in minimum system voltage regulation.

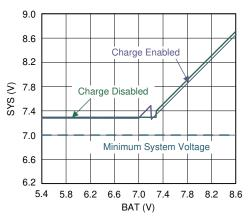


图 19. System Voltage vs. Battery Voltage


### 8.3.6.2 Dynamic Power Management

To meet maximum current limit in USB spec and avoid over loading the adapter, the device features Dynamic Power Management (DPM), which continuously monitors the input current and input voltage. When input source is over-loaded, either the current exceeds the input current limit (IINDPM or ICO\_ILIM or ILIM pin setting) or the voltage falls below the input voltage limit (VINDPM). The device then reduces the charge current until the input current falls below the input current limit and the input voltage rises above the input voltage limit.

When the charge current is reduced to zero, but the input source is still overloaded, the system voltage starts to drop. Once the system voltage falls below the battery voltage, the device automatically enters the Supplement Mode where the BATFET turns on and battery starts discharging so that the system is supported from both the input source and battery.

During DPM mode, the status register bits VINDPM\_STAT (VINDPM) and/or IINDPM\_STAT (IINDPM) go high. The figure shows the DPM response with 5-V/3-A adapter, 6.4-V battery, 1.5-A charge current and 6.8-V minimum system voltage setting.




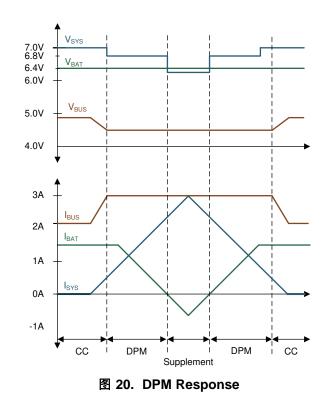

### 8.3.6.3 Supplement Mode

When the voltage falls below the battery voltage, the BATFET turns on.

As the discharge current increases, the BATFET gate is regulated with a higher voltage to reduce  $R_{DSON}$  until the BATFET is in full conduction. At this point onwards, the BATFET  $V_{DS}$  linearly increases with discharge current. The figure shows the V-I curve of the BATFET gate regulation operation. BATFET turns off to exit Supplement Mode when the battery is below battery depletion threshold ( $V_{BAT}$  DPL).



## 图 21. BATFET I-V Curve

### 8.3.7 Battery Charging Management

The device charges 2-cell Li-Ion battery with up to 2.2-A charge current for high capacity battery. The low  $R_{DS(ON)}$  BATFET improves charging efficiency and minimize the voltage drop during discharging.



### 8.3.7.1 Autonomous Charging Cycle

When battery charging is enabled (EN\_CHG bit =1 and /CE pin is LOW), the device autonomously completes a charging cycle without host involvement. The device default charging parameters are listed in the table below. The host can always control the charging operation and optimize the charging parameters by writing to the corresponding registers through  $l^2C$ .

DEFAULT MODE	BQ25882
Charging Voltage	8.4 V
Charging Current	1.00 A
Pre-Charge Current	150 mA
Termination Current	150 mA
Temperature Profile	JEITA
Safety Timer	12 hours

A new charge cycle starts when the following conditions are valid:

- Converter starts
- Battery charging is enabled by I<sup>2</sup>C register bit (EN\_CHG = 1 and CE pin is LOW and ICHG register is not 0 mA)
- No thermistor fault on TS
- No safety timer fault

The charger device automatically terminates the charging cycle when the charging current is below termination threshold, charge voltage is above recharge threshold, and device is not in DPM mode or thermal regulation. When a full battery voltage is discharged below recharge threshold (threshold selectable via <u>VRECHG[1:0]</u> bits), the device automatically starts a new charging cycle. After the charge is done, toggle either <u>CE</u> pin or EN\_CHG bit can initiate a new charging cycle.

The status register (CHRG\_STAT) indicates the different charging phases as:

- 000 Not Charging
- 001 Trickle Charge (VBAT < V<sub>BAT\_SHORT</sub>)
- 010 Pre-charge (V<sub>BAT\_SHORT</sub> < VBAT < V<sub>BAT\_LOWV</sub>)
- 011 Fast-charge (CC mode)
- 100 Taper Charge (CV mode)
- 101 Top-off Timer Active Charging
- 110 Charge Termination Done

When the charger transitions to any of these states, including when charge cycle is completed, an INT is asserted to notify the host.

### 8.3.7.2 Battery Charging Profile

The device charges the battery in five phases: trickle charge, pre-charge, constant current, constant voltage, and top-off trickle charging (optional). At the beginning of a charging cycle, the device checks the battery voltage and regulates current/voltage accordingly.

VBAT	CHARGING CURRENT	REGISTER DEFAULT SETTING	CHRG_STAT
< V <sub>BAT_SHORT</sub>	IBAT_SHORT	100 mA	001
$V_{BAT\_SHORT}$ to $V_{BAT\_LOWV}$	I <sub>PRECHG</sub>	150 mA	010
> V <sub>BAT_LOWV</sub> ICHG		1500 mA	011

### 表 6. Default Charging Current Setting



If the charger device is in DPM regulation or thermal regulation during charging, the actual charging current will be less than the programmed value. In this case, termination is temporarily disabled and the charging safety timer is counted at half the clock rate, as explained in the Charging Safety Timer section.

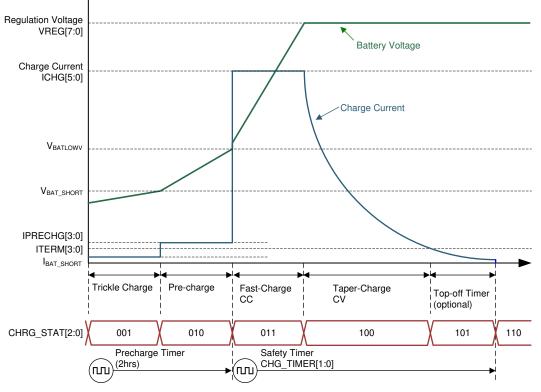


图 22. Battery Charging Profile

### 8.3.7.3 Charging Termination

The device terminates a charge cycle when the battery voltage is above recharge threshold, and the current is below termination current. After the charging cycle is completed, the BATFET turns off. The converter keeps running to power the system, and BATFET can turn on again to engage Supplement Mode.

When termination occurs, the status register CHRG\_STAT is set to 110, and an INT pulse is asserted to the host. Termination is temporarily disabled when the charger device is in input current, voltage or thermal regulation. Termination can be permanently disabled by writing 0 to EN\_TERM bit prior to charge termination.

At low termination currents (50 mA to100 mA), due to the comparator offset, the actual termination current may be up to 40% higher than the termination target. In order to compensate for comparator offset, a programmable top-off timer (default disabled) can be applied after termination is detected. The top-off timer will follow safety timer constraints, such that if safety timer is suspended, so will the top-off timer. Similarly, if safety timer is doubled, so will the top-off timer. CHRG\_STAT reports whether the top off timer is active via the 101 code. Once the Top-Off timer expires, the CHRG\_STAT register is set to 110 and an INT pulse is asserted to the host.

Top-off timer gets reset (set to 0 and counting resumes when appropriate) for any of the following conditions:

- 1. Charge disable to enable
- 2. Termination status low to high
- 3. REG\_RST register bit is set (disables top-off timer)

The top-off timer settings are read in once termination is detected by the charger. Programming a top-off timer value after termination will have no effect until a new charge cycle is initiated. An INT is asserted to the host when entering top-off timer segment as well as when top-off timer expires. All charge cycle related INT pulses (including top-off timer INT pulses) can be masked by CHRG\_MASK bit.



#### 8.3.7.4 Thermistor Qualification

The charger device provides a single thermistor input for battery temperature monitor.

#### 8.3.7.4.1 JEITA Guideline Compliance in Charge Mode

To improve the safety of charging Li-ion batteries, JEITA guideline was released on April 20, 2007. The guideline emphasized the importance of avoiding a high charge current and high charge voltage at certain low and high temperature ranges.

To initiate a charge cycle, the voltage on TS pin must be within the VT1 to VT5 thresholds. If TS voltage exceeds the T1-T5 range, the controller suspends charging and waits until the battery temperature is within the T1 to T5 range. At cool temperature (T1-T2), JEITA recommends the charge current to be reduced to half of the charge current or lower. At warm temperature (T3-T5), JEITA recommends charge voltage less than 4.1 V / cell.

The charger provides flexible voltage/current settings beyond the JEITA requirement. The voltage setting at warm temperature (T3-T5) can be VREG, 8.0 V, 8.3 V, or charge suspend (configured by JEITA\_VSET [1:0]). The fast charge current setting at warm temperature (T3-T5) can be 100%, or 40% of fast charge current, ICHG (configured by JEITA\_ISETH). The fast charge current setting at cool temperature (T1-T2) can be 100%, 40%, or 20% of fast charge current, ICHG, or charge suspend (configured by JEITA\_ISETC[1:0]). Whenever the charger detects "warm" or "cool" temperature, TERMINATION is automatically disabled regardless of JEITA\_VSET, JEITA\_ISETH and JEITA\_ISETC register bit settings.


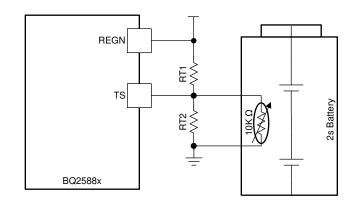


图 23. TS Resistor Network



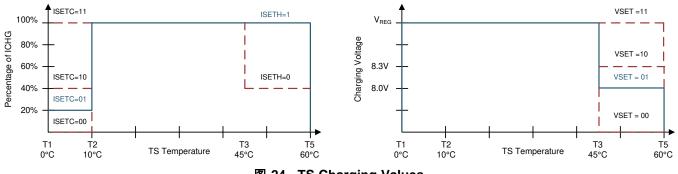

Assuming a 103AT NTC thermistor on the battery pack as shown above, the value of RT1 and RT2 can be determined by:

$$RT2 = \frac{V_{REGN} \times RTH_{COLD} \times RTH_{HOT} \times \left(\frac{1}{VT1} - \frac{1}{VT5}\right)}{RTH_{HOT} \times \left(\frac{V_{REGN}}{VT5} - 1\right) - RTH_{COLD} \times \left(\frac{V_{REGN}}{VT1} - 1\right)}$$
(1)



$$RT1 = \frac{\frac{V_{REGN}}{VT1} - 1}{\frac{1}{RT2} + \frac{1}{RTH_{COLD}}}$$

Select 0°C to 60°C range for Li-ion or Li-polymer battery:

 $RTH_{T1} = 27.28 \text{ k}\Omega$ 

 $RTH_{T5} = 3.02 \text{ k}\Omega$ 

RT1 = 5.24 kΩ

 $RT2 = 30.31 \text{ k}\Omega$ 

#### 8.3.7.4.2 Cold/Hot Temperature Window in OTG Buck Mode

For battery protection during OTG buck mode, the device monitors the battery temperature to be within the VBCOLD to VBHOT thresholds. When temperature is outside of the temperature thresholds, the OTG mode is suspended. In addition, VBUS\_STAT bits are set to 000 and corresponding TS\_STAT is reported. Once temperature returns within thresholds, the OTG mode is recovered and TS STAT is cleared.

VREGN	Temperature Range for OTG Buck Mode
VILLON	Buck Disable
V <sub>BCOLDx</sub> (-10°C / -20°C)	
(,	Buck Enable
V <sub>BHOTx</sub>	
(55°C / 60°C / 6	5°C)
	Buck Disable
GND —	

图 25. TS Pin Thermistor Sense Threshold in OTG Buck Mode

#### 8.3.7.5 Charging Safety Timer

The device has built-in safety timer to prevent extended charging cycle due to abnormal battery conditions. The user can program fast charge safety timer through I<sup>2</sup>C (CHG\_TIMER bits). When safety timer expires, the fault register TMR\_STAT bit is set to 1, and an INT pulse is asserted to the host. The safety timer feature can be disabled by clearing EN\_TIMER bit.

During input voltage, current or thermal regulation, the safety timer counts at half clock rate as the actual charge current is likely to be below the register setting. For example, if the charger is in input current regulation (IINDPM\_STAT=1) throughout the whole charging cycle, and the safety timer is set to 5 hours, then the timer will expire in 10 hours. This half clock rate feature can be disabled by setting TMR2X\_EN = 0. Changing the TMR2X\_EN bit while the device is running has no effect on the safety timer count, other than forcing the timer to count at half the rate under the conditions dictated above.

During faults which disable charging, or supplement mode, timer is suspended. Since the timer is not counting in this state, the TMR2X\_EN bit has no effect. Once the fault goes away, safety timer resumes. If the charging cycle is stopped and started again, the timer gets reset (toggle CE pin or EN\_CHG bit restarts the timer).

The safety timer is reset for the following events:

- 1. Charging cycle stop and restart (toggle CE pin, EN\_CHG bit, or charged battery falls below recharge threshold)
- 2. BAT voltage changes from pre-charge to fast-charge or vice versa (in host-mode or default mode)



www.ti.com.cn

(2)



The precharge safety timer (fixed 2hr counter that runs when VBAT <  $V_{BAT_SHORT}$ ), follows the same rules as the fast-charge safety timer in terms of getting suspended, reset, and counting at half-rate when TMR2X\_EN is set.

#### 8.3.8 Integrated 16-Bit ADC for Monitoring

The device includes a 16-bit ADC to monitor critical system information based on the device's modes of operation. The control of the ADC is done through the ADC Control Register (Address = 15h) [reset = 30h] register. The ADC\_EN bit provides the ability to enable and disable the ADC to conserve power. The ADC\_RATE bit allows continuous conversion or one-shot behavior. After a 1-shot conversion finishes, the ADC\_EN bit is cleared, and must be re-asserted to start a new conversion.

To enable the ADC, the ADC\_EN bit must be set to '1'. The ADC is allowed to operate if either the  $V_{VBUS}$ - $V_{VBUS}$ - $U_{VLOZ}$  or VBAT- $V_{BAT}$ - $U_{VLOZ}$  is valid. If no adapter is present, and the VBAT is less than  $V_{BAT}$ - $U_{VLOZ}$ , the device will not perform an ADC measurement, nor update the ADC read-back values in REG17 through REG24. Additionally, the device will immediately reset ADC\_EN bit without sending any interrupt. The same will happen if the ADC is enabled when all ADC channels are disabled. It is recommended to read back ADC\_EN after setting it to '1' to ensure ADC is running a conversion. If the charger changes mode (for example, if adapter is connected, EN\_HIZ goes to '1', or EN\_OTG goes to '1') while an ADC conversion is running, the conversion is interrupted. Once the mode change is complete, the ADC resumes conversion, starting with the channel where it was interrupted.

The ADC\_SAMPLE bits control the sample speed of the ADC, with conversion time of  $t_{ADC\_CONV}$ . The integrated ADC has two rate conversion options: a 1-shot mode and a continuous conversion mode set by the ADC\_RATE bit. By default, all ADC parameters will be converted in 1-shot or continuous conversion mode unless disabled in the ADC Function Disable Register (Address = 16h) [reset = 00h]. If an ADC parameter is disabled by setting the corresponding bit in REG16, then the read-back value in the corresponding register will be from the last valid ADC conversion or the default POR value (all zeros if no conversions have taken place). If an ADC parameter is disabled in the middle of an ADC measurement cycle, the device will finish the conversion of that parameter, but will not convert the parameter starting the next conversion cycle. Even though no conversion takes place when all ADC measurement parameters are disabled, the ADC circuitry is active and ready to begin conversion as soon as one of the bits in the ADC Function Disable register is set to '0'. If all channels are disabled in 1-shot conversion mode, the ADC\_EN bit is cleared.

The ADC\_DONE\_STAT and ADC\_DONE\_FLAG bits signal when a conversion is complete in 1-shot mode only. This event produces an INT pulse, which can be masked with ADC\_DONE\_MASK. During continuous conversion mode, the ADC\_DONE\_STAT bit has no meaning and will be '0'. The ADC\_DONE\_FLAG bit will remain unchanged in continuous conversion mode.

ADC conversion operates independently of the faults present in the device. ADC conversion will continue even after a fault has occurred (such as one that causes the power stage to be disabled), and the host must set ADC\_EN = '0' to disable the ADC. ADC conversion is interrupted upon adapter plug-in, and will only resume until after Input Source Type Detection is complete. ADC readings are only valid for DC states and not for transients. When host writes ADC\_EN = 0, the ADC stops immediately, and ADC measurement values correspond to last valid ADC reading.

If the host wants to exit ADC more gracefully, it is possible to do either of the following:

- 1. Write ADC\_RATE to one-shot, and the ADC will stop at the end of a complete cycle of conversions, or
- 2. Disable all ADC conversion channels, and the ADC will stop at the end of the current measurement.

## 8.3.9 Status Outputs (PG, and INT)

### 8.3.9.1 Power Good Indicator (PG)

The PG\_STAT bit goes HIGH and the  $\overline{PG}$  pin goes LOW to indicate a good input source when:

- 1. VBUS above V<sub>VBUS\_UVLOZ</sub>
- 2. VBUS below  $V_{VBUS_OV}$  threshold
- 3. VBUS above V<sub>POORSRC</sub> when I<sub>POORSRC</sub> current is applied (not a poor source)
- 4. Input Source Type Detection is completed

## 8.3.9.2 Interrupt to Host (INT)

In some applications, the host does not always monitor the charger operation. The  $\overline{INT}$  pin notifies the system host on the device operation. By default, the following events will generate an active-low, 256-µs INT pulse.

- 1. Good input source detected
  - V<sub>VBUS</sub> < V<sub>VBUS\_OV</sub> threshold
  - V<sub>VBUS</sub> > V<sub>POORSRC</sub> when I<sub>POORSRC</sub> current is applied (not a poor source)
- 2. VBUS\_STAT changes state (VBUS\_STAT any bit change)
- 3. Good input source removed
- 4. Entering IINDPM regulation
- 5. Entering VINDPM regulation
- 6. Entering IC junction temperature regulation (TREG)
- 7. I<sup>2</sup>C Watchdog timer expired
  - At initial power up, this INT gets asserted to signal I<sup>2</sup>C is ready for communication
- 8. Charger status changes state (CHRG\_STAT value change), including Charge Complete
- 9. TS\_STAT changes state (TS\_STAT any bit change)
- 10. VBUS overvoltage detected (VBUS\_OVP)
- 11. Junction temperature shutdown (TSHUT)
- 12. Battery overvoltage detected (BATOVP)
- 13. Charge safety timer expired
- 14. A rising edge on any of the \*\_STAT bits

Each one of these INT sources can be masked off to prevent INT pulses from being sent out when they occur. Three bits exist for each one of these events:

- The STAT bit holds the current status of each INT source
- The FLAG bit holds information on which source produced an INT, regardless of the current status
- The MASK bit is used to prevent the device from sending out INT for each particular event

When one of the above conditions occurs (a rising edge on any of the \*\_STAT bits), the device sends out an INT pulse and keeps track of which source generated the INT via the FLAG registers. The FLAG register bits are automatically reset to zero after the host reads them, and a new edge on STAT bit is required to re-assert the FLAG.



**IINDPM\_STAT IINDPM FLAG** TREG\_STAT TREG FLAG INT I2C Flag Read



#### 8.3.10 Input Current Limit on ILIM Pin

For safe operation, the device has an additional hardware pin on ILIM to limit maximum input current. The maximum input current is set by a resistor from ILIM pin to ground as:

$$I_{\rm INMAX} = \frac{K_{\rm ILIM}}{R_{\rm ILIM}}$$
(3)

The actual input current limit is the lower value between ILIM pin setting and register setting (IINDPM). For example, if the register setting is 3.3 A (0x1C), and ILIM has a 820- $\Omega$  resistor to ground, the input current limit is 1.43 A ( $K_{IIIM}$  = 1170 max). ILIM pin can be used to set the input current limit rather than the register settings when EN ILIM bit is set. The device regulates ILIM pin at 0.8 V. If ILIM voltage exceeds 0.8 V, the device enters input current regulation (refer to Dynamic Power Management section). Entering IINDPM through ILIM pin sets the IINDPM\_STAT and FLAG bits, and produces an interrupt to host. The interrupt can be masked via the IINDPM\_MASK bit.

The ILIM pin can also be used to monitor input current when EN ILIM is set and the device is not in ILIM regulation. The voltage on ILIM pin is proportional to the input current. ILIM can be used to monitor input current with the following relationship:

$$I_{IN} = \frac{K_{ILIM} \times V_{ILIM}}{R_{ILIM} \times 0.8V}$$
(4)

For example, if ILIM pin is set with 820-Ω resistor, and the ILIM voltage 0.5 V, the actual input current is 0.762 A to 0.892 A (based on KILIM specified). If ILIM pin is open, the input current is limited to zero since ILIM voltage floats above 0.8 V. If ILIM pin is shorted, the input current limit is set by the register.

The ILIM pin function can be disabled by setting the EN ILIM bit to 0. When the pin is disabled, both input current limit function and monitoring function are not available.

版权 © 2018-2019, Texas Instruments Incorporated

#### 8.3.11 Voltage and Current Monitoring

The device closely monitors the input and system voltage, as well as internal FET currents for safe boost and buck mode operation.

#### 8.3.11.1 Voltage and Current Monitoring in Boost Mode

#### 8.3.11.1.1 Input Over-voltage Protection

The valid input voltage range for boost mode operation is V<sub>VBUS\_OP</sub>. If VBUS voltage exceeds V<sub>VBUS\_OV</sub>, the device stops switching immediately to protect the power FETs. During input over-voltage, an INT pulse is asserted to signal the host, and the VBUS\_OVP\_STAT and VBUS\_OVP\_FLAG fault registers get set. The device automatically starts switching again when the over-voltage condition goes away.

## 8.3.11.1.2 Input Under-Voltage Protection

The valid input voltage range for boost mode operation is V<sub>VBUS OP</sub>. If VBUS voltage falls below V<sub>POORSRC</sub> during operation, the device stops switching. During input under-voltage, an INT pulse is asserted to signal the host, and the PG STAT bit gets cleared. The PG FLAG bit will get set to signal this event. The device automatically attempts to restart switching when the under-voltage condition goes away.

#### 8.3.11.1.3 System Over-Voltage Protection

The charger device clamps the system voltage during load transient so that the components connect to system would not be damaged due to high voltage. SYSOVP threshold is 350 mV above system regulation voltage. Upon SYSOVP, converter stops immediately to clamp the overshoot.

#### 8.3.11.1.4 System Over-Current Protection

The charger device continually monitors and compares VBUS to VSYS to protect against a system short-circuit event. In the event that VSYS drops to within 250 mV of VBUS during operation, and the input current exceeds IINDPM threshold, a short circuit event is flagged and the converter stops switching. The SYS\_SHORT\_FLAG bit is set and an INT pulse is asserted to the host. The device attempts to recover from this condition automatically.

#### 8.3.11.2 Voltage and Current Monitoring in OTG Buck Mode

The device closely monitors the VBUS voltage, as well as RBFET (Q1, QBLK) and LSFET (Q3, QLS) current to ensure safe buck mode operation.

#### 8.3.11.2.1 VBUS Over-Voltage Protection

When the VBUS voltage rises above regulation target and exceeds V<sub>OTG\_OVP</sub>, the device enters over-voltage protection which stops switching, clears the EN\_OTG bit and exits buck mode. During the over-voltage duration, the OTG STAT and OTG FLAG bits are set high to indicate a fault in buck mode operation. An INT is also asserted to the host.

#### 8.3.11.2.2 VBUS Over-Current Protection

The device monitors output current to provide output short protection. The OTG buck mode has built-in constant current regulation to allow OTG to adapt to various types of loads. If short circuit is detected on VBUS, the OTG turns off and OTG is disabled with EN OTG bit cleared. In addition OTG STAT and OTG FLAG bits are set high to indicate the fault, and an INT is asserted to the host.

#### 8.3.12 Thermal Regulation and Thermal Shutdown

#### 8.3.12.1 Thermal Protection in Boost Mode

30

The device monitors internal junction temperature, T<sub>J</sub>, to avoid overheating and limits the IC surface temperature in boost mode. When the internal junction temperature exceeds the preset thermal regulation limit (TREG bits), the device reduces charge current. A wide thermal regulation range from 60°C to 120°C allows optimization for the system thermal performance.

During thermal regulation, the actual charging current is usually below the programmed value in ICHG registers. Therefore, termination is disabled, the safety timer runs at half the clock rate, the status register TREG\_STAT bit goes high, and an INT is asserted to the host.





Additionally, the device has thermal shutdown to turn off the converter when IC surface temperature exceeds  $T_{SHUT}$ . The fault register bits TSHUT\_STAT and TSHUT\_FLAG are set and an INT pulse is asserted to the host. The converter turns back on when IC temperature is below  $T_{SHUT}$  HYS.

#### 8.3.12.2 Thermal Protection in OTG Buck Mode

The device monitors the internal junction temperature to provide thermal shutdown during OTG buck mode. When IC surface temperature exceeds  $T_{SHUT}$ , the buck mode is disabled (converter is turned off) by setting EN\_OTG bit low. The fault register bits TSHUT\_STAT and TSHUT\_FLAG are set and an INT pulse is asserted to the host. When IC surface temperature is below  $T_{SHUT_HYS}$  (typ. 30°C), the host can set EN\_OTG bit to '1' to recover.

#### 8.3.13 Battery Protection

#### 8.3.13.1 Battery Overvoltage Protection (BATOVP)

The battery over-voltage limit is clamped at 4% above the battery regulation voltage while charging. When battery overvoltage occurs, the charger device immediately disables charge. The fault register BATOVP\_STAT bit goes high and an INT pulse is asserted to signal the host.

#### 8.3.13.2 Battery Over-Discharge Protection

When the battery is discharged below  $V_{BAT_UVLOZ}$ , the BATFET is turned off to protect battery from overdischarge. To recover from over-discharge, an input source is required at VBUS. When an input source is plugged in, the BATFET turns on. The battery is charged with  $I_{BAT_SHORT}$  current when the VBAT <  $V_{BAT_SHORT}$ , or pre-charge current as set in IPRECHG registers when the battery voltage is between  $V_{BAT_SHORT}$  and  $V_{BAT_LOWV}$ .

#### 8.3.14 Serial Interface

The device uses I<sup>2</sup>C compatible interface for flexible charging parameter programming and instantaneous device status reporting. I<sup>2</sup>C is a bi-directional 2-wire serial interface. Only two open-drain bus lines are required: a serial data line (SDA), and a serial clock line (SCL). Devices can be considered as masters or slaves when performing data transfers. A master is a device which initiates a data transfer on the bus and generates the clock signals to permit that transfer. At that time, any device addressed is considered a slave.

The device operates as a slave device with address 0x6B, receiving control inputs from the master device like micro-controller or digital signal processor through REG00 – REG25. Register read beyond REG25 (0x25), returns 0xFF. The I<sup>2</sup>C interface supports both standard mode (up to 100 kbits/s), and fast mode (up to 400 kbits/s). When the bus is free, both lines are HIGH. The SDA and SCL pins are open drain and must be connected to the positive supply voltage via a current source or pull-up resistor.

#### 8.3.14.1 Data Validity

The data on the SDA line must be stable during the HIGH period of the clock. The HIGH or LOW state of the data line can only change when the clock signal on SCL line is LOW. One clock pulse is generated for each data bit transferred.

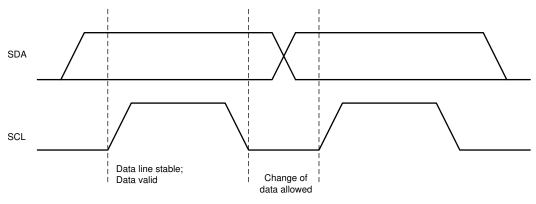


图 27. Bit Transfers on the I<sup>2</sup>C bus



#### 8.3.14.2 START and STOP Conditions

All transactions begin with a START (S) and are terminated with a STOP (P). A HIGH to LOW transition on the SDA line while SCL is HIGH defines a START condition. A LOW to HIGH transition on the SDA line when the SCL is HIGH defines a STOP condition.

START and STOP conditions are always generated by the master. The bus is considered busy after the START condition, and free after the STOP condition.

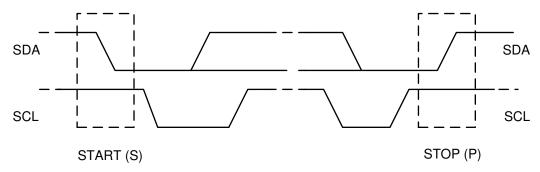


图 28. START and STOP Conditions on the  $I^2C$  Bus

#### 8.3.14.3 Byte Format

Every byte on the SDA line must be 8 bits long. The number of bytes to be transmitted per transfer is unrestricted. Each byte has to be followed by an ACKNOWLEDGE (ACK) bit. Data is transferred with the Most Significant Bit (MSB) first. If a slave cannot receive or transmit another complete byte of data until it has performed some other function, it can hold the SCL line low to force the master into a wait state (clock stretching). Data transfer then continues when the slave is ready for another byte of data and releases the SCL line.

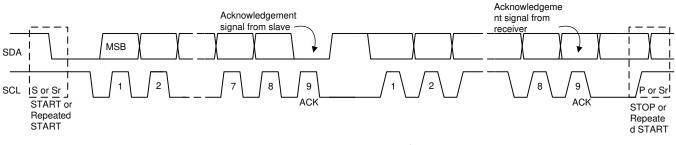


图 29. Data Transfer on the I<sup>2</sup>C Bus

### 8.3.14.4 Acknowledge (ACK) and Not Acknowledge (NACK)

The ACK signaling takes place after byte. The ACK bit allows the receiver to signal the transmitter that the byte was successfully received and another byte may be sent. All clock pulses, including the acknowledge 9<sup>th</sup> clock pulse, are generated by the master.


The transmitter releases the SDA line during the acknowledge clock pulse so the receiver can pull the SDA line LOW and it remains stable LOW during the HIGH period of this 9<sup>th</sup> clock pulse.

A NACK is signaled when the SDA line remains HIGH during the 9<sup>th</sup> clock pulse. The master can then generate either a STOP to abort the transfer or a repeated START to start a new transfer.

#### 8.3.14.5 Slave Address and Data Direction Bit

After the START signal, a slave address is sent. This address is 7 bits long, followed by the 8 bit as a data direction bit (bit R/W). A zero indicates a transmission (WRITE) and a one indicates a request for data (READ). The device 7-bit address is defined as 1101 011' (0x6B) by default. The address bit arrangement is shown below.



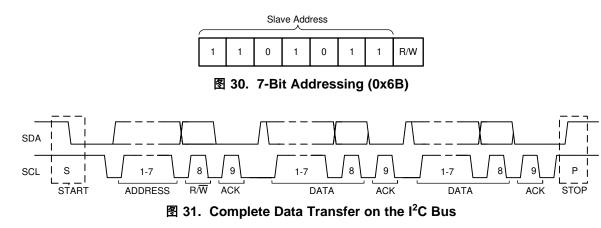

#### 8.3.14.6 Single Write and Read

1	7	1	1	8	1	8	1	1
S	Slave Address	0	ACK	Reg Addr	ACK	Data to Addr	ACK	Р

#### 图 32. Single Write




图 33. Single Read

If the register address is not defined, the charger IC sends back NACK and returns to the idle state.

### 8.3.14.7 Multi-Write and Multi-Read

The charger device supports multi-read and multi-write of all registers.




图 34. Multi-Write




图 35. Multi-Read

### 8.4 Device Functional Modes

#### 8.4.1 Host Mode and Default Mode

The device is a host controlled charger, but it can operate in default mode without host management. In default mode, the device can be used as an autonomous charger with no host or while host is in sleep mode. When the charger is in default mode, WD\_STAT bit is HIGH. When the charger is in host mode, WD\_STAT bit is LOW.

After power-on-reset, the device starts in default mode with watchdog timer expired, or default mode. All the registers are in the default settings.

In default mode, the device keeps charging the battery with default 10-hour fast charging safety timer. At the end of the 10-hour, the charging is stopped and the boost converter continues to operate to supply system load.

A write to any  $I^2C$  register transitions the charger from default mode to host mode, and initiates the watchdog timer. All the device parameters can be programmed by the host. To keep the device in host mode, the host has to reset the watchdog timer by writing 1 to WD\_RST bit before the watchdog timer expires (WD\_STAT bit is set), or disable watchdog timer by setting WATCHDOG bits = 00.

When the watchdog timer (WD\_STAT bit = 1) is expired, the device returns to default mode and all registers are reset to default values except as detailed in the Register Maps section.




图 36. Watchdog Timer Flow Chart



## 8.5 Register Maps

Default I<sup>2</sup>C Slave Address: 0x6B (1101 011B +  $R/\overline{W}$ )

Address	Access Type	Acronym	Register Name	Section
00h	R/W	REG00	Battery Voltage Limit	Go
01h	R/W	REG01	Charge Current Limit	Go
02h	R/W	REG02	Input Voltage Limit	Go
03h	R/W	REG03	Input Current Limit	Go
04h	R/W	REG04	Precharge and Termination Control	Go
05h	R/W	REG05	Charger Control 1	Go
06h	R/W	REG06	Charger Control 2	Go
07h	R/W	REG07	Charger Control 3	Go
08h	R/W	REG08	Charger Control 4	Go
09h	R/W	REG09	OTG Control	Go
0Ah	R	REG0A	ICO Current Limit	Go
0Bh	R	REG0h	Charger Status 1	Go
0Ch	R	REG0C	Charger Status 2	Go
0Dh	R	REG0D	NTC Status	Go
0Eh	R	REG0E	FAULT Status	Go
0Fh	R	REG0F	Charger Flag 1	Go
10h	R	REG10	Charger Flag 2	Go
11h	R	REG11	Fault Flag	Go
12h	R/W	REG12	Charger Mask 1	Go
13h	R/W	REG13	Charger Mask 2	Go
14h	R/W	REG14	Fault Mask	Go
15h	R/W	REG15	ADC Control	Go
16h	R/W	REG16	ADC Function Disable	Go
17h	R	REG17	IBUS ADC1	Go
18h	R	REG18	IBUS ADC0	Go
19h	R	REG19	ICHG ADC1	Go
1Ah	R	REG1A	ICHG ADC0	Go
1Bh	R	REG1B	VBUS ADC1	Go
1Ch	R	REG1C	VBUS ADC0	Go
1Dh	R	REG1D	VBAT ADC1	Go
1Eh	R	REG1E	VBAT ADC0	Go
1Fh	R	REG1F	VSYS ADC1	Go
20h	R	REG20	VSYS ADC0	Go
21h	R	REG21	TS ADC1	Go
22h	R	REG22	TS ADC0	Go
23h	R	REG23	TDIE ADC1	Go
24h	R	REG24	TDIE ADC0	Go
25h	R/W	REG25	Part Information	Go

## 表 7. I<sup>2</sup>C Registers

Complex bit access types are encoded to fit into small table cells.  $\frac{1}{8}$  8 shows the codes that are used for access types in this section.



ACCESS TYPE	CODE	DESCRIPTION			
Read Type	Read Type				
R	R	Read			
Write Type	Write Type				
W	W	Write			
Reset Value					
-n		Value after reset			
-X		Undefined value			

## 表 8. I<sup>2</sup>C Access Type Codes



# 8.5.1 Battery Voltage Regulation Limit Register (Address = 00h) [reset = A0h]

REG00 is shown in 图 37 and described in 表 9.

Return to Summary Table.

# 图 37. REG00 Register

Bit	7	6	5	4	3	2	1	0	
Reset	1	0	1	0	0	0	0	0	
Field		VREG[7:0]							

### 表 9. REG00 Register Field Descriptions

Bit	Field	Туре	Reset by REG_RST	Reset by WATCHDOG	Description	I
7	VREG[7]	R/W	Yes	Yes	1280 mV	Charge voltage limit
6	VREG[6]	R/W	Yes	Yes	640 mV	Offset: 6.80 V
5	VREG[5]	R/W	Yes	Yes	320 mV	Range: 6.80 V to 9.20 V
4	VREG[4]	R/W	Yes	Yes	160 mV	Default 8.40 V
3	VREG[3]	R/W	Yes	Yes	80 mV	
2	VREG[2]	R/W	Yes	Yes	40 mV	
1	VREG[1]	R/W	Yes	Yes	20 mV	
0	VREG[0]	R/W	Yes	Yes	10 mV	



# 8.5.2 Charger Current Limit Register (Address = 01h) [reset = 54h]

REG01 is shown in 图 38 and described in 表 10.

Return to Summary Table.

### 图 38. REG01 Register

Bit	7	6	5	4	3	2	1	0	
Reset	0	1	0	1	0	1	0	0	
Field	EN_HIZ	EN_ILIM	ICHG[5:0]						

### 表 10. REG01 Register Field Descriptions

Bit	Field	Туре	Reset by REG_RST	Reset by WATCHDOG	Description	1
7	EN_HIZ	R/W	Yes	Yes	Enable HIZ Mode: 0 – Disable (default) 1 – Enable	
6	EN_ILIM	R/W	Yes	Yes	Enable ILIM Pin Function: 0 – Disable 1 – Enable (default)	
5	ICHG[5]	R/W	Yes	Yes	1600 mA	Fast Charge Current Limit
4	ICHG[4]	R/W	Yes	Yes	800 mA	Offset: 0 mA
3	ICHG[3]	R/W	Yes	Yes	400 mA	Range: 100 mA – 2200 mA Default: 1000 mA
2	ICHG[2]	R/W	Yes	Yes	200 mA Note: ICHG > 2.2 A (2Ch) clamped to 2.2 A. ICHG < 100	
1	ICHG[1]	R/W	Yes	Yes	100 mA clamped at 100 mA	
0	ICHG[0]	R/W	Yes	Yes	50 mA	



# 8.5.3 Input Voltage Limit Register (Address = 02h) [reset = 85h]

REG02 is shown in 图 39 and described in 表 11.

Return to Summary Table.

### 图 39. REG02 Register

Bit	7	6	5	4	3	2	1	0
Reset	1	0	0	0	0	1	0	1
Field	EN_VINDPM_ RST	EN_BAT_ DISCHG	PFM_OOA_DIS			VINDPM[4:0]		

Bit	Field	Туре	Reset by REG_RST	Reset by WATCHDOG	Description		
7	EN_VINDPM_RST	R/W	Yes	Yes	Enable VINDPM automatic reset upon adapter plugin: 0 – Disable VINDPM reset when adapter is plugged in 1 – Enable VINDPM reset when adapter is plugged in (VINDPM resets to def value after Input Source Type Detection)		
6	EN_BAT_DISCHG	R/W	Yes	Yes	Enable BAT pin discharge load (I <sub>BAT_DISCHG</sub> ): 0 – Disable load (Default) 1 – Enable BAT discharge load		
5	PFM_OOA_DIS	R/W	Yes	No	0 – Out-of-a	f-Audio (OOA) Mode Disable: audio mode enabled while in converter is in PFM (Default) audio mode disabled while in converter is in PFM	
4	VINDPM[4]	R/W	Yes	No	1600 mV	Absolute Input Voltage Limit:	
3	VINDPM[3]	R/W	Yes	No	800 mV Offset: 3.9 V		
2	VINDPM[2]	R/W	Yes	No	400 mV Range: 3.9 V – 5.5 V Default: 4.4 V		
1	VINDPM[1]	R/W	Yes	No	200 mV Note: VINDPM > 5.5 V (10h) clamped to 5.5 V. VINDPM re		
0	VINDPM[0]	R/W	Yes	No	100 mV	reset upon adapter plug-in if EN_VINDPM_RST = 1.	

### 表 11. REG02 Register Field Descriptions



# 8.5.4 Input Current Limit Register (Address = 03h) [reset = 39h]

REG03 is shown in  $\[mathbb{8]$  40 and described in  $\[mathbb{5]$  12.

Return to Summary Table.

### 图 40. REG03 Register

Bit	7	6	5	4	3	2	1	0
Reset	0	0	1	1	1	0	0	1
Field	FORCE_ICO	FORCE_INDET	EN_ICO			IINDPM[4:0]		

### 表 12. REG03 Register Field Descriptions

Bit	Field	Туре	Reset by REG_RST	Reset by WATCHDOG	Description		
7	FORCE_ICO	R/W	Yes	Yes	Force Start Input Current Optimizer (ICO): 0 – Do not force ICO (default) 1 – Force ICO start Note: This bit can only be set and always returns 0 after ICO starts. This bit valid when EN_ICO = 1		
6	FORCE_INDET	R/W	Yes	Yes	Force D+/D– Detection: 0 – Not in D+/D– detection (default) 1 – Force D+/D– detection		
5	EN_ICO	R/W	Yes	No	0 – Disable	nt Optimization (ICO) Algorithm Control: ICO ICO (default)	
4	IINDPM[4]	R/W	Yes	No	1600 mA	Input Current Limit:	
3	IINDPM[3]	R/W	Yes	No	800 mA         Offset: 500 mA           400 mA         Range: 500 mA – 3300 mA           Default: 3000 mA		
2	IINDPM[2]	R/W	Yes	No			
1	IINDPM[1]	R/W	Yes	No	200 mA Note: IINDPM > 3300 mA (1Ch) clamped to 3300 mA. Act		
0	IINDPM[0]	R/W	Yes	No	100 mA	current limit is lower of I <sup>2</sup> C or ILIM pin.	



# 8.5.5 Precharge and Termination Current Limit Register (Address = 04h) [reset = 22h]

REG04 is shown in 图 41 and described in 表 13.

Return to Summary Table.

### 图 41. REG04 Register

Bit	7	6	5	4	3	2	1	0
Reset	0	0	1	0	0	0	1	0
Field		IPREC	HG[3:0]			ITERI	V[3:0]	

### 表 13. REG04 Register Field Descriptions

Bit	Field	Туре	Reset by REG_RST	Reset by WATCHDOG	Description	n
7	IPRECHG[3]	R/W	Yes	Yes	400 mA	Precharge Current Limit:
6	IPRECHG[2]	R/W	Yes	Yes	200 mA	Offset: 50 mA
5	IPRECHG[1]	R/W	Yes	Yes	100 mA	Range: 50 mA – 800 mA Default: 150 mA
4	IPRECHG[0]	R/W	Yes	Yes	50 mA	
3	ITERM[3]	R/W	Yes	Yes	400 mA	Termination Current Limit:
2	ITERM[2]	R/W	Yes	Yes	200 mA	Offset: 50 mA
1	ITERM[1]	R/W	Yes	Yes	100 mA	Range: 50 mA – 800 mA Default: 150 mA
0	ITERM[0]	R/W	Yes	Yes	50 mA	



# 8.5.6 Charger Control 1 Register (Address = 05h) [reset = 9Dh]

REG05 is shown in 图 42 and described in 表 14.

Return to Summary Table.

### 图 42. REG05 Register

Bit	7	6	5	4	3	2	1	0
Reset	1	0	0	1	1	1	0	1
Field	EN_TERM	RESERVED	WATCHDOG[1:0]		EN_TIMER	CHG_TI	MER[1:0]	TMR2X_EN

#### 表 14. REG05 Register Field Descriptions

Bit	Field	Туре	Reset by REG_RST	Reset by WATCHDOG	Description
7	EN_TERM	R/W	Yes	Yes	Termination Control: 0 – Disable termination 1 – Enable termination (default)
6	RESERVED	R/W	Yes	Yes	Reserved bit always reads 0
5	WATCHDOG[1]	R/W	Yes	Yes	I2C Watchdog Timer Settings:
4	WATCHDOG[0]	R/W	Yes	Yes	00 – Disable WD Timer 01 – 40s (default) 10 – 80s 11 – 160s
3	EN_TIMER	R/W	Yes	Yes	Charging Safety Timer Enable 0 – Disable 1 – Enable (Default)
2	CHG_TIMER[1]	R/W	Yes	Yes	Fast Charge Timer Setting
1	CHG_TIMER[0]	R/W	Yes	Yes	00 – 5 hrs 01 – 8 hrs 10 – 12 hrs (Default) 11 – 20 hrs
0	TMR2X_EN	R/W	Yes	Yes	Safety Timer during DPM or TREG 0 – Safety timer always count normally 1 – Safety timer slowed by 2X during input DPM or TREG (Default)

**System Note:** When the WATCHDOG bits are changed (writing the same value does not change WATCHDOG bit), the internal counter is reset. The same applies for the CHG\_TIMER bits. Only changing the value in the register will reset the CHG\_TIMER



# 8.5.7 Charger Control 2 Register (Address = 06h) [reset = 7Dh]

REG06 is shown in 图 43 and described in 表 15.

Return to Summary Table.

# 图 43. REG06 Register

Bit	7	6	5	4	3	2	1	0
Reset	0	1	1	1	1	1	0	1
Field	EN_OTG	AUTO_INDET_ EN	TREC	G[1:0]	EN_CHG	BATLOWV	VREC	HG[1:0]

Bit	Field	Туре	Reset by REG_RST	Reset by WATCHDOG	Description
7	EN_OTG	R/W	Yes	Yes	Buck (OTG) Mode control: 0 – Disable OTG (default) 1 – Enable OTG Note: If EN_OTG and EN_CHG are set simultaneously, EN_CHG takes priority
6	AUTO_INDET_EN	R/W	Yes	Yes	Automatic Input Source Detection Enable: 0 – Disable D+/D– detection when VBUS plugs in 1 – Enable D+/D– detection when VBUS plugs in (default)
5	TREG[1]	R/W	Yes	Yes	Thermal Regulation Threshold
4	TREG[0]	R/W	Yes	Yes	00 – 60°C 01 – 80°C 10 – 100°C 11 – 120°C (Default)
3	EN_CHG	R/W	Yes	Yes	Charger Enable Configuration 0 – Charge Disable 1 – Charge Enable (default) Note: If EN_OTG and EN_CHG are set simultaneously, EN_CHG takes priority
2	BATLOWV	R/W	Yes	Yes	Battery precharge to fast-charge threshold: 0 - 5.6 V 1 - 6.0 V (default)
1	VRECHG[1]	R/W	Yes	No	200 mV Battery Recharge Threshold Offset (below VREG):
0	VRECHG[0]	R/W	Yes	No	100 mV         Offset: 100 mV           Range: 100 mV – 400 mV         Default: 200 mV

# 表 15. REG06 Register Field Descriptions



# 8.5.8 Charger Control 3 Register (Address = 07h) [reset = 0Ah]

REG07 is shown in 图 44 and described in 表 16.

Return to Summary Table.

# 图 44. REG07 Register

Bit	7	6	5	4	3	2	1	0
Reset	0	0	0	0	1	0	1	0
Field	PFM_DIS	WD_RST	TOPOFF_	TIMER[1:0]		SYS_N	/IN[3:0]	

### 表 16. REG07 Register Field Descriptions

Bit	Field	Туре	Reset by REG_RST	Reset by WATCHDOG	Description	1		
7	PFM_DIS	R/W	Yes	No	0 – Enable	Disable control: PFM operation (default) PFM operation		
6	WD_RST	R/W	Yes	Yes	I2C Watchdog Timer Reset: 0 – Normal 1 – Reset (Bit goes back to 0 after timer reset)			
5	TOPOFF_TIMER[1]	R/W	Yes	Yes	Top-off Timer Control :			
4	TOPOFF_TIMER[0]	R/W	Yes	Yes	00 – Disabled (default) 01 – 15 mins 10 – 30 mins 11 – 45 mins			
3	SYS_MIN[3]	R/W	Yes	No	800 mV	Minimum System Voltage Limit		
2	SYS_MIN[2]	R/W	Yes	No	400 mV Offset: 6.0 V Range: 6.0 V – 7.5 V			
1	SYS_MIN[2]	R/W	Yes	No	200 mV Default: 7.0 V			
0	SYS_MIN[0]	R/W	Yes	No	100 mV			



# 8.5.9 Charger Control 4 Register (Address = 08h) [reset = 0Dh]

REG08 is shown in 图 45 and described in 表 17.

Return to Summary Table.

# 图 45. REG08 Register

Bit	7	6	5	4	3	2	1	0
Reset	0	0	0	0	1	1	0	1
Field	BHO	T[1:0]	BCOLD	JEITA_VSET[1:0]		JEITA_ISETH	JEITA_ISETC[1:0]	

# 表 17. REG08 Register Field Descriptions

Bit	Field	Туре	Reset by REG_RST	Reset by WATCHDOG	Description
7	BHOT[1]	R/W	Yes	Yes	OTG Mode TS HOT Temperature Threshold:
6	BHOT[0]	R/W	Yes	Yes	00 – VBHOT1 threshold (34.75%) (default) 01 – VBHOT0 threshold (37.75%) 10 – VBHOT2 threshold (31.25%) 11 – Disable OTG mode thermal protection
5	BCOLD	R/W	Yes	Yes	OTG Mode TS COLD Temperature Threshold: 0 – VBCOLD0 threshold (77%) (default) 1 – VBCOLD1 threshold (80%)
4	JEITA_VSET[1]	R/W	Yes	Yes	JEITA High Temp. (45°C – 60°C) Voltage Setting:
3	JEITA_VSET[0]	R/W	Yes	Yes	00 – Charge Suspend 01 – Set VREG to 8.0 V (default) 10 – Set VREG to 8.3 V 11 – VREG unchanged
2	JEITA_ISETH	R/W	Yes	Yes	JEITA High Temp. (45°C – 60°C) Current Setting (percentage with respect to ICHG REG01[5:0]): $0 - 40\%$ of ICHG $1 - 100\%$ of ICHG (default)
1	JEITA_ISETC[1]	R/W	Yes	Yes	JEITA Low Temp. (0°C - 10°C) Current Setting (percentage with respect to
0	JEITA_ISETC[0]	R/W	Yes	Yes	ICHG REG01[5:0]): 00 - Charge Suspend 01 - 20% of ICHG (default) 10 - 40% of ICHG 11 - 100% of ICHG



# 8.5.10 OTG Control Register (Address = 09h) [reset = F6h]

REG09 is shown in 图 46 and described in 表 18.

Return to Summary Table.

### 图 46. REG09 Register

Bit	7	6	5	4	3	2	1	0	
Reset	1	1	1	1	0	1	1	0	
Field		OTG_II	IM[3:0]		OTG_VLIM[3:0]				

表 18. REG09 Register Field Descriptions

Bit	Field	Туре	Reset by REG_RST	Reset by WATCHDOG	Description				
7	OTG_ILIM[3]	R/W	Yes	Yes	800 mA	Buck (OTG) Mode Current Limit:			
6	OTG_ILIM[2]	R/W	Yes	Yes	400 mA	Offset: 0.5 A Range: 0.5 A – 2.0 A			
5	OTG_ILIM[1]	R/W	Yes	Yes	200 mA	Default: 2 A			
4	OTG_ILIM[0]	R/W	Yes	Yes	100 mA				
3	OTG_VLIM[3]	R/W	Yes	Yes	800 mV	Buck (OTG) Mode Regulation Voltage:			
2	OTG_VLIM[2]	R/W	Yes	Yes	400 mV	Offset: 4.5 V Range: 4.5 V – 5.5 V			
1	OTG_VLIM[1]	R/W	Yes	Yes	200 mV	Default: 5.1 V			
0	OTG_VLIM[0]	R/W	Yes	Yes	100 mV	Note: Values above 5.5 V (Ah) will be clamped to 5.5 V			



# 8.5.11 ICO Current Limit Register (Address = 0Ah) [reset = XXh]

REG0A is shown in 图 47 and described in 表 19.

Return to Summary Table.

### 图 47. REG0A Register

Bit	7	6	5	4	3	2	1	0	
Reset	0	0	0	х	х	х	х	х	
Field	RESERVED	RESERVED	RESERVED	ICO ILIM[4:0]					

### 表 19. REG0A Register Field Descriptions

Bit	Field	Туре	Reset by REG_RST	Reset by WATCHDOG	Description				
7	RESERVED	R	No	No	Reserved bit always reads 0				
6	RESERVED	R	No	No	Reserved bit always reads 0				
5	RESERVED	R	No	No	Reserved bit always reads 0				
4	ICO_ILIM[4]	R	No	No	1600 mA	Input Current Limit when ICO is enabled:			
3	ICO_ILIM[3]	R	No	No	800 mA	Offset: 500 mA Range: 500 mA – 3300 mA			
2	ICO_ILIM[2]	R	No	No	400 mA				
1	ICO_ILIM[1]	R	No	No	200 mA				
0	ICO_ILIM[0]	R	No	No	100 mA				



# 8.5.12 Charger Status 1 Register (Address = 0Bh) [reset = XXh]

REG0B is shown in 图 48 and described in 表 20.

Return to Summary Table.

### 图 48. REG0B Register

Bit	7	6	5	4	3	2	1	0	
Reset	х	Х	Х	Х	Х	Х	Х	Х	
Field	ADC_DONE_ STAT	IINDPM_STAT	VINDPM_STAT	TREG_STAT	WD_STAT	CHRG_STAT[2:0]			

#### Reset by REG\_RST Reset by WATCHDOG Bit Field Туре Description 7 ADC\_DONE\_STAT R No No ADC Conversion Status (in one-shot mode only): 0 - Conversion not complete 1 - Conversion complete Note: Always reads 0 in continuous mode IINDPM\_STAT R **IINDPM Status:** 6 No No 0 - Normal 1 - In IINDPM Regulation (ILIM pin or IINDPM register) VINDPM Status: 5 VINDPM\_STAT R No No 0 – Normal 1 - In VINDPM Regulation 4 TREG\_STAT R No No IC Thermal regulation Status: 0 – Normal 1 - In Thermal Regulation I2C Watchdog Timer Status bit: 3 WD\_STAT R No No 0 – Normal 1 - WD Timer expired 2 CHRG\_STAT[2] R No No Charge Status bits: 000 – Not Charging 001 – Trickle Charge (VBAT < VBAT\_SHORT) 010 – Pre-charge (VBAT\_SHORT < VBAT < VBAT\_LOWV) 1 CHRG\_STAT[1] R No No 0 CHRG\_STAT[0] R No No 011 - Fast-charge (CC mode) 100 - Taper Charge (CV mode) 101 – Top-off Timer Charging 110 – Charge Termination Done 111 - Reserved

### 表 20. REG0B Register Field Descriptions



# 8.5.13 Charger Status 2 Register (Address = 0Ch) [reset = XXh]

REG0C is shown in 图 49 and described in 表 21.

Return to Summary Table.

# 图 49. REG0C Register

Bit	7	6	5	4	3	2	1	0
Reset	х	Х	Х	Х	0	Х	Х	х
Field	PG_STAT	VBUS_STAT[2:0]			RESERVED	ICO_STAT[1]	ICO_STAT[0]	VSYS_STAT

表 21. REG0C Register Field Descriptions

Bit	Field	Туре	Reset by REG_RST	Reset by WATCHDOG	Description
7	PG_STAT	R	No	No	Power Good Status: 0 – Not Power Good 1 – Power Good
6	VBUS_STAT[2]	R	No	No	VBUS Detection Status
5	VBUS_STAT[1]	R	No	No	000 – No Input 001 – USB Host SDP
4	VBUS_STAT[0]	R	No	No	010 – USB CDP (1.5 A) 011 – USB DCP (3.0 A) 100 – POORSRC detected 7 consecutive times 101 – Unknown Adapter (500 mA) 110 – Non-standard Adapter (1 A/2 A/2.1 A/2.4 A) 111 – OTG
3	RESERVED	R	No	No	Reserved bit always reads 0
2	ICO_STAT[1]	R	No	No	Input Current Optimizer (ICO) Status:
1	ICO_STAT[0]	R	No	No	00 – ICO Disabled 01 – ICO Optimization is in progress 10 – Maximum input current detected 11 – Reserved
0	VSYS_STAT	R	No	No	VSYS Regulation Status: 0 – Not in SYS_MIN regulation (BAT > VSYS_MIN) 1 – In SYS_MIN regulation (BAT < VSYS_MIN)



# 8.5.14 NTC Status Register (Address = 0Dh) [reset = 0Xh]

REG0D is shown in  $\[mathbb{B}\]$  50 and described in  $\[mathbb{R}\]$  22.

Return to Summary Table.

# 图 50. REG0D Register

Bit	7	6	5	4	3	2	1	0	
Reset	0	0	0	0	0	Х	Х	Х	
Field	RESERVED	RESERVED	RESERVED	RESERVED	RESERVED	TS_STAT[2:0]			

表 22. REG0D Register Field Descriptions

Bit	Field	Туре	Reset by REG_RST	Reset by WATCHDOG	Description
7	RESERVED	R	No	No	Reserved bit always reads 0
6	RESERVED	R	No	No	Reserved bit always reads 0
5	RESERVED	R	No	No	Reserved bit always reads 0
4	RESERVED	R	No	No	Reserved bit always reads 0
3	RESERVED	R	No	No	Reserved bit always reads 0
2	TS_STAT[2]	R	No	No	NTC (TS) Status:
1	TS_STAT[1]	R	No	No	000 – Normal 010 – TS Warm
0	TS_STAT[0]	R	No	No	011 – TS Cool 101 – TS Cold 110 – TS Hot



# 8.5.15 FAULT Status Register (Address = 0Eh) [reset = XXh]

REG0E is shown in  $\[mathbb{B}\]$  51 and described in  $\[mathbb{R}\]$  23.

Return to Summary Table.

# 图 51. REG0E Register

Bit	7	6	5	4	3	2	1	0
Reset	х	Х	Х	Х	0	0	0	0
Field	VBUS_OVP_ STAT	TSHUT_STAT	BATOVP_STAT	TMR_STAT	RESERVED	RESERVED	RESERVED	RESERVED

# 表 23. REG0E Register Field Descriptions

Bit	Field	Туре	Reset by REG_RST	Reset by WATCHDOG	Description			
7	VBUS_OVP_STAT	R	No	No	Input overvoltage Status: 0 – Normal 1 – Device in overvoltage protection			
6	TSHUT_STAT	R	No	No	IC Temperature shutdown Status: 0 – Normal 1 – Device in thermal shutdown protection			
5	BATOVP_STAT	R	No	No	Battery over-voltage Status: 0 – Normal 1 – BATOVP (VBAT > VBATOVP)			
4	TMR_STAT	R	No	No	Charge Safety timer Status: 0 – Normal 1 – Charge Safety timer expired			
3	RESERVED	R	No	No	Reserved bit always reads 0			
2	RESERVED	R	No	No	Reserved bit always reads 0			
1	RESERVED	R	No	No	Reserved bit always reads 0			
0	RESERVED	R	No	No	Reserved bit always reads 0			



# 8.5.16 Charger Flag 1 Register (Address = 0Fh) [reset = 00h]

REG0F is shown in 图 52 and described in 表 24.

Return to Summary Table.

### 图 52. REG0F Register

Bit	7	6	5	4	3	2	1	0
Reset	0	0	0	0	0	0	0	0
Field	ADC_DONE_ FLAG	IINDPM_FLAG	VINDPM_FLAG	TREG_FLAG	WD_FLAG	RESERVED	RESERVED	CHRG_FLAG

Bit	Field	Туре	Reset by REG_RST	Reset by WATCHDOG	Description
7	ADC_DONE_FLAG	R	Yes	No	ADC Conversion Flag (only 1-shot mode): 0 – Conversion not complete 1 – Conversion complete <b>Note:</b> Always reads 0 in continuos mode
6	IINDPM_FLAG	R	Yes	No	IINDPM Regulation INT Flag: 0 – Normal 1 – IINDPM signal rising edge detected
5	VINDPM_FLAG	R	Yes	No	VINDPM regulation INT Flag: 0 – Normal 1 – VINDPM signal rising edge detected
4	TREG_FLAG	R	Yes	No	IC Temperature Regulation INT Flag: 0 – Normal 1 – TREG signal rising edge detected
3	WD_FLAG	R	Yes	No	I2C Watchdog INT Flag: 0 – Normal 1 – WD_STAT signal rising edge detected
2	RESERVED	R	Yes	No	Reserved bit always reads 0
1	RESERVED	R	Yes	No	Reserved bit always reads 0
0	CHRG_FLAG	R	Yes	No	Charge Status INT Flag: 0 – Normal 1 – CHRG_STAT[2:0] bits changed (transition to any state)

# 表 24. REG0F Register Field Descriptions



# 8.5.17 Charger Flag 2 Register (Address = 10h) [reset = 00h]

REG10 is shown in 图 53 and described in 表 25.

Return to Summary Table.

# 图 53. REG10 Register

Bit	7	6	5	4	3	2	1	0
Reset	0	0	0	0	0	0	0	0
Field	PG_FLAG	RESERVED	RESERVED	VBUS_FLAG	RESERVED	TS_FLAG	ICO_FLAG	VSYS_FLAG

表 25. REG10 Register Field Descriptions

Bit	Field	Туре	Reset by REG_RST	Reset by WATCHDOG	Description
7	PG_FLAG	R	Yes	No	Power Good INT Flag: 0 – Normal 1 – PG signal toggle detected
6	RESERVED	R	Yes	No	Reserved bit always reads 0
5	RESERVED	R	Yes	No	Reserved bit always reads 0
4	VBUS_FLAG	R	Yes	No	VBUS Status INT Flag: 0 – Normal 1 – VBUS_STAT[2:0] bits changed (transition to any state)
3	RESERVED	R	Yes	No	Reserved bit always reads 0
2	TS_FLAG	R	Yes	No	TS Status INT Flag: 0 – Normal 1 – TS_STAT[2:0] bits changed (transition to any state)
1	ICO_FLAG	R	Yes	No	Input Current Optimizer (ICO) INT Flag: 0 – Normal 1 – ICO_STAT[1:0] changed (transition to any state)
0	VSYS_FLAG	R	Yes	No	VSYS Regulation INT Flag: 0 – Normal 1 – Entered or exited SYS_MIN regulation



# 8.5.18 FAULT Flag Register (Address = 11h) [reset = 00h]

REG11 is shown in 图 54 and described in 表 26.

Return to Summary Table.

# 图 54. REG11 Register

Bit	7	6	5	4	3	2	1	0
Reset	0	0	0	0	0	0	0	0
Field	VBUS_OVP_ FLAG	TSHUT_FLAG	BATOVP_FLAG	TMR_FLAG	SYS_SHORT_ FLAG	RESERVED	RESERVED	OTG_FLAG

Bit	Field	Туре	Reset by REG_RST	Reset by WATCHDOG	Description				
7	VBUS_OVP_FLAG	R	Yes	No	Input over-voltage INT Flag: 0 – Normal 1 – Entered VBUS_OVP Fault				
6	TSHUT_FLAG	R	Yes	No	IC Temperature shutdown INT Flag: 0 – Normal 1 – Entered TSHUT Fault				
5	BATOVP_FLAG	R	Yes	No	Battery over-voltage INT Flag: 0 – Normal 1 – Entered BATOVP Fault				
4	TMR_FLAG	R	Yes	No	Charge Safety timer Fault INT Flag: 0 – Normal 1 – Charge Safety timer expired rising edge detected				
3	SYS_SHORT_FLAG	R	Yes	No	System Short INT Flag: 0 – Normal 1 – Stopped switching due to boost converter overload				
2	RESERVED	R	Yes	No	Reserved bit always reads 0				
1	RESERVED	R	Yes	No	Reserved bit always reads 0				
0	OTG_FLAG	R	Yes	No	OTG Buck Mode Fault INT Flag: 0 – Normal 1 – VBUS overloaded in OTG, or VBUS OVP, or battery below VOTG_BAT				

# 表 26. REG11 Register Field Descriptions

54



# 8.5.19 Charger Mask 1 Register (Address = 12h) [reset = 00h]

REG12 is shown in 图 55 and described in 表 27.

Return to Summary Table.

### 图 55. REG12 Register

Bit	7	6	5	4	3	2	1	0
Reset	0	0	0	0	0	0	0	0
Field	ADC_DONE_ MASK	IINDPM_MASK	VINDPM_MASK	TREG_MASK	WD_MASK	RESERVED	RESERVED	CHRG_MASK

Bit	Field	Туре	Reset by REG_RST	Reset by WATCHDOG	Description
7	ADC_DONE_MASK	R/W	Yes	No	ADC Conversion INT Mask Flag (only 1-shot mode) 0 – ADC_DONE does produce INT pulse 1 – ADC_DONE does produce not INT pulse
6	IINDPM_MASK	R/W	Yes	No	IINDPM Regulation INT Mask 0 – IINDPM entry produces INT pulse 1 – IINDPM entry does not produce INT pulse
5	VINDPM_MASK	R/W	Yes	No	VINDPM Regulation INT Mask 0 – VINDPM entry produces INT pulse 1 – VINDPM entry not produce INT pulse
4	TREG_MASK	R/W	Yes	No	IC Temperature Regulation INT Mask 0 – TREG entry produces INT pulse 1 – TREG entry produce INT pulse
3	WD_MASK	R/W	Yes	No	I2C Watchdog Timer INT Mask 0 – WD_STAT rising edge produces INT pulse 1 – WD_STAT rising edge does not produce INT
2	RESERVED	R/W	Yes	No	Reserved bit always reads 0
1	RESERVED	R/W	Yes	No	Reserved bit always reads 0
0	CHRG_MASK	R/W	Yes	No	Charge Status INT Mask 0 – CHRG_STAT[2:0] bit change produces INT 1 – CHRG_STAT[2:0] bit change does not produce INT pulse

# 表 27. REG12 Register Field Descriptions



# 8.5.20 Charger Mask 2 Register (Address = 13h) [reset = 00h]

REG13 is shown in 图 56 and described in 表 28.

Return to Summary Table.

# 图 56. REG13 Register

Bit	7	6	5	4	3	2	1	0
Reset	0	0	0	0	0	0	0	0
Field	PG_MASK	RESERVED	RESERVED	VBUS_MASK	RESERVED	TS_MASK	ICO_MASK	VSYS_MASK

表 28. REG13 Register Field Descriptions

Bit	Field	Туре	Reset by REG_RST	Reset by WATCHDOG	Description
7	PG_MASK	R/W	Yes	No	Power Good INT Mask: 0 – PG toggle produces INT pulse 1 – PG toggle does not produce INT pulse
6	RESERVED	R/W	Yes	No	Reserved bit always reads 0
5	RESERVED	R/W	Yes	No	Reserved bit always reads 0
4	VBUS_MASK	R/W	Yes	No	VBUS Status INT Mask: 0 – VBUS_STAT[2:0] bit change produces INT 1 – VBUS_STAT[2:0] bit change does not produces INT
3	RESERVED	R/W	Yes	No	Reserved bit always reads 0
2	TS_MASK	R/W	Yes	No	TS Status INT Mask: 0 – TS_STAT[2:0] bit change produces INT 1 – TS_STAT[2:0] bit change does not produces INT pulse
1	ICO_MASK	R/W	Yes	No	Input Current Optimizer (ICO) INT Mask: 0 – ICO_STAT rising edge produces INT 1 – ICO_STAT rising edge does not produce INT
0	VSYS_MASK	R/W	Yes	No	VSYS Regulation INT Mask: 0 – Entering or exiting SYS_MIN produces INT 1 – Entering or exiting SYS_MIN does not produce INT



# 8.5.21 FAULT Mask Register (Address = 14h) [reset = 00h]

REG14 is shown in 图 57 and described in 表 29.

Return to Summary Table.

### 图 57. REG14 Register

Bit	7	6	5	4	3	2	1	0
Reset	0	0	0	0	0	0	0	0
Field	VBUS_OVP_ MASK	TSHUT_MASK	BATOVP_MAS K	TMR_MASK	SYS_SHORT_ MASK	RESERVED	RESERVED	OTG_MASK

# 表 29. REG14 Register Field Descriptions

Bit	Field	Туре	Reset by REG_RST	Reset by WATCHDOG	Description
7	VBUS_OVP_MASK	R/W	Yes	No	Input over-voltage INT Mask: 0 – VBUS_OVP rising edge produces INT pulse 1 – VBUS_OVP rising edge does not produce INT pulse
6	TSHUT_MASK	R/W	Yes	No	Thermal Shutdown INT Mask: 0 – TSHUT rising edge produces INT pulse 1 – TSHUT rising edge does not produce INT pulse
5	BATOVP_MASK	R/W	Yes	No	Battery overvoltage INT Mask: 0 – BATOVP rising edge produces INT pulse 1 – BATOVP rising edge does not produce INT pulse
4	TMR_MASK	R/W	Yes	No	Charge Safety Timer Fault INT Mask: 0 – Timer expired rising edge produces INT pulse 1 – Timer expired rising edge does not produce INT pulse
3	SYS_SHORT_MASK	R/W	Yes	No	System Short Fault INT Mask: 0 – System short rising edge produces INT pulse 1 – System short rising edge does not produce INT pulse
2	RESERVED	R/W	Yes	No	Reserved bit always reads 0
1	RESERVED	R/W	Yes	No	Reserved bit always reads 0
0	OTG_MASK	R/W	Yes	No	OTG Buck Mode Fault INT Mask: 0 – OTG_STAT event produces INT 1 – OTG_STAT event does not produce INT



# 8.5.22 ADC Control Register (Address = 15h) [reset = 30h]

REG15 is shown in  $\[mathbb{8]$  58 and described in  $\[mathbb{3]$  30.

Return to Summary Table.

# 图 58. REG15 Register

Bit	7	6	5	4	3	2	1	0
Reset	0	0	1	1	0	0	0	0
Field	ADC_EN	ADC_RATE	ADC_SAMPLE[1:0]		RESERVED	RESERVED	RESERVED	RESERVED

表 30. REG15 Register Field Descriptions

Bit	Field	Туре	Reset by REG_RST	Reset by WATCHDOG	Description
7	ADC_EN	R/W	Yes	Yes	ADC Control: 0 – Disable ADC (default) 1 – Enable ADC
6	ADC_RATE	R/W	Yes	No	0 – Continuous conversion (default) 1 – One-shot conversion
5	ADC_SAMPLE[1]	R/W	Yes	No	Sample Speed of ADC:
4	ADC_SAMPLE[0]	R/W	Yes	No	00 – 15-bit effective resolution 01 – 14-bit effective resolution 10 – 13-bit effective resolution 11 – 12-bit effective resolution (default)
3	RESERVED	R/W	Yes	No	Reserved bit always reads 0
2	RESERVED	R/W	Yes	No	Reserved bit always reads 0
1	RESERVED	R/W	Yes	No	Reserved bit always reads 0
0	RESERVED	R/W	Yes	No	Reserved bit always reads 0



# 8.5.23 ADC Function Disable Register (Address = 16h) [reset = 00h]

REG16 is shown in 图 59 and described in 表 31.

Return to Summary Table.

### 图 59. REG16 Register

Bit	7	6	5	4	3	2	1	0
Reset	0	0	0	0	0	0	0	0
Field	IBUS_ADC_DIS	ICHG_ADC_ DIS	VBUS_ADC_ DIS	VBAT_ADC_ DIS	VSYS_ADC_ DIS	TS_ADC_DIS	RESERVED	TDIE_ADC_DIS

# 表 31. REG16 Register Field Descriptions

Bit	Field	Туре	Reset by REG_RST	Reset by WATCHDOG	Description
7	IBUS_ADC_DIS	R/W	Yes	No	0 – Enable conversion 1 – Disable conversion
6	ICHG_ADC_DIS	R/W	Yes	No	0 – Enable conversion 1 – Disable conversion
5	VBUS_ADC_DIS	R/W	Yes	No	0 – Enable conversion 1 – Disable conversion
4	VBAT_ADC_DIS	R/W	Yes	No	0 – Enable conversion 1 – Disable conversion
3	VSYS_ADC_DIS	R/W	Yes	No	0 – Enable conversion 1 – Disable conversion
2	TS_ADC_DIS	R/W	Yes	No	0 – Enable conversion 1 – Disable conversion
1	RESERVED	R/W	Yes	No	Reserved bit always reads 0
0	TDIE_ADC_DIS	R/W	Yes	No	0 – Enable conversion 1 – Disable conversion



# 8.5.24 IBUS ADC 1 Register (Address = 17h) [reset = 00h]

REG17 is shown in 图 60 and described in 表 32.

Return to Summary Table.

# 图 60. REG17 Register

Bit	7	6	5	4	3	2	1	0				
Reset	0	0	0	0	0	0	0	0				
Field	IBUS_ADC[15:8]											

#### 表 32. REG17 Register Field Descriptions

Bit	Field	Туре	Reset by REG_RST	Reset by WATCHDOG	Description				
7	IBUS_ADC[15]	R	Yes	No	Sign bit: overall results reported in two's complement.				
6	IBUS_ADC[14]	R	Yes	No	16384 mA				
5	IBUS_ADC[13]	R	Yes	No	8192 mA				
4	IBUS_ADC[12]	R	Yes	No	4096 mA				
3	IBUS_ADC[11]	R	Yes	No	2048 mA	VBUS Current Reading (positive current flows into VBUS pin,			
2	IBUS_ADC[10]	R	Yes	No	1024 mA	negative current flows out ot VBUS pin): Range: 0 A – 4 A			
1	IBUS_ADC[9]	R	Yes	No	512 mA				
0	IBUS_ADC[8]	R	Yes	No	256 mA				

# 8.5.25 IBUS ADC 0 Register (Address = 18h) [reset = 00h]

REG18 is shown in  $\[Begin{smallmatrix} 8 \\ 61 \]$  and described in  $\[Embed{smallmatrix}$  33.

Return to Summary Table.

### 图 61. REG18 Register

Bit	7	6	5	4	3	2	1	0				
Reset	0	0	0	0	0	0	0	0				
Field	IBUS_ADC[7:0]											

#### 表 33. REG18 Register Field Descriptions

Bit	Field	Туре	Reset by REG_RST	Reset by WATCHDOG	Description	1
7	IBUS_ADC[7]	R	Yes	No	128 mA	VBUS Current Reading (positive current flows into VBUS pin,
6	IBUS_ADC[6]	R	Yes	No	64 mA	negative current flows out ot VBUS pin): Range: 0 A – 4 A
5	IBUS_ADC[5]	R	Yes	No	32 mA	
4	IBUS_ADC[4]	R	Yes	No	16 mA	
3	IBUS_ADC[3]	R	Yes	No	8 mA	
2	IBUS_ADC[2]	R	Yes	No	4 mA	
1	IBUS_ADC[1]	R	Yes	No	2 mA	
0	IBUS_ADC[0]	R	Yes	No	1 mA	



# 8.5.26 ICHG ADC 1 Register (Address = 19h) [reset = 00h]

REG19 is shown in  $\[Begin{smallmatrix} 8 & 62 \\ 1 & 62$ 

Return to Summary Table.

#### 图 62. REG19 Register

Bit	7	6	5	4	3	2	1	0
Reset	0	0	0	0	0	0	0	0
Field	RESERVED	ICHG_ADC[14:8]						

#### 表 34. REG19 Register Field Descriptions

Bit	Field	Туре	Reset by REG_RST	Reset by WATCHDOG	Description			
7	RESERVED	R	Yes	No	Reserved re	egister always reads 0.		
6	ICHG_ADC[14]	R	Yes	No	16384 mA			
5	ICHG_ADC[13]	R	Yes	No	8192 mA			
4	ICHG_ADC[12]	R	Yes	No	4096 mA			
3	ICHG_ADC[11]	R	Yes	No	2048 mA	Charge Current Reading:		
2	ICHG_ADC[10]	R	Yes	No	1024 mA	Range: 0 A – 4 A		
1	ICHG_ADC[9]	R	Yes	No	512 mA			
0	ICHG_ADC[8]	R	Yes	No	256 mA			

# 8.5.27 ICHG ADC 0 Register (Address = 1Ah) [reset = 00h]

REG1A is shown in 图 63 and described in 表 35.

Return to Summary Table.

#### 图 63. REG1A Register

Bit	7	6	5	4	3	2	1	0		
Reset	0	0 0 0 0 0 0 0 0								
Field		ICHG_ADC[7:0]								

#### 表 35. REG1A Register Field Descriptions

Bit	Field	Туре	Reset by REG_RST	Reset by WATCHDOG	Description	1
7	ICHG_ADC[7]	R	Yes	No	128 mA	Charge Current Reading:
6	ICHG_ADC[6]	R	Yes	No	64 mA	Range: 0 A – 4 A
5	ICHG_ADC[5]	R	Yes	No	32 mA	
4	ICHG_ADC[4]	R	Yes	No	16 mA	
3	ICHG_ADC[3]	R	Yes	No	8 mA	
2	ICHG_ADC[2]	R	Yes	No	4 mA	
1	ICHG_ADC[1]	R	Yes	No	2 mA	
0	ICHG_ADC[0]	R	Yes	No	1 mA	



# 8.5.28 VBUS ADC 1 Register (Address = 1Bh) [reset = 00h]

REG1B is shown in 图 64 and described in 表 36.

Return to Summary Table.

### 图 64. REG1B Register

Bit	7	6	5	4	3	2	1	0		
Reset	0	0 0 0 0 0 0 0								
Field		VBUS_ADC[15:8]								

#### 表 36. REG1B Register Field Descriptions

Bit	Field	Туре	Reset by REG_RST	Reset by WATCHDOG	Description		
7	VBUS_ADC[15]	R	Yes	No	Sign bit: ove	erall results reported in two's complement.	
6	VBUS_ADC[14]	R	Yes	No	16384 mV		
5	VBUS_ADC[13]	R	Yes	No	8192 mV	VBUS Voltage reading	
4	VBUS_ADC[12]	R	Yes	No	4096 mV	Range: 0 V – 10 V	
3	VBUS_ADC[11]	R	Yes	No	2048 mV		
2	VBUS_ADC[10]	R	Yes	No	1024 mV		
1	VBUS_ADC[9]	R	Yes	No	512 mV		
0	VBUS_ADC[8]	R	Yes	No	256 mV		

# 8.5.29 VBUS ADC 0 Register (Address = 1Ch) [reset = 00h]

REG1C is shown in 图 65 and described in 表 37.

Return to Summary Table.

### 图 65. REG1C Register

Bit	7	6	5	4	3	2	1	0		
Reset	0	0 0 0 0 0 0 0 0								
Field		VBUS_ADC[7:0]								

#### 表 37. REG1C Register Field Descriptions

Bit	Field	Туре	Reset by REG_RST	Reset by WATCHDOG	Description	1
7	VBUS_ADC[7]	R	Yes	No	128 mV	VBUS Voltage Reading:
6	VBUS_ADC[6]	R	Yes	No	64 mV	Range: 0 V – 10 V
5	VBUS_ADC[5]	R	Yes	No	32 mV	
4	VBUS_ADC[4]	R	Yes	No	16 mV	
3	VBUS_ADC[3]	R	Yes	No	8 mV	
2	VBUS_ADC[2]	R	Yes	No	4 mV	
1	VBUS_ADC[1]	R	Yes	No	2 mV	
0	VBUS_ADC[0]	R	Yes	No	1 mV	



# 8.5.30 VBAT ADC 1 Register (Address = 1Dh) [reset = 00h]

REG1D is shown in 图 66 and described in 表 38.

Return to Summary Table.

图	66.	REG1D	Register
---	-----	-------	----------

Bit	7	6	5	4	3	2	1	0		
Reset	0	0 0 0 0 0 0 0								
Field		VBAT_ADC[15:8]								

#### 表 38. REG1D Register Field Descriptions

Bit	Field	Туре	Reset by REG_RST	Reset by WATCHDOG	Description		
7	VBAT_ADC[15]	R	Yes	No	Sign bit: ove	erall results reported in two's complement.	
6	VBAT_ADC[14]	R	Yes	No	16384 mV		
5	VBAT_ADC[13]	R	Yes	No	8192 mV	VBAT Voltage reading:	
4	VBAT_ADC[12]	R	Yes	No	4096 mV	Range: 0 V – 10 V	
3	VBAT_ADC[11]	R	Yes	No	2048 mV		
2	VBAT_ADC[10]	R	Yes	No	1024 mV		
1	VBAT_ADC[9]	R	Yes	No	512 mV		
0	VBAT_ADC[8]	R	Yes	No	256 mV		

# 8.5.31 VBAT ADC 0 Register (Address = 1Eh) [reset = 00h]

REG1E is shown in 图 67 and described in 表 39.

Return to Summary Table.

# 图 67. REG1E Register

Bit	7	6	5	4	3	2	1	0	
Reset	0	0	0	0	0	0	0	0	
Field		VBAT_ADC[7:0]							

#### 表 39. REG1E Register Field Descriptions

Bit	Field	Туре	Reset by REG_RST	Reset by WATCHDOG	Description	1
7	VBAT_ADC[7]	R	Yes	No	128 mV	VBAT Voltage reading:
6	VBAT_ADC[6]	R	Yes	No	64 mV	Range: 0 V – 10 V
5	VBAT_ADC[5]	R	Yes	No	32 mV	
4	VBAT_ADC[4]	R	Yes	No	16 mV	
3	VBAT_ADC[3]	R	Yes	No	8 mV	
2	VBAT_ADC[2]	R	Yes	No	4 mV	
1	VBAT_ADC[1]	R	Yes	No	2 mV	
0	VBAT_ADC[0]	R	Yes	No	1 mV	



# 8.5.32 VSYS ADC 1 Register (Address = 1Fh) [reset = 00h]

REG1F is shown in 图 68 and described in 表 40.

Return to Summary Table.

# 图 68. REG1F Register

Bit	7	6	5	4	3	2	1	0	
Reset	0	0	0	0	0	0	0	0	
Field		VSYS_ADC[15:8]							

### 表 40. REG1F Register Field Descriptions

Bit	Field	Туре	Reset by REG_RST	Reset by WATCHDOG	Description		
7	VSYS_ADC[15]	R	Yes	No	Sign bit: overall results reported in two's complement.		
6	VSYS_ADC[14]	R	Yes	No	16384 mV		
5	VSYS_ADC[13]	R	Yes	No	8192 mV	VSYS Voltage reading:	
4	VSYS_ADC[12]	R	Yes	No	4096 mV	Range: 0 V – 10 V	
3	VSYS_ADC[11]	R	Yes	No	2048 mV		
2	VSYS_ADC[10]	R	Yes	No	1024 mV		
1	VSYS_ADC[9]	R	Yes	No	512 mV		
0	VSYS_ADC[8]	R	Yes	No	256 mV		

### 8.5.33 VSYS ADC 0 Register (Address = 20h) [reset = 00h]

REG20 is shown in 图 69 and described in 表 41.

Return to Summary Table.

#### 图 69. REG20 Register

Bit	7	6	5	4	3	2	1	0	
Reset	0	0	0	0	0	0	0	0	
Field		VSYS_ADC[7:0]							

#### 表 41. REG20 Register Field Descriptions

Bit	Field	Туре	Reset by REG_RST	Reset by WATCHDOG	Description	ı
7	VSYS_ADC[7]	R	Yes	No	128 mV	VSYS Voltage reading:
6	VSYS_ADC[6]	R	Yes	No	64 mV	Range: 0 V – 10 V
5	VSYS_ADC[5]	R	Yes	No	32 mV	
4	VSYS_ADC[4]	R	Yes	No	16 mV	
3	VSYS_ADC[3]	R	Yes	No	8 mV	
2	VSYS_ADC[2]	R	Yes	No	4 mV	
1	VSYS_ADC[1]	R	Yes	No	2 mV	
0	VSYS_ADC[0]	R	Yes	No	1 mV	



# 8.5.34 TS ADC 1 Register (Address = 21h) [reset = 00h]

REG21 is shown in 图 70 and described in 表 42.

Return to Summary Table.

					-				
Bit	7	6	5	4	3	2	1	0	
Reset	0	0	0	0	0	0	0	0	
Field		TS_ADC[15:8]							

图 70. REG21 Register

#### 表 42. REG21 Register Field Descriptions

Bit	Field	Туре	Reset by REG_RST	Reset by WATCHDOG	Description		
7	TS_ADC[15]	R	Yes	No	Sign bit: overall results reported in two's complement.		
6	TS_ADC[14]	R	Yes	No			
5	TS_ADC[13]	R	Yes	No			
4	TS_ADC[12]	R	Yes	No			
3	TS_ADC[11]	R	Yes	No			
2	TS_ADC[10]	R	Yes	No			
1	TS_ADC[9]	R	Yes	No	50.0%	TS as percentage of REGN reading:	
0	TS_ADC[8]	R	Yes	No	25.0%	Range: 0% – 94.9%	

# 8.5.35 TS ADC 0 Register (Address = 22h) [reset = 00h]

REG22 is shown in 图 71 and described in 表 43.

Return to Summary Table.

#### 图 71. REG22 Register

Bit	7	6	5	4	3	2	1	0	
Reset	0	0	0	0	0	0	0	0	
Field		TS_ADC[7:0]							

#### 表 43. REG22 Register Field Descriptions

Bit	Field	Туре	Reset by REG_RST	Reset by WATCHDOG	Description	ı
7	TS_ADC[7]	R	Yes	No	12.50%	TS as percentage of REGN reading:
6	TS_ADC[6]	R	Yes	No	6.25%	Range: 0% – 94.9%
5	TS_ADC[5]	R	Yes	No	3.125%	
4	TS_ADC[4]	R	Yes	No	1.563%	
3	TS_ADC[3]	R	Yes	No	0.781%	
2	TS_ADC[2]	R	Yes	No	0.391%	
1	TS_ADC[1]	R	Yes	No	0.195%	
0	TS_ADC[0]	R	Yes	No	0.098%	



# 8.5.36 TDIE ADC 1 Register (Address = 23h) [reset = 00h]

REG23 is shown in 图 72 and described in 表 44.

Return to Summary Table.

# 图 72. REG23 Register

Bit	7	6	5	4	3	2	1	0	
Reset	0	0	0	0	0	0	0	0	
Field	RESERVED		TDIE_ADC[14:8]						

#### 表 44. REG23 Register Field Descriptions

Bit	Field	Туре	Reset by REG_RST	Reset by WATCHDOG	Description		
7	RESERVED	R	Yes	No	Reserved bit always reads 0		
6	TDIE_ADC[14]	R	Yes	No			
5	TDIE_ADC[13]	R	Yes	No			
4	TDIE_ADC[12]	R	Yes	No			
3	TDIE_ADC[11]	R	Yes	No			
2	TDIE_ADC[10]	R	Yes	No			
1	TDIE_ADC[9]	R	Yes	No			
0	TDIE_ADC[8]	R	Yes	No	128°C	TDIE (IC Temperature) reading: Range: 0°C – 128°C	

# 8.5.37 TDIE ADC 0 Register (Address = 24h) [reset = 00h]

Return to Summary Table.

### 图 73. REG24 Register

Bit	7	6	5	4	3	2	1	0
Reset	0	0	0	0	0	0	0	0
Field	TDIE_ADC[7:0]							

### 表 45. REG24 Register Field Descriptions

Bit	Field	Туре	Reset by REG_RST	Reset by WATCHDOG	Description	
7	TDIE_ADC[7]	R	Yes	No	64°C	TDIE (IC Temperature) reading:
6	TDIE_ADC[6]	R	Yes	No	32°C	Range: 0°C – 128°C
5	TDIE_ADC[5]	R	Yes	No	16°C	
4	TDIE_ADC[4]	R	Yes	No	8°C	
3	TDIE_ADC[3]	R	Yes	No	4°C	
2	TDIE_ADC[2]	R	Yes	No	2°C	
1	TDIE_ADC[1]	R	Yes	No	1°C	
0	TDIE_ADC[0]	R	Yes	No	0.5°C	



# 8.5.38 Part Information Register (Address = 25h) [reset = 11h]

REG25 is shown in 图 74 and described in 表 46.

Return to Summary Table.

### 图 74. REG25 Register

Bit	7	6	5	4	3	2	1	0
Reset	0	0	0	1	0	0	0	1
Field	REG_RST	PN[3:0]				DEV_REV[2:0]		

### 表 46. REG25 Register Field Descriptions

Bit	Field	Туре	Reset by REG_RST	Reset by WATCHDOG	Description	
7	REG_RST	R	Yes	No	Register Reset: 0 – Keep current register settings 1 – Reset to default register value and reset safety timer (bit resets to 0 after register reset is complete)	
6	PN[3]	R	Yes	No	0010: BQ25882	
5	PN[2]	R	Yes	No		
4	PN[1]	R	Yes	No		
3	PN[0]	R	Yes	No		
2	DEV_REV[2]	R	Yes	No	Device revision: 001	
1	DEV_REV[1]	R	Yes	No		
0	DEV_REV[0]	R	Yes	No		



# 9 Application and Implementation

#### 注

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

### 9.1 Application Information

A typical application consists of the device configured as an I<sup>2</sup>C controlled power path management device and a dual-cell battery charger for Li-Ion and Li-polymer batteries used in a wide range of smartphones and other portable devices. It integrates an input blocking FET (QBLK, Q1), high-side switching FET (QHS, Q2), low-side switching FET (QLS, Q3), and battery FET (QBAT, Q4) between system and battery. The device also integrates a bootstrap diode for the high-side gate drive.

# 9.2 Typical Application

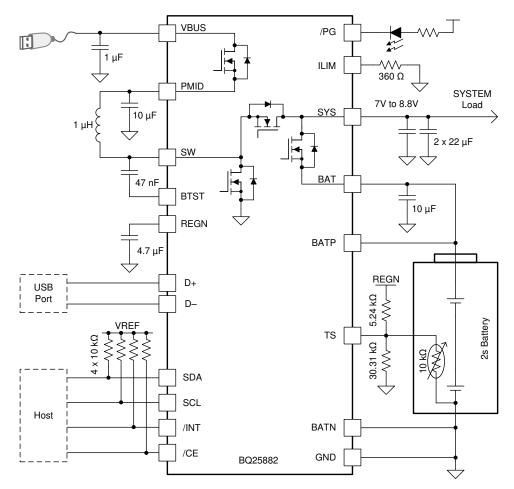


图 75. BQ25882 Typical Application Diagram

#### 9.2.1 Design Requirements

For this design example, use the parameters shown in the table below.



# Typical Application (接下页)

BQ25882
ZHCSJ56C – FEBRUARY 2018 – REVISED SEPTEMBER 2019

PARAMETER	VALUE
VBUS voltage range	3.9 V to 6.2 V
Input current limit (IINDPM[4:0])	3.0 A
Fast charge current limit (ICHG[5:0])	1.5 A
Minimum system voltage (SYS_MIN[3:0])	7.0 V
Cell regulation voltage (VREG[7:0])	8.7 V

#### 表 47. Design Parameters

#### 9.2.2 Detailed Design Procedure

#### 9.2.2.1 Inductor Selection

The device has 1.5-MHz switching frequency to allow the use of small inductor and capacitor values. The inductor saturation current should be higher than the input current ( $I_{IN}$ ) plus half the ripple current ( $I_{RIPPLE}$ ):

$$I_{SAT} \ge I_{IN} + \frac{I_{RIPPLE}}{2}$$
(5)

The inductor ripple current ( $I_{RIPPLE}$ ) depends on input voltage ( $V_{VBUS}$ ), duty cycle (D = 1 -  $V_{BUS}/V_{BAT}$ ), switching frequency ( $f_{SW}$ ) and inductance (L):

$$I_{RIPPLE} = \frac{V_{BUS} \times (V_{SYS} - V_{BUS})}{V_{SYS} \times f_{SW} \times L}$$
(6)

The maximum inductor ripple current happens in the vicinity of D = 0.5. Usually inductor ripple is designed in the range of (20 - 40%) maximum charging current as a trade-off between inductor size and efficiency for a practical design.

#### 9.2.2.2 Input (VBUS / PMID) Capacitor

Input capacitor should have enough ripple current rating to absorb input switching ripple current. The worst case RMS ripple current occurs when duty cycle is 0.5. If the converter does not operate at 50% duty cycle, then the worst case capacitor RMS current  $I_{PMID}$  occurs where the duty cycle is closest to 50% and can be estimated by

$$I_{PMID} = \frac{I_{RIPPLE}}{2 \times \sqrt{3}} \approx 0.29 \times I_{RIPPLE}$$
(7)

Low ESR ceramic capacitor such as X7R or X5R is preferred for input decoupling capacitor and should be placed close to the PMID and GND pins of the IC. Voltage rating of the capacitor must be higher than normal input voltage level. 25-V rating or higher capacitor is preferred for up to 5-V input voltage.  $10-\mu$ F capacitor is suggested for up to 3.3-A input current.

#### 9.2.2.3 Output (VSYS) Capacitor

SYS capacitor is the boost converter output capacitor and should also have enough ripple current rating to absorb output switching ripple current. The output capacitor RMS current  $I_{CSYS}$  is given:

$$I_{CSYS, rms} = I_{OUT} \times \sqrt{\frac{D}{1 - D}}$$
(8)

The output capacitor voltage ripple is a function of the boost output current  $(I_{OUT})$ , and can be calculated as follows:

$$\Delta V_{SYS} = \frac{I_{OUT} \times D}{f_{SW} \times C_{SYS}} \tag{9}$$

版权 © 2018-2019, Texas Instruments Incorporated




Low ESR ceramic capacitor such as X7R or X5R is preferred for SYS decoupling capacitor and should be placed close to the SYS and GND pins of the IC. Voltage rating of the capacitor must be higher than normal output voltage level. 16-V rating or higher capacitor is preferred.  $40-\mu$ F capacitor is suggested for up to 2.2-A boost converter output current.



### 9.2.3 Application Curves

C<sub>VBUS</sub> = 1µF, C<sub>PMID</sub>= 10µF, C<sub>BAT</sub> = 10µF, C<sub>SYS</sub> = 44µF, L = DFE252012F-1R0 (1µH) (unless otherwise specified)

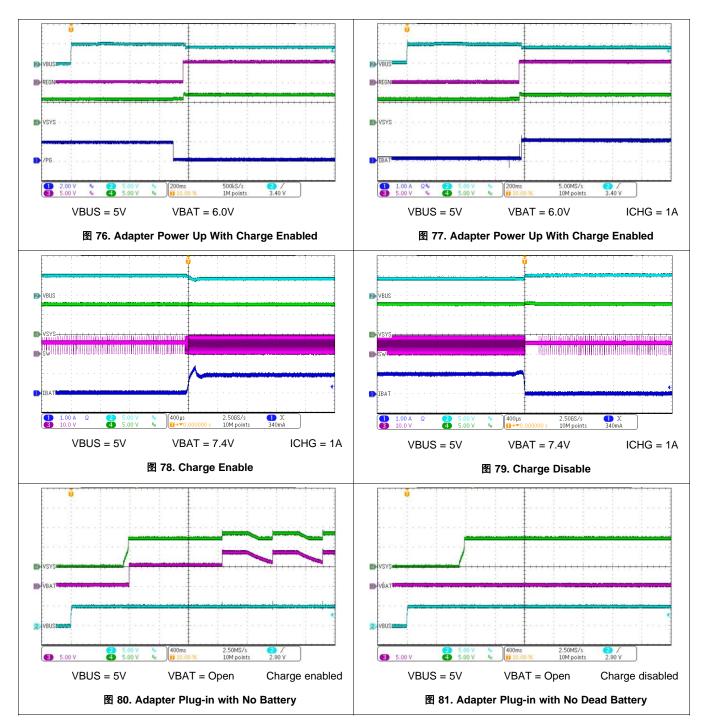


**BQ25882** 

NUSU:

Ð

3 5.00

VBUS = 5V

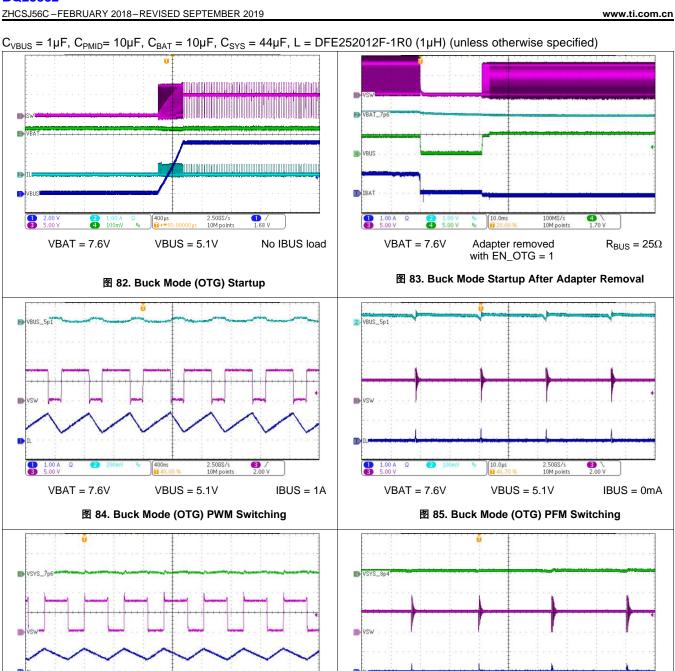

(1) 2.00 A (3) 5.00 V

VBUS = 5V

3 / 4.40 V

Charge disabled

2.50GS/s 10M points

版权 © 2018-2019, Texas Instruments Incorporated

0.0µs

VBAT = 8.4V

图 87. Boost Mode PFM Switching

2.50GS/s 10M point

VBAT = 7.6V


图 86. Boost Mode PWM Switching

4.40 V

ICHG = 1A



**BQ25882** ZHCSJ56C - FEBRUARY 2018 - REVISED SEPTEMBER 2019

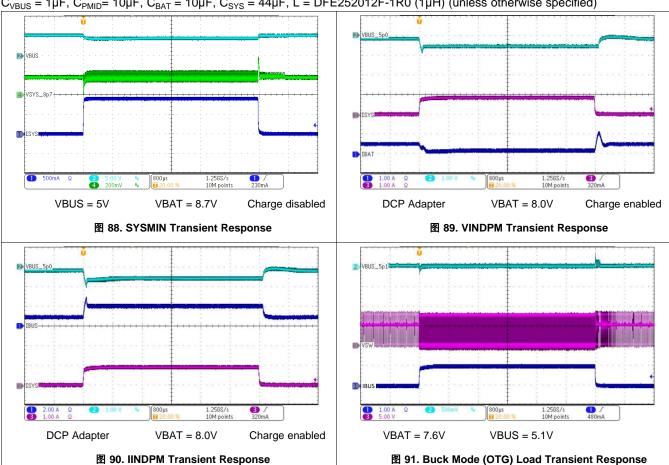



### 10 Power Supply Recommendations

In order to provide an output voltage on SYS, the device requires a power supply between 3.9 V and 6.2 V input with at least 500-mA current rating connected to VBUS or a dual-cell Li-Ion battery with voltage > VBAT\_UVLO connected to BAT. The source current rating needs to be at least 3.3 A in order for the boost converter of the charger to provide maximum output power to SYS.



### 11 Layout

### 11.1 Layout Guidelines

The switching node rise and fall times should be minimized for minimum switching loss. Proper layout of the components to minimize high frequency current path loops is important to prevent electrical and magnetic field radiation and high frequency resonant problems. Here is a PCB layout priority list for proper layout. Layout PCB according to this specific order is essential.

- 1. Place SYS and BAT output capacitor as close to SYS, BAT and GND bumps as possible. Ground connections need to be tied to the IC ground with a short copper trace connection or GND plane.
- 2. Place PMID input capacitor as close as possible to PMID bumps and GND bumps and use shortest copper trace connection or GND plane.
- 3. Place inductor input terminal to SW bumps as close as possible. Minimize the copper area of this trace to lower electrical and magnetic field radiation but make the trace wide enough to carry the input current. Minimize parasitic capacitance from this area to any other trace or plane.
- 4. Decoupling capacitors should be placed next to the IC and make trace connection as short as possible.
- 5. Ensure that there are sufficient thermal vias directly under bumps of the power FETs, connecting to copper on other layers.
- 6. Via size and number should be enough for a given current path.
- 7. Route BATP and BATN away from switching nodes such as SW.

Refer to the EVM design and the Layout Example below for the recommended component placement with trace and via locations.



### BQ25882 ZHCSJ56C-FEBRUARY 2018-REVISED SEPTEMBER 2019

www.ti.com.cn

## 11.2 Layout Example

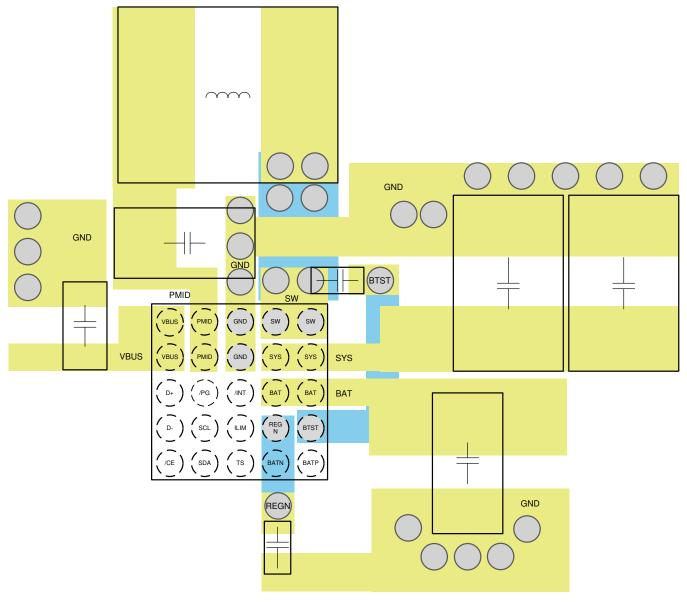


图 92. PCB Layout Example



### 12 器件和文档支持

12.1 器件支持

12.1.1 第三方产品免责声明

### 12.1.1.1 第三方产品免责声明

TI 发布的与第三方产品或服务有关的信息,不能构成与此类产品或服务或保修的适用性有关的认可,不能构成此类产品或服务单独或与任何 TI 产品或服务一起的表示或认可。

12.2 文档支持

12.2.1 相关文档

请参阅如下相关文档:

• 《BQ2588x 升压电池充电器评估模块用户指南》

### 12.3 接收文档更新通知

要接收文档更新通知,请导航至 ti.com. 上的器件产品文件夹。单击右上角的通知我进行注册,即可每周接收产品 信息更改摘要。有关更改的详细信息,请查看任何已修订文档中包含的修订历史记录。

### 12.4 社区资源

TI E2E<sup>™</sup> support forums are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's Terms of Use.

### 12.5 商标

E2E is a trademark of Texas Instruments. All other trademarks are the property of their respective owners.

#### 12.6 静电放电警告

ESD 可能会损坏该集成电路。德州仪器 (TI) 建议通过适当的预防措施处理所有集成电路。如果不遵守正确的处理措施和安装程序,可能会损坏集成电路。



ESD 的损坏小至导致微小的性能降级,大至整个器件故障。 精密的集成电路可能更容易受到损坏,这是因为非常细微的参数更改都可能会导致器件与其发布的规格不相符。

### 12.7 Glossary

SLYZ022 — TI Glossary.

This glossary lists and explains terms, acronyms, and definitions.

ZHCSJ56C - FEBRUARY 2018 - REVISED SEPTEMBER 2019



www.ti.com.cn

## 13 机械、封装和可订购信息

以下页面包含机械、封装和可订购信息。这些信息是指定器件的最新可用数据。数据如有变更, 恕不另行通知, 且 不会对此文档进行修订。如需获取此数据表的浏览器版本,请查阅左侧的导航栏。



10-Dec-2020

## PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead finish/ Ball material (6)	MSL Peak Temp (3)	Op Temp (°C)	Device Marking (4/5)	Samples
BQ25882YFFR	ACTIVE	DSBGA	YFF	25	3000	RoHS & Green	SNAGCU	Level-1-260C-UNLIM	-40 to 85	BQ25882	Samples
BQ25882YFFT	ACTIVE	DSBGA	YFF	25	250	RoHS & Green	SNAGCU	Level-1-260C-UNLIM	-40 to 85	BQ25882	Samples

<sup>(1)</sup> The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

<sup>(2)</sup> RoHS: TI defines "RoHS" to mean semiconductor products that are compliant with the current EU RoHS requirements for all 10 RoHS substances, including the requirement that RoHS substance do not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, "RoHS" products are suitable for use in specified lead-free processes. TI may reference these types of products as "Pb-Free".

**RoHS Exempt:** TI defines "RoHS Exempt" to mean products that contain lead but are compliant with EU RoHS pursuant to a specific EU RoHS exemption.

Green: TI defines "Green" to mean the content of Chlorine (CI) and Bromine (Br) based flame retardants meet JS709B low halogen requirements of <= 1000ppm threshold. Antimony trioxide based flame retardants must also meet the <= 1000ppm threshold requirement.

<sup>(3)</sup> MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

<sup>(4)</sup> There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

<sup>(5)</sup> Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

<sup>(6)</sup> Lead finish/Ball material - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

**Important Information and Disclaimer:**The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.



www.ti.com

## PACKAGE OPTION ADDENDUM

10-Dec-2020



www.ti.com

### TAPE AND REEL INFORMATION





### QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE




*All d	imensions are nominal												
	Device	-	Package Drawing		SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
	BQ25882YFFR	DSBGA	YFF	25	3000	180.0	8.4	2.28	2.28	0.73	4.0	8.0	Q1
	BQ25882YFFT	DSBGA	YFF	25	250	180.0	8.4	2.28	2.28	0.73	4.0	8.0	Q1



www.ti.com

# PACKAGE MATERIALS INFORMATION

29-Dec-2022

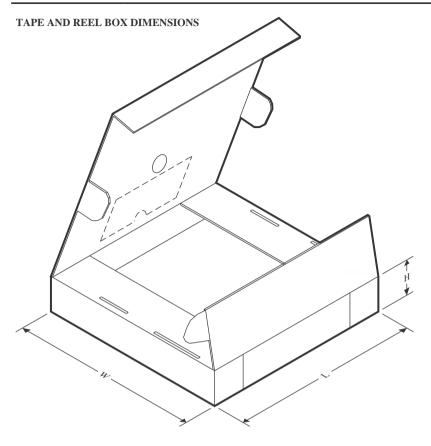

\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
BQ25882YFFR	DSBGA	YFF	25	3000	182.0	182.0	20.0
BQ25882YFFT	DSBGA	YFF	25	250	182.0	182.0	20.0


# YFF0025



# **PACKAGE OUTLINE**

## DSBGA - 0.625 mm max height

DIE SIZE BALL GRID ARRAY

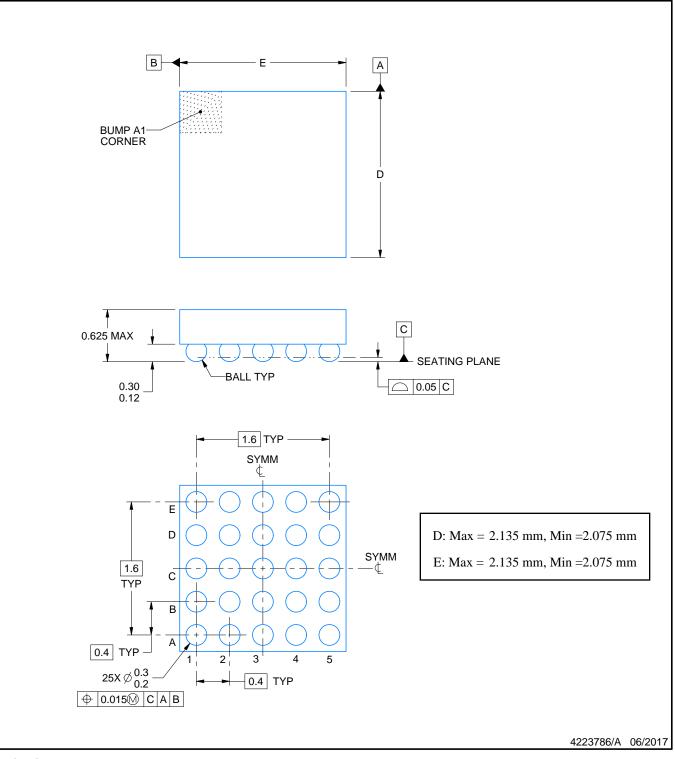

NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

2. This drawing is subject to change without notice.




# YFF0025

# **EXAMPLE BOARD LAYOUT**

## DSBGA - 0.625 mm max height

DIE SIZE BALL GRID ARRAY

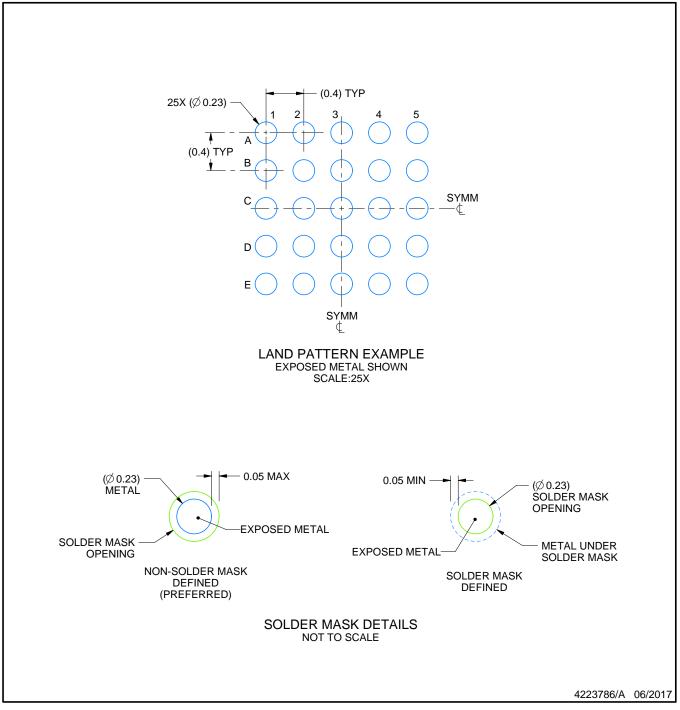

NOTES: (continued)

3. Final dimensions may vary due to manufacturing tolerance considerations and also routing constraints. For more information, see Texas Instruments literature number SNVA009 (www.ti.com/lit/snva009).




# YFF0025

# **EXAMPLE STENCIL DESIGN**

## DSBGA - 0.625 mm max height

DIE SIZE BALL GRID ARRAY

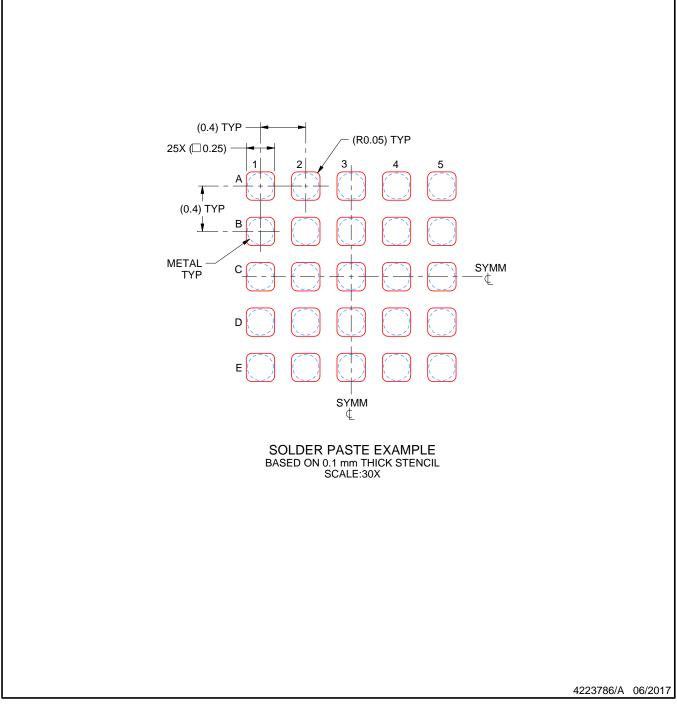

NOTES: (continued)

4. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release.



### 重要声明和免责声明

TI"按原样"提供技术和可靠性数据(包括数据表)、设计资源(包括参考设计)、应用或其他设计建议、网络工具、安全信息和其他资源, 不保证没有瑕疵且不做出任何明示或暗示的担保,包括但不限于对适销性、某特定用途方面的适用性或不侵犯任何第三方知识产权的暗示担 保。

这些资源可供使用 TI 产品进行设计的熟练开发人员使用。您将自行承担以下全部责任:(1) 针对您的应用选择合适的 TI 产品,(2) 设计、验 证并测试您的应用,(3) 确保您的应用满足相应标准以及任何其他功能安全、信息安全、监管或其他要求。

这些资源如有变更,恕不另行通知。TI 授权您仅可将这些资源用于研发本资源所述的 TI 产品的应用。严禁对这些资源进行其他复制或展示。 您无权使用任何其他 TI 知识产权或任何第三方知识产权。您应全额赔偿因在这些资源的使用中对 TI 及其代表造成的任何索赔、损害、成 本、损失和债务,TI 对此概不负责。

TI 提供的产品受 TI 的销售条款或 ti.com 上其他适用条款/TI 产品随附的其他适用条款的约束。TI 提供这些资源并不会扩展或以其他方式更改 TI 针对 TI 产品发布的适用的担保或担保免责声明。

TI 反对并拒绝您可能提出的任何其他或不同的条款。

邮寄地址:Texas Instruments, Post Office Box 655303, Dallas, Texas 75265 Copyright © 2022,德州仪器 (TI) 公司