

TANDEM 64-TAP DIGITAL POTENTIOMETER


Check for Samples: [TPL8002-25](#)

FEATURES

- Adjustable Gain From 23.25 dB to –24 dB
- 64-Tap Positions With 0.75 dB Per Step
- Supports 8-MHz Analog Bandwidth
- Operating Range up to $-4\text{-V } V_{EE}/+4\text{-V } V_{DD}$
- 100- μA Maximum Static Supply Current
- $\pm 30\%$ End-to-End Resistance Tolerance
- Absolute Tolerance of ± 0.3 dB
- Operating Temperature Range From -40°C to 85°C
- ESD Performance Tested Per JESD 22
 - 2000-V Human-Body Model (A114-B, Class II)

APPLICATIONS

- Tandem Adjustable Feedback and Gain Resistors for Operational Amplifiers

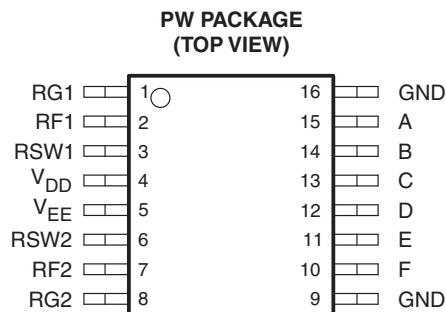

DESCRIPTION/ORDERING INFORMATION

The TPL8002-25 is a programmable resistor device implementing two digital potentiometers with 64 wiper positions each that are tandem controlled through a 6-bit parallel interface. The device has fixed wiper resistances at the respective wiper contacts that tap the potentiometer resistors at a point determined by the binary code present at its digital inputs.

The resistive wiper tap terminals, RSW, of the TPL8002-25 are typically connected to the inverting inputs (–) of an external differential path inverting operational amplifier configuration, with the non-inverting inputs (+) connected through to ground. The application's differential input to the configuration is the device's RG terminals. The differential output of the external operational amplifiers is connected to the device's RF terminals, and thus becomes the differential output of the application configuration.

The resistance between the wiper contacts and the end points RG and RF of the TPL8002-25 provides a logarithmic gain/attenuation response of the configuration. With a digital code of decimal 0 (b000000) the configuration has an inverting maximum attenuation of –24 dB. With a digital code of decimal 32 (b100000) the configuration has inverting unity gain of 0.00 dB. With a digital code of decimal 63 (b111111) the configuration has an inverting maximum gain of +23.25 dB. The response of the configuration with respect to the digital code varies in fixed steps of 0.75 dB.

ORDERING INFORMATION

T _A	PACKAGE ⁽¹⁾ (2)		ORDERABLE PART NUMBER	TOP-SIDE MARKING
–40°C to 85°C	TSSOP – PW	Tape and reel	TPL8002-25PWR	PHY03A


(1) Package drawings, thermal data, and symbolization are available at www.ti.com/packaging.

(2) For the most current package and ordering information, see the Package Option Addendum at the end of this document, or see the TI website at www.ti.com.




Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

FUNCTIONAL BLOCK DIAGRAM

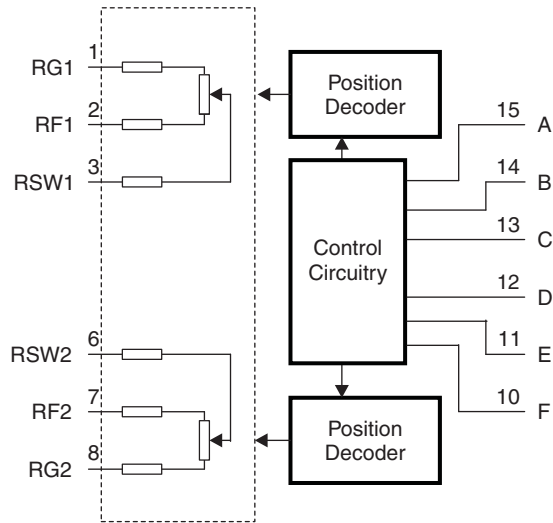

TYPICAL APPLICATION CIRCUIT

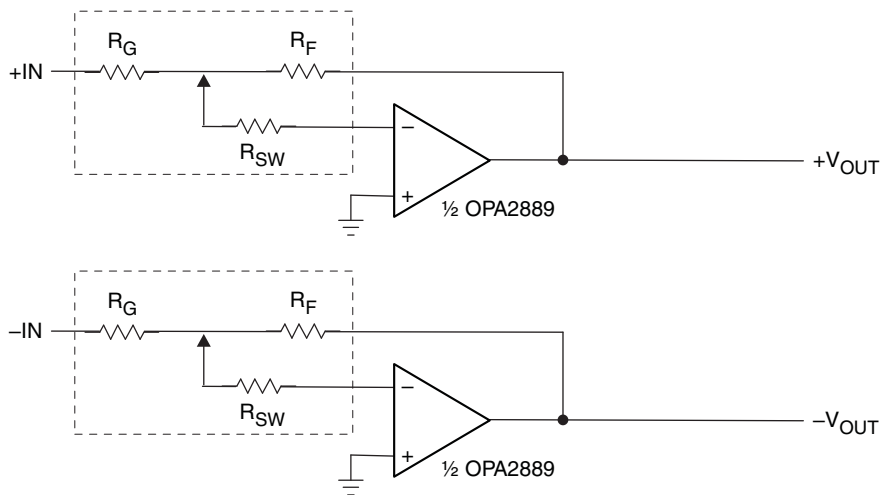

FUNCTION TABLE

Table 1. Switch Truth Table

DECIMAL CONTROL	FEDCBA	GAIN/ATTN (dB)	R _G (Ω)	R _F (Ω)
63	111111	23.25	161	2339
62	111110	22.5	174	2326
61	111101	21.75	189	2311
60	111100	21	205	2295
59	111011	20.25	221	2279
58	111010	19.5	239	2261
57	111001	18.75	259	2241
56	111000	18	280	2220
55	110111	17.25	302	2198
54	110110	16.5	325	2175
53	110101	15.75	351	2149
52	110100	15	377	2123
51	110011	14.25	406	2094
50	110010	13.5	436	2064
49	110001	12.75	468	2032
48	110000	12	502	1998
47	101111	11.25	537	1963
46	101110	10.5	575	1925
45	101101	9.75	614	1886
44	101100	9	655	1845
43	101011	8.25	697	1803
42	101010	7.5	742	1758
41	101001	6.75	787	1713
40	101000	6	835	1665
39	100111	5.25	883	1617
38	100110	4.5	933	1567
37	100101	3.75	984	1516
36	100100	3	1036	1464
35	100011	2.25	1089	1411
34	100010	1.5	1142	1358
33	100001	0.75	1196	1304
32	100000	0	1250	1250
31	011111	-0.75	1304	1196
30	011110	-1.5	1358	1142
29	011101	-2.25	1411	1089
28	011100	-3	1464	1036
27	011011	-3.75	1516	984
26	011010	-4.5	1567	933
25	011001	-5.25	1617	883
24	011000	-6	1665	835
23	010111	-6.75	1713	787
22	010110	-7.5	1758	742
21	010101	-8.25	1803	697
20	010100	-9	1845	655

Table 1. Switch Truth Table (continued)

DECIMAL CONTROL	FEDCBA	GAIN/ATTN (dB)	R _G (Ω)	R _F (Ω)
19	010011	-9.75	1886	614
18	010010	-10.5	1925	575
17	010001	-11.25	1963	537
16	010000	-12	1998	502
15	001111	-12.75	2032	468
14	001110	-13.5	2064	436
13	001101	-14.25	2094	406
12	001100	-15	2123	377
11	001011	-15.75	2149	351
10	001010	-16.5	2175	325
9	001001	-17.25	2198	302
8	001000	-18	2220	280
7	000111	-18.75	2241	259
6	000110	-19.5	2261	239
5	000101	-20.25	2279	221
4	000100	-21	2295	205
3	000011	-21.75	2311	189
2	000010	-22.5	2326	174
1	000001	-23.25	2339	161
0	000000	-24	2352	148

ABSOLUTE MAXIMUM RATINGS^{(1) (2)}

over operating free-air temperature range (unless otherwise noted)

			MIN	MAX	UNIT
$V_{DD} - V_{EE}$	Power supply delta voltage ⁽³⁾			10	V
V_{DD}	Positive supply voltage range ⁽³⁾		-0.3	5	V
V_{EE}	Negative supply voltage range ⁽³⁾		0.3	-5	V
V_{IN}	Control input voltage range ^{(2) (3)}		-0.3	$V_{DD} + 0.3$	V
$V_{I/O}$	Resistor I/O voltage range ^{(2) (3) (4)}		$V_{EE} - 0.3$	$V_{DD} + 0.3$	V
I_{IK}	Control input clamp current	$V_{IN} < 0$ and $V_{I/O} < 0$		-18	mA
$I_{I/OK}$	I/O port clamp current	$V_{IN} < 0$ and $V_{I/O} < 0$		-18	mA
T_{stg}	Storage temperature range		-40	85	°C

- (1) Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) All voltages are with respect to ground, unless otherwise specified.
- (3) The input and output voltage ratings may be exceeded if the input and output clamp-current ratings are observed.
- (4) V_I and V_O are used to denote specific conditions for $V_{I/O}$.

RECOMMENDED OPERATING CONDITIONS

over operating free-air temperature range (unless otherwise noted)

		MIN	TYP	MAX	UNIT
$V_{DD} - V_{EE}$	Power supply delta voltage			8	V
V_{DD}	Positive supply voltage	2.5	3.6	4	V
V_{EE}	Negative supply voltage	-2.5	-3.6	-4	V
V_{IH}	High-level control input voltage	$V_{DD} \times 0.65$			V
V_{IL}	Low-level control input voltage			$V_{DD} \times 0.35$	V
V_I	Control input voltage	GND		V_{DD}	V
$V_{I/O}$	Resistor inputs/outputs	V_{EE}		V_{DD}	V
T_A	Operating free-air temperature	-40		85	°C

ELECTRICAL CHARACTERISTICS

Dual ± 4 -V Supply

over operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
V_{IK}	Control inputs	$V_{DD} = 4\text{ V}$, $I_{IN} = -18\text{ mA}$			-1.8	V
I_{IN}		$V_{DD} = 4\text{ V}$, $V_{IN} = V_{DD}$ or GND			± 1	μA
$I_{DD} + I_{EE} $		$V_{DD} = 4\text{ V}$, $V_{EE} = -4\text{ V}$, $V_{IN} = V_{DD}$ or GND, $I_{IO} = 0$			100	μA
C_{IN}	Control capacitance ⁽¹⁾	$V_{DD} = 4\text{ V}$, $V_{IN} = V_{DD}$ or GND		3.2		pF
C_{RG}	RG capacitance ⁽¹⁾	$V_{IN} = 0\text{ V}$, frequency = 10 MHz		45		pF
C_{RF}	RF capacitance ⁽¹⁾	$V_{IN} = 0\text{ V}$, frequency = 10 MHz		45		pF
C_W	Wiper capacitance ⁽¹⁾	$V_{IN} = 0\text{ V}$, frequency = 10 MHz		45		pF
R	End-to-end resistance		1.75	2.5	3.25	k Ω
R_W	Wiper resistance				420	Ω
INL	Integral nonlinearity		-0.3		0.3	dB
DNL	Differential nonlinearity		-0.3		0.3	dB

- (1) The AC method is a frequency domain measurement. A 10-MHz ac voltage signal of known dc offset and amplitude of 82.5 mV are applied to the pin under test. The imaginary component of the complex current is measured and used in the equation:
 $C = I_{im} / (2 \times \pi \times F \times V_{IN})$ where I_{im} = imaginary component of input current, V_{IN} = magnitude of input voltage, and F = frequency.

SWITCHING CHARACTERISTICS⁽¹⁾

over operating free-air temperature range (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
t_{PS}	Control to output step delay			100		ns
BW	Analog signal bandwidth	For a typical example, see Figure 2	8			MHz

- (1) Typical bandwidth shown in [Figure 2](#) supports 6 MHz minimum.

PARAMETER MEASUREMENT INFORMATION

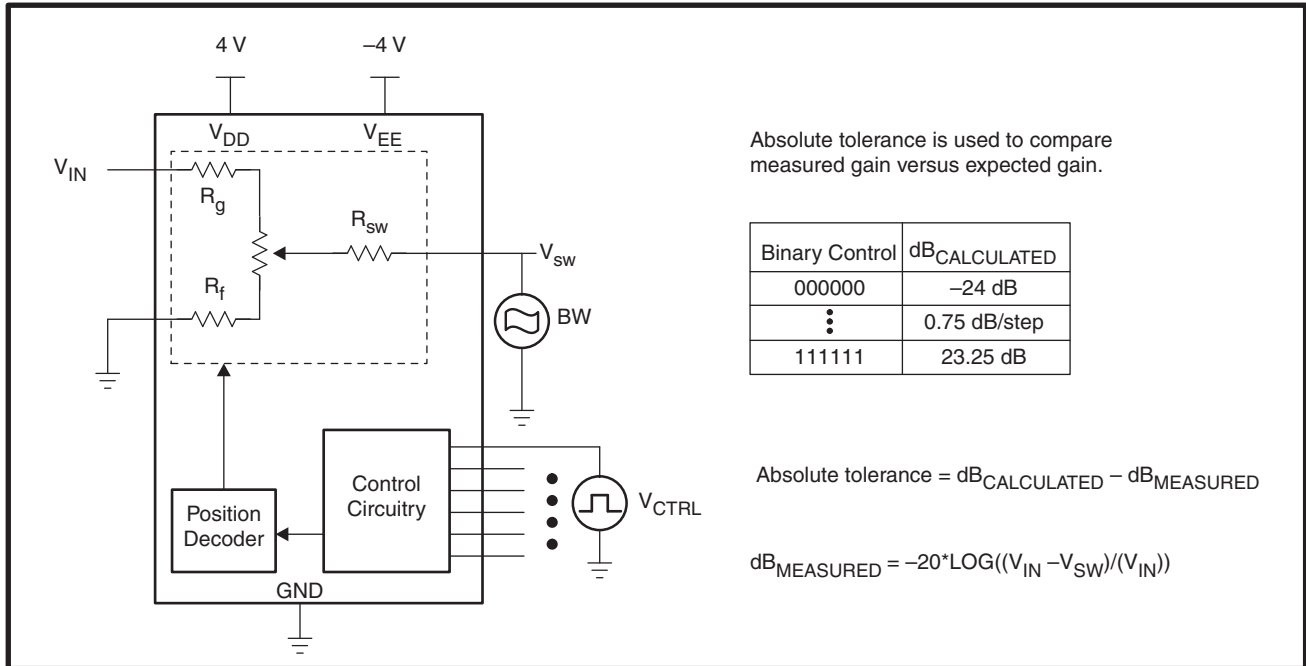


Figure 1. Analog Signal Bandwidth and Absolute Tolerance

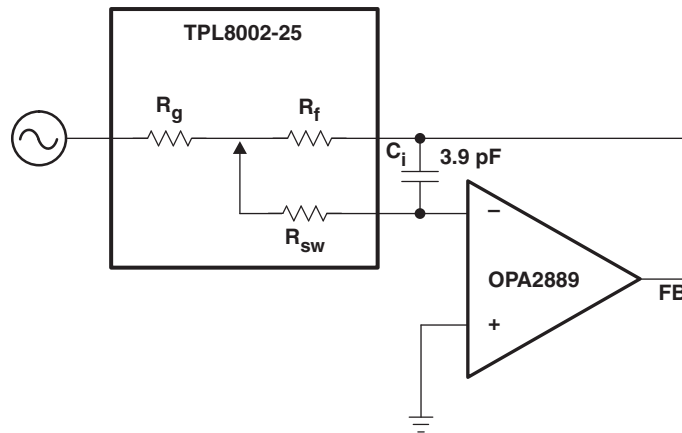


Figure 2. Bandwidth Setup

PACKAGING INFORMATION

Orderable part number	Status (1)	Material type (2)	Package Pins	Package qty Carrier	RoHS (3)	Lead finish/ Ball material (4)	MSL rating/ Peak reflow (5)	Op temp (°C)	Part marking (6)
TPL8002-25PWR	Active	Production	TSSOP (PW) 16	2000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	PHY03A
TPL8002-25PWR.B	Active	Production	TSSOP (PW) 16	2000 LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 85	PHY03A

(1) **Status:** For more details on status, see our [product life cycle](#).

(2) **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

(3) **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

(4) **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

(5) **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

(6) **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer:The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

TAPE AND REEL INFORMATION

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE


*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TPL8002-25PWR	TSSOP	PW	16	2000	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1

TAPE AND REEL BOX DIMENSIONS


*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TPL8002-25PWR	TSSOP	PW	16	2000	353.0	353.0	32.0



4220204/B 12/2023

NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
5. Reference JEDEC registration MO-153.

EXAMPLE BOARD LAYOUT

PW0016A

TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE



LAND PATTERN EXAMPLE
EXPOSED METAL SHOWN
SCALE: 10X



SOLDER MASK DETAILS

4220204/B 12/2023

NOTES: (continued)

- 6. Publication IPC-7351 may have alternate designs.
- 7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

EXAMPLE STENCIL DESIGN

PW0016A

TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE



SOLDER PASTE EXAMPLE
BASED ON 0.125 mm THICK STENCIL
SCALE: 10X

4220204/B 12/2023

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#), [TI's General Quality Guidelines](#), or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025