



Literature Number: ZHCA398

Surface Mount - Tape & Reel

General Description

Tape-and-Reel is one of the primary methods for shipping surface mount devices. This system simplifies the handling of semiconductors for automated circuit board assembly systems. Tape-and-Reel holds hundreds-to-thousands of surface mount devices so that pick-and-place machines have to be reloaded less frequently.

Features

- The reel is made of polystyrene (PS) plastic material and topically coated with antistatic solution.
- The carrier tape is made of standard polycarbonate or polystyrene materials.
- The cover tape is made of polyester material.
- The cover tape uses pressure sensitive or heat activated adhesive.
- Fully compliant to EIA-481 electronics industry standard.
- Meets European standard IEC 60286-3 PACKAGING OF COMPONENTS FOR AUTOMATIC HANDLING PART 3: PACKAGING OF SURFACE MOUNT COMPONENTS ON CONTINUOUS TAPES.

- Product is shipped in either 7-inch or 13-inch reels, depending on package/product types.

NOTE: Please check with your National local representative for details specific to your product needs.

Cover Tape Peel Strength


The force required to peel off the cover tape from the carrier tape will fall within the range of 0.1 Newton to 1.3 Newton (10 grams to 130 grams) at a peeling speed to 300 mm per minute. This complies with the EIA standard.

Electrostatic Charges

National Semiconductor uses only static dissipative tape-and-reel materials (surface resistivity of 10^5 to $10^{12} \Omega$ to avoid damaging static charges building up during the peeling off of the cover tape prior to pick and place. National Semiconductor ran extensive evaluations on cover tape materials and found that static charge build up was very low (less than 200 volts) on static dissipative cover tapes. In comparison, commonly used insulative cover tapes had readings consistently in excess of 3000 volts.

For All Package Types


For all Package Types			
Overall Hub Length (mm)		Overall Leader Length (mm)	
300 minimum	740 maximum	500 minimum	1200 maximum




20016419

FIGURE 1. Pin 1 Orientation

MINI SOIC, SOIC, SSOP, TSSOP and PSOP

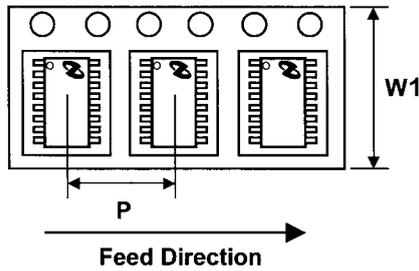

20016401

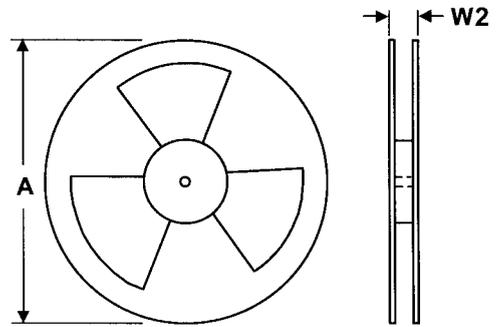

20016402

Package Type Lead Count	MKT- Outline Drawing	Tape Size W1 (mm)	Pocket Pitch P(mm)	Pin 1 Quadrant Figure 1	Units per Reel	Reel Size A (inches)	Reel Width W2 (mm)
MINI SOIC							
8 Ld	MUA08A	12	8	Q1	250/1000/3500	7/13	18/18.4
	MUY08A						
10 Ld	MUB10A	12	8	Q1	250/1000/3500	7/13	18/18.4
	MUC10A						

Ordering Instruction for 250 units/reel: use Suffix "E". Example: LMH6612MME

Ordering Instruction for 1000 units/reel: no Suffix, Example: LMH6612MM

Ordering Instruction for 3500 units/reel: use Suffix 'X'. Example: LMH6612MMX

SOIC							
8 Ld (Narrow)	M08A	12	8	Q1	250/2500	7/13	18/18.4
14 Ld (Narrow)	M14A	16	8	Q1	250/2500	7/13	22.4
16 Ld (Narrow)	M16A	16	8	Q1	250/2500	7/13	22.4
14 Ld (Wide)	M14B	16	12	Q1	1000	13	22.4
16 Ld (Wide)	M16B	16	12	Q1	1000	13	22.4
20 Ld (Wide)	M20B	24	12	Q1	1000	13	30.4
24 Ld (Wide)	M24B	24	12	Q1	1000	13	30.4
28 Ld (Wide)	M28B	24	12	Q1	1000	13	30.4

Note: Standard Packing Option is Rail.

Narrow Ordering Instruction for 250 units/reel: use Suffix 'E'. Example: LMP2231BMAE


Wide Ordering Instruction for 1000 units/reel: use Suffix "X". Example: ADC0831CCWMX

Narrow Ordering Instruction for 2500 units/reel: use Suffix 'X'. Example: LMP2231BMAX


TSSOP							
14 Ld	MTC14	12	8	Q1	250/2500	7/13	18/18.4
	MXA14A						
16 Ld	MTC16	12	8	Q1	250/2500	7/13	18/18.4
	MXA16A						
20 Ld	MTC20	16	8	Q1	250/2500	7/13	22.4
	MXA20A						
24 Ld	MTC24	16	8	Q1	250/2500	7/13	22.4
28 Ld	MTC28	16	8	Q1	250/2500	7/13	22.4
	MXA28A						
48 Ld	MTD48	24	12	Q1	1000	13	30.4
56 Ld	MTD56	24	12	Q1	1000	13	30.4
64 Ld	MXD64A	24	12	Q1	1000	13	30.4

Package Type Lead Count	MKT- Outline Drawing	Tape Size W1 (mm)	Pocket Pitch P(mm)	Pin 1 Quadrant <i>Figure 1</i>	Units per Reel	Reel Size A (inches)	Reel Width W2 (mm)
<p>Note: Standard Packing Option is Rail. Ordering Instruction for 250 units/reel: use Suffix 'E'. Example: LMP2234BMTE Ordering Instruction for 1000 units/reel: use Suffix "X". Example: LM8207MTX Ordering Instruction for 2500 units/reel: use Suffix 'X'. Example: LMP2234BMTX</p>							
10 Ld	MXF10A	12	8	Q1	250/1000/3500 0	7/13	18/18.4
<p>Ordering Instruction for 250 units/reel: use Suffix "E". Example: LM4914MHE Ordering Instruction for 1000 units/reel: no Suffix, Example: LM4990MH Ordering Instruction for 3500 units/reel: use Suffix "X". Example: LM4990MHX</p>							
SSOP-JEDEC							
16 Ld	MQA16	16	8	Q1	2500	13	22.4
24 Ld	MQA24	16	8	Q1	2500	13	22.4
48 Ld	MS48A	32	16	Q1	1000	13	38.4
<p>Note: Standard Packing Option is Rail. For Tape & Reel Packing use Suffix 'X'. Example: LM82CIMQAX</p>							
SSOP-EIAJ							
20 Ld	MSA20	16	12	Q1	2000	13	22.4
24 Ld	MSA24	16	12	Q1	2000	13	22.4
28 Ld	MSA28	16	12	Q1	2000	13	22.4
<p>Note: Standard Packing Option is Rail. For Tape & Reel Packing use Suffix 'X'. Example: DSP92LV1212AMSAX</p>							
PSOP							
8 Ld	MRA08A	12	8	Q1	250/2500	7/13	18/18.4
	MRA08B						
<p>Note: Standard Packing Option is Rail. Ordering Instruction for 2500 units/reel: use Suffix 'X'. Example: LP2998MRX Ordering Instruction for 250 units/reel: use Suffix 'E'. Example: LP2998MRE</p>							

PLCC

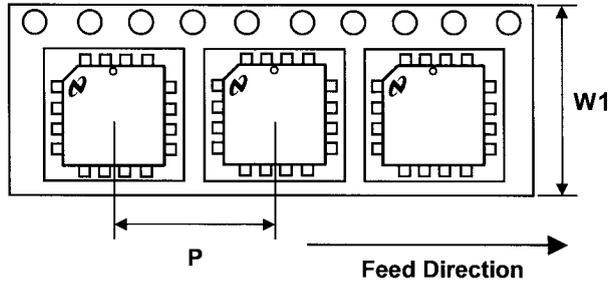

20016403

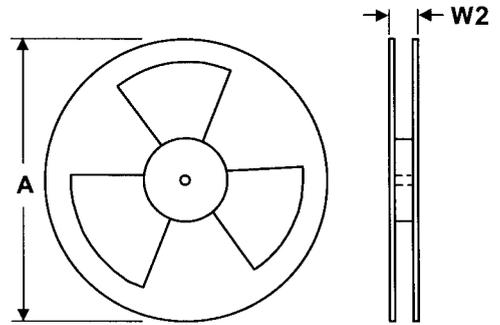


20016402


Package Type Lead Count	MKT- Outline Drawing	Tape Size W1 (mm)	Pocket Pitch P(mm)	Pin 1 Quadrant Figure 1	Units per Reel	Reel Size A (inches)	Reel Width W2 (mm)
PLCC							
20 Ld	V20A	16	12	Q1/Q2	1000	13	22.4
28 Ld	V28A	24	16	Q1/Q2	750	13	30.4
44 Ld	V44A	32	24	Q1/Q2	500	13	38.4
68 Ld	V68A	44	32	Q1/Q2	250	13	50.4
84 Ld	V84A	44	36	Q1/Q2	250	13	50.4

Standard Packing Option is Rail.
For Tape & Reel Packing please contact your local NSC representative.

PQFP, LQFP and TQFP

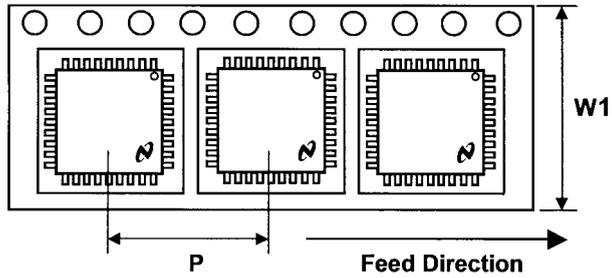

20016404

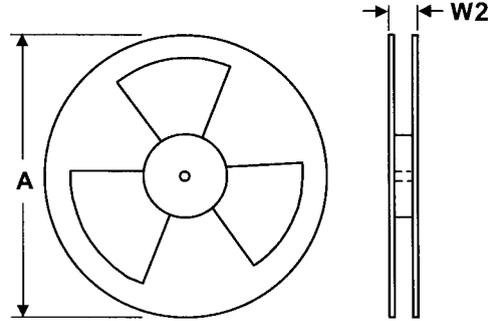

20016402

Package Type Lead Count	MKT- Outline Drawing	Tape Size W1 (mm)	Pocket Pitch P(mm)	Pin 1 Quadrant <i>Figure 1</i>	Units per Reel	Reel Size A (inches)	Reel Width W2 (mm)
----------------------------	-------------------------	----------------------	-----------------------	--------------------------------------	----------------	-------------------------	-----------------------

PQFP							
80 Ld	VJE80A	32	24	Q2	500	13	38.4

Standard Packing Option is Tray.

For Tape & Reel Packing please contact your local NSC representative.

LQFP							
32 Ld	VBE32A	16	12	Q2	1000	13	22.4
44 Ld	VEJ44A	24	16	Q2	1000	13	30.4
48 Ld	VBH48A	16	12	Q2	1000	13	22.4
	VXH48A						
64 Ld	VEH64A	24	16	Q2	1000	13	30.4
80 Ld	VHG80A	24	16	Q2	1000	13	30.4
100 Ld	VJG100A	32	24	Q2	1000	13	38.4
128 Ld	VLB128A	44	24	Q1	500	13	50.4
144 Ld	VNG144A	44	32	Q1	500	13	50.4
144 Ld	VNG144C	44	32	Q2	500	13	50.4

Note: Standard Packing Option is Tray.

For Tape & Reel Packing use Suffix 'X'. Example: ADC12040CIVYX




TQFP							
32 Ld	VXA32A	16	12	Q2	1000	13	22.4
48 Ld	VBC48A	16	12	Q2	1000	13	22.4
64 Ld	VEC64A	24	16	Q2	1000	13	30.4
	VXE64A						
80 Ld	VHB80A	24	20	Q2	1000	13	30.4
100 Ld	VJD100A	32	24	Q2	1000	13	38.4

Note: Standard Packing Option is Tray.

For Tape & Reel Packing use Suffix 'X'. Example: DS90CF388VJDX




Note 1: Exposed Heatsink

TO-263, TO-263 THIN and TO-252

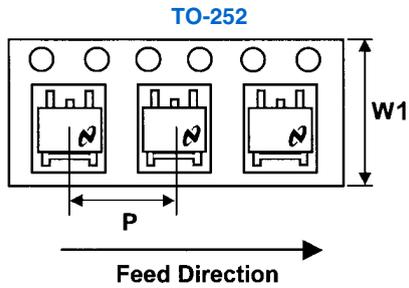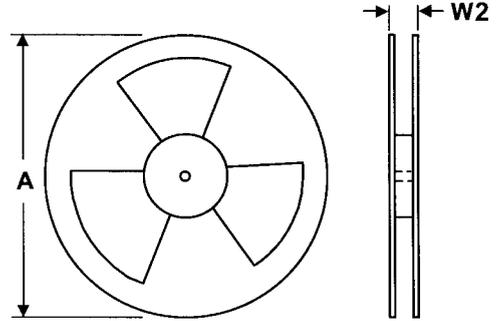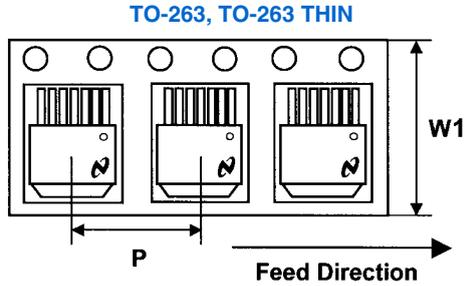


Package Type Lead Count	MKT- Outline Drawing	Tape Size W1 (mm)	Pocket Pitch P(mm)	Pin 1 Quadrant <i>Figure 1</i>	Units per Reel	Reel Size A (inches)	Reel Width W2 (mm)
TO-263							
3 Ld	TS3B	24	16	Q2	500	13	30.4
5 Ld	TS5B	24	16	Q2	500	13	30.4
7 Ld	TS7B	24	16	Q2	500	13	30.4
9 Ld	TS9A	24	16	Q2	500	13	30.4
Note: Standard Packing Option is Rail. For Tape & Reel Packing use Suffix 'X'. Example: LP2954AISX							
TO-263 THIN							
3 Ld	TJ3A	24	12	Q2	1000	13	30.4
5 Ld	TJ5A	24	12	Q2	1000	13	30.4
7 Ld	TJ7A	24	12	Q2	1000	13	30.4
9 Ld	TJ9A	24	12	Q2	1000	13	30.4
Note: Standard Packing Option is 1000 units in Tape and Reel.							
TO-252							
3 Ld	TD03B	16	8	Q2	2500	13	22.4
Note: Standard Packing Option is Rail. For Tape & Reel Packing use Suffix 'X'. Example: LM1117DTX-ADJ							

SOT-23, SOT-223, SC-70 and TSOT

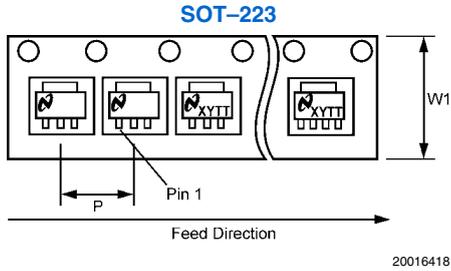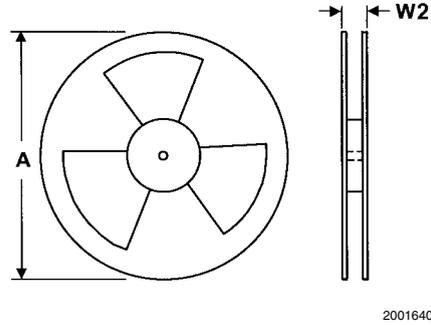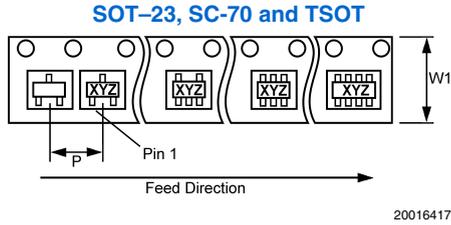


Package Type Lead Count	MKT- Outline Drawing	Tape Size W1 (mm)	Pocket Pitch P(mm)	Pin 1 Quadrant <i>Figure 1</i>	Units per Reel	Reel Size A (inches)	Reel Width W2 (mm)
SOT-23							
3 Ld	MF03A	8	4	Q3	1000/3000	7	14.4
5 Ld	MF05A	8	4	Q3	1000/3000	7	14.4
6 Ld	MF06A	8	4	Q3	1000/3000	7	14.4
8 Ld	MF08A	8	4	Q3	1000/3500	7/13	18/18.4
Ordering Instruction for smaller quantities: no Suffix 'X'. Example: LM431ACM3 For larger quantities use Suffix 'X'. Example: LM431ACM3X							
SC-70							
5 Ld	MAA05A	8	4	Q3	1000/3000	7	14.4
6 Ld	MAA06A	8	4	Q3	1000/3000	7	14.4
Ordering Instruction for 1000 units/reel: no Suffix 'X'. Example: LMV821M7 For 3000 units/reel use Suffix 'X'. Example: LMV821M7X							
SOT-223							
4 Ld	MP04A	16	12	Q3	1000/2000	13	22.4
5 Ld	MP05A	16	12	Q3	1000/2000	13	22.4
Ordering Instruction for 1000 units/reel: no Suffix 'X'. Example: LM317AEMP For 2000 units/reel use Suffix 'X'. Example: LM317AEMPX							
TSOT							
6 Ld	MK06A	8	4	Q3	1000/3000	7	14.4
Ordering Instruction for 1000 units/reel: no Suffix 'X'. Example: LM2734XMK For 3000 units/reel use Suffix 'X'. Example: LM2734XMKX							

Micro SMD, Micro SMDxt and Micro Array




20016414

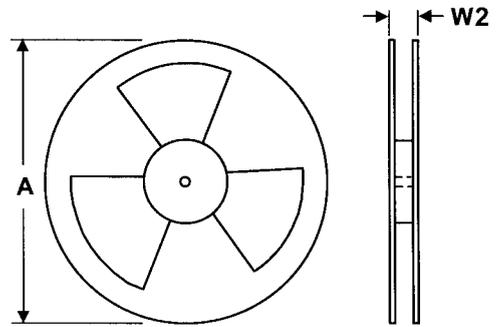


20016402

Package Type Lead Count	MKT- Outline Drawing	Tape Size W1 (mm)	Pocket Pitch P(mm)	Pin 1 Quadrant <i>Figure 1</i>	Units per Reel	Reel Size A (inches)	Reel Width W2 (mm)
Micro SMD							
All Micro SMD Small Bump, Large Bump, SnPb, Pb-free		8	4	Q1	250/3000	7	14.4
Ordering Instruction for 250 units/reel: No Suffix 'X'. Example: LM4872IBP For 3000 units/reel use Suffix 'X'. Example: LM4872IBPX							
Micro SMDxt							
All Micro SMDxt		12	8	Q1	250/1000	7	18
Ordering Instruction for 250 units/reel: No Suffix 'X'. Example: LM4934RL For 1000 units/reel use Suffix 'X'. Example: LM4934RLX							
Micro Array							
All Micro Array		12	8	Q1	1000/3500	7/13	18/18.4
Ordering Instruction for 1000 units/reel: No Suffix 'X'. Example: LM4308GR For 3500 units/reel use Suffix 'X'. Example: LM4308GRX							

FBGA, TFBGA, UFBGA, LBGA and LTCC

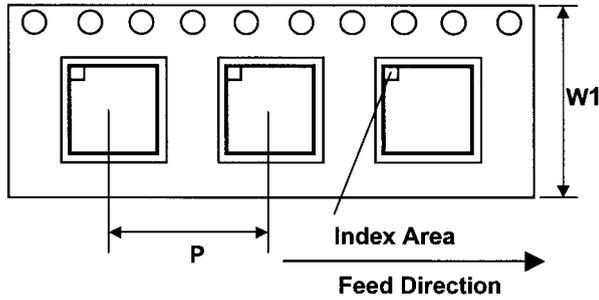

20016415

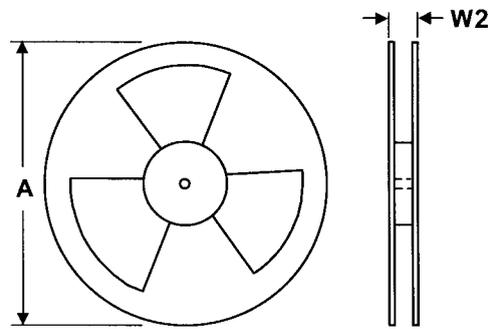

20016402

Package Type Lead Count	MKT- Outline Drawing	Tape Size W1 (mm)	Pocket Pitch P(mm)	Pin 1 Quadrant <i>Figure 1</i>	Units per Reel	Reel Size A (inches)	Reel Width W2 (mm)
FBGA							
49 Bumps	SLC49A	16	12	Q1	2000	13	22.4
64 Bumps	SLC64A	16	12	Q1	2000	13	22.4
81 Bumps	SLC81A	16	12	Q1	2000	13	22.4
100 Bumps	SLC100A	24	16	Q1	1000	13	30.4

Standard Packing Option is Tray.

For Tape & Reel Packing use Suffix 'X'. Example: SCANSTA111SMX

TFBGA							
60 Bumps	SLF60A	16	8	Q2	2500	13	22.4

Standard Packing Option is Tray.

For Tape & Reel Packing use Suffix 'X'. Example: LMX9830SMX

UFBGA							
49 Bumps	SLH49A	12	8	Q1	1000/4500	7/13	18/18.4

Ordering Instruction for 1000 units/reel: No Suffix 'X'. Example: LM2502SM

For 4500 units/reel use Suffix 'X'. Example: LM2502SMX

LBGA							
196 Bumps	UJB196A	24	20	Q1	1000	13	30.4
	UJB196B						

Standard Packing Option is Tray.


For Tape & Reel Packing use Suffix 'X'. Example: SCAN926260TUFX

LTCC							
70 Bumps	SB70A	32	16	Q1	1000	13	38.4


Standard Packing Option is Tray.

For Tape & Reel Packing use Suffix 'X'. Example: LMX9838SBX

Laminated CSP, Laminate TCSP and LLP

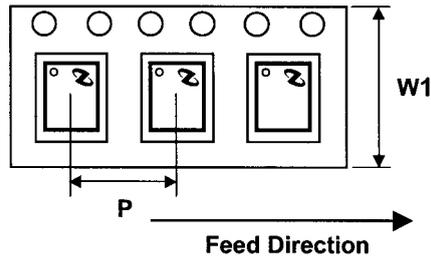

20016416

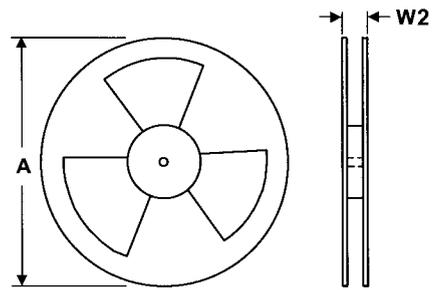

20016402

Package Type Lead Count (Lead Pitch)	MKT- Outline Drawing	Tape Size W1 (mm)	Pocket Pitch P(mm)	Pin 1 Quadrant <i>Figure 1</i>	Units per Reel	Reel Size A (inches)	Reel Width W2 (mm)
--	-------------------------	----------------------	-----------------------	--------------------------------------	----------------	-------------------------	-----------------------

Laminate CSP

16 Ld	SLB16A	12	8	Q1	2500	13	18.4
24 Ld	SLB24A	12	8	Q1	2500	13	18.4
28 Ld	SLB28A	12	8	Q1	250/2500	7/13	18/18.4
48 Ld	SLB48A	16	12	Q1	250/2500	7/13	22.4
128 Ld	SLB128A	24	16	Q1	500/1000	13	30.4
	SLB128B						

Standard Packing Option is Tape & Reel with Suffix 'X'.

Example: LMV2401SLBX

176 Ld	SLB176A	24	16	Q1	1000	13	30.4
--------	---------	----	----	----	------	----	------

Standard Packing Option is Tray.

For Tape & Reel Packing use Suffix 'X'. Example: LMX1630SLBX

Laminate TCSP

20 Ld	SLB48B	12	8	Q1	2500	13	18.4
24 Ld	SLD24A	12	8	Q1	2500	13	18.4
	SLE24A						
32 Ld	SLD32A	12	8	Q1	1000/2500	7/13	18/18.4

Ordering Instruction for smaller quantities: no Suffix 'X'. Example: LP3936SL

For larger quantities use Suffix 'X'. Example: LP3936SLX

Pullback LLP-Dual

6 Ld	LDB06A	12	8	Q1	1000/4500	7/13	18/18.4
	LDE06A						
	LDC06D						
8 Ld	LDA08A	12	8	Q1	1000/4500	7/13	18/18.4
	LDC08A						
	LDA08B						
	LDA08C						
10 Ld	YDA08A	12	8	Q1	1000/4500	7/13	18/18.4
	LDA10A						
14 Ld	LDA10B	12	8	Q1	1000/4500	7/13	18/18.4
	LDA14A						
14 Ld	LDC14A	16	12	Q1	250/2500	7/13	18/18.4
16 Ld	LDA16A	12	8	Q1	250/2500	7/13	18/18.4

Ordering Instruction for smaller quantities: no Suffix 'X'. Example: LM4871LD

For larger quantities use Suffix 'X'. Example: LM4871LDX

Pullback LLP-Quad

8 Ld	LQB08A	12	8	Q1	1000/4500	7/13	18/18.4
------	--------	----	---	----	-----------	------	---------

Package Type Lead Count (Lead Pitch)	MKT- Outline Drawing	Tape Size W1 (mm)	Pocket Pitch P(mm)	Pin 1 Quadrant <i>Figure 1</i>	Units per Reel	Reel Size A (inches)	Reel Width W2 (mm)
16 Ld	LQA16A	12	8	Q1	1000/4500	7/13	18/18.4
20 Ld	LQA20A	12	8	Q1	1000/4500	7/13	18/18.4
24 Ld	LQA24A	12	8	Q1	1000/4500	7/13	18/18.4
	YQA24A						
28 Ld	LQA28A	12	8	Q1	1000/4500	7/13	18/18.4
32 Ld	LQA32A	16	12	Q1	250/2500	7/13	22.4
36 Ld	LQA36A	16	12	Q1	250/2500	7/13	22.4
44 Ld	LQA44A	16	12	Q1	250/2500	7/13	22.4
Ordering Instruction for smaller quantities: no Suffix 'X'. Example: DS92LV040ATLQA For larger quantities use Suffix 'X'. Example: DS92LV040ATLQAX							
56 Ld	LQA56A	16	12	Q1	2000	13	22.4
Standard Packing Option is Tray. For Tape & Reel Packing please contact your local NSC representative.							
No Pullback LLP							
6 Ld	LCA06B	12	8	Q1	1000/4500	7/13	18/18.4
	SDB06A						
	SDE06A						
8 Ld	SDA08A	12	8	Q1	1000/4500	7/13	18/18.4
	SDA08B						
	SDA08C						
	SDC08A						
	SDC08B						
10 Ld	SDA10A	12	8	Q1	1000/4500	7/13	18/18.4
	SDC10A						
14 Ld	SDA14A	12	8	Q1	1000/4500	7/13	18/18.4
	SDA14B						
14 Ld	SRC14A	16	12	Q1	250/2500	7/13	22.4
16 Ld	SDA16A	12	8	Q1	1000/4500	7/13	18/18.4
	SDA16B						
	SQA16A						
	SQB16A						
24 Ld	SQA24A	12	8	Q1	1000/4500	7/13	18/18.4
	SQA24B						
	SQA24C						
28 Ld	SPA28A	12	8	Q1	1000/4500	7/13	18/18.4
	SQA28A						
32 Ld	SQA32A	12	8	Q1	1000/4500	7/13	18/18.4
40 Ld	SQF40A	12	8	Q1	1000/4500	7/13	18/18.4
	SNA40A	16	12	Q1	250/2500	7/13	22.4
	SQA40A	16	12	Q1	250/2500	7/13	22.4
	SQA40B	16	12	Q1	250/2500	7	22.4
48 Ld	SPA48A	16	12	Q1	250/2500	7/13	22.4
	SQA48A						
	SQA48D						
	SQF48A						
Ordering Instruction for smaller quantities: no Suffix 'X'. Example: LM71CISD For larger quantities use Suffix 'X'. Example: LM71CISDX							

For more National Semiconductor product information and proven design tools, visit the following Web sites at:

Products		Design Support	
Amplifiers	www.national.com/amplifiers	WEBENCH® Tools	www.national.com/webench
Audio	www.national.com/audio	App Notes	www.national.com/appnotes
Clock and Timing	www.national.com/timing	Reference Designs	www.national.com/refdesigns
Data Converters	www.national.com/adc	Samples	www.national.com/samples
Interface	www.national.com/interface	Eval Boards	www.national.com/evalboards
LVDS	www.national.com/lvds	Packaging	www.national.com/packaging
Power Management	www.national.com/power	Green Compliance	www.national.com/quality/green
Switching Regulators	www.national.com/switchers	Distributors	www.national.com/contacts
LDOs	www.national.com/ldo	Quality and Reliability	www.national.com/quality
LED Lighting	www.national.com/led	Feedback/Support	www.national.com/feedback
Voltage Reference	www.national.com/vref	Design Made Easy	www.national.com/easy
PowerWise® Solutions	www.national.com/powerwise	Solutions	www.national.com/solutions
Serial Digital Interface (SDI)	www.national.com/sdi	Mil/Aero	www.national.com/milaero
Temperature Sensors	www.national.com/tempensors	SolarMagic™	www.national.com/solarmagic
Wireless (PLL/VCO)	www.national.com/wireless	PowerWise® Design University	www.national.com/training

THE CONTENTS OF THIS DOCUMENT ARE PROVIDED IN CONNECTION WITH NATIONAL SEMICONDUCTOR CORPORATION ("NATIONAL") PRODUCTS. NATIONAL MAKES NO REPRESENTATIONS OR WARRANTIES WITH RESPECT TO THE ACCURACY OR COMPLETENESS OF THE CONTENTS OF THIS PUBLICATION AND RESERVES THE RIGHT TO MAKE CHANGES TO SPECIFICATIONS AND PRODUCT DESCRIPTIONS AT ANY TIME WITHOUT NOTICE. NO LICENSE, WHETHER EXPRESS, IMPLIED, ARISING BY ESTOPPEL OR OTHERWISE, TO ANY INTELLECTUAL PROPERTY RIGHTS IS GRANTED BY THIS DOCUMENT.

TESTING AND OTHER QUALITY CONTROLS ARE USED TO THE EXTENT NATIONAL DEEMS NECESSARY TO SUPPORT NATIONAL'S PRODUCT WARRANTY. EXCEPT WHERE MANDATED BY GOVERNMENT REQUIREMENTS, TESTING OF ALL PARAMETERS OF EACH PRODUCT IS NOT NECESSARILY PERFORMED. NATIONAL ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR BUYER PRODUCT DESIGN. BUYERS ARE RESPONSIBLE FOR THEIR PRODUCTS AND APPLICATIONS USING NATIONAL COMPONENTS. PRIOR TO USING OR DISTRIBUTING ANY PRODUCTS THAT INCLUDE NATIONAL COMPONENTS, BUYERS SHOULD PROVIDE ADEQUATE DESIGN, TESTING AND OPERATING SAFEGUARDS.

EXCEPT AS PROVIDED IN NATIONAL'S TERMS AND CONDITIONS OF SALE FOR SUCH PRODUCTS, NATIONAL ASSUMES NO LIABILITY WHATSOEVER, AND NATIONAL DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY RELATING TO THE SALE AND/OR USE OF NATIONAL PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS PRIOR WRITTEN APPROVAL OF THE CHIEF EXECUTIVE OFFICER AND GENERAL COUNSEL OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

Life support devices or systems are devices which (a) are intended for surgical implant into the body, or (b) support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in a significant injury to the user. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system or to affect its safety or effectiveness.

National Semiconductor and the National Semiconductor logo are registered trademarks of National Semiconductor Corporation. All other brand or product names may be trademarks or registered trademarks of their respective holders.

Copyright© 2009 National Semiconductor Corporation

For the most current product information visit us at www.national.com



**National Semiconductor
Americas Technical
Support Center**
Email: support@nsc.com
Tel: 1-800-272-9959

**National Semiconductor Europe
Technical Support Center**
Email: europe.support@nsc.com

**National Semiconductor Asia
Pacific Technical Support Center**
Email: ap.support@nsc.com

**National Semiconductor Japan
Technical Support Center**
Email: jpn.feedback@nsc.com

重要声明

德州仪器(TI) 及其下属子公司有权在不事先通知的情况下, 随时对所提供的产品和服务进行更正、修改、增强、改进或其它更改, 并有权随时中止提供任何产品和服务。客户在下订单前应获取最新的相关信息, 并验证这些信息是否完整且是最新的。所有产品的销售都遵循在订单确认时所提供的TI 销售条款与条件。

TI 保证其所销售的硬件产品的性能符合TI 标准保修的适用规范。仅在TI 保证的范围内, 且TI 认为有必要时才会使用测试或其它质量控制技术。除非政府做出了硬性规定, 否则没有必要对每种产品的所有参数进行测试。

TI 对应用帮助或客户产品设计不承担任何义务。客户应对其使用TI 组件的产品和应用自行负责。为尽量减小与客户产品和应用相关的风险, 客户应提供充分的设计与操作安全措施。

TI 不对任何TI 专利权、版权、屏蔽作品权或其它与使用了TI 产品或服务的组合设备、机器、流程相关的TI 知识产权中授予的直接或隐含权限作出任何保证或解释。TI 所发布的与第三方产品或服务有关的信息, 不能构成从TI 获得使用这些产品或服务的许可、授权、或认可。使用此类信息可能需要获得第三方的专利权或其它知识产权方面的许可, 或是TI 的专利权或其它知识产权方面的许可。

对于TI 的产品手册或数据表, 仅在没有对内容进行任何篡改且带有相关授权、条件、限制和声明的情况下才允许进行复制。在复制信息的过程中对内容的篡改属于非法的、欺诈性商业行为。TI 对此类篡改过的文件不承担任何责任。

在转售TI 产品或服务时, 如果存在对产品或服务参数的虚假陈述, 则会失去相关TI 产品或服务的明示或暗示授权, 且这是非法的、欺诈性商业行为。TI 对此类虚假陈述不承担任何责任。

TI 产品未获得用于关键的安全应用中的授权, 例如生命支持应用(在该类应用中一旦TI 产品故障将预计造成重大的人员伤亡), 除非各方官员已经达成了专门管控此类使用的协议。购买者的购买行为即表示, 他们具备有关其应用安全以及规章衍生所需的所有专业技术和知识, 并且认可和同意, 尽管任何应用相关信息或支持仍可能由TI 提供, 但他们将独力负责满足在关键安全应用中使用其产品及TI 产品所需的所有法律、法规和安全相关要求。此外, 购买者必须全额赔偿因在此类关键安全应用中使用TI 产品而对TI 及其代表造成的损失。

TI 产品并非设计或专门用于军事/航空应用, 以及环境方面的产品, 除非TI 特别注明该产品属于“军用”或“增强型塑料”产品。只有TI 指定的军用产品才满足军用规格。购买者认可并同意, 对TI 未指定军用的产品进行军事方面的应用, 风险由购买者单独承担, 并且独力负责在此类相关使用中满足所有法律和法规要求。

TI 产品并非设计或专门用于汽车应用以及环境方面的产品, 除非TI 特别注明该产品符合ISO/TS 16949 要求。购买者认可并同意, 如果他们在汽车应用中使用任何未被指定的产品, TI 对未能满足应用所需要求不承担任何责任。

可访问以下URL 地址以获取有关其它TI 产品和应用解决方案的信息:

	产品		应用
数字音频	www.ti.com.cn/audio	通信与电信	www.ti.com.cn/telecom
放大器和线性器件	www.ti.com.cn/amplifiers	计算机及周边	www.ti.com.cn/computer
数据转换器	www.ti.com.cn/dataconverters	消费电子	www.ti.com/consumer-apps
DLP® 产品	www.dlp.com	能源	www.ti.com/energy
DSP - 数字信号处理器	www.ti.com.cn/dsp	工业应用	www.ti.com.cn/industrial
时钟和计时器	www.ti.com.cn/clockandtimers	医疗电子	www.ti.com.cn/medical
接口	www.ti.com.cn/interface	安防应用	www.ti.com.cn/security
逻辑	www.ti.com.cn/logic	汽车电子	www.ti.com.cn/automotive
电源管理	www.ti.com.cn/power	视频和影像	www.ti.com.cn/video
微控制器 (MCU)	www.ti.com.cn/microcontrollers		
RFID 系统	www.ti.com.cn/rfidsys		
OMAP 机动性处理器	www.ti.com/omap		
无线连通性	www.ti.com.cn/wirelessconnectivity		
	德州仪器在线技术支持社区		www.deyisupport.com

邮寄地址: 上海市浦东新区世纪大道 1568 号, 中建大厦 32 楼 邮政编码: 200122
Copyright © 2011 德州仪器 半导体技术 (上海) 有限公司