

TAS6884-Q1 48V, 13A Digital Input 4-Channel Automotive Class-D Audio Amplifier With Current Sense and Real-time Load Diagnostics

1 Features

- AEC-Q100 qualified for automotive applications
 - Temperature grade 1: –40°C to +125°C, T_A
- General operation
 - 4.5V to 48V supply voltage, 50V load dump
 - Support for 1.8V and 3.3V I/O
 - I²C control with 8 address options
 - <2W idle power loss at 14.4V, <8μA max VBAT+PVDD shutdown loss
- Integrated DSP processing
 - Class-H supply voltage control
 - Thermal monitoring and foldback
 - Clip detection, PVDD monitoring and foldback
- Output current sensing by channel using I²S/TDM
 - No need for external circuitry
- Real-time load diagnostics
 - Monitor output conditions Open load, Shorted load while playing audio
 - Real-time temperature monitor for each channel
- DC and AC Standby load diagnostics
- Audio inputs
 - 2-4 channel I²S or 4-16 channel TDM input
 - Input sample rates: 44.1, 48, 96, 192kHz
 - Low latency <100μs at 96k sample rate
- Audio outputs
 - 384kHz to 2MHz configurable output switching frequency
 - Up to 13A channel output current
 - 400VA peak BTL output power
 - 136W (48V, 8Ω, 1% THD+N, BTL)
 - 250W (48V, 4Ω, 1% THD+N, BTL)
 - 418W (45V, 2Ω, 1% THD+N, PBTL)
- Audio Performance
 - THD+N 0.03% (8Ω, 1W, 1kHz)
 - 111dB SNR
 - 37μV (14.4V), 80μV (45V) output noise
- Protection
 - Output short protection
 - DC offset, undervoltage and overvoltage
 - Configurable overtemperature warning and individual channel shutdown
 - I²C temperature and supply voltage readout
- Easily meet CISPR25L5 EMC specification
 - Advanced spread-spectrum

2 Applications

- [Automotive external amplifier](#)
- [Automotive head unit](#)

3 Description

The TAS6884-Q1 is a four-channel, digital-input, high-voltage, Class-D audio amplifier that supports up to 48V supply voltage. The device provides four channels at 155W (48V, 8Ω, 1% THD, BTL) and 250W (48V, 4Ω, 1% THD, BTL).

The TAS6884-Q1 integrates DC and AC load diagnostics to determine the status of the connected loads before enabling the output stage. During audio playback, the status can be monitored through the output current sense and temperature of each channel which is available for each channel, and reports the measurement to a host processor through TDM with minimal delay.

The device monitors the output load condition while playing audio using real-time load diagnostics which operate independently from the host and audio input. To optimize system efficiency, the integrated DSP of the TAS6884-Q1 enables Class-H envelope tracking control, eliminating the need for the development of complex tracking software and external microcontroller.

The TAS6884-Q1 device features an additional low-latency signal path for each channel, providing up to 70% faster signal processing at 48kHz and support an audio signal path latency of < 100μs at 96kHz sample rate, which enables time-sensitive Active Noise Cancellation (ANC), Road Noise Cancellation (RNC) applications.

The TAS6884-Q1 is offered in a 64-pin QFP package with the exposed thermal pad up, TAS6884-Q1 is pin-to-pin compatible with TAS6684A-Q1.

Package Information

PART NUMBER	PACKAGE ⁽¹⁾	PACKAGE SIZE (NOM) ⁽²⁾
TAS6884-Q1	PHD (HTQFP, 64)	14mm × 14mm

- (1) For all available packages, see the orderable addendum at the end of the datasheet.
- (2) The package size (length × width) is a nominal value and includes pins, where applicable.



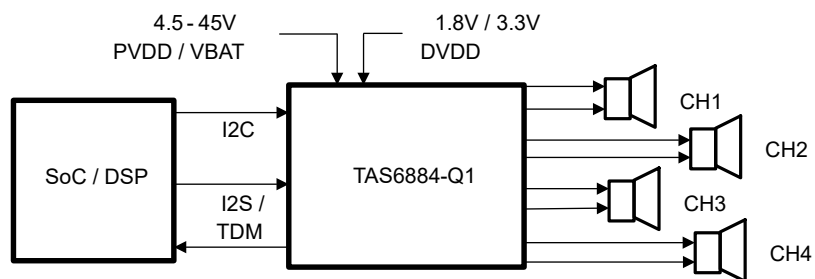
**Simplified Diagram**

Table of Contents

1 Features	1	5.4 Electrostatic Discharge Caution.....	4
2 Applications	1	5.5 Glossary.....	4
3 Description	1	6 Revision History	4
4 Related Products	3	7 Mechanical, Packaging, and Orderable Information	4
5 Device and Documentation Support	4	7.1 Package Option Addendum.....	5
5.1 Receiving Notification of Documentation Updates.....	4	7.2 Tape and Reel Information.....	6
5.2 Support Resources.....	4	7.3 Mechanical Data.....	8
5.3 Trademarks.....	4		

4 Related Products

PART NUMBER	CHANNEL COUNT	MAXIMUM PVDD OPERATION VOLTAGE	OTSD REGISTER REPORT FUNCTION	SCHOTTKY DIODE QUANTITY PBTL	2Ω PBTL 1% THD+N BD MODE MAX POUT
TAS6684-Q1	4	45V	Scenario dependent	16	200W at 25V
TAS6684A-Q1	4	45V	Valid	16	200W at 25V
TAS6682-Q1	2	45V	Valid	8	200W at 25V
TAS6884-Q1	4	48V BTL, 45V PBTL	Valid	0	400W at 45V

5 Device and Documentation Support

TI offers an extensive line of development tools. Tools and software to evaluate the performance of the device, generate code, and develop solutions are listed below.

5.1 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on [ti.com](https://www.ti.com). Click on *Notifications* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

5.2 Support Resources

TI E2E™ [support forums](#) are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

5.3 Trademarks

TI E2E™ is a trademark of Texas Instruments.

All trademarks are the property of their respective owners.

5.4 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

5.5 Glossary

[TI Glossary](#)

This glossary lists and explains terms, acronyms, and definitions.

6 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

DATE	REVISION	NOTES
August 2026	*	Initial Release

7 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this datasheet, refer to the left-hand navigation.


7.1 Package Option Addendum

Packaging Information


Orderable Device	Status ⁽¹⁾	Package Type	Package Drawing	Pins	Package Qty	Eco Plan ⁽²⁾	Lead/Ball Finish ⁽⁶⁾	MSL Peak Temp ⁽³⁾	Op Temp (°C)	Device Marking ⁽⁴⁾ ⁽⁵⁾
TAS6884QPHDRQ1	ACTIVE	HTQFP	PHD	64	1000	RoHS & Green	NIPDAU	Level-3-260C-168 HR	-40 to 125	TAS6884

- (1) The marketing status values are defined as follows:
ACTIVE: Product device recommended for new designs.
LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.
NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.
PRE_PROD Unannounced device, not in production, not available for mass market, nor on the web, samples not available.
PREVIEW: Device has been announced but is not in production. Samples may or may not be available.
OBSOLETE: TI has discontinued the production of the device.
- (2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check www.ti.com/productcontent for the latest availability information and additional product content details.
TBD: The Pb-Free/Green conversion plan has not been defined.
Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.
Pb-Free (RoHS Exempt): This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.
Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material).
- (3) MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.
- (4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.
- (5) Multiple Device markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.
- (6) Lead/Ball Finish - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.

7.2 Tape and Reel Information

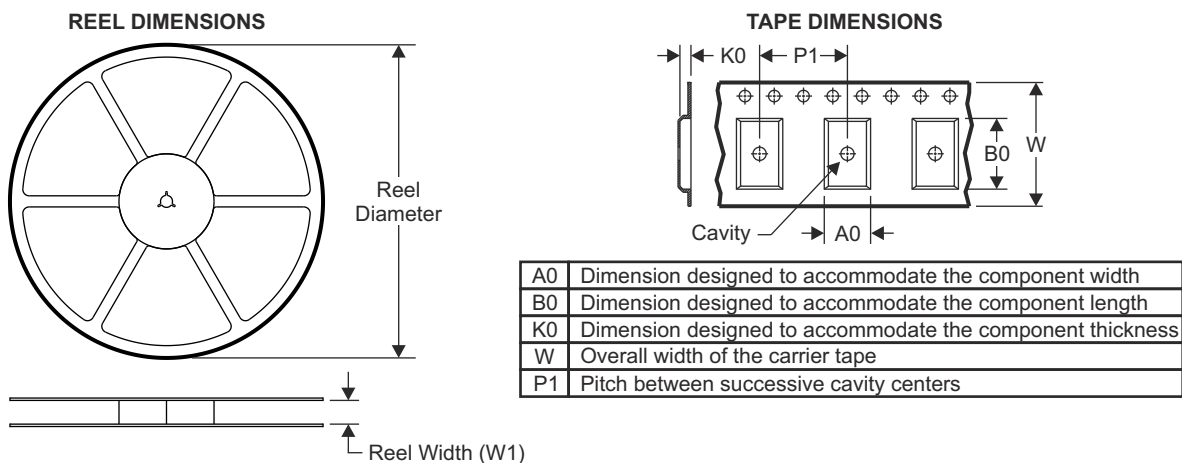


QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE

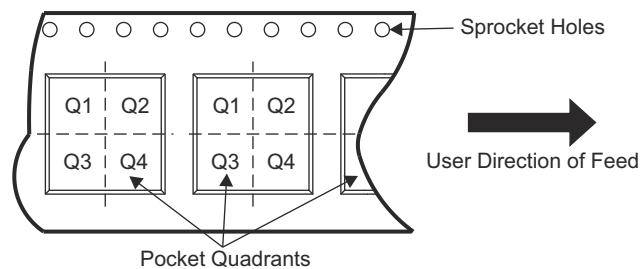


Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
TAS6884QPHDRQ1	HTQFP	PHD	64	1000	330.0	24.4	17.0	17.0	1.5	20.0	24.0	Q2

TAPE AND REEL BOX DIMENSIONS

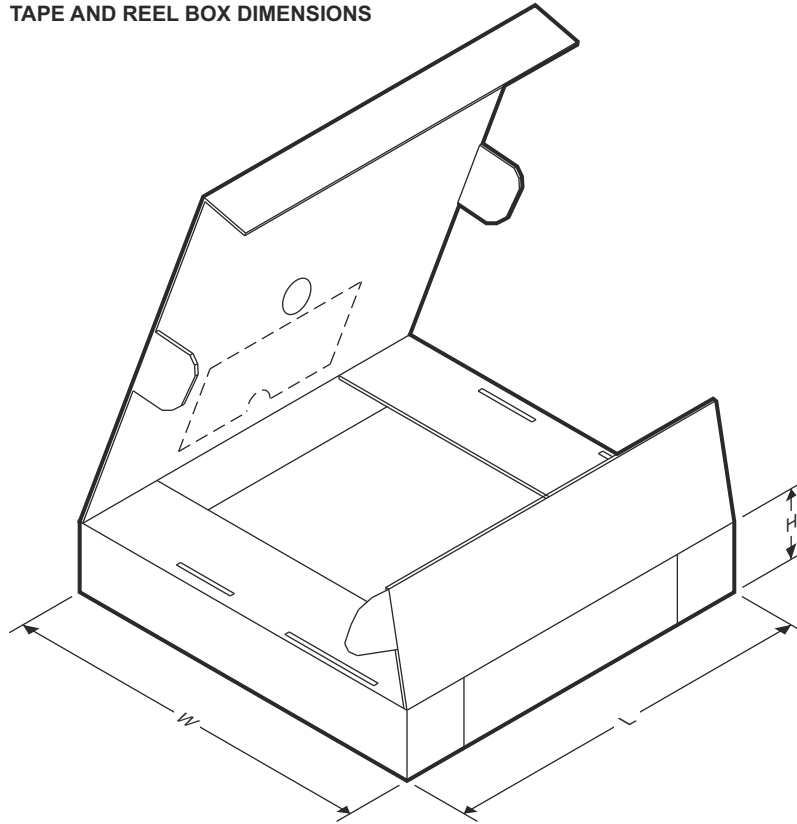

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
TAS6884QPHDRQ1	HTQFP	PHD	64	1000	350.0	350.0	43.0


7.3 Mechanical Data

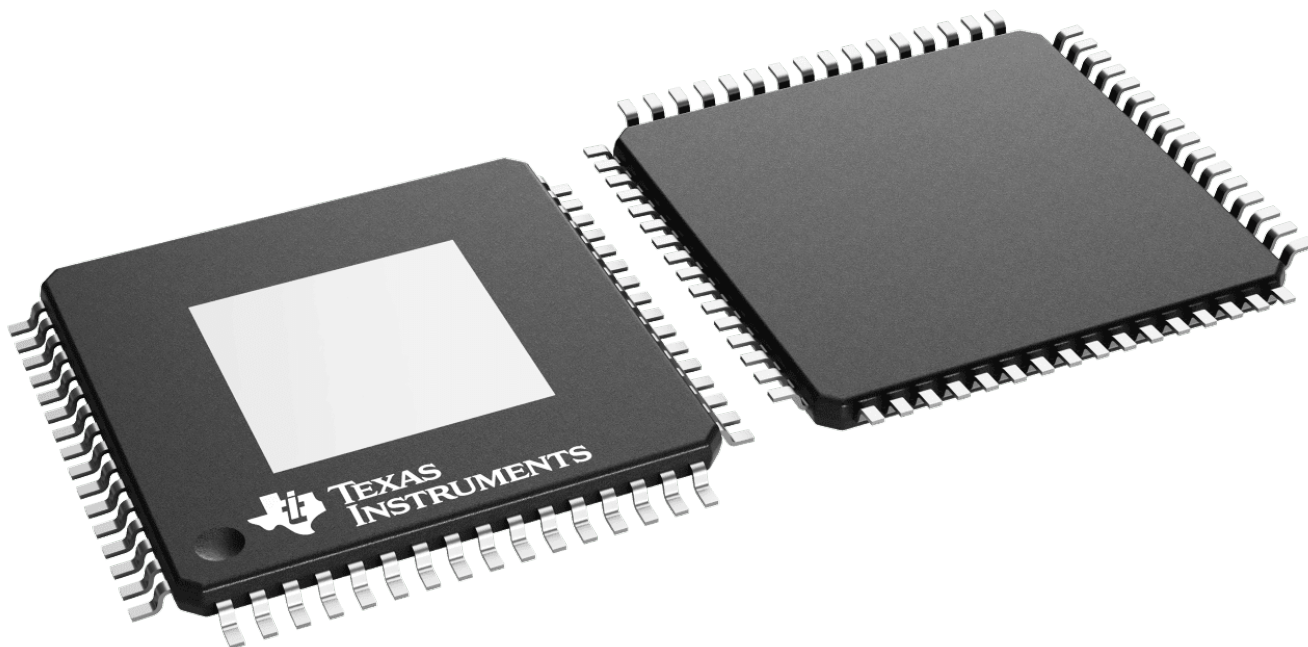

PHD0064B

PACKAGE OUTLINE HTQFP - 1.2 mm max height

PLASTIC QUAD FLATPACK

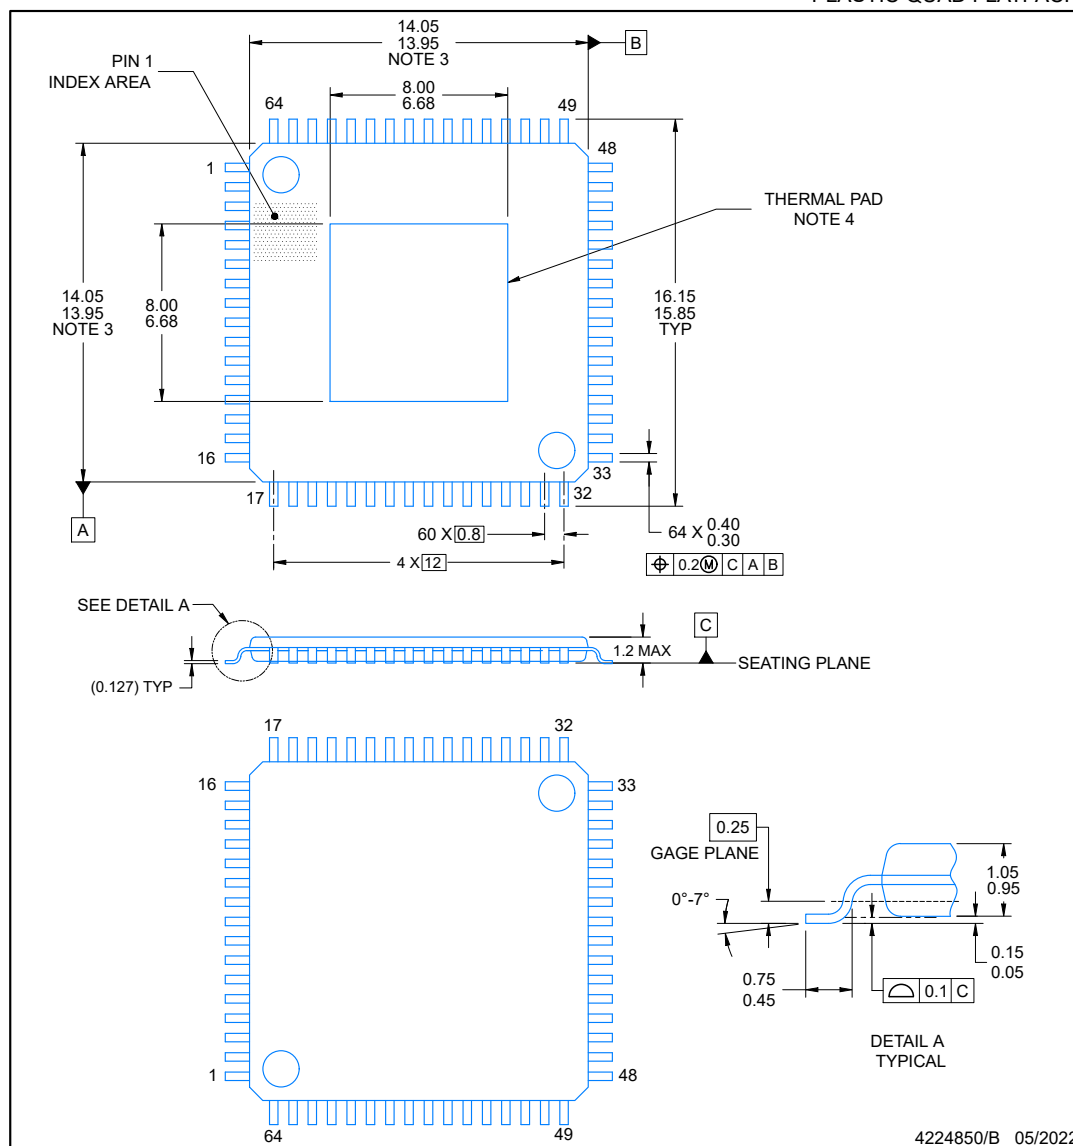


NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 per side.
4. See technical brief, PowerPad Thermally Enhanced Package, Texas Instruments Literature No. SLMA002 (www.ti.com/lit/slma002) and SLMA004 (www.ti.com/lit/slma004) for information regarding recommended board layout.

EXAMPLE BOARD LAYOUT**HTQFP - 1.2 mm max height****PHD0064B**

PLASTIC QUAD FLATPACK

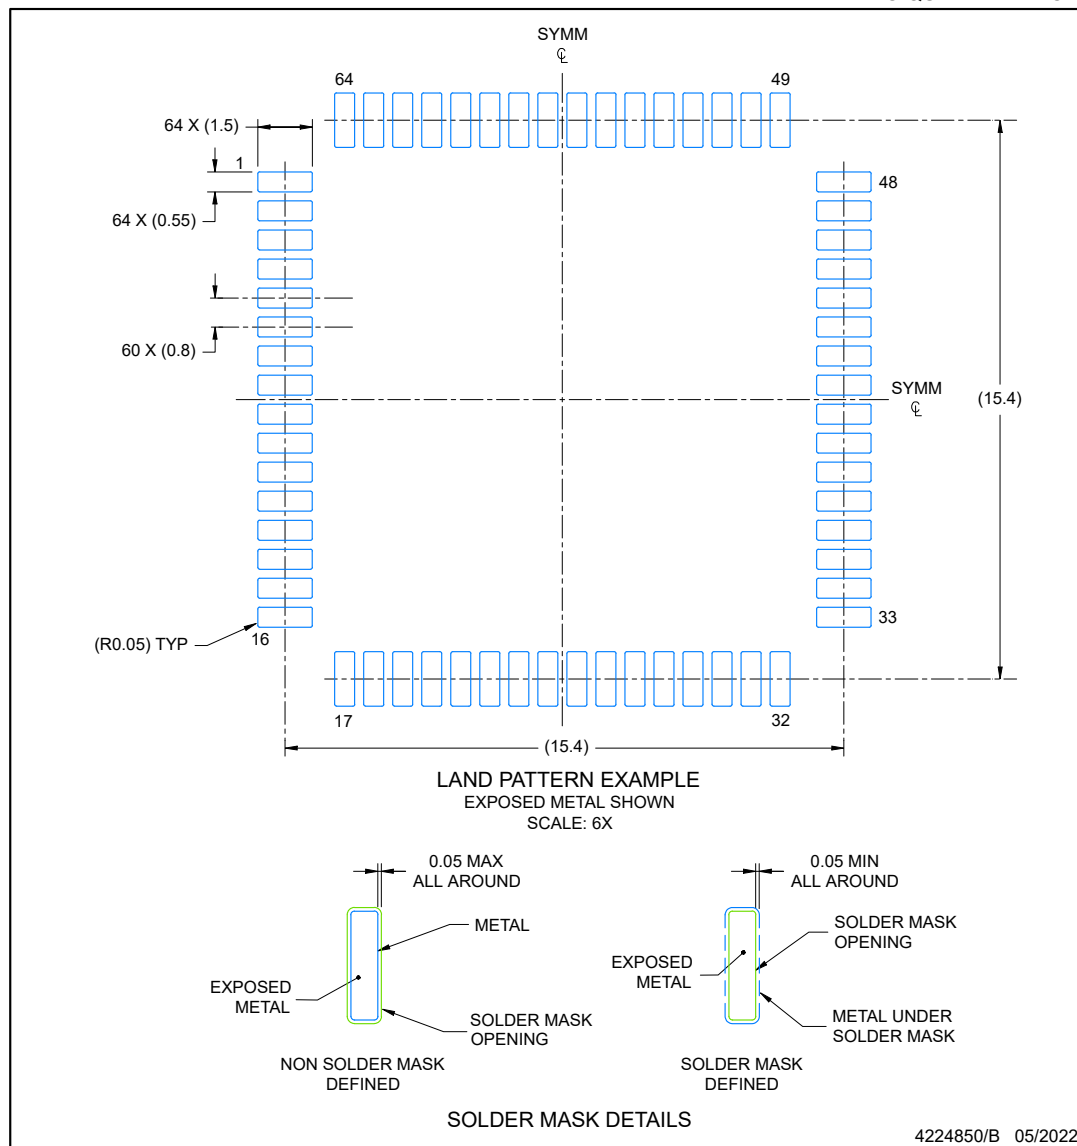

NOTES: (continued)

5. Publication IPC-7351 may have alternate designs.
6. Solder mask tolerances between and around signal pads can vary based on board fabrication site.
7. Vias are optional depending on application, refer to device data sheet. It is recommended that vias under paste be filled, plugged or tented.

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#), [TI's General Quality Guidelines](#), or other applicable terms available either on [ti.com](#) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2026, Texas Instruments Incorporated

Last updated 10/2025